

VFM (Vivliostyle Flavored Markdown) ドキュメント

Table of Contents


Vivliostyle Flavored Markdown | Vivliostyle Documentation 3

Vivliostyle Flavored Markdown | Vivliostyle Documentation 4

Hooks | Vivliostyle Documentation 5

Vivliostyle Flavored Markdown

Vivliostyle Flavored Markdown

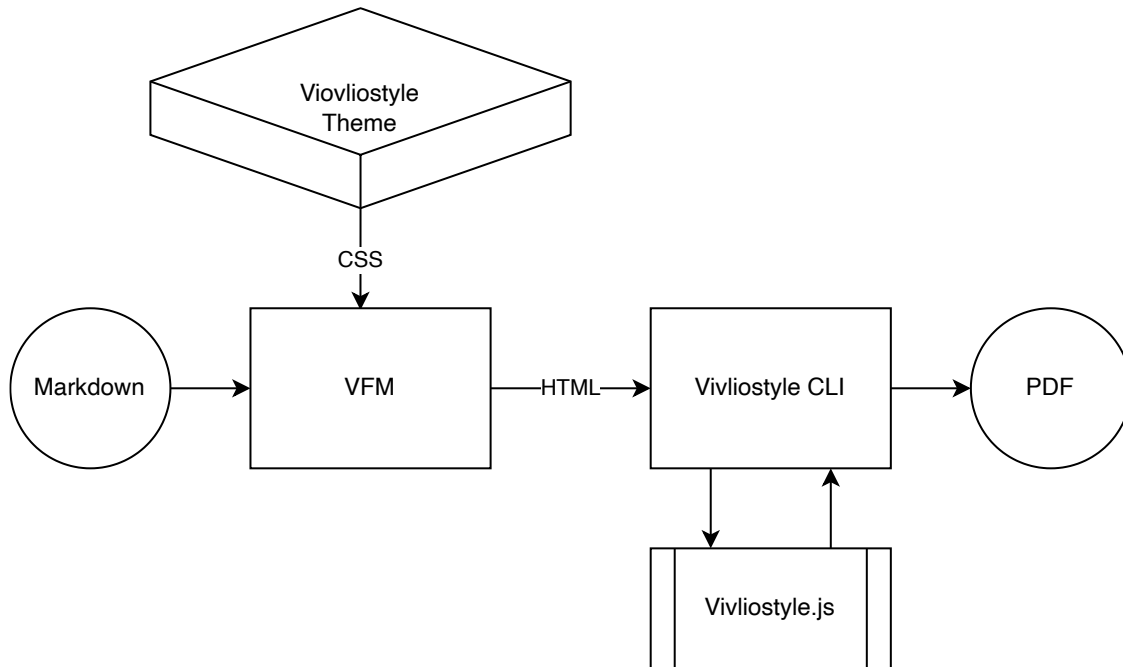

Principles

1. Rule of least surprise
 - Should be lined and matched to another Markdown syntax.
2. (Mostly) backward-compatible syntax. should not be incorrectly rendered in Markdown editor like Typora.

Vivliostyle Flavored Markdown

Vivliostyle Flavored Markdown

Vivliostyle Flavored Markdown (VFM) は本の執筆のために最適化された Markdown 記法です。Vivliostyle とその関連プロジェクトのために標準化され、公開されています。VFMは 1. <https://commonmark.org/CommonMark>^{*1} および 2. <https://github.github.com/gfm/> GitHub Flavored Markdown (GFM)^{*2} をベースにして実装されています。

コード (Code)

VFM

```
```javascript
function main() {}
```
```

HTML

```
<pre class="language-javascript">
<code class="language-javascript"><span class="token keyword">function</span> <span class="token function">main</span><span class="token punctuation">(</span><span class="token punctuation">(</span><span class="token punctuation">{</span><span class="token punctuation">}</span><span class="token punctuation">)</span><span class="token punctuation">}</span></code></pre>
```

CSS

```
pre {
}
pre code {
}
```

VFM は構文強調に 3. <https://prismjs.com/Prism>^{*3} を利用しています。

キャプションをつける (with caption)

VFM

Hooks

Hooks

Replace

```
[icon1][notice]
```

```
[person][nod nod]
```

```
const rules = [
  {
    test: /\[(.+?)\]\[(.+?)\]/,
    match: ([, a, b], h) => {
      return h(
        'div',
        {class: 'balloon'},
        h('img', {src: `./img/${a}.png`}),
        h('span', b),
      );
    },
  },
];

stringify(markdown, {
  partial: true,
  replace: rules,
});
```

```
<p><div class="balloon"><span>Notice</span></div></p>
<p><div class="balloon"><span>Nod nod</span></div></p>
```