

Build Large Language Models (LLMs) from Scratch

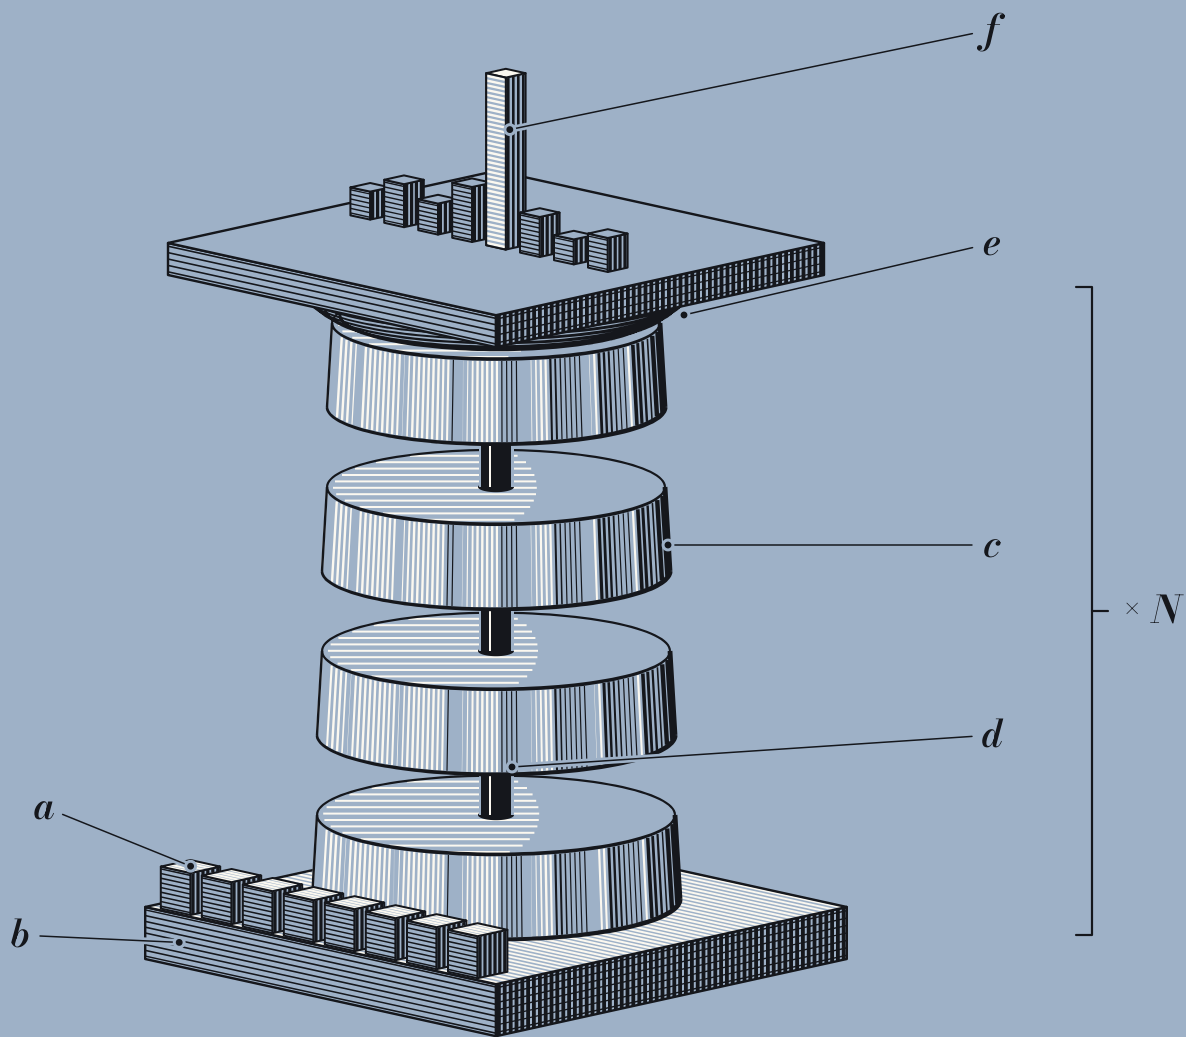


Fig. 1. A decoder-only model, raised as a column. a tokens; b embedding; c a transformer block, one of N ; d the residual stream they are threaded on; e output head; f next-token distribution.