

Embedding Staged Domain-Specific Languages

THIS IS A TEMPORARY TITLE PAGE
It will be replaced for the final print by a version
provided by the service academique.



To my son David.



Acknowledgements

Lausanne, Switzerland, October 30th, 2015

V. J.



Abstract



Zusammenfassung

Contents

Acknowledgements	i
Abstract (English/Deutsch)	iii
Table of Contents	ix
List of Figures	xi
List of Tables	xiii
1 Introduction	1
1.1 Terminology	2
1.2 Related Work	2
2 Background	3
2.1 The Scala Programming Language	3
2.2 Embedded Domain-Specific Languages	3
2.3 Partial Evaluation and Multi-Stage Programming	3
2.3.1 Scala	3
2.3.2 Deep Embedding of DSLs with LMS	3
2.3.3 Scala Macros	5
2.3.4 Partial Evaluation	5
I Improving the Programmer Experience with Deeply Embedded Domain-Specific Languages	7
3 Introduction: Concealing the Deep Embedding of DSLs	9
4 Motivation: Abstraction Leaks in the Deep Embedding	13
4.1 The Deep Embedding	14
4.2 Abstraction Leaks in the Deep Embedding	16
4.2.1 Convoluted Interfaces	16
4.2.2 Difficult Debugging	16
4.2.3 Convoluted and Incomprehensible Type Errors	17

Contents

4.2.4	Unrestricted Host Language Constructs	18
4.2.5	Domain-Specific Error Reporting at Runtime	18
4.2.6	Runtime Overheads of DSL Compilation	19
4.2.7	Long Compilation Times	19
4.2.8	Abstraction Leaks in the Deep Embedding Specific to Scala	19
5	Translation of the Direct Embedding	23
5.1	Language Virtualization	24
5.1.1	Virtualizing Pattern Matching	26
5.2	DSL Intrinsicification	28
5.2.1	Constants and Free Variables	28
5.2.2	Type Translation	29
5.2.3	Operation Translation	32
5.2.4	Translation Example	34
5.2.5	Correctness	34
5.3	Translation in the Wider Context	35
6	Deep Embedding with Yin-Yang	41
6.1	Relaxed Interface of the Deep Embedding	41
6.2	Embedding for the Identity Translation	42
6.3	Polymorphic Embedding	43
6.4	Polymorphic Embedding With Eager Inlining	47
6.5	Embedding With Custom Types	48
6.6	The Yin-Yang Interface	50
6.7	Using Yin-Yang	51
6.7.1	Defining a Translation for a DSL	51
6.8	Using a Yin-Yang DSL	52
7	Improving Error Reporting of DSLs	53
7.1	Restricting Host Language Constructs	53
7.2	Domain-Specific Error Reporting at Compile Time	54
8	Reducing Runtime Overheads of the Deep Embedding	55
9	Minimizing Compilation Time of the Deep Embedding	57
10	Evaluation and Case Studies	59
10.1	Automatic Deep EDSL Generation	59
10.2	No Annotations in the Direct Embedding	60
10.3	Case Study: Yin-Yang for Slick	61
11	Related Work	63

II	Deep Embedding Development with a Breeze	65
12	Generation of the Deep Embedding	67
12.1	Constructing High-Level IR Nodes	68
12.1.1	Lowering High-Level IR Nodes to Their Low-Level Implementation	69
13	Dynamic Compilation of Domain-Specific Languages	71
III	Removing Abstraction Overheads in Shallow Domain-Specific Languages	73
14	Introduction: Different Approaches to Removing Abstraction Overheads in Direct DSLs	75
15	Polyvariant Staging	77
15.1	Introduction	77
15.2	ScalaCT Interface	81
15.2.1	Well-Formedness of Compile-Time Views	83
15.2.2	Minimizing the Number of Annotations	83
15.3	Polymorphic Binding-Time Analysis	84
15.3.1	Nominal Types and Subtyping	84
15.3.2	Compile-Time Evaluation	84
15.3.3	Mutable State	84
15.4	Case Studies	84
15.4.1	Inlining Expressed Through Staging	85
15.4.2	Recursion	85
15.4.3	Variable Argument Functions	86
15.4.4	Removing Abstraction Overhead of Type-Classes	86
15.4.5	Inner Product of Vectors	88
15.5	Discussion	89
15.6	Evaluation	89
15.6.1	Reduction in Code Duplication	90
15.6.2	Performance of Generated Code	90
15.7	Limitations	91
15.7.1	Nominal Typing, Lower Bounds, and Higher-Kinded Types	91
15.8	Related Work	91
	Bibliography	95
	Curriculum Vitae	101

List of Figures

2.1	Minimal EDSL for vector manipulation.	4
4.1	The interface of a direct EDSL for manipulating numerical vectors.	14
4.2	A deep EDSL for manipulating numerical vectors based on LMS.	15
5.1	Translation from the direct to the deep embedding.	37
5.2	Rules for virtualization of Scala language intrinsics.	38
5.3	Rules for virtualization of methods on Any and AnyRef	39
5.4	The implementation of the virtualized pattern matcher with the original Scala semantics and with Option as the zero-plus monad.	39
5.5	Transformation of an EDSL program for calculating $\sum_{i=0}^n i^{exp}$	40
6.1	Interface of the identity DSL.	44
6.2	Interface of the generic polymorphic embedding.	45
6.3	Interface of the polymorphic embedding with eager inlining.	47
6.4	Interface of the embedding with custom types. The DSL author can arbitrarily override each type in the embedding.	48
6.5	Overriding semantics of Boolean with the reification semantics for the deep embedding.	49
6.6	The trait for that Yin-Yang uses to execute the deep embedding.	50
6.7	Interface to the Yin-Yang translation.	52
12.1	High-level IR nodes for Vector.	68
12.2	Direct and deep embedding for Vector with side-effects.	69
12.3	Lowering to the low-level implementation for Vector.	70
15.1	Interface of ScalaCT.	81
15.2	Function min is desugared into a min macro that based on the binding time of the arguments dispatches to the partially evaluated version (min_CT) for statically known varargs or to the original min function for dynamic arguments min_D	87
15.3	Removing abstraction overheads of type classes.	87

List of Tables

10.1	LOC for direct EDSL, Forge specification, and deep EDSL.	60
15.1	Compile-time views of types and additional methods that will be available to the user.	82
15.2	Promotion of terms to their compile-time views.	82
15.3	Speedup of LMS and ScalaCT compared to the naive implementation of the algorithms.	90

1 Introduction

Domain-specific languages (DSLs) provide a restricted, high-level, and user-friendly interface crafted for a specific domain. Restricting the language to a particular domain allows programming at a high level of abstraction while retaining good run-time performance by leveraging domain knowledge for optimized code generation or interpretation. In certain cases, code can even be targeted at heterogeneous computing environments [Rompf et al., 2013b].

The implementation of a usable *external* (or *stand-alone*) DSL requires building a parser, type-checker, and possibly a complete tool chain consisting of IDE integration, debugging, and documentation tools. This is a great undertaking that is often not justified by the benefits of having an external DSL. A promising alternative to external DSLs are *embedded DSLs* (EDSLs) [Hudak, 1996] which are hosted in a general-purpose language and reuse its facilities. For the purpose of the following discussion, we distinguish between two main types of embeddings: *shallow* and *deep* embeddings.

- In a shallowly embedded DSL, values of the embedded language are *directly* represented by values in the host language. Consequently, terms in the host language that represent terms in the embedded language are evaluated directly into host-language values that represent DSL values. In other words, evaluation in the embedded language corresponds directly to evaluation in the host language.
- In a deeply embedded DSL, values of the embedded language are represented *symbolically*, that is, by host-language data structures, which we refer to as the *intermediate representation (IR)*. Terms in the host language that represent terms in the embedded language are evaluated into this intermediate representation. An additional evaluation step is necessary to reduce the intermediate representation to a direct representation. This additional evaluation is typically achieved through *interpretation* of the IR in the host language, or through *code generation* and subsequent *execution*.

An important advantage of deep embeddings over shallow ones is that DSL terms can be easily manipulated by the host language. This enables domain-specific optimizations [Rompf and Odersky, 2012b, Rompf et al., 2013b] that lead to orders-of-magnitude improvements in program performance, and multi-target code generation [Brown et al., 2011].

1.1 Terminology

1.2 Related Work

2 Background

2.1 The Scala Programming Language

2.2 Embedded Domain-Specific Languages

2.3 Partial Evaluation and Multi-Stage Programming

In this section we provide background information necessary for understanding Yin-Yang’s implementation in Scala. We briefly explain the core concepts of Lightweight Modular Staging [Rompf and Odersky, 2012b, Rompf et al., 2013b] and Scala Macros [Burmako, 2013]. Throughout the paper we assume familiarity with the basics of the Scala Programming Language [Odersky et al., 2014].

2.3.1 Scala

2.3.2 Deep Embedding of DSLs with LMS

Lightweight Modular Staging (LMS) is a staging [Taha and Sheard, 1997] framework and an embedded compiler for developing deeply embedded DSLs. LMS provides a library of reusable language components organized as *traits* (Scala’s first-class modules). An EDSL developer selects traits containing the desired language features, combines them through *mix-in* composition [Odersky and Zenger, 2005] and adds DSL-specific functionality to the resulting EDSL trait. EDSL programs then extend this trait, inheriting the selected LMS and EDSL language constructs. Figure 2.1 illustrates this principle. The trait `VectorDSL` defines a simplified EDSL for creating and manipulating vectors over some numeric type `T`. Two LMS traits are mixed into the `VectorDSL` trait: the `Base` trait introduces core LMS constructs and the `NumericOps` trait introduces the `Numeric` type class and the corresponding support for numeric operations. The bottom of the figure shows an example usage of the EDSL. The constant literals in the program are lifted to

```
// The EDSL declaration
trait VectorDSL extends NumericOps with Base {
  object Vector {
    def fill[T:Numeric]
      (v: Rep[T], size: Rep[Int]): Rep[Vector[T]] =
      vector_fill(v, size)
  }

  implicit class VectorOps[T:Numeric]
    (v: Rep[Vector[T]]) {
    def +(that: Rep[Vector[T]]): Rep[Vector[T]] =
      vector_+(v, that)
  }
  // Operations vector_fill and vector_+ are elided
}

new VectorDSL { // EDSL program
  Vector.fill(1,3) + Vector.fill(2,3)
} // returns a regular Scala Vector(3,6)
```

Figure 2.1 – Minimal EDSL for vector manipulation.

the IR through *implicit conversions* introduced by `NumericOps` [Oliveira et al., 2010].

All types in the `VectorDSL` interface are instances of the parametric type `Rep[_]`. The `Rep[_]` type is an abstract type member of the `Base` LMS trait and abstracts over the concrete types of the IR nodes that represent DSL operations in the deep embedding. Its type parameter captures the type underlying the IR: EDSL terms of type `Rep[T]` evaluate to host language terms of type `T` during EDSL execution.

Operations on `Rep[T]` terms are added by implicit conversions that are introduced in the EDSL scope. For example, the implicit class `VectorOps` introduces the `+` operation on every term of type `Rep[Vector[T]]`. In the example, the type class `Numeric` ensures that vectors contain only numerical values.

[TODO: remove tool] LMS has been successfully used by in project Delite [Brown et al., 2011, Sujeeth et al., 2013a] for building DSLs that support heterogeneous parallel computing. EDSLs developed with Delite cover domains such as machine learning, graph processing, data mining, etc. Due to its wide use and high performance we choose Delite as a back-end for Yin-Yang.

2.3.3 Scala Macros

Scala Macros [Burmako, 2013] are a compile-time meta-programming feature of Scala. Macros operate on Scala abstract syntax trees (ASTs): they can construct new ASTs, or transform and analyze the existing Scala ASTs. Macro programs can use common functionality of the Scala compiler like error-reporting, type checking, transformations, traversals, and implicit search.

Yin-Yang uses a particular flavor of Scala macros called *def macros*, though we will often drop the prefix “def” for the sake of brevity. From a programmer’s point of view, def macros are invoked just like regular Scala methods. However, macro invocations are *expanded* during compile time to produce new ASTs. Macro invocations are type checked both before and after expansion to ensure that expansion preserves well-typedness. Macros have separated declarations and definitions: declarations are represented to the user as regular methods while macro definitions operate on Scala ASTs. The arguments of macro method definitions are the type-checked ASTs of the macro arguments.

For DSLs based on Yin-Yang we use a macro that accepts a single block of code as its input. At compile time, this block is first type checked against the interface of the direct embedding. Then, Yin-Yang applies the generic transformation to translate the directly embedded AST to the corresponding deeply embedded AST. For example, given the following DSL snippet, Yin-Yang produces the `VectorDSL` program in Figure 2.1:

```
vectorDSL {  
  Vector.fill(1,3) + Vector.fill(2,3)  
}
```

2.3.4 Partial Evaluation

Improving the Programmer Experience with Deeply Embedded Domain-Specific Languages

Part I

3 Introduction: Concealing the Deep Embedding of DSLs

In §1 we introduced domain-specific languages and how they can be embedded into a host language. Then we discussed strengths and weaknesses of deep and shallow embeddings. In this section we compare deep and shallow embeddings and then show how they can be combined in order to keep all the strengths and cancel out the weaknesses with embedded DSLs (EDSLs).

Deep EDSLs intrinsically *compromise programmer experience* by leaking their implementation details (§4.2). Often, IR construction is achieved through complex type system constructs that are, inevitably, visible in the EDSL interface. This can lead to cryptic type errors that are often incomprehensible to DSL users. In addition, the IR complicates program debugging as programmers cannot easily relate their programs to the code that is finally executed. Finally, the host language often provides more constructs than the embedded language and the usage of these constructs can be undesired in the DSL. If these constructs are generic in type (e.g., list comprehensions or `try\catch`) they can not be restricted in the embedded language by using complex types (§4.2).

Shallow embeddings typically suffer less from *linguistic mismatch* than deep embeddings: this is particularly obvious for a class of shallow embeddings that we refer to as *direct* embeddings. Direct embeddings preserve the intrinsic constructs of the host language “on the nose”. That is, DSL constructs such as `if` statements, loops, or function literals, as well as primitive data types such as integers, floating-point numbers, or strings are represented directly by the corresponding constructs of the host language.

Ideally, we would like to complement the high performance of deeply embedded DSLs, along with their capabilities for multi-target code generation, with the usability of their directly embedded counterparts. Reaching this goal turns out to be more challenging than one might expect: let us compare the interfaces of a direct embedding and a deep embedding of a simple EDSL for manipulating vectors¹. The direct version of the

¹ All code examples are written in *Scala*. Similar techniques can be applied in other statically typed languages. Cf. [Carette et al., 2009, Lokhorst, 2012, Svenningsson and Axelsson, 2013].

interface is declared as:

```
trait Vector[T] {  
  def map[U](fn: T => U): Vector[U]  
}
```

The interface of the deep embedding, however, fundamentally differs in the types: while the (polymorphic) `map` operation in the direct embedding operates directly on values of some generic type `T`, the deep embedding must operate on whatever intermediate representations we chose for `T`. For our example, we chose the abstract, higher-kinded type `Rep[T]` to represent values of type `T` in the deep embedding:

```
trait Vector[T] {  
  def map[U](fn: Rep[T] => U): Rep[Vector[U]]  
}
```

The difference in types is necessarily visible in the signature and thus inevitably leaks into user programs. This might seem like a low price to pay for all the advantages offered by a deep embedding. However, as we will see in §4.2, this difference in types is at the heart of many of the inconveniences associated with deep embeddings such as long compilation times, execution overheads, and inability to restrict the host language constructs. How then, can we conceal this fundamental difference?

In Forge [Sujeeth et al., 2013b], Sujeeth et al. propose maintaining two parallel embeddings, shallow and deep, with a single interface equivalent to the deep embedding. In the shallow embedding, `Rep` is defined to be the identity on types, that is `Rep[T] = T`, effectively identifying IR types with their direct counterparts. As a result, shallowly embedded programs may be executed directly to allow for easy prototyping and debugging. In production, a simple “flip of a switch” enables the deep embedding. Unfortunately, artifacts of the deep embedding still leak to the user through the fundamentally “deeply typed” interface. We would like to preserve the idiomatic interface of the host language and completely conceal the deep embedding.

The central idea of this work is the use of *reflection* to convert programs written in an unmodified direct embedding into their deeply embedded counterparts. Since the fundamental difference between the interfaces of the two embeddings resides in their types, we employ a configurable *type translation* to map directly embedded types `T` to their deeply embedded counterparts `[[T]]`. For our motivating example the type translation is simply:

$$\begin{aligned} [[T]] &= T && \text{if } T \text{ is in type argument position,} \\ [[T]] &= \text{Rep}[T] && \text{otherwise.} \end{aligned}$$

In §5 we describe this translation among several others and discuss their trade-offs.

Together with a corresponding translation on terms, the type translation forms the core of Yin-Yang, a generic framework for DSL embedding, that uses Scala’s macros [Burmako, 2013] to reliably translate directly embedded DSL programs into corresponding deeply embedded DSL programs. The virtues of the direct embedding are used during program development when performance is not of importance; the translation is applied when performance is essential or alternative interpretations of a program are required (e.g., for hardware generation).

Once we “broke the ice” by using reflection it becomes simpler to further improve the deep embeddings. Yin-Yang enables *domain-specific error reporting* at host language compile time by compiling a DSL program during host language compilation. It *restricts* the embedded language by providing an additional verification step for producing comprehensible error messages, reduces long compilation times of the deep embedding by directly calling reification logic, and reduces run-time overheads by compiling the deep programs at host language compile-time.

Finally, to avoid error prone maintenance of synchronized direct and deep embeddings Yin-Yang reuses the core translation to generate the deep embeddings based on the definition of direct embeddings. Since the same translation is applied both for the EDSL definition and the EDSL program the equivalence between the embeddings is assured.

Yin-Yang contributes to the state of the art as follows:

- It completely conceals leaky abstractions of deep EDSLs from the users. The virtues of the direct embedding are used for prototyping, while the deep embedding enables high-performance in production. The reliable translation ensures that programs written in the direct embedding will always be correct in the deep embedding. The core translation is described in §5.
- It allows changing different deep embedding back-ends with simple configuration changes. We discuss different deep embeddings supported by Yin-Yang in §6.
- It improves error reporting (§7) in the direct embedding by: *i*) allowing domain-specific error reporting at host language compile-time (§??) and *ii*) restricting host language features in the direct EDSL based on the supported features of the deep EDSL (§7.1).
- It reduces the run-time overheads of the deep embedding (§8). The deep embeddings always reify their IR before execution at runtime and thus impose execution overheads. For DSLs which are fundamentally not staged Yin-Yang uses *reflective instantiation* to compile DSLs at host language compile time. For staged DSLs (compiled at host language run-time) Yin-Yang avoids re-reification of programs by storing them into a cache.

- It reduces large compilation times introduced by the deep embedding. The translation is changed such that it directly calls the reification methods without having to use the complicated type system constructs. Reducing compilation times is presented in §9.
- It simplifies deep EDSL development and guarantees semantic equivalence between the direct embedding and the deep embedding by reusing the core translation to generate the deep EDSL definition out of the direct EDSL definition (§12).

We evaluate Yin-Yang by generating 3 deep EDSLs from their direct embedding, and providing interfaces for 2 existing EDSLs. The effects of concealing the deep embedding and reliability of the translation were evaluated on 21 programs (1284 LOC), from EDSLs OptiGraph [Sujeeth et al., 2013a] and OptiML [Sujeeth et al., 2011]. In all programs combined the direct implementation obviates 101 type annotations related to the deep embedding.

We evaluate Yin-Yang as a tool for generating a user-friendly frontend for the Slick DSL [Typesafe]. The evaluation shows that developing a frontend for existing DSLs requires little effort and that developing an API with Yin-Yang takes far less time than the deep embedding. The complete evaluation is presented in §10.

4 Motivation: Abstraction Leaks in the Deep Embedding

The main idea of this work is that EDSL users should program in a direct embedding, while the corresponding deep embedding should be used only in production. To motivate this idea we consider the direct embedding and the deep embedding of a simple EDSL for manipulating vectors. Here, we use Scala to show the problems with the deep embedding that apply to other statically typed programming languages (e.g., Haskell and OCaml). These languages achieve the embedding in different ways [Svenningsson and Axelsson, 2013, Lokhorst, 2012, Carette et al., 2009, Guerrero et al., 2004], but this is always reflected in the type signatures. In the context of Scala, there are additional problems with type inference and implicit conversions that we discuss in §4.2.8.

Figure 4.1 shows a simple direct EDSL for manipulating numerical vectors. Vectors are instances of a `Vector` class, and have only two operations: *i*) vector addition (the `+`), and *ii*) the higher-order `map` function which applies a function `f` to each element of the vector. The `Vector` object provides factory methods `fromSeq`, `range`, and `fill` for vector construction. Note that though the type of the elements in a vector is generic, we require it to be an instance of the `Numeric` type class.

For a programmer, this is an easy to use library. Not only can we write expressions such as `v1 + v2` for summing vectors (resembling mathematical notation), but we can also get meaningful type error messages. The EDSL is an idiomatic Scala and displayed type errors are comprehensible. Finally, in the direct embedding, all terms directly represent values from the embedded language and inspecting intermediate values with the debugger is straightforward.

The problem, however, is that the code written in such a direct embedding suffers from major performance issues [Rompf et al., 2013b]. For some intuition, consider the following code for adding 3 vectors: `v1 + v2 + v3`. Here, each `+` operation creates an intermediate `Vector` instance, uses the `zip` function, which itself creates an intermediate `Seq` instance, and calls a higher-order `map` function. The abstractions of the language that allow us to write code with high-level of abstraction have a downfall in terms of

```
object Vector {
  def fromSeq[T: Numeric](seq: Seq[T]): Vector[T] =
    new Vector(seq)
  def fill[T: Numeric](v: T, size: Int): Vector[T] =
    fromSeq(Seq.fill(size)(v))
  def range(start: Int, end: Int): Vector[Int] =
    fromSeq(Seq.range(start, end))
}
class Vector[T: Numeric](val data: Seq[T]) {
  def map[S: Numeric](f: T => S): Vector[S] =
    Vector.fromSeq(data.map(x => f(x)))
  def +(that: Vector[T]): Vector[T] =
    Vector.fromSeq(data.zip(that.data))
      .map(x => x._1 + x._2)
}
```

Figure 4.1 – The interface of a direct EDSL for manipulating numerical vectors.

performance. Consecutive vector summations would perform much better if they were implemented with a simple while loop.

4.1 The Deep Embedding

For the DSL from Figure 4.1, the overhead could be eliminated with optimizations like stream fusion [Coutts et al., 2007] and inlining, but to properly exploit domain knowledge, and to potentially target other platforms, one must introduce an intermediate representation of the EDSL program. The intermediate representation can be transformed according to the domain-specific rules (e.g., eliminating addition with a null vector) to improve performance beyond common compiler optimizations [Rompf et al., 2013b]. To this effect, we use the LMS framework and present the deep version of the EDSL for manipulating numerical vectors in Figure 4.2.

In the **VectorDSL** interface every method has an additional implicit parameter of type **SourceContext** and every generic type requires an additional **TypeTag** type class. The **SourceContext** contains information about the current file name, line number, and character offset. **SourceContexts** are used for mapping generated code to the original program source. **TypeTags** carry all information about the type of terms. They are used to propagate run-time type information through the EDSL compilation for optimizations and generating code for statically typed target languages. In the EDSL definitions the **SourceContext** is rarely used explicitly (i.e., as an argument). It is provided “behind the scenes” by implicit definitions that are provided in the DSL.


```

trait VectorDSL extends Base {
  object Vector {
    def fromSeq[T:Numeric:TypeTag](seq: Rep[Seq[T]])
      (implicit sc: SourceContext): Rep[Vector[T]] =
      vector_fromSeq(seq)
    def fill[T:Numeric:TypeTag](value: Rep[T], size: Rep[Int])
      (implicit sc: SourceContext): Rep[Vector[T]] =
      vector_fill(value, size)
    def range(start: Rep[Int], end: Rep[Int])
      (implicit sc: SourceContext): Rep[Vector[Int]] =
      vector_range(start, end)
  }

  implicit class VectorRep[T:Numeric:TypeTag]
    (v: Rep[Vector[T]]) {
    def data(implicit sc: SourceContext): Rep[Seq[T]] =
      vector_data(v)
    def +(that: Rep[Vector[T]])
      (implicit sc: SourceContext): Rep[Vector[T]] =
      vector_plus(v, that)
    def map[S:Numeric:TypeTag](f: Rep[T] => Rep[S])
      (implicit sc: SourceContext): Rep[Vector[S]] =
      vector_map(v, f)
  }

  // IR constructors for 'map' and 'plus' are elided
  case class VectorFill[T:TypeTag](v: Rep[T], s: Rep[Int])
    (implicit sc: SourceContext)
  def vector_fill[T:Numeric:TypeTag](v: Rep[T], size: Rep[Int])
    (implicit sc: SourceContext): Rep[Vector[T]] =
    VectorFill(v, size) // IR node construction
}

```

Figure 4.2 – A deep EDSL for manipulating numerical vectors based on LMS.

4.2 Abstraction Leaks in the Deep Embedding

The programs in the deep embedding construct the IR instead of the values in the embedded language and this inevitably leaks to the users. In this section we discuss how DSL interfaces are convoluted in the deep embedding (§4.2.1), how debugging is made difficult (§4.2.2), how type errors can become incomprehensible (§4.2.3), how it is not possible to restrict certain host language constructs (§4.2.4), how domain-specific error reporting can only be achieved at run time (§4.2.5), how run-time compilation at host-language runtime creates execution overheads (§4.2.6), how deep embedding of DSLs can impose long compilation times (§4.2.7), and how deep embedding becomes more complicated in the deep embedding (§4.2.8).

4.2.1 Convoluted Interfaces

The interface of the EDSLs have `Rep[_]` types in their method signatures in order to abstract over the IR construction. These `Rep[_]` types inevitably leak to the user through code documentation, auto-completion, etc. The user defined functions, given that it has to work with DSL constructs, must also have `Rep` types in the interface, further convoluting the intended interface.

In DSLs that use code generation, method signatures must be enriched with source code information for purposes of debugging (`SourceContext`) and type information for generating right types (`TypeTag`). This information also leaks in the DSL interface. In Scala `TypeTags` and `SourceContexts` are passed with implicit parameters. This makes the interface harder to understand as the user of the EDSL, who might not be an expert programmer, needs to understand concepts like `TypeTag` and `SourceContext`. A method `map` from the introductory example (§3) with source and type information has two additional implicit parameters:

```
def map[U](fn: Rep[T => U])
  (implicit sc: SourceContext, tpe: TypeTag[U]): Rep[Vector[U]]
```

4.2.2 Difficult Debugging

In the methods of the direct EDSL all terms directly represent values in the embedded language (there is no intermediate representation). This allows users to trivially use debugging tools to step through the terms and inspect the values of the embedded language.

With the deep EDSL, user programs in the reification phase only instantiate the IR nodes. In the classical debugging mode this leads to difficulties as: *i*) users inspecting variable values will be faced with IR nodes, *ii*) the control flow follows all branches in the

host language constructs as they get reified, and *iii*) stepping into the DSL operations will only display reification logic.

The only way to achieve debugging is to make exact maps from the generated code to the deep program and implement a specialized debugger[**TODO: cite**] a specialized. Furthermore, debugging generated code or an interpreter is extremely difficult as users cannot relate the debugger position and the original line of code.

4.2.3 Convoluted and Incomprehensible Type Errors

The `Rep[_]` types leak to the user through type errors. Even for simple type errors the user is exposed to non-standard error messages. In certain cases (e.g., incorrect call to an overloaded function), the error messages can become hard to understand. To illustrate, we present a typical type error for invalid method invocation:

```
found    : Int(1)
required: Vector[Int]
      x + 1
      ^
```

In the deep embedding the corresponding type error contains `Rep` types and the `this` qualifier:

```
found    : Int(1)
required: this.Rep[this.Vector[Int]]
      (which expands to) this.Rep[vect.Vector[Int]]
      x + 1
      ^
```

This example represents one of the most common type errors.

The errors get more involved when artifacts of language virtualization leak to the user:

```
val x = HashMap[Int, String](1 -> "one", 2 -> "two")
x.keys()
```

yields an error message with `SourceContext` parameters:

```
error: not enough arguments for method keys: (implicit pos
: scala.reflect.SourceContext)Prog.this.Rep[Iterable[Int]].
Unspecified value parameter pos.
      x.keys()
      ^
```

4.2.4 Unrestricted Host Language Constructs

In the deep embedding all generic constructs of a host language can be used arbitrarily. For example, `scala.List.fill[T](count: Int, el: T)` can, for the argument `el`, accept both direct and deep terms. This is often undesirable as it can lead to code explosion and unexpected program behavior.

In the following example, assume that generic methods `fill` and `reduce` are not masked by the `VectorDSL` and belong only to the host language library. In this case, the invocation of `fill` and `reduce` performs meta-programming over the IR of the deep embedding:

```
new VectorDSL {  
  List.fill(1000, Vector.fill(1000,1)).reduce(_+_)  
}
```

Here, at DSL compilation time, the program creates a Scala list that contains a thousand IR nodes for the `Vector.fill` operation and performs a vector addition over them. Instead of producing a small IR the compilation result is a thousand IR nodes for vector addition. This is a typical case of code explosion that could not happen in the direct embedding which does not introduce an IR.

On the other hand, some operations can be completely ignored. In the next example, the `try/catch` block will be executed during EDSL compilation instead during DSL program execution:

```
new VectorDSL {  
  try Vector.fill(1000, 1) / 0  
  catch { case _ => Vector.fill(1000, 0) }  
}
```

Here, the resulting program always throws a `DivisionByZero` exception.

4.2.5 Domain-Specific Error Reporting at Runtime

Domain-specific languages often provide additional program analysis and verification beyond the type system. DSLs perform verification if data-sources are present [McClure et al., 2005, Zaharia et al., 2012], operations are supported on a given platform [Typesafe], whether multi-dimensional array shapes are correct [Ureche et al., 2012], etc. Ideally, error reporting with the domain-specific analysis should be performed at compile-time in order to avoid run-time errors in production and to provide faster reaction time.

Deep EDSLs do not support compile-time error reporting due to their execution at host language run time. This requires users to execute the DSL body in order to perform

domain-specific error reporting. This can lead to accidental errors in production code, requires more time find the errors as the error reporting requires running tests, and errors are can not be nicely integrated into the host language error reporting environment.

4.2.6 Runtime Overheads of DSL Compilation

The deeply embedded DSLs are compiled at run time when the code is executed. This compilation introduces overheads on the first execution of the program as well as subsequent executions. The first execution has a larger overhead as the DSL needs to be fully compiled, and the overhead of subsequent executions depend on the implementation of the deep embedding. Some deep embeddings recompile their programs every time [Rompf and Odersky, 2012a, Typesafe] which can lead to significant execution overheads [Taha and Sheard, 1997]. Others support guards for re-compilation which lower the overheads but introduce additional constructs in the user programs further leaking deep embedding abstractions. **[TODO: cite amirs thesis] [TODO: expand a bit]**

4.2.7 Long Compilation Times

Deeply embedded DSL programs compile longer than their direct counterparts. In the deep embedding operations are added on types that hide IR reification. These operations are added with language constructs like type-classes, extension methods, and implicit conversions. These mechanisms are typically more costly than the mechanisms for operation resolution on host language types.

In Scala the compilation overheads for the deep embedding are significant and affect programmer experience. Scala uses `implicit search` to find adequate extension methods for a given type. In presence of many types in the embedded language implicit search starts dominating compilation and introducing delays noticeable by the user. We provide detailed analysis of compilation times in the polymorphic embeddings in Scala in §9.

4.2.8 Abstraction Leaks in the Deep Embedding Specific to Scala

Scala specific features like *weak least upper bounds* [Odersky et al., 2014] and *type erasure* lead to further abstraction leaks in the deep embedding. In this section we discuss those and show how they affect the DSL user.

Weak least upper bounds. The Scala language introduces *weak type conformance* where primitive types can conform although they are not in a subtyping relation. According to the language specification [Odersky et al., 2014] type T weakly conforms to

Chapter 4. Motivation: Abstraction Leaks in the Deep Embedding

$U (T <_{\omega} U)$ if T is a subtype of U ($T < U$) or T precedes U in the following ordering:

```
Byte <:ω Short <:ω Int
Char <:ω Int
Int <:ω Long <:ω Float <:ω Double
```

The weak least upper bounds are computed with respect to weak conformance in: *i*) inferring the return type of conditional statements (e.g., `if` and pattern matching), and *ii*) type inference of type arguments. For example, term `if (cond) 1 else 1.0d` has a type `Double`. Weak least upper bounds are computed before the numeric conversions so the `then` branch of the previous term is widened to `1.0d`.

In case of the deep embedding there are no weak least upper bounds are applied as term types are not primitive. This leads to inconsistent behavior with the host language. For example, type checking

```
val res = if(pos) 1 else -1.0
res * 42
```

leads to the following type error:

```
error: value * is not a member of Prog.this.Rep[AnyVal]
res * 42
    ^
```

This behavior in the deep embedding can not be improved with implicit conversions as the programs are type correct and implicit conversions are triggered only for incorrect programs.

Type erasure. Scala introduces *erasure* [Odersky et al., 2014] of abstract types to the base reference type (`AnyRef`). As a result, overloaded methods with apparently different argument types erase to the same signature. Two methods having the same signature is illegal and leads to compilation errors.

In the deep embedding all types are abstract and the methods that could be defined regularly become illegal. Defining methods

```
def from(json: Rep[String]): Rep[Vector[Double]]
def from(bytes: Rep[Array[Byte]]): Rep[Vector[Double]]
```

yields the following error which would be otherwise legal code in the host language.

The DSL users are left with two options: *i*) to rename one of the methods and diverge from the original design (e.g., rename `from` to `fromBytes`, or *ii*) to introduce additional

4.2. Abstraction Leaks in the Deep Embedding

implicit parameters which will disambiguate the two methods after erasure

```
def from(json: Rep[String]): Rep[Vector[Double]]
def from(bytes: Rep[Array[Byte]])
  (implicit p: Overloaded): Rep[Vector[Double]]
```

where implicit argument `Overloaded` is always present in scope. Adding implicit arguments further convolutes the interface and increases compilation times thus causing additional abstraction leaks.

5 Translation of the Direct Embedding

The purpose of the core Yin-Yang translation is to reliably and automatically make a transition from a directly embedded DSL program to its deeply embedded counterpart. The transition requires a translation for the following reasons: *i)* host language constructs such as `if` statements are strongly typed and accept only primitive types for some of their arguments (e.g., a condition has to be of type `Boolean`), *ii)* all types in the direct embedding need to be translated into their IR counterparts (e.g., `Int` to `Rep[Int]`), *iii)* the directly embedded DSL operations need to be mapped onto their deeply embedded counterparts, and *iv)* methods defined in the deep embedding require additional parameters, such as run-time type information and source positions. To address these inconsistencies we propose a straightforward solution: a type-directed program translation from direct to deep embeddings.

Since the translation is type-directed it requires reflection that supports *type introspection* and *type transformation*. The translation is based on the idea of representing language constructs as method calls [Carette et al., 2009, Rompf et al., 2013a] and systematically intrinsifying direct DSL operations and types of the direct embedding to their deep counterparts [Carette et al., 2009]. The translation operates in two main steps:

Language virtualization converts host language intrinsics into function calls, which can then be evaluated to the appropriate IR values in the deep embedding.

EDSL intrinsification converts DSL intrinsics, such as types and operations, from the direct embedding into their deep counterparts.

Figure 5.1 shows the translation pipeline of Yin-Yang. Language virtualization is covered in §5.1 and DSL intrinsification in §5.2. The whole translation is explained on a concrete example in §5.2.4. Finally we argue for correctness of the translation in §5.2.5.

5.1 Language Virtualization

Language virtualization allows to redefine intrinsic constructs of the host language, such as `if` and `while` statements. This can be achieved by translating them into suitable method invocations as shown by Rompf et al. in the modified Scala compiler named Scala-Virtualized [Rompf et al., 2013a].

Yin-Yang follows the ideas of Carette et al. [Carette et al., 2009] and Scala-Virtualized but virtualizes all Scala expressions and uses macros of unmodified Scala to virtualize its intrinsics. Practice has shown that DSL authors are reluctant to use a modified compiler and that for the wide adoption of embedded DSLs it is important to provide a solution based on unmodified Scala.

Compared to Scala-Virtualized we translate additional language constructs: function/method definition and function application, exception handling, and all kinds of value-binding constructs (i.e., values, lazy values, and variables). Translation rules for supported language constructs are represented in Figure 5.2 with $\llbracket t \rrbracket$ denoting the translation of a term t . In some expressions the original types are introspected and used as a type argument of the corresponding virtualized method. These generic types are later translated to the deep embedding during the DSL intrinsification phase.

Defined translation rules convert language constructs into method calls where each language construct has a corresponding method. The signature of each method is partially defined by Yin-Yang. Method names, the number of type parameters and the number of type arguments are predefined while types of arguments and return types are open for the DSL author to define. **[TODO: link to the signature]**

Binding of the translated language constructs to the corresponding methods in the deep embedding is achieved during DSL intrinsification; language virtualization is agnostic of this binding. Further, in the implementation, all method names are prepended with `$`¹ which avoids collisions with other user functions.

Functions. We virtualize function definition and application to support full abstraction over the host language expressions. This allows DSL authors to define how functions are treated by reifying them and optionally providing analysis and transformations over them. For example, DSL authors can define different inlining strategies, perform call graph analysis, or instrument all function calls. With Scala-Virtualized this is not possible as functions are not translated and thus it is impossible to abstract over them.

¹In Scala it is a convention that user defined method's names should not contain `$` characters as those are reserved for the name mangling performed by the Scala compiler.

frameworks that use Yin-Yang it was hard to identify an abstraction that would allow virtualization of Scala classes.

This limitation, however, does not preclude class virtualization for embedded DSLs. We allow extensions to Yin-Yang that virtualize classes and traits through the use of the reflection API. The drawback of this approach is that DSL authors are required to know the reflection API compared to the simple interface of language virtualization. For now, each framework that uses Yin-Yang defines its own translation scheme. Extending Yin-Yang to achieve class virtualization is described in **[TODO: cf. extensions]**.

Configuring method virtualization. When we virtualize methods and their application we effectively override all expressions of Scala. In this case the DSL author has to: *i*) write the DSL definition in a way that corresponds to the translation and is not idiomatic to Scala, and *ii*) do additional transformation that removes all combinations of applications over domain-specific operations.

This can be cumbersome and we leave method virtualization as a configuration option that is disabled by default. This way DSL authors can write DSLs in the Scala idiomatic way and the `app/lam` pairs for DSL operations never appear in the DSL intermediate representation.

5.1.1 Virtualizing Pattern Matching

The Scala compiler has a virtual pattern matcher that allows for changing the semantics of the construct. The semantics can be changed to reify the pattern match for its use in DSLs or to provide alternative Yin-Yang reuses the functionality of this pattern matcher in combination with DSL intrinsification to allow reasoning about it in DSL compilers. In this section, for purposes of explaining DSL intrinsification, we explain the functioning of the virtualized pattern matcher.

Scala's pattern matching can be interpreted with deconstructors and operations on the `Option` type of Scala. The successful match is represented with the `Some` type which is a constructed the monadic return of the `Option` monad; failures failures with the `None` type which is a monadic *zero* operation. The pattern nesting is represented with the monadic *bind* operation `flatMap`; alternation is represented with the `orElse` combinator on the `Option` monad which represents monadic addition. The semantics of Scala pattern matching can be represented completely with the operations of the zero-plus monad.

The virtual pattern matcher converts Scala pattern matching to the operations on a user-defined zero-plus monad. A pattern match is virtualized if the object `__match` is defined in the scope. For the original semantics of Scala pattern matching is defined by the object `__match` defined in Figure 5.4. To virtualize pattern matching users can

provide their own type signatures and implementations in `__match`, on implementations of the zero-plus monad, and implementations and signatures of the deconstructors.

If the object `__match` is in scope a simple pattern match

```
p match {  
  case Pair(l, r) => f(l,r)  
}
```

is translated into

```
__match.runOrElse(p) { x1: Any =>  
  Pair.unapply(x1).flatMap(x2: (Int, Int) => {  
    val l: Int = x2._1; val r: Int = x2._2;  
    __match.one(f(l, r))  
  })  
}
```

In case of multiple case clauses

```
p match {  
  case Pair(l, r) => f(l,r)  
  case Tuple2(l, r) => f(l,r)  
}
```

the monadic addition `orElse` is used for matching alternative statements in order:

```
Pair.unapply(p).flatMap(x2: (Int, Int) => {  
  val l: Int = x2._1; val r: Int = x2._2;  
  __match.one(f(l, r))  
}).orElse(  
  Tuple2.unapply(p).flatMap(x3: (Int, Int) => {  
    val l: Int = x3._1; val r: Int = x3._2;  
    __match.one(f(l, r))  
  })  
)))
```

Nested pattern matches

```
p match {  
  case Pair(Pair(l1, l2), r) => f(f(l1,l2), r)  
}
```

are translated into nested calls to `flatMap`:

```
Pair.unapply(p).flatMap(x2: (Int, Int) => {  
  val r: Int = x2._2;  
  Pair.unapply(x2._1).flatMap(x4: (Int, Int) => {
```

```

    val ll: Int = x4._1; val lr: Int = x4._2;
    __match.one(f(f(ll, lr), r))
  })
})

```

Finally the pattern guards are translated into the call to the **guard** function that executes the by-name body of the case if the **cond** statement is satisfied.

[TODO: here add a link to later sections]

5.2 DSL Intrinsicification

DSL intrinsicification maps directly embedded versions of the DSL intrinsics to their deep counterparts. The constructs that need to be converted are: *i)* DSL types, *ii)* constant literals, *iii)* captured variables, and *iv)* DSL operations in the direct program.

[TODO: section pointers]

[TODO: pointer to the figure and add lines to the figure, also adapt the figure for the new translation]

5.2.1 Constants and Free Variables

Constants. Constant values can be intrinsicified in the deep embedding in multiple ways. They can be converted to a method call for each constant (e.g., $\llbracket 1 \rrbracket = __1$), type (e.g., $\llbracket 1 \rrbracket = \text{liftInt}(1)$), or with a unified polymorphic function (e.g., $\llbracket 1 \rrbracket = \text{lift}[Int](1)$) that uses type classes to define behavior and the return type of **lift**.

In Yin-Yang we use the polymorphic function approach for to translate constants

$$\frac{\Gamma \vdash c : T}{\llbracket c \rrbracket = \text{lift}[T](c)}$$

where c is a constant. We choose this approach as DSL frameworks commonly have a single IR node for all constants and it is easiest to implement such behavior with a single lift method.

The deep embedding can, given that Scala supports type-classes, provide an implementation of lift that depends on the type of c . The DSL author achieves this by providing a type class instance for lifting a set of types (defined by upper and lower bounds) of constants.

In Yin-Yang we treat as constants:

1. *Scala literals* of all primitive types `Char`, `Short`, `Int`, `Long`, `Float`, and `Double`, as well as literals of type `String` ("`...`"), `Unit` (`()`), and `Null` (`null`).
2. *Scala object accesses* e.g., `Vector` in `Vector.fill` is viewed as a constant. This allows the DSL authors to re-define the default behavior of object access. Translating objects is optional as leaving their original semantics simplifies the implementation of the deep embedding, but requires special cases in type translation. [\[TODO: link to the examples \]](#)

Free variables. Free variables are external variables captured by a direct EDSL term. All that deep embedding knows about these terms is their type and that they will become available only during evaluation (i.e., interpretation or execution after code generation). Hence, free variables need to be treated specially by the translation and the deep embedding needs to provide support for their evaluation.

Yin-Yang tracks free variables in the DSL scope and translates them into a call to the polymorphic function `hole[T]`. As the arguments Yin-Yang passes the unique identifier for that variable:

$$\frac{\Gamma \vdash x : T \quad x \text{ is a free variable}}{\llbracket x \rrbracket = \text{hole}[T](\text{uid}(x))}$$

In Figure 5.5, the free variables `n` and `exp` are replaced with calls to the polymorphic method `hole[T]`, which handles the evaluation of free variables in the deep embedding. Each captured identifier is assigned with a unique number that is passed as an argument to the `hole` method (0 and 1 in Figure 5.5). The identifiers are later sorted and passed as arguments to the Scala function that is a result of EDSL compilation. The DSL author is required to ensure that the position and the type of the resulting function matches the order and types of the sorted identifiers passed by Yin-Yang.

5.2.2 Type Translation

The *type translation* maps every DSL type in the, already virtualized, term body to an equivalent type in the deep embedding. In other words, the type translation is a function on types. Note that this function is inherently DSL-specific, and hence needs to be configurable by the DSL author.

The type mapping depends on the input type and the context. In practice, we need only distinguish between types in type-argument position, e.g. the type argument `Int` in the polymorphic function call `lam[Int, Int]`, and the others. To this end, we define a pair of mutually recursive functions $\tau_{\text{arg}}, \tau : \mathbb{T} \rightarrow \mathbb{T}$ where \mathbb{T} is the set of all types and τ_{arg} and τ translate types in argument and non-argument positions, respectively.

Having type translation as a function opens a number of possible deep embedding strategies. Alternative type translations can also dictate the interface of `lam` and `app` and other core EDSL constructs. Here we discuss the ones that we find useful in EDSL design:

[TODO: link translations to their later applications]

The identity translation. If we choose τ to be the identity function and virtualization methods such as `lam`, `app` and `ifThenElse` to be implemented in the obvious way using the corresponding Scala intrinsics, the resulting translation will simply yield the original, directly embedded DSL program.

Generic polymorphic embedding. If instead we choose τ to map any type term T (in non-argument position) to $\text{Rep}[T]$, for some abstract, higher-kinded IR type `Rep` in the deep EDSL scope, we obtain a translation to a *finally-tagless, polymorphic* embedding [Carette et al., 2009, Hofer et al., 2008]. For this embedding, the translation functions are defined as:

$$\begin{aligned}\tau_{\text{arg}}(T) &= T \\ \tau(T) &= \text{Rep}[T]\end{aligned}$$

By choosing the virtualized methods to operate on the IR-types in the appropriate way, one obtains an embedding that *preserves well-typedness*, irrespective of the particular DSL it implements. We will not present the details of this translation here, but refer the interested reader to [Carette et al., 2009].

Eager inlining. In high-performance EDSLs it is often desired to eagerly inline all functions and to completely prevent dynamic dispatch in user code (e.g., storing functions into lists). This is achieved by translating function types of the form $A \Rightarrow B$ in the direct embedding into $\text{Rep}[A] \Rightarrow \text{Rep}[B]$ in the deep embedding (where `Rep` again designates IR types). Instead of constructing an IR node for function application, such functions reify the whole body of the function starting with IR nodes passed as arguments. The effect of such reification is equivalent to inlining. This function representation is used in LMS [Rompf and Odersky, 2012b] by default and we use it in Figure 5.5. The

translation functions are defined as:

$$\begin{aligned}
\tau_{\text{arg}}(T[I_1, \dots, I_n]) &= T[\tau_{\text{arg}}(I_1), \dots, \tau_{\text{arg}}(I_n)] \\
\tau_{\text{arg}}(T_1 \Rightarrow T_2) &= \text{error} \\
\tau_{\text{arg}}(T) &= T, \text{ otherwise} \\
\tau(T_1 \Rightarrow T_2) &= \text{Rep}[\tau_{\text{arg}}(T_1)] \Rightarrow \text{Rep}[\tau_{\text{arg}}(T_2)] \\
\tau(T) &= \text{Rep}[T], \text{ otherwise}
\end{aligned}$$

This translation preserves well-typedness but rejects programs that contain function types in the type-argument position. In this case this is a desired behavior as it fosters high-performance code by avoiding dynamic dispatch. As an alternative to rejecting function types in the type-argument position the deep embedding can provide coercions from $\text{Rep}[A] \Rightarrow \text{Rep}[B]$ to $\text{Rep}[A \Rightarrow B]$ and from $\text{Rep}[A \Rightarrow B]$ to $\text{Rep}[A] \Rightarrow \text{Rep}[B]$.

This translation disallows usage of curried functions in the direct programs. If we represent the curried functions as the polymorphic types [\[TODO: link somehow to scala here or before\]](#) then functions would appear in the type argument position. To re-introduce the curried functions we provide a translation with the modified rule for translation of functions:

$$\tau(T_1 \Rightarrow T_2) = \tau(T_1) \Rightarrow \tau(T_2)$$

which is correct only when the virtualization of functions is disabled.

Untyped backend. If DSL authors want to avoid complicated types in the back-end (e.g., $\text{Rep}[T]$), the τ functions can simply transform all types to the `Dynamic` [Abadi et al., 1991] type. Giving away type safety can make transformations in the back-end easier for the DSL author.

Custom types. All previous translations preserved types in the type parameter position. The reason is that the τ functions behaved like a higher-kinded type. If we would like to map some of the base types in a custom way, those types need to be changed in the position of type-arguments as well. This translation is used for EDSLs based on polymorphic embedding [Hofer et al., 2008] that use `this.T` to represent type `T`.

This translation simply prepends each type with a prefix (e.g., `this`) so that the deep

embedding can redefine it:

$$\begin{aligned}\tau_{\text{arg}}(T) &= \text{this}.T \\ \tau(T) &= \text{this}.T\end{aligned}$$

Unlike with the previous translations, where the type system of the direct embedding was ensuring that the term will type-check in the deep embedding, this translation gives no guarantees. The responsibility for the correctness of the translation is on the DSL author. We applied this translation to Slick [Typesafe] with great success (§10.3).

Changing the translation. By simply changing the type translation, the EDSL author can modify behavior of an EDSL. For example, with the generic polymorphic embedding the EDSL will reify function IR nodes and thus allow for dynamic dispatch. In the same EDSL that uses the eager inlining translation, dynamic dispatch is restricted and all function calls are inlined.

5.2.3 Operation Translation

The *operation translation* maps directly embedded versions of the DSL operations into corresponding deep embeddings. To this end, we define a function `opMap` on terms that returns a deep operation for each directly embedded operation.

The `opMap` function in Scala intrinsifies direct EDSL body in the context of the deep embedding. `opMap` can be defined as a composition of two functions: *i*) function `inject` that inserts the direct EDSL body into a context where deep EDSL definitions are visible, and *ii*) `rebind` rebinds operations of the direct EDSL to the operations of the deep EDSL. Function `opMap` is equivalent to the composition of `inject` and `rebind` (written in Scala as `rebind andThen inject`).

Operation `rebind`. Operations in Scala are resolved through a *path*. For example, a call to the `println` method of the Scala object `Predef`

```
scala.collection.immutable.Vector.fill(1)(42)
```

has a path `scala.collection.immutable.List.fill`².

This phase of the translation translates paths of all operations so they bind to operations in the deep embedding. The translation function can perform an identity operation,

²Scala packages have a hidden prefix `_root_` that we always omit for simplicity.

prefix addition, name mangling of function names, etc.

Operation inject. For Yin-Yang and polymorphic embeddings [Hofer et al., 2008] in general we chose to inject the body of our DSLs into the refinement of the Scala component that contains all deep DSL definitions

$$\llbracket dsl \rrbracket = \mathbf{new} \ de \ \{ \ \mathbf{def} \ \mathbf{main}(): \ \tau(T) = dsl \}$$

where *dsl* is the direct DSL program after rebinding and *de* is the component name that is provided by the DSL author that holds all definitions in the deep embedding, and τ is the type translation.

Alternatively the DSLs can be injected into the scope by importing all DSL operations from the object that contains the deep embedding definitions.

$$\llbracket dsl \rrbracket = \mathbf{val} \ c = \mathbf{new} \ de; \ \mathbf{import} \ c._; \ dsl$$

In both cases the corresponding `rebind` function can be left as an identity. If the deep embedding has all the required methods with corresponding signatures all operations will rebind to the operations of the deep embedding by simply re-type-checking the program in the new context.

For example in a simple function application

```
Vector.fill(1)(42)
```

the injection will rebind the operation through the extension methods of Scala. The resulting code will contain wrapper classes that extend DSL types with deep operations:

```
VectorOps(lift(Vector)).fill(lift(1))(lift(42))
```

Finally injection in the DSL scope allows the deep embedding to introduce additional implicit arguments to all DSL operations. The implicit arguments introduced in the direct embedding are treated as explicit in the deep embedding. For example, the `fill` operation can be augmented with the source information from the direct embedding and run-time type representation:

```
VectorOps(lift(Vector)).fill(lift(1))(lift(42))(
  sourceContext("example.scala",1,1), typeTag[Int]
)
```

In Yin-Yang we chose the operation translations that closely match the structure of the direct embeddings. This allows the authors of the deep embedding to use the DSL itself

for development of new DSL components. In this case the DSL author can use the deep interface augmented with implicit conversions that all simplify lifting constants, calling operations etc. With such interface the previous example resembles the direct embedding

```
Vector.fill(1)(42)
```

except for the abstraction leaks of the deep embedding (§4.2). This approach requires less code than than “naked” AST manipulation[**TODO: cite**], e.g:

```
VectorFill(Const(1), Const(42))
```

[**TODO: calling the methods**]

5.2.4 Translation Example

To illustrate the core translation, we use an example program for calculating $\sum_{i=0}^n i^{exp}$ using the vector EDSL defined in Figure 4.1. Figure 5.5 contains three versions of the program: Figure 5.5a depicts the direct embedding version, Figure 5.5b represents the program after type checking (as the translation sees it), and Figure 5.5c shows the result of the translation.

In Figure 5.5, calls to `range` on the object `vector.Vector` and `pow` on the package object `math.‘package‘` are respectively translated to calls `range` and `pow` on `this.Vector` and `this.‘package‘`. For simplicity, passing source information (`SourceContext`) and type information `TypeTag` is handled implicitly by the Scala compiler. In absence of implicit parameters they should be handled by the translation.

5.2.5 Correctness

To completely conceal the deep embedding all type errors must be captured in the direct embedding or by the translation, i.e., the translation must never produce an ill-typed program. Proving this property is verbose and partially covered by previous work. Therefore, for each version of the type translation we provide references to the previous work and give a high-level intuition:

- *The identity translation* ensures that well-typed programs remain well typed after the translation to the deep embedding [Carette et al., 2009]. Here the deep embedding is the direct embedding with virtualized host language intrinsics.
- *Generic polymorphic embedding* preserves well-typedness [Carette et al., 2009]. Type `T` is uniformly translated to `Rep[T]` and thus every term will conform to its expected type.

- *Eager inlining* preserves well-typedness for programs that are not explicitly rejected by the translation. We discuss correctness of eager inlining in [Jovanovic et al., 2014b] on a Hindley-Milner based calculus similar to the one of Carette et al. [Carette et al., 2009].

For the intuition why type arguments can not contain function types consider passing an increment function to the generic identity function:

```
id[T => T](lam[T, T](x => x + 1))
```

Here, the `id` function expects `Rep[_]` type but the argument is `Rep[T] => Rep[T]`.

- The *Dynamic* type supports all operations and, thus, static type errors will not occur. Here, the DSL author is responsible for providing a back-end where dynamic type errors will not occur.
- *Custom types* can cause custom type errors since EDSL authors can arbitrarily redefine types (e.g., `type Int = String`). Yin-Yang provides *no guarantees* for this type of the translation.

5.3 Translation in the Wider Context

Yin-Yang consistently translates terms to the embedded domain and, thus, postpones DSL compilation to run-time. Although, compilation happens in a different compilation stage, Yin-Yang does not allow staging [Taha and Sheard, 1997]. EDSLs can, however, achieve partial evaluation [Jones et al., 1993] if their implementation supports it.


We implemented Yin-Yang in Scala, however the underlying principles are applicable in the wider context. Yin-Yang operates in the domain of statically typed languages based on the Hindley-Milner calculus with a type system that is advanced enough to support deep EDSL embedding. The type inference mechanism, purity, laziness, and sub-typing, do not affect the operation of Yin-Yang. Different aspects of Yin-Yang require different language features, which we discuss separately below.

The core translation are based on term and type transformations. Thus, the host language must support reflection, introspection and transformation on types and terms. This can be achieved both at run-time and compile-time.

Semantic equivalence between the direct embedding and deep embedding is required for debugging and prototyping. If there is a *semantic mismatch* [Czarnecki et al., 2004] between the two embeddings, e.g., the host language is lazy and the embedded language is strict, Yin-Yang can not be used for debugging. In this scenario the direct embedding

Chapter 5. Translation of the Direct Embedding

can be implemented as stub which is used only for its user friendly interface and error reporting.

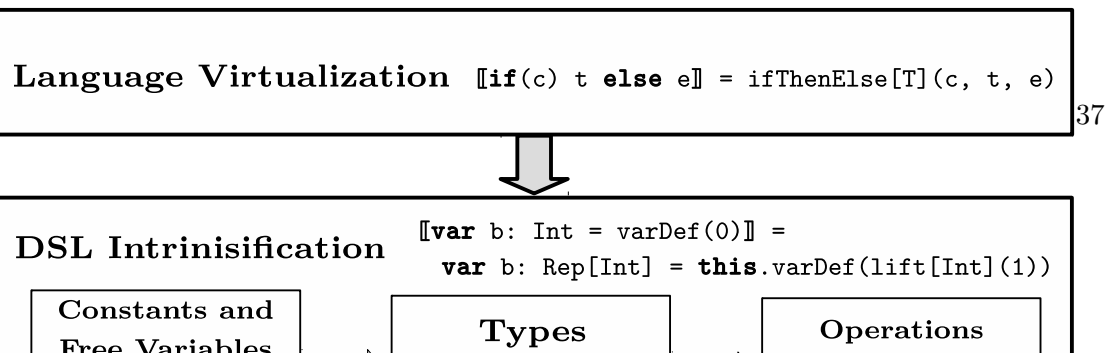

Function Virtualization

$$\frac{\Gamma \vdash t : T_2}{\llbracket x : T_1 \Rightarrow t \rrbracket = \text{lam}[T_1, T_2](x : T_1 \Rightarrow \llbracket t \rrbracket)} \quad \frac{\Gamma \vdash t_1 : T_1 \Rightarrow T_2 \quad t_2 : T_1}{\llbracket t_1(t_2) \rrbracket = \text{app}[T_1, T_2](\llbracket t_1 \rrbracket, \llbracket t_2 \rrbracket)}$$

Method Virtualization

$$\llbracket \text{def } f[T_1](x : T_2) : T_3 = t \rrbracket = \text{def } f[T_1] : (T_2 \Rightarrow T_3) = \llbracket x : T_2 \Rightarrow t \rrbracket$$

$$\frac{\Gamma \vdash t_1.f : [T_1](T_2 \Rightarrow T_3)}{\llbracket t_1.f[T_1](t_2) \rrbracket = \text{app}[T_2, T_3](\llbracket t_1 \rrbracket.f[T_1], \llbracket t_2 \rrbracket)}$$

Control Constructs

$$\frac{\Gamma \vdash \text{if}(t_1) t_2 \text{ else } t_3 : T}{\llbracket \text{if}(t_1) t_2 \text{ else } t_3 \rrbracket = \text{ifThenElse}[T](\llbracket t_1 \rrbracket, \llbracket t_2 \rrbracket, \llbracket t_3 \rrbracket)}$$

$$\frac{\Gamma \vdash \text{try } t_1 \text{ catch } t_2 \text{ finally } t_3 : T}{\llbracket \text{try } t_1 \text{ catch } t_2 \text{ finally } t_3 \rrbracket = \text{try}[T](\llbracket t_1 \rrbracket, \llbracket t_2 \rrbracket, \llbracket t_3 \rrbracket)}$$

$$\llbracket \text{while}(c) b \rrbracket = \text{whileDo}(\llbracket c \rrbracket, \llbracket b \rrbracket) \quad \llbracket \text{do } b \text{ while}(c) \rrbracket = \text{doWhile}(\llbracket c \rrbracket, \llbracket b \rrbracket)$$

$$\llbracket \text{return } t \rrbracket = \text{ret}(\llbracket t \rrbracket)$$

Value Bindings

$$\llbracket \text{lazy val } x : T = t \rrbracket = \text{val } x : T = \text{lazyValDef}[T](\llbracket t \rrbracket)$$

$$\llbracket \text{val } x : T = t \rrbracket = \text{val } x : T = \text{valDef}[T](t) \quad \llbracket \text{var } x : T = t \rrbracket = \text{val } x : T = \text{varDef}[T](\llbracket t \rrbracket)$$

$$\frac{\Gamma \vdash x : T}{\llbracket x \rrbracket = \text{read}[T](\llbracket x \rrbracket)}$$

$$\frac{\Gamma \vdash x : T}{\llbracket x = t \rrbracket = \text{assign}[T](x, \llbracket t \rrbracket)}$$

Figure 5.2 – Rules for virtualization of Scala language intrinsics.

Methods on the Any type

$$\begin{aligned}
 \llbracket t_1 == t_2 \rrbracket &= \text{infix_} == (\llbracket t_1 \rrbracket, \llbracket t_2 \rrbracket) & \llbracket t_1 != t_2 \rrbracket &= \text{infix_} != (\llbracket t_1 \rrbracket, \llbracket t_2 \rrbracket) \\
 \llbracket t.## \rrbracket &= \text{infix_} ## (\llbracket t \rrbracket) & \llbracket t.\text{getClass} \rrbracket &= \text{infix_} \text{getClass} (\llbracket t \rrbracket) \\
 \llbracket t.\text{isInstanceOf}[T] \rrbracket &= \text{infix_} \text{isInstanceOf}[T] (\llbracket t \rrbracket) \\
 \llbracket t.\text{asInstanceOf}[T] \rrbracket &= \text{infix_} \text{asInstanceOf}[T] (\llbracket t \rrbracket)
 \end{aligned}$$

Methods on the AnyRef type

$$\begin{aligned}
 \llbracket t_1 \text{ eq } t_2 \rrbracket &= \text{infix_} \text{eq} (\llbracket t_1 \rrbracket, \llbracket t_2 \rrbracket) & \llbracket t_1 \text{ ne } t_2 \rrbracket &= \text{infix_} \text{ne} (\llbracket t_1 \rrbracket, \llbracket t_2 \rrbracket) \\
 \llbracket t_1.\text{wait}(t_2, t_3) \rrbracket &= \text{infix_} \text{wait} (\llbracket t_1 \rrbracket, \llbracket t_2 \rrbracket, \llbracket t_3 \rrbracket) & \llbracket t_1.\text{wait}(t_2) \rrbracket &= \text{infix_} \text{wait} (\llbracket t_1 \rrbracket, \llbracket t_2 \rrbracket) \\
 \llbracket t.\text{wait} \rrbracket &= \text{infix_} \text{wait} (\llbracket t \rrbracket) & \llbracket t.\text{notify} \rrbracket &= \text{infix_} \text{notify} (\llbracket t \rrbracket) \\
 \llbracket t.\text{notifyAll} \rrbracket &= \text{infix_} \text{notifyAll} (\llbracket t \rrbracket) \\
 \llbracket t_1.\text{synchronized}[T](t_2) \rrbracket &= \text{infix_} \text{synchronized}[T] (\llbracket t_1 \rrbracket, \llbracket t_2 \rrbracket)
 \end{aligned}$$

Figure 5.3 – Rules for virtualization of methods on Any and AnyRef.

```

object __match {
  def zero: Option[Nothing] = None
  def one[T](x: T): Option[T] = Some(x)
  def guard[T](cond: Boolean, then: => T): Option[T] =
    if(cond) one(then) else zero
  def runOrElse[T, U](x: T)(f: T => Option[U]): U =
    f(x) getOrElse (throw new MatchError(x))
}
    
```

Figure 5.4 – The implementation of the virtualized pattern matcher with the original Scala semantics and with Option as the zero-plus monad.

<pre> import vector._; import math.pow; val n = 100; val exp = 6; vectorDSL { if (n > 0) { val v = Vector.range(0, n) v.map(x => pow(x, exp)).sum } else 0 } </pre>	<pre> val n = 100; val exp = 6; vectorDSL { if (n > 0) { val v: Vector[Int] = vector.Vector.range(0, n) v.map[Int](x: Int => math.`package`.pow(x, exp)).sum[Int](math.Numeric.IntIsIntegral) } else 0 } </pre>
---	--

(a) A program in direct embedding for calculating $\sum_{i=0}^n i^{exp}$.

(b) The original program after desugaring and type inference.

```

val n = 100; val exp = 6;
new VectorDSL with IfOps
  with MathOps { def main() = {
    ifThenElse[Int](hole[Int](0, typeTag[Int]) > lift[Int](0), {
      val v: Rep[Vector[Int]] = this.valDef[Vector[Int]](
        lift(vector.Vector).range(lift[Int](0), hole[Int](
          typeTag[Int], 0)))
      v.map[Int](lam[Int, Int](x: Rep[Int] =>
        lift(math.`package`.pow(x, hole[Int](typeTag[Int], 1))
      ).sum[Int](lift(math.Numeric).IntIsIntegral)
    }, {
      lift[Int](0)
    })
  }
}

```

(c) The Yin-Yang translation of the program from Figure 5.5b.

Figure 5.5 – Transformation of an EDSL program for calculating $\sum_{i=0}^n i^{exp}$.

6 Deep Embedding with Yin-Yang

The translation to the deep embedding assumes existence of an adequate deep embedding. This deep embedding should have an interface that corresponds to: *i*) methods emitted by language virtualization, *ii*) translation of constants and free variables, and *iii*) DSL operations defined in the direct embedding.

For each type translation, interface of the deep embedding and IR reification is achieved differently. In this section we describe how to define the deep embedding interface (§6.1) and achieve reification for relevant type translations: *i*) the identity translation (§6.2), *ii*) the polymorphic embedding (§6.3), *iii*) the polymorphic embedding with eager inlining (§6.4), and *iv*) the embedding with custom types (§6.5). Finally, we discuss how is the deep embedding compiled and executed (§6.6). For conciseness, in all embeddings we omit the interface of pattern matching and virtualized universal methods.

6.1 Relaxed Interface of the Deep Embedding

The Yin-Yang translation requires a certain interface from the deep embedding. This interface, however, does not conform to the typical definition of an interface in object oriented programming languages. In most translation rules only the method name, number of type arguments, and number of explicit arguments is defined.

The number of implicit arguments and the return type, however, are left open to the DSL author. The implicit parameters are added by the type-checker after the operation translation phase if they are present in the deep embedding. For example, if we define the `$ifThenElse` function as

```
def $ifThenElse[T](cond: Boolean, thn: => T, els: => T)(
  implicit tpe: TypeTag[T]): T = \\...
```

after the translation the Scala type-checker will provide the arguments that carry run-time

type information.

This feature can be used in the deep embeddings for various purposes. The ones that were used in practice are: *i)* tracking type information, *ii)* tracking positions in the source code of the direct embedding, *iii)* changing the method return type based on its argument types, and *iv)* allowing multiple methods with the same erased signature¹.

6.2 Embedding for the Identity Translation

The DSL embedding for the identity translation is not truly a deep embedding. The types are unmodified and, thus, can not represent the DSL intermediate representation. This translations is still interesting as a mechanism for instrumenting language constructs of Scala, as well as for restricting certain language features in the direct embedding. The basic interface that contains all the language features, without any additional implicit parameters, is defined in Figure 6.1.

With this embedding the order of execution in all control flow constructs of Scala is preserved with by-name parameters. For example, in `$ifThenElse` both the `thn` and the `els` parameters are by-name and their execution order is defined by the implementation of the method. Similarly, `$whileDo`, `$doWhile`, `$try`, and `$lazyValDef` have their parameters by-name.

The DSL author can instrument Scala language features by re-defining virtualized methods. For example, collecting profiles of `if` conditions can be simply added by overriding the `$ifThenElse` method:

```
def $ifThenElse[T](cond: Boolean, thn: => T, els: => T)(
  implicit sc: SourceContext): T = {
  val (thnCnt: Long, elsCnt: Long) =
    globalProfiles.getOrElse(sc, (0, 0))

  globalProfiles.update(sc,
    if (cond) (thnCnt + 1, elsCnt)
    else (thnCnt, elsCnt + 1))
  if (cond) thn else els
}
```

Achieving the same effect with a facility like macros would require the DSL author to know the reflection API of Scala which involves details about the Scala intermediate representation. Further, the DSL author would be required to write transformers of that intermediate representation.

¹On the JVM, due to type erasure, methods with different argument types are sometimes erased to the same signature. This can be avoided by augmenting methods with an additional implicit parameter that modifies the overall method signature.

Supported features that are not of interest in the deep embedding can be removed with an interesting trick. If we implement each method in the deep embedding as a macro that inlines the method to its original language construct all abstraction overhead of virtualized methods disappears. For example, `$ifThenElse` can be returned to a regular `if` with

```
def $ifThenElse[T](cond: Boolean, thn: => T, els: => T): T =
  macro ifThenElseImpl[T]

def ifThenElseImpl[T](c: Context)(cond: c.Tree,
  thn: c.Tree, els: c.Tree): c.Tree = { import c.universe._
  q"if ($cond) $thn else $els"
}
```

Yin-Yang provides a component that has all language features overridden with macros that rewrite to the original language construct. By using this component the DSL author can override functionality of individual language constructs without a need to redefine all other language features.

In Figure 6.1 method `hole` has a slightly different representation than what is presented in §5. Method `hole` has an additional parameter for the run-time type information (`tpe: TypeTag[T]`). This parameter is passed explicitly by Yin-Yang to allow the compiler to infer the type arguments of the method `hole`. This allows additional freedom for defining the interface of `hole` (see [\[TODO: embedding with custom types\]](#)).

6.3 Polymorphic Embedding

With the generic polymorphic embedding we uniformly abstract over each type in the direct embedding. This abstraction can be used to give different semantics (thus polymorphic) to the deep programs. In the context of the deep DSLs the most common semantics is reification of the intermediate representation.

In Figure 6.2 we show the basic interface for the generic polymorphic embedding. In trait `PolymorphicBase` the type `R[+T]` is the abstraction over the types in the direct embedding. This type is covariant in type `T` and therefore the abstract types have the same subtyping relation as the types in the direct embedding. Some deep embeddings call this type `Rep`.

In this embedding both function definition and function application are abstracted over. `lam` converts functions from the host language into the functions in the embedded language and `app` returns functions from the embedded language into the host language. This way the DSL author has complete control over the function definition/application in the deep embedding.

```

trait FunctionsInterface {
  // only a subset of function arities is displayed
  def $app[U](f: () => U): () => U
  def $lam[U](f: () => U): () => U

  def $app[T_1, U](f: T_1 => U): T_1 => U
  def $lam[T_1, U](f: T_1 => U): T_1 => U
}

trait IdentityInterface with FunctionsInterface {
  // constants and captured variables
  def lift[T](v: T): T
  def hole[T](id: Long, tpe: TypeTag[T]): T

  // control structures
  def $ifThenElse[T](cond: Boolean, thn: => T, els: => T): T
  def $return(expr: Any): Nothing
  def $whileDo(cond: Boolean, body: => Unit): Unit
  def $doWhile(body: => Unit, cond: Boolean): Unit
  def $try[T](body: => T, catches: Throwable => T, fin: => T): T
  def $throw(t: Throwable): Nothing

  // variables
  def $valDef[T](init: T): T
  def $lazyValDef[T](init: => T): T
  def $varDef[T](init: T): T
  def $read[T](init: T): T
  def $assign[T](lhs: T, rhs: T): Unit
}

```

Figure 6.1 – Interface of the identity DSL.

```

trait PolymorphicBase { type R[+T] }

trait GenericFunctionsBase extends PolymorphicBase {
  // only a subset of function arities is displayed
  def $app[U](f: R[()] => U): () => R[U]
  def $lam[U](f: () => R[U]): R[()] => U

  def $app[T_1, U](f: R[T_1] => U): R[T_1] => R[U]
  def $lam[T_1, U](f: R[T_1] => R[U]): R[T_1] => U
}

trait PolymorphicInterface extends GenericFunctionsBase {
  // constants and captured variables
  def lift[T](v: T): R[T]
  def hole[T](id: Long, tpe: TypeTag[T]): R[T]

  // control structures
  def $ifThenElse[T](cnd: R[Boolean], thn: => R[T], els: => R[T]): R[T]
  def $return(expr: R[Any]): R[Nothing]
  def $whileDo(cnd: R[Boolean], body: => R[Unit]): R[Unit]
  def $doWhile(body: => R[Unit], cond: R[Boolean]): R[Unit]
  def $try[T](body: => R[T], catches: R[Throwable] => T, fin: => R[T]): R[T]
  def $throw(e: R[Throwable]): R[Nothing]

  // variables
  def $valDef[T](init: R[T]): R[T]
  def $lazyValDef[T](init: => R[T]): R[T]
  def $varDef[T](init: R[T]): R[T]
  def $read[T](init: R[T]): R[T]
  def $assign[T](lhs: R[T], rhs: R[T]): R[Unit]
}

```

Figure 6.2 – Interface of the generic polymorphic embedding.

Compared to the deep embeddings in Scala (e.g., LMS) the DSL author should follow the translation rules for the deep embedding to be applicable to Yin-Yang. Similarly to deep DSLs the DSL operation are added to `R[T]` types in the same manner. In addition the DSL author should: *i*) provide lifting for Scala objects and *ii*) transform the bodies of deep embedding operations.

Objects in the deep embedding. Objects in the deep embedding must correspond to the translated objects in the direct embedding. Since we treat objects as constants they are handled by the `lift` method.

An object from the direct embedding should be represented with an appropriate lift method and a set of extension methods that represent its operations. For example, to support the `println` method on the `Predef` object the deep embedding introduce an extension method on `R[Predef.type]`:

```
implicit class PredefOps(predef: R[Predef.type]) {  
  def println(p: R[Any]): R[Unit] = \\...  
}
```

To preserve the original API of the deep embedding one can introduce a shortcut for the `Predef` object in the DSL component:

```
val Predef = lift[Predef.type](scala.Predef)
```

This way the deep embedding can be used in a similar way to the direct embedding for the purpose of developing internal DSL components.

Operations in the direct embedding. Implementation of the deep embedding operations depends on which rules of virtualization are applied. If we apply method virtualization in the DSL programs the bodies of the deep embedding operations should be transformed with the same transformation. For example, an identity method in the deep embedding

```
def id[T](v: R[T]): R[T] = Identity(v)
```

should be transformed into

```
def id[T]: R[T => T] = $lam[T]((x: R[T]) => Identity(v))
```

In practice, the deep DSL operations only reify the deep program and tracking function application of these methods just introduces superfluous IR nodes. Further, this transformation convolutes the implementation of the deep embedding. For these reasons, in most


```

trait InliningFunctionsBase extends PolymorphicBase {
  def $app[U](f: () => R[U]): () => R[U]
  def $app[T_1, U](f: R[T_1] => R[U]): R[T_1] => R[U]

  def $lam[U](f: () => R[U]): () => R[U]
  def $lam[T_1, U](f: R[T_1] => R[U]): R[T_1] => R[U]
}

```

Figure 6.3 – Interface of the polymorphic embedding with eager inlining.

of the DSLs it is common to disable method virtualization. This way the domain-specific operations are always executed in the host language.

6.4 Polymorphic Embedding With Eager Inlining

Polymorphic embedding with eager inlining differs from the generic polymorphic embedding in the way host language functions are translated. With this type of embedding functions are left unmodified, and thus executed, in the host language and therefore always executed during DSL compilation. Effectively, this way of treating functions always inlines all functions in the deep embedding embedding.

With the type translation for eager inlining there two possibilities for the DSL author: *i)* use the full language virtualization but disallow curried functions, and *ii)* to completely disable virtualization of functions. In both of these cases the DSL author must implement the interface `PolymorphicInterface` from Figure 6.2, however, the interface for functions is different.

Eager inlining with function virtualization. If the full virtualization is used the deep embedding should provide an interface shown in Figure 6.3. This way the user can track function applications and definitions in the deep embedding with a drawback that curried functions are not allowed.

Eager inlining without function virtualization. Without virtualization the interface for functions in the deep embedding is not necessary. The deep embedding will use the functions from the host language. This kind of embedding is the primary choice of DSLs based on LMS².

²LMS supports both generic polymorphic embedding and embedding with eager inlining. However, in LMS DSLs[[TODO: cite](#)] and tutorials[[TODO: cite](#)] eager inlining is more common.

```

trait CustomFunctionsBase {
  type Function0[U]
  type Function1[T, U]
  def $app[U](f: Function0[U]): () => U
  def $app[T_1, U](f: Function1[T_1, U]): T_1 => U

  def $lam[U](f: () => U): Function0[U]
  def $lam[T_1, U](f: T_1 => U): Function1[T_1, U]
}

```

Figure 6.4 – Interface of the embedding with custom types. The DSL author can arbitrarily override each type in the embedding.

6.5 Embedding With Custom Types

In the embedding with custom types the DSL author is required to redefine every type of the direct embedding in the deep embedding. The overriding is achieved by the abstract types of Scala. For example, the type `scala.Boolean` can be overridden with a type `scala.Int` (as it is in the C based languages) inside of the DSL component with:

```

type Boolean = scala.Int

```

The interface of this type of embeddings is equivalent to the interface of the identity embedding (Figure 6.1) except that all types need to be abstract. Further, in Scala functions can not be directly converted into abstract types so all functions in the deep embedding must be represented with their nominal equivalents (e.g., `Int => Int` must be represented as `Function1[Int, Int]`). An example of the interface for functions is presented in Figure 6.4. Here, type `Function0[U]` makes the function type abstract.

A common pitfall with naming abstract types is using only their type name (e.g., `Function0`). The problem arises when two different types (with different paths) have the same name. In these cases the DSL author must use the full type path as the abstract type. Yin-Yang can be configured to add a prefix to the types with their full path or only to their name. In all examples, for conciseness reasons, we use the translation that places the prefix only in front of the type name. **[TODO: name the option]**

In the embedding with custom types a common way to reify the DSL IR is to define abstract types with the IR nodes of the deep embedding. In this scheme, in order to preserve well-typedness after the translation each IR node must satisfy the interface of the type from the direct embedding. The methods in the overridden type all methods can perform reification and still return the correct program.

In Figure 6.5 we show how one reifies operations on the `Boolean` type. All nodes in the IR usually have a common subtype (`Exp` in the example). Then the abstract type for

```

trait DSLBase {
  trait Exp // base class for all nodes
}
trait BooleanDSL extends DSLBase {
  type Boolean = BooleanOps
  trait BooleanOps with Exp {
    def &&(y: Boolean): Boolean = BooleanAnd(this, y)
    def ||(y: Boolean): Boolean = BooleanOr(this, y)
    def unary_!: Boolean = BooleanNot(this)
  }
}

case class BooleanAnd(lhs: Boolean, rhs: Boolean) extends BooleanOps
case class BooleanOr(lhs: Boolean, rhs: Boolean) extends BooleanOps
case class BooleanNot(lhs: Boolean) extends BooleanOps
}

```

Figure 6.5 – Overriding semantics of `Boolean` with the reification semantics for the deep embedding.

`Boolean` is overridden with a trait (`BooleanOps`) that redefines its operations. These redefined operations can now perform reification of the program in the deep embedding. With this embedding all IR nodes of type `Boolean` extend `BooleanOps` and therefore all method implementations have valid types.

[TODO: Type-check this snippet.]

The types in the deep embedding can not be expressed as a type function and therefore defining the interface of `hole` and `lift` is different than the other embeddings. Here, for each type in the direct embedding there needs to be a definition that maps the type to the deep embedding.

One way to achieve such type map is to use function overloading in Scala. The deep embedding should have one `hole` and `lift` method for each type in the direct embedding. For example, lifting the type `Int` is achieved with:

```

def hole(id: Long, tpe: TypeTag[scala.Int]): this.Int =
  new Hole(sym, v) with IntOps
def lift(v: scala.Int): this.Int =
  new Const(v) with IntOps

```

With this type of embedding the DSL author is free to redefine types arbitrarily thus giving the deep embedding different semantics. The embedding can perform pretty printing or provide a wrapper for another DSL. For further information on such embeddings see [Hofer et al., 2008] and §10.3.

```
trait Executable { =>
  def execute[T](args: Seq[Any]): T
}
```

Figure 6.6 – The trait for that Yin-Yang uses to execute the deep embedding.

6.6 The Yin-Yang Interface

Yin-Yang does not require an exact interface for the translation to the deep embedding and therefore there are no `traits` that a DSL author must extend in order to use the translation. The interface is defined by method names defined in the translation and by the types dictated by the type translation.

After the translation a program in the deep embedding should be executed and should produce the same result³ as the direct embedding. Execution of a program should happen transparently to the DSL, i.e., it should completely resemble the execution in the direct embedding.

Execution of the deep program depends on all the variables that were captured by the direct embedding. Yin-Yang, after the core translation, must assure that the deep embedding gets all the values that were replaced by holes and that the DSL compiler or interpreter can distinguish to which hole does a value belong.

To achieve this Yin-Yang requires that the deep embedding implements the `Executable` interface (Figure 6.6). This interface contains a single method `execute` that is used for execution of the DSL at host language run-time. Yin-Yang simply calls the method `execute` on the translated DSL with the arguments that were converted to holes.

Yin-Yang invokes `execute` with all captured variables sorted in the ascending order by the identifier that is passed to the corresponding `hole` methods. Since the identifiers passed to `hole` are strictly increasing, the DSL can uniquely map arguments to the holes they belong to. For example, the DSL program in the example translation (Figure 5.5c) has two captured variables (`n` and `exp`) with identifiers 0 and 1 respectively. Yin-Yang will, after translation, invoke this DSL with

```
dsl.execute[Int](Seq(n, exp))
```

This way of invoking a DSL is convenient for the DSL author as one needs to implement a single method, however, it is not optimal. Putting arguments in a `Seq` introduces an additional level of indirection and imposes boxing of all the arguments. In short running DSL programs that are executed in tight loops the overhead of boxing can become significant.

³The result can be different in case of floating-point operations executed on different back-end platforms, however this difference should not change decisions that are made based on the result.

To avoid this overhead, before translating to the generic `execute` method, Yin-Yang looks for more specific methods that would correspond to the holes that are passed. If this method is found Yin-Yang will execute that method although it is not in the interface. For example, if a DSL from the example translation ((Figure 5.5c)) would implement a method with a signature

```
def execute(v0:Int, v1:Int): Int
```

this method would be invoked instead.

The deeply embedded DSLs can generate and compile code in the host language, other languages, or be interpreted. We have abstracted over these types of DSLs with a simple interface. With this approach all compilation decisions are left to the DSL author. This simplifies the framework, however, it complicates management of DSL compilation in presence of multiple DSLs.

In the case where multiple DSL frameworks simultaneously invoke compilation of a program it is possible to exhaust memory resources of the running process. For example, each compilation in Scala requires loading the whole compiler and requires significant amounts of memory. When multiple frameworks use compilation without coordination the system resources are easily exhausted.

Yin-Yang currently does not provide a way to coordinate compilation of different DSLs. Resolving this problem has been studied before in context of JIT compilation [**TODO: cite jit compilation**] and it falls out of the scope of this work.

6.7 Using Yin-Yang

In this section we show how to define a DSL with Yin-Yang, given that we have both the direct and deep embedding that conforms to the required interface. First we describe how to apply the translation (§6.7.1) and then how the DSL user uses Yin-Yang based DSLs.

6.7.1 Defining a Translation for a DSL

The direct-to-deep embedding translation is defined as a macro that accepts a single by-name parameter that represents a body of a DSL program. For example, the `vectorDSL` from Figure 5.5 is defined as

```
def vectorDSL[T](body: => T): T = macro vectorDSLImpl[T]
```

where `vectorDSLImpl` represents the macro implantation.

```
object YYTransformer {  
  def apply[C <: Context, T](c: C)(  
    dslType: c.Type,  
    tpeTransformer: TypeTransformer[c.type],  
    config: YYConfig): YYTransformer[c.type, T]  
}
```

Figure 6.7 – Interface to the Yin-Yang translation.

The macro implementation calls into a single transformer (`YYTransformer`) that implements the whole translation. The `YYTransformer` is configured with: *i*) the type of a DSL component that implements the deep embedding (e.g., `la.VectorDSL`), *ii*) the type transformer (e.g., generic polymorphic transformer), and *iii*) the configuration object (i.e., whether to virtualize functions, methods, lift Scala objects, etc.). Interface of the object that creates a `YYTransformer` is shown in Figure 6.7.

With the `YYTransformer` object the method `vectorDSLImpl` is implemented as:

```
def vectorDSLImpl[T](c: Context)(body: c.Expr[T]): c.Expr[T] =  
  YYTransformer[c.type, T](c)(  
    typeOf[la.VectorDSL],  
    new EagerInliningTypeTransformer[c.type](c),  
    YYConfig(virtualizeFunctions = false)(  
      body)
```

here the type of the `VectorDSL` is provided in with `typeOf` construct, `EagerInliningTypeTransformer` represents the translation for polymorphic embedding with eager inlining, and `YYConfig` defines that functions should not be virtualized.

6.8 Using a Yin-Yang DSL

7 Improving Error Reporting of DSLs

While describing all the abstraction leaks in the deep embedding (§4) of the

7.1 Restricting Host Language Constructs

The direct DSL programs can contain well-typed expressions that are not supported by the deep embedding. Often, these expressions lead to unexpected program behavior (§4) and we must rule them out by reporting meaningful and precise error messages to the user.

We could rule out unsupported programs by relying on properties of the core translation. If a direct program contains unsupported expressions, after translation it will become ill-typed in the deep embedding. We could reject unsupported programs by simply reporting type checking errors. Since, the direct program is well-typed and the translation preserves well-typedness all type errors must be due to unsupported expressions.

Unfortunately, naively restricting the language by detecting type-checking failures is leaking information about the deep embedding. The reported error messages will contain virtualized language constructs and types. This is not desirable as users should not be exposed to the internals of the deep embedding.

Yin-Yang avoids leakage of the deep embedding internals in error messages by performing an additional verification step that, in a fine grained way, checks if a method from the direct program exists in the deep embedding. This step traverses the tree generated by the core translation and verifies for each method call if it correctly type-checks in the deep embedding. If the type checking fails Yin-Yang reports two kinds of error messages:

- Generic messages for unsupported methods:

```
List.fill(1000, Vector.fill(1000,1)).reduce(_+_)
```

```
^  
Method List.fill[T] is unsupported in VectorDSL.
```

- Custom messages for unsupported host language constructs:

```
try Vector.fill(1000, 1) / 0  
^  
Construct try/catch is unsupported in VectorDSL.
```

With Yin-Yang the DSL author can arbitrarily restrict virtualized constructs in an embedded language by simply omitting corresponding method definitions from the deep embedding. Due to the additional verification step all error messages are clearly shown to the user. This allows easy construction of embedded DSLs that support only a subset of the host language.

7.2 Domain-Specific Error Reporting at Compile Time

8 Reducing Runtime Overheads of the Deep Embedding

9 Minimizing Compilation Time of the Deep Embedding

10 Evaluation and Case Studies

We compared the deep embedding generation of Yin-Yang with Forge on three Delite-based deep EDSLs: OptiML, OptiQL, and Vector (§10.1). Then, we measured the effect of concealing the deep embedding by counting the number of obviated annotations related to deep embedding in the test suites of OptiML and OptiGraph EDSLs (§10.2). Finally, we evaluated the ease of adopting Yin-Yang for the existing deep EDSL Slick [Typesafe] (§10.3) and compare the effort of designing the interface with the current version of the interface. We do not report on execution speed since performance benefits of the deep embedding have been studied previously [Rompf et al., 2013b, Sujeeth et al., 2013b].

10.1 Automatic Deep EDSL Generation

To evaluate the automatic deep EDSL generation for OptiML, OptiQL, and Vector, we used Forge [Sujeeth et al., 2013b], a Scala based meta-EDSL for generating both direct and deep EDSLs from a single specification. Forge already contained specifications for OptiML and OptiQL.

To avoid re-typing OptiML and OptiQL we modified Forge to generate the direct embedding from its specification and generated the direct embeddings from the existing Forge based EDSL specifications. Then, we used our automatic deep generation tool to convert these direct embeddings into their deep counterparts. Since, deep EDSLs mostly consist of boilerplate the generated embeddings have a similar number of LOC as the handwritten counterparts. For all three EDSLs, we verified that tests running in the direct embeddings behave the same as the tests for the deep embeddings.

In Table 10.1, we give a line count comparison for the code in the direct embedding, Forge specification, and deep embedding for three EDSLs: *i)* *OptiML* is a Delite-based EDSL for machine learning, *ii)* *OptiQL* is a Delite-based EDSL for running in-memory queries, and *iii)* *Vector* is the EDSL shown as an example throughout this paper. We are careful with measuring lines-of-code (LOC) with Forge and the deep EDSLs: we only

count the parts which are generated out of the given direct EDSL.

Overall, Yin-Yang requires roughly the same number of LOC as Forge to specify the DSL. This can be viewed as positive result since Forge relies on a specific meta-language for defining the two embeddings. Yin-Yang, however, uses Scala itself for this purpose and is thus much easier to use. In case of OptiML, Forge slightly outperforms Yin-Yang. This is because Forge supports meta-programming at the level of classes while Scala does not.

Table 10.1 – LOC for direct EDSL, Forge specification, and deep EDSL.

EDSL	Direct	Forge	Deep
OptiML	1128	1090	5876
OptiQL	73	74	526
Vector	70	71	369

We did not compare the efforts required to specify the DSL with Yin-Yang and Forge. The reason is twofold:

- It is hard to estimate the effort required to design a DSL. If the same person designs a single DSL twice, the second implementation will always be easier and take less time. On the other hand, when multiple people implement a DSL their skill levels can greatly differ. Finally, DSL design is technically demanding and it is hard to find a large enough group to conduct a statistically significant user study.
- Writing the direct embedding in Scala is arguably simpler than writing a Forge specification. Forge is Delite-specific language and uses a custom preprocessor to define method bodies in Scala. Thus, learning a new language and combining it with Scala snippets must be harder than just writing idiomatic Scala.

10.2 No Annotations in the Direct Embedding

To evaluate the number of obviated annotations related to the deep embedding we implemented a direct embedding for the OptiGraph EDSL (an EDSL for graph processing), and used the generated direct EDSL for OptiML. We implemented the whole application suites of these EDSLs with the direct embedding. All 21 applications combined have 1284 lines of code.

To see the effects of the direct embedding as the front-end we counted the number of deep embedding related annotations that were used in the application suite. The counted annotations are `Rep[T]` for types and `lift(t)` for lifting literals when implicit conversions fail. In 21 applications the direct embedding obviated 96 `Rep[T]` annotations and 5 `lift(t)` annotations.

10.3 Case Study: Yin-Yang for Slick

Slick is a deeply embedded Scala EDSL for database querying and access. Slick is not based on LMS, but still uses `Rep` types to achieve reification. To improve the complicated interface of Slick we used Yin-Yang. However, since the deep embedding of Slick already exists, we first designed the new interface (direct embedding). The new interface has dummy method implementations since semantics of different database back-ends can not be mapped to Scala. Thus, this interface is used only for user friendly error reporting and documentation. The interface is completely new, covers all the functionality of Slick, and consists of only 70 lines of code (cf. [Jovanovic et al., 2014b]).

Slick has complicated method signatures that do not correspond to the simple new interface. In order to preserve backward compatibility, the redesign of Slick to fit Yin-Yang's core translation was not possible. We addressed this by adding a wrapper for the deep embedding of Slick that fits the required signature. The wrapper contains only 240 lines of straightforward code.

We compare the effort required for the interface design with Yin-Yang and with traditional type system based approaches. The development of the previous Slick interface required more than a year of development while the Yin-Yang version was developed in less than one month. The new front-end passes all 54 tests that cover the most important functionalities of Slick. When using Slick all error messages are idiomatic to Scala and resemble typical error messages from the standard library.

This study was performed by only two users and, thus, is not statistically significant. Still, we find the difference in required effort large enough to indicate that Yin-Yang simplifies front-end development of EDSLs.

11 Related Work

Yin-Yang is a framework for developing embedded DSLs in the spirit of Hudak [Hudak, 1996, 1998]: embedded DSLs are *Scala libraries* and DSL programs are just *Scala programs* that do not, in general, require pre- or post-processing using external tools. Yin-Yang translates directly embedded DSL programs into finally-tagless [Carette et al., 2009] deep embeddings. Our approach supports (but is not limited to) polymorphic [Hofer et al., 2008] deep embeddings, and – as should be apparent from the examples used in this paper – is particularly well-adapted for deep EDSLs using an LMS-type IR [Rompf et al., 2013a,b].

Sujeeth et al. propose Forge [Sujeeth et al., 2013b], a Scala based meta-EDSL for generating equivalent shallow and deep embeddings from a single specification. DSLs generated by Forge provide a common abstract interface for both shallow and deep embeddings through the use of abstract `Rep` types. A shallow embedding is obtained by defining `Rep` as the identity function on types, i.e. `Rep[T] = T`.

Forge provides some additional features compared to Yin-Yang as the Forge language allows meta-programming constructs on the definition level which is not possible in Scala. This makes Forge programs, more concise in certain scenarios. Further, in the deep embedding Forge sometimes generates code which is tightly coupled with the Delite framework.

A DSL user can switch between the shallow and deep embeddings by changing a single flag in the project build. Unfortunately, the interface of the shallow embedding generated by Forge remains cluttered with `Rep` type annotations. Additionally, some plain types that are admissible in a directly embedded program may lack counterparts among the IR types of the deep embedding. This means that some seemingly well-typed DSL programs become ill-typed once the transition from the shallow to the deep embedding is made, forcing users to manually fix type errors in the deeply embedded program. Finally, DSL authors must learn a new language for EDSL design whereas with Yin-Yang this language is Scala itself.

Project Lancet [Rompf et al., 2013c] by Rompf et al. and work of Scherr and Chiba [Scherr and Chiba, 2014] interpret Java bytecode to extract domain-specific knowledge from directly embedded DSL programs compiled to bytecode. These solutions are similar to Yin-Yang in that the direct embedding is translated to the deep embedding, however, they do not provide functionality to generate a deep embedding out of a direct one.

Awesome Prelude [Lokhorst, 2012] proposes replacing all primitive types in Haskell with type classes that can then be implemented to either construct IR or execute programs directly. This allows to easily switch between dual embeddings while the type classes ensure equivalent type checking. Unfortunately, this approach does not extend easily to native language constructs, and requires changing the type signatures of common functions.

Deep Embedding Development **Part II** with a Breeze

12 Generation of the Deep Embedding

So far, we have seen how Yin-Yang translates programs written in the direct embedding to the deep embedding. This arguably simplifies life for EDSL users by allowing them to work with the interface of the direct embedding. However, the EDSL author still needs to maintain synchronized implementations of the two embeddings, which can be a tedious and error prone task.

To alleviate this issue, Yin-Yang automatically generates the deep embedding from the implementation of the direct embedding. This happens in two steps: First, we generate high-level IR nodes and methods that construct them through a systematic conversion of methods declared in a direct embedding to their corresponding methods in the deep embedding (§12.1). Second, we exploit the fact that method implementations in the direct embedding are also direct DSL programs. Reusing our core translation from §5, we translate them to their deep counterparts (§12.1.1).

[TODO: Explain that there is a core language.]

The automatic generation of deep embeddings reduces the amount of boilerplate code that has to be written and maintained by EDSL authors, allowing them to instead focus on tasks that can not be easily automated, such as the implementation of domain-specific optimizations in the deep embedding. However, automatic code generation is not a silver bullet. Hand-written optimizations acting on the IR typically depend on the structure of the later, introducing hidden dependencies between such optimizations and the direct embedding. Care must be taken in order to avoid breaking optimizations when changing the direct embedding of the EDSL.

While these optimizations are not re-generated; only the components that correspond to the interface and the IR nodes are modified. Therefore, the DSL author is only responsible for maintaining analysis and optimizations in the deep embedding. A change in the direct embedding interface should affect only optimizations related to that change. However, this is back-end dependent so Yin-Yang does not provide any guarantees.

```
trait VectorOps extends SeqOps with
  NumericOps with Base {
    // elided implicit enrichment methods. E.g.:
    //   Vector.fill(v, n) = vector_fill(v, n)

    // High level IR node definitions
    case class VectorMap[T:Numeric,S:Numeric]
      (v: Rep[Vector[T]], f: Rep[T] => Rep[S])
      extends Rep[Vector[S]]
    case class VectorFill[T:Numeric]
      (v: Rep[T], size: Rep[Int])
      extends Rep[Vector[T]]

    def vector_map[T:Numeric,S:Numeric]
      (v: Rep[Vector[T]], f: Rep[T] => Rep[S]) =
      VectorMap(v, f)
    def vector_fill[T:Numeric]
      (v: Rep[T], size: Rep[Int]) =
      VectorFill(v, size)
  }
```

Figure 12.1 – High-level IR nodes for Vector.

[TODO: Give an example here.]

12.1 Constructing High-Level IR Nodes

To make the generation regular Yin-Yang provides a corresponding IR node and construction method for every operation in the direct embedding. By using reflection, we extract the method signatures from the direct embedding. From these, we generate the interface, implementation, and code generation traits as prescribed by LMS. This part of the translation is LMS specific and applying it to other frameworks would require changing the code templates. Based on the signature of each method, we generate the *case class* that represents the IR node. Then, for each method we generate a corresponding method that instantiates the high-level IR nodes. Whenever a method is invoked in the deep EDSL, instead of being evaluated, a high-level IR node is created.

Figure 12.1 illustrates the way of defining IR nodes for **Vector** EDSL. The case classes in the **VectorOps** trait define the IR nodes for each method in the direct embedding. The fields of these case classes are the callee object of the corresponding method (e.g., **v** in **VectorMap**), and the arguments of that method (e.g., **f** in **VectorMap**).

Deep embedding should, in certain cases, be aware of side-effects. The EDSL author must annotate methods that cause side-effects with an appropriate annotation. To minimize

```

class Vector[T: Numeric](val data: Seq[T]) {
  // effect annotations not necessary
  def print() = System.out.print(data)
}

trait VectorOps extends SeqOps with
  NumericOps with Base {
  case class VectorPrint[T:Numeric]
    (v: Rep[Vector[T]]) extends Rep[Vector[T]]
  def vector_print[T:Numeric](v: Rep[Vector[T]]) =
    reflect(VectorPrint(v))
}

```

Figure 12.2 – Direct and deep embedding for Vector with side-effects.

the number of needed annotations we use Scala FX [Rytz et al., 2012]. Scala FX is a compiler plugin that adds an effect system on top of the Scala type system. With Scala FX the regular Scala type inference also infers the effects of expressions. As a result, if the direct EDSL is using libraries which are already annotated, like the Scala collection library, then the EDSL author does not have to annotate the direct EDSL. Otherwise, there is a need for manual annotation of the direct embedding by the EDSL author. Finally, the Scala FX annotations are mapped to the corresponding effect construct in LMS.

Figure 12.2 shows how we automatically transform the I/O effect of a `print` method to the appropriate construct in LMS. As the Scala FX plugin knows the effect of `System.out.println`, the effect for the `print` method is inferred together with its result type (`Unit`). Based on the fact that the `print` method has an I/O effect, we wrap the high-level IR node creation method into `reflect`, which is an effect construct in LMS to specify an I/O effect [Rompf et al., 2011]. In effect, all optimizations in the EDSL will have to preserve the order of `println` and other I/O effects. We omit details about the LMS effect system; for more details cf. [Rompf et al., 2011].

12.1.1 Lowering High-Level IR Nodes to Their Low-Level Implementation

Having domain-specific optimizations on the high-level representation is not enough for generating high performance code. In order to improve the performance, we must transform these high-level nodes into their corresponding low-level implementations. Hence, we must represent the low-level implementation of each method in the deep EDSL. After creating the high-level IR nodes and applying domain-specific optimizations, we transform these IR nodes into their corresponding low-level implementation. This can be achieved by using a *lowering* phase [Rompf et al., 2013b].

Figure 12.3 illustrates how the invocation of each method results in creating an IR node together with a lowering specification for transforming it into its low-level implementation. For example, whenever the method `fill` is invoked, a `VectorFill` IR node is created like before. However, this high-level IR node needs to be transformed to its low-level IR nodes in the lowering phase. This delayed transformation is specified using an `atPhase(lowering)` block [Rompf et al., 2013b]. Furthermore, the low-level implementation uses constructs requiring deep embedding of other interfaces. In particular, an implementation of the `fill` method requires the `Seq.fill` method that is provided by the `SeqLowLevel` trait.

```
trait VectorLowLevel extends VectorOps
  with SeqLowLevel {
    // Low level implementations
    override def vector_fill[T:Numeric]
      (v: Rep[T], s: Rep[Int]) =
      VectorFill(v, s) atPhase(lowering) {
        Vector.fromSeq(Seq.fill[T](s)(v))
      }
  }
```

Figure 12.3 – Lowering to the low-level implementation for Vector.

Generating the low-level implementation is achieved by transforming the implementation of each direct embedding method. This is done in two steps. First, the expression given as the implementation of a method is converted to a Scala AST of the deep embedding by core translation of Yin-Yang. Second, the code represented by the Scala AST must be injected back to the corresponding trait. To this effect, we implemented `Sprinter` [Nikolaev], a library that generates correct and human readable code out of Scala ASTs. The generated source code is used to represent the lowering specification of every IR node.

13 Dynamic Compilation of Domain-Specific Languages

Removing Abstraction Overheads

in Shallow Domain-Specific Languages

Part III

14 Introduction: Different Approaches to Removing Abstraction Overheads in Direct DSLs

15 Polyvariant Staging

15.1 Introduction

Multi-stage programming (or *staging*) is a meta-programming technique where compilation is separated in multiple *stages*. Execution of each stage outputs code that is executed in the *next stage* of compilation. The first stage of compilation happens at the *host language* compile time, the second stage happens at the host language runtime, the third stage happens at runtime of runtime generated code, etc. Different stages of compilation can be executed in the same language [Taha and Sheard, 1997, Nielson and Nielson, 2005] or in different languages [Brown et al., 2011, DeVito et al., 2013]. In this work we will focus on staging where all stages are in the same language and that, through static typing, assures that terms in the next stage are well typed.

Notable staging systems in statically typed languages are MetaOCaml [Taha and Sheard, 1997, Calcagno et al., 2003] and LMS [Rompf and Odersky, 2012a]. These systems were successfully applied as a *partial evaluator* [Jones et al., 1993]: for removing abstraction overheads in high-level programs [Carette and Kiselyov, 2005, Rompf and Odersky, 2012a], for domain-specific languages [Czarnecki et al., 2004, Jonnalagedda et al., 2014, Taha, 2004], and for converting language interpreters into compilers [Rompf et al., 2013c, Futamura, 1999]. Staging originates from research on two-level [Nielson and Nielson, 2005, Davies, 1996] and multi-level [Davies and Pfenning, 1996] calculi.

We show an example of how staging is used for partial evaluation of a function for computing the inner product of two vectors¹:

```
def dot[T:Numeric](v1: Vector[T], v2: Vector[T]): T =  
  (v1 zip v2).foldLeft(zero[T]) {  
    case (prod, (c1, cr)) => prod + c1 * cr  
  }
```

In function `dot`, if vector sizes are constant, the inner product can be partially evaluated

into a sum of products of vector components. To achieve partial evaluation, we must communicate to the staging system that operations on values of vector components should be executed in the next stage. The compilation stage in which a term is executed is determined by *code quotation* (in MetaOCaml) or by parametric types `Rep` (in LMS). In LMS we denote that the vector size is statically known is achieved by annotating only vector elements with a `Rep` type²:

```
def dot[T:Numeric]  
  (v1: Vector[Rep[T]], v2: Vector[Rep[T]]): Rep[T]
```

Here the `Rep` annotations on `Rep[T]` denote that elements of vectors will be known only in the next stage (in LMS, this is a stage after run-time compilation). After run-time compilation `zip`, `foldLeft`, and pattern matching inside the closure will not exist in the *residual* program as they were evaluated in the previous stage of compilation (host language runtime). Note that in LMS unannotated code is always executed during host-language runtime and type-annotated code is executed after run-time compilation.

Stage monovariance. The `dot` function in LMS is monovariant: it can only accept vectors that are statically known but their elements are dynamic. In order to support both versions the author of `dot` would have the body of `dot` with slightly different stage annotations:

```
def dot[T:Numeric](v1: Vector[T], v2: Vector[T]): T
```

Designers of *binding-time analysis* for offline partial-evaluators had the same difficulties with monovariance. First solutions duplicate code [Rytz and Gengler, 1992] to achieve polyvariance. Duplication is much less troublesome with partial evaluation as users do not write the duplicate code. Henglein and Mossin introduce polymorphic binding-time analysis [Henglein and Mossin, 1994] to avoid code duplication, which was further refined to parametric polymorphism [Heldal and Hughes, 2001], and recursion and subtyping [Dussart et al., 1995]. Although effective, these approaches are not used for staging but for offline partial evaluation. Finally, Ofenbeck et al. [Ofenbeck et al., 2013] propose a solution to this problem based on type classes and higher-kinded types. Their solution requires additional annotations and implicit parameters in the type signature of polyvariant methods.

Code Duplication. Staging systems based on type annotations (e.g., LMS and type-directed partial evaluation [Danvy, 1999]) inherently require code duplication as, a priori, no operations are defined on `Rep` annotated types. For example, in the LMS version of the `dot` function, all numeric types (i.e., `Rep[Int]`, `Rep[Double]`, etc.) must be re-implemented in order to typecheck the programs and achieve code generation for the next stage.

Sujeeth et al. [Sujeeth et al., 2013b] and Jovanovic et al. [Jovanovic et al., 2014a] propose

generating code for the next stage computations based on a language specification. These approaches solve the problem, but they require writing additional specification for the libraries, require a large machinery for code generation, and support only restricted parts of Scala.

Staging at host language compile time. How can we use type based staging for programs whose values are statically known at the host language compile-time (the first stage)? Existing staging frameworks treat unannotated terms as runtime values of the host language and annotated terms as values in later stages of compilation. Even if we would take that the first stage is executed at the host language compile time, we would have to annotate all run-time values. Annotating all values is cumbersome since host language run-time values comprise the majority of user programs (§15.5).

MacroML [Ganz et al., 2001] expresses macros as two-stage computations that start executing from host language compile time. In MacroML, parameters of macros can be annotated as an early stage computation. These parameters can then be used in escaped terms for compile-time computation. Terms scheduled for runtime execution, within the escaped terms, again need to be quoted with brackets. This, in effect, imposes quotation for both escaping and brackets which requires additional effort.

Polymorphic binding-time information. The main idea of this paper is to use polymorphic binding-time analysis: *i*) to enable stage polyvariant code through bounded parametric polymorphism, and *ii*) to allow reusing existing data types in different stages of computation without code duplication.

With bounded parametric polymorphism we can make functions stage polyvariant in their arguments by replacing them with type parameters upperbounded by their original type. For example, polymorphic power function is defined as:

```
@ct def pow[V <: Long](base: Long, exp: V): Long
```

Annotated types denote terms whose instances and non-polymorphic fields are known, and whose methods can be executed at in the *previous stage* (i.e., compile time). We call annotated types *compile-time views* of existing data types. Types are promoted to their compile-time views with type qualifiers [Foster et al., 1999] expressed with the `@ct` annotation (e.g., `Int@ct`). In terms, statically known terms can be promoted to their compile time duals with the function `ct`. By having two views of the same type we obviate the need for introducing reification and code generation logic for existing types.

With compile-time views, to require that vectors `v1` and `v2` are static and to partially evaluate the function, a programmer needs to make a simple modification of the `dot`

¹All code examples are written in *Scala*. It is necessary to know the basics of Scala to comprehend this paper.

²In this work we use LMS as a representative of type-based staging systems.

signature:

```
def dot[V: Numeric@ct]  
  (v1: Vector[V]@ct, v2: Vector[V]@ct): V
```

Since, vector elements are stage polymorphic the result of the function can be a dynamic value, or a compile-time view that can be further used for compile-time computations. The binding time of the return type of `dot` will match the binding time of vector elements:

```
// [el1, el2, el3, el4] are dynamic decimals  
dot(Vector(el1, el2), Vector(el3, el4))  
  ↪ (el1 * el3 + el2 * el4): Double  
  
// ct promotes static terms to compile-time views  
dot(Vector(ct(2), ct(4)), Vector(ct(1), ct(10)))  
  ↪ 42: Double@ct
```

In this paper we contribute to the state of the art:

- By using bounded parametric polymorphism as a vehicle to succinctly achieve polyvariant staging. This allows writing polyvariant stage programs without code duplication or additional language features. Stage annotations passed through type parameters are used by underlying polymorphic binding-time analysis to determine the correct binding-times.
- By obviating the need for reification and code generation logic in type based staging systems. The same binding-time analysis is to allow types defined in monovariant way to be used in multiple stages.
- By introducing compile-time views (§15.2) as means to achieve type safe type based two-stage programming starting from host language compile time.
- By demonstrating the usefulness of compile-time views in four case studies (§15.4): inlining, partially evaluating recursion, removing overheads of variable argument functions, and removing overheads of type-classes [Wadler and Blott, 1989, Hall et al., 1996, Oliveira et al., 2010].

We have implemented a staging extension for Scala ScalaCT. ScalaCT has a minimal interface (§15.2) based on type annotations. We have evaluated performance gains and the validity of ScalaCT on all case studies (§15.4) and compared them to LMS. In all benchmarks (§15.6) our evaluator performs the same as LMS and gives significant performance gains compared to original programs.

```

package object scalact {
  final class ct extends StaticAnnotation

  def ct[T](body: => T): T = ???
}

```

Figure 15.1 – Interface of ScalaCT.

15.2 ScalaCT Interface

In this section we present ScalaCT, a staging extension for Scala based polymorphic binding-time analysis. ScalaCT is a compiler plugin that executes in a phase after the Scala type checker. The plugin takes as input typechecked Scala programs and uses type annotations [Odersky and Läufer, 1996] to track and verify information about the binding-time of terms. It supports only two stages of compilation: host language compile-time (types annotated with `@ct`) and host language run-time (unannotated code).

To the user, ScalaCT exposes a minimal interface (Figure 15.1) with a single annotation `ct` and a single function `ct`.

Annotation `ct` is used on types (e.g., `Int@ct`) to promote them to their compile-time views. The annotation is integrated in the Scala’s type system and, therefore, can be arbitrarily nested in different variants of types.

Since operations on compile-time views should be executed at compile time, the `ct` type can be viewed as the original type whose instance is known at compile time with additional methods whose non-generic method parameters and result types also become compile-time views (if possible). Generic parameters remain unchanged as their binding time is defined during corresponding type application. Table 15.1 shows how the `@ct` annotation can be placed on types and how it affects method signatures of additional methods. Note that methods are not in fact added to the type but the binding-time polymorphic behavior of original methods can be observed as additional methods.

In Table 15.1, on `Int@ct` both parameters and result types of all methods are also compile-time views. On the other hand, `Vector[Int]@ct` has parameters of all methods transformed except the generic ones. In effect, this, makes higher order combinators of `Vector` operate on dynamic values, thus, function `f` passed to `map` accepts the dynamic value as input. Note that `hashCode` of `Vector[Int]@ct` returns a dynamic value—this is due to its implementation that internally operates on generic values that are dynamic. Type `Vector[Int@ct]@ct` has all additional methods promoted to compile-time. The return type of the function `map` on `Vector[Int@ct]@ct` can still be either dynamic or a compile-time view due to the type parameter `U`.

Chapter 15. Polyvariant Staging

Table 15.1 – Compile-time views of types and additional methods that will be available to the user.

Annotated Type	Type’s Method Signatures
<code>Int@ct</code>	<code>+(rhs: Int@ct): Int@ct</code>
<code>Vector[Int]@ct</code>	<code>map[U](f: (Int => U)@ct): Vector[U]@ct</code> <code>length: Int@ct</code> <code>hashCode: Int</code>
<code>Vector[Int@ct]@ct</code>	<code>map[U](f: (Int@ct => U)@ct): Vector[U]@ct</code> <code>length: Int@ct</code> <code>hashCode: Int@ct</code>
<code>Map[Int@ct, Int]@ct</code>	<code>get(key: Int@ct): Option[Int]@ct</code>

Table 15.2 – Promotion of terms to their compile-time views.

Promoted Term	Term’s Type
<code>ct(Vector)(1, 2, 3)</code>	<code>:Vector[Int]@ct</code>
<code>ct(Vector)(ct(1), ct(2), ct(3))</code>	<code>:Vector[Int@ct]@ct</code>
<code>ct((x: Int@ct) => x)</code>	<code>:(Int@ct => Int@ct)@ct</code>
<code>ct((x: Int) => x)</code>	<code>:(Int => Int)@ct</code>
<code>new (::@ct)(1, Nil)</code>	<code>: (::[Int])@ct</code>
<code>new (::@ct)(ct(1), ct(Nil))</code>	<code>: (::[Int@ct])@ct</code>

Annotation `ct` can also be used to achieve inlining of statically known methods and functions. This is achieved by putting the annotation of the method/function¹ definition:

```
@ct def dot[T: Numeric]
  (v1: Vector[T], v2: Vector[T]): T
```

Annotated methods will have an annotated method type

```
((v1: Vector[T], v2: Vector[T]) => T)@ct
```

which can not be written by the users.

Function `ct` is used at the term level for promoting literals, modules, and methods/-functions into their compile-time views. Table 15.2 shows how different types of terms are promoted to their compile-time views. An exception for promoting terms to compile-time views is the `new` construct. Here we use the type annotation on the constructed type.

¹This is not the first time that inlining is achieved through partial evaluation [Monnier and Shao, 2003].

15.2.1 Well-Formedness of Compile-Time Views

Earlier stages of computation can not depend on values from later stages. This property—defined as *cross-stage persistence* [Taha and Sheard, 1997, Westbrook et al., 2010]—imposes that all operations on compile-time views must be known at compile time.

To satisfy cross-stage persistence ScalaCT verifies that binding time of composite types (e.g., polymorphic types, function types, record types, etc.) is always a sub-type of the binding time of their components. In the following example, we show malformed types and examples of terms that are inconsistent:

```
xs: List[Int@ct]      => ct(Predef).println(xs.head)
fn: (Int@ct=>Int@ct) => ct(Predef).println(fn(ct(1)))
```

In the first example the program would, according to the semantics of `@ct`, print a head of the list at compile time. However, the head of the list is known only in the runtime stage. In the second example the program should print the result of `fn` at compile time but the body of the function will be known only at runtime. By causality such examples are not possible.

On functions/methods the `ct` annotation requires that function/method bodies are known at compile-time. Otherwise, inlining of such functions/methods would not be possible at compile-time. In Scala, method bodies are statically known in objects and classes with final methods, thus, the `ct` annotation is only applicable on such methods.

15.2.2 Minimizing the Number of Annotations

One of the design goals of ScalaCT is to minimize the number of superfluous staging annotations. We achieve this by implicitly adding annotations and term promotions that would with high probability be added by the user.

Adding `ct` to Functions. Due to cross-stage persistence if a single parameter of a function is annotated with `ct` the whole function must also be `ct`. Since forgetting this annotation would only result in an error we implicitly add the `ct` annotation when at least one parameter type or the result type is marked as `ct`.

Implicit Conversions. If method parameters require the compile-time view of a type the corresponding arguments in method application would always have to be promoted to `ct`. In some libraries this could require an inconveniently large number of annotations.

To minimize the number of required annotations we introduce *implicit conversions* from certain `static` terms to `ct` terms. Note that we use a custom mechanism for implicit conversions based on type annotations. This is necessary as Scala implicit conversions are oblivious to type annotations (§15.7).

The conversions support translation of language literals, direct class constructor calls with static arguments, and static method calls with static arguments into their compile-time views. Since our compile-time evaluator does not use Asai’s [Asai, 2002, Sumii and Kobayashi, 2001] method to keep track of the value of each static term, we disallow implicit conversions of terms with static variables.

For example, for a factorial function

```
def fact(n: Int@ct): Int@ct =  
  if (n == 0) 1 else fact(n - 1)
```

we will not require promotions of literals 0, and 1. Furthermore, the function can be invoked without promoting the argument into its compile-time view:

```
fact(5)  
  ↦ 120
```

Without implicit conversions the factorial functions would be more verbose

```
@ct def fact(n: Int@ct): Int@ct = if (n == ct(0)) ct(1)  
  else fact(n - ct(1))
```

as well as each function application (`fact(ct(5))`).

Implicit conversions are safe in all cases except when the user should be warned about potential code explosion. For example, a user could accidentally call `fact` with a very large number and cause code explosion without even knowing that staging is happening. If `ct` was required it would remind the users about the potential problems. In the design of ScalaCT we decided to prefer less annotations over code-explosion prevention.

15.3 Polymorphic Binding-Time Analysis

15.3.1 Nominal Types and Subtyping

15.3.2 Compile-Time Evaluation

15.3.3 Mutable State

15.4 Case Studies

In this section we present selected use-cases for compile-time views that, at the same time, demonstrate step-by-step the mechanics behind ScalaCT. We start by inlining a simple function with staging (§15.4.1), then do the canonical staging example of the integer power function (§15.4.2), then we demonstrate how variable argument functions

can be desugared into the core functionality (§15.4.3). Finally, we demonstrate how the abstraction overhead of the `dot` function and all associated type-class related abstraction can be removed (§15.4.5).

15.4.1 Inlining Expressed Through Staging

Function inlining can be expressed as staged computation [Monnier and Shao, 2003]. Inlining is achieved when a statically known function body is applied with symbolic arguments. In ScalaCT we use the `ct` annotation on functions and methods to achieve inlining:

```
@ct def zero[T](implicit num: Numeric[T]) = num.zero

zero[Double]
  ↪ num.zero
```

15.4.2 Recursion

The canonical example in staging literature is partial evaluation of the power function where exponent is an integer:

```
def pow(base: Double, exp: Int): Double =
  if (exp == 0) 1 else base * pow(base, exp - 1)
```

When the exponent (`exp`) is statically known this function can be partially evaluated into `exp` multiplications of the `base` argument, significantly improving performance [Calcagno et al., 2003].

With compile-time views making `pow` partially evaluated requires adding only one annotation:

```
def pow(base: Double, exp: Int@ct): Double =
  if (exp == 0) 1 else base * pow(base, exp - 1)
```

To satisfy cross-stage persistence (§15.2.1) the `pow` must be `@ct`. This annotation is automatically added by ScalaCT as described in §15.2.2. In the example, the `ct` annotation on `exp` requires that the function must be called with a compile-time view of `Int`. ScalaCT ensures that the definition of the `pow` function does not cause infinite recursion at compile-time by invoking the power function only when the value of the `ct` arguments is known.

The application of the function `pow` with a constant exponent produces:

```
pow(base, 4)
```

```
↪ base * base * base * base * 1
```

Constant 4 is promoted to `ct` by the implicit conversions (§15.2.2).

15.4.3 Variable Argument Functions

Variable argument functions appear in widely used languages like Java, C#, and Scala. Such arguments are typically passed in the function body inside of the data structure (e.g. `Seq[T]` in Scala). When applied with variable arguments the size of the data-structure is statically known and all operations on them can be partially evaluated. However, sometimes, the function is called with arguments of dynamic size. For example, function `min` that accepts multiple integers

```
def min(vs: Int*): Int = vs.tail.foldLeft(vs.head) {  
  (min, el) => if (el < min) el else min  
}
```

can be called either with statically known arguments (e.g., `min(1,2)`) or with dynamic arguments:

```
val values: Seq[Int] = ... // dynamic value  
min(values: _*)
```

Ideally, we would be able to achieve partial evaluation if the arguments are of statically known size and avoid partial evaluation in case of dynamic arguments. To this end we translate the method `min` into a partially evaluated version and a dynamic version. The call to these methods is dispatched, at compile-time, by the `min` method which checks if arguments are statically known. Desugaring of `min` is shown in Figure 15.2.

15.4.4 Removing Abstraction Overhead of Type-Classes

Type-classes are omnipresent in everyday programming as they allow abstraction over generic parameters (e.g., `Numeric` abstracts over numeric values). Unfortunately, type-classes introduce *dynamic dispatch* on every call [Rompf et al., 2013b] and, thus, impose a performance penalty. Type-classes are in most of the cases statically known. Here we show how with ScalaCT we can remove all abstraction overheads of type classes.

In Scala, type classes are implemented with objects and implicit parameters [Oliveira et al., 2010]. In Figure 15.3, we define a `trait Numeric` serves as an interface for all numeric types. Then we define a concrete implementation of `Numeric` for type `Double` (`DoubleNumeric`). The `DoubleNumeric` is then passed as an implicit argument `dnum` to all methods that use it (e.g., `zero`).


```

def min(vs: Int*): Int = macro
  if (isVarargs(vs)) q"min_CT(vs)"
  else q"min_D(vs)"

def min_CT(vs: Seq[Int]@ct): Int =
  vs.tail.foldLeft(vs.head) { (min, el) =>
    if (el < min) el else min
  }

def min_D(vs: Seq[Int]): Int =
  vs.tail.foldLeft(vs.head) {
    (min, el) => if (el < min) el else min
  }

```

Figure 15.2 – Function `min` is desugared into a `min` macro that based on the binding time of the arguments dispatches to the partially evaluated version (`min_CT`) for statically known varargs or to the original `min` function for dynamic arguments `min_D`.

```

object Numeric {
  implicit def dnum: Numeric[Double]@ct =
    ct(DoubleNumeric)
  def zero[T](implicit num: Numeric[T]@ct): T =
    num.zero
}

trait Numeric[T] {
  def plus(x: T, y: T): T
  def times(x: T, y: T): T
  def zero: T
}

object DoubleNumeric extends Numeric[Double] {
  def plus(x: Double, y: Double): Double = x + y
  def times(x: Double, y: Double): Double = x * y
  def zero: Double = 0.0
}

```

Figure 15.3 – Removing abstraction overheads of type classes.

When `zero` is applied first the implicit argument (`dnum`) gets inlined due to the `ct` annotation of the return type, then the function `zero` gets inlined. Since `dnum` returns a compile-time view of `DoubleNumeric` the method `zero` on `dnum` is evaluated at compile time. The constant `0.0` is promoted to `ct` since `DoubleNumeric` is a compile time view. Finally the `ct(0.0)` result is coerced to a dynamic value by the signature of `Numeric.zero`. The compile-time execution is shown in the following snippet

```
Numeric.zero[Double]
  ⇨ Numeric.zero[Double](DoubleNumeric)
  ⇨ ct(DoubleNumeric).zero
  ⇨ (ct(0.0): Double)
  ⇨ 0.0
```

15.4.5 Inner Product of Vectors

Here we demonstrate how the introductory example is partially evaluated through staging. We start with the desugared `dot` function (i.e., all implicit operations are shown):

```
def dot[V](v1: Vector[V]@ct, v2: Vector[V]@ct)
  (implicit num: Numeric[V]@ct): V =
  (v1 zip v2).foldLeft(zero[V](num)) {
    case (prod, (cl, cr)) => prod + cl * cr
  }
```

Function `dot` is generic in the type of vector elements. This will reflect upon the staging annotations as well (`ct` and `static`). When we apply the `dot` function with static arguments we will get the vector with static elements back:

```
dot[Double@static](
  ct(Vector)(2.0, 4.0), ct(Vector)(1.0, 10.0))(
  Numeric.dnum)
⇨
  (ct(Vector)(2.0, 4.0) zip ct(Vector)(1.0, 10.0))
  .foldLeft(ct(0.0)) {
    case (prod, (cl, cr)) => prod + cl * cr
  }
⇨ (2.0 * 1.0 + 4.0 * 10.0): Double@static
```

When `dot` is evaluated with the `ct` elements the last step will further execute to a single compile-time value that can further be used in compile-time computations:

```
dot[Double@ct](
  ct(Vector)(ct(2.0), ct(4.0)),
  ct(Vector)(ct(1.0), ct(10.0)))(Numeric.dnum)
⇨ ct(2.0) * ct(1.0) + ct(4.0) * ct(10.0)
```

\hookrightarrow 42.0: Double@ct

15.5 Discussion

To distinguish terms executed at compile-time from terms executed at runtime with type annotations we have the following possibilities:

1. Annotate types of all terms that should be executed at runtime. Here all types analyzed LMS and realized that this is not an option.
2. Annotate types of terms that should be executed at runtime but introduce scopes (e.g., method bodies) for which this rule applies. In this way we would avoid annotating types of all runtime terms. This approach is taken by MacroML where macro functions are executed at compile time and quoted terms are executed at runtime. First approach is, also, a special case of this approach where there is a single scope for the whole language.
3. Annotate types of terms that are executed at compile time. This approach is used with ScalaCT and annotated types are called compile-time views.

To compare approach of ScalaCT with the first approach we analyzed 817 functions from the OptiML [Sujeeth et al., 2011] DSL based on LMS. With the ScalaCT scheme OptiML would require more than 2x less annotations to implement.

Compared to the second approach our solution is simpler to comprehend and communicate. In the second approach there are two things that users need to understand when reasoning about staged programs: *i)* where does the compile time scope start, and *ii)* which terms are annotated. With ScalaCT the comprehension is simple: terms whose types are annotated with `ct` are executed at compile time.

It is also interesting to the second and third approaches. Here the number of annotations depends on the program. If the programs are mostly partially evaluated the second approach is better. These category of programs could also be regarded as code generators as most of the code is executed at compile time and produces large outputs. When programs are comprised of mostly runtime values the approach of ScalaCT requires less annotations.

15.6 Evaluation

In this section we evaluate the amount of code that is obviated with ScalaCT compared to existing type directed staging systems (§15.6.1). Then we evaluate performance of ScalaCT compared to LMS and hand optimized code (§15.6.2)

15.6.1 Reduction in Code Duplication

Evaluating reduction of duplicated code (for reification and code generation) in type based staging systems is difficult as the factor varies from program to program. To avoid benchmark dependent results we instead calculate the lower bound on the duplication factor.

Given that we have a method on a type T whose body contains n lines of code (without the method definition). To introduce the same method on an annotated type $\text{Rep}[T]$ we need another method for reification which has at least 1 line of code. Then we need code generation logic, which, if we use the same language should not have less lines than the original method plus at least one line for matching the reified method. For method of n lines we get a lower bound on the code duplication factor of:

$$2n + 3/n + 1$$

For single line methods ($n = 0$) the factor is 3 and for large methods ($n \rightarrow \infty$) it converges to 2.

15.6.2 Performance of Generated Code

In this section we compare performance of ScalaCT with LMS and original code. All benchmarks are executed on an Intel Core i7 processor (4960HQ) working frequency of 2.6 GHZ with 16GB of DDR3 with a working frequency of 1600 MHz. For all benchmarks we use Scala 2.11.5 and the HotSpot(TM) 64-Bit Server (24.51-b03) virtual machine. In all benchmarks the virtual machine is warmed up, no garbage collection happens, and all reported numbers are a mean of 5 measurements.

In Table 15.3 we show execution time normalized to original code for: *i*) `pow(42.0, 10)`, *ii*) `min(a, b, c, d, e)`, *iii*) inner product of two statically known vectors of size 50, and *iv*) the butterfly network of size 4 for fast Fourier transform `fft` (equivalent to code presented by Rompf and Odersky [Rompf and Odersky, 2012a]). For all benchmarks the performance results are equivalent to LMS.

Table 15.3 – Speedup of LMS and ScalaCT compared to the naive implementation of the algorithms.

Benchmark	LMS	ScalaCT
<code>pow</code>	221.75	221.70
<code>min</code>	1.82	1.79
<code>dot</code>	246.08	246.08
<code>fft</code>	12.14	12.88

15.7 Limitations

Type Annotations. Using type annotations for annotating the compilation stage is not ideal. Type annotations are not fully integrated into the Scala language. Major drawbacks are that overloading resolution and implicit search are oblivious about annotations. For example, if two methods have the same signatures but different staging annotations the compiler will report an error. Implicit search will fail in two ways: *i)* if two implicit functions with the same type are in scope but annotations differ the compiler will report an error about ambiguous implicits and *ii)* if a method requires an implicit parameter with the `ct` annotation the compiler might provide an implicit argument without the annotation. These are not fundamental limitations and, in practice, stage polyvariance can be used to avoid difficulties with annotations.

Type Annotation Position. Annotations in Scala can be used in many different positions and ScalaCT supports only some of them. Annotation `ct` can not be used in following positions: *i)* on classes, traits, and modules, *ii)* *in the list of inherited classes and traits*, *iii)* on the right hand side of the type variable definitions, and *iv)* on all terms outside the method definitions (constructors, constructor arguments, etc.).

Access Modifiers. Scala supports access modifiers of members. If methods that use ScalaCT internally access `private` members of the class ScalaCT will fail as all staged methods are inlined at the call site. Similar limitations exist with inlining functions in Scala. This problem could be circumvented inside Scala, however, the JVM will not allow this in the bytecode verification phase.

Code Explosion. Annotation `ct` inlines all functions that are annotated and unrolls all loops on compile-time executed data structures. This can, for a staged function, lead to unacceptable code explosion for some inputs while the code can behave regularly for other inputs. For example, calling `pow(0.5, 10000000)` on the function from §15.4 will make unacceptably large code while `pow(0.5, 10)` will work as expected.

15.7.1 Nominal Typing, Lower Bounds, and Higher-Kinded Types

15.8 Related Work

MetaOCaml [Taha and Sheard, 1997, Calcagno et al., 2003] is a staging extension for OCaml. It uses quotation to determine the stage in which the term is executed. Types of quoted terms are annotated to assure cross-stage persistence. Staging in MetaOCaml starts at host language runtime and can not express compile-time computations. Further, operations on annotated types do not get automatically promoted to the adequate stage of computation as with compile-time views. Finally, there are no implicit conversions so all stage promotions of terms must be explicit.

MacroML [Ganz et al., 2001] is a language that translates macros into MetaML staging executed at compile time to provide a “clean” solution for macros. In MacroML, within the `let mac` construct function parameters can be annotated as an early stage computation. These parameters can then be used in escaped terms, i.e., terms scheduled to execute at compile time. Unlike ScalaCT, MacroML uses escapes and early parameters to mark terms scheduled for to execute at compile time. Within escapes terms scheduled for runtime again need to be marked with brackets. This kind of dual annotations are not required as compile-time views are automatically promoted to runtime terms.

In LMS [Rompf and Odersky, 2012a] terms that are annotated with `Rep` types will be executed at the stage after runtime compilation. Therefore, LMS can not directly be used for compile time computation. Furthermore, LMS requires additional reification logic and code generation for all `Rep` types.

Programming language Idris [Brady and Hammond, 2010] introduces the `static` annotation on function parameters to achieve partial evaluation. Annotation `static` denotes that the term is statically known and that all operations on that term should be executed at compile-time. However, since `static` is placed on terms rather than types, it can mark only *whole terms* as static. This restricts the number of programs that can be expressed, e.g., we could not express that vectors in the signature of `dot` are static only in size. Finally, information about `static` terms can not be propagated through return types of functions so `static` in Idris is a partial evaluation construct, i.e., it hints that partial evaluation should be applied if function arguments are static.

Hybrid Partial Evaluation (HPE) [Shali and Cook, 2011] is a technique for partial evaluation that does not perform binding time analysis (similarly to online partial evaluators) but relies on the user provided annotation `CT`². HPE implementations exist for both Java and Scala [Sherwany et al., 2015]. Although, `CT` is used for partial evaluation, it does not affect typing of user programs. Furthermore, behavior of `CT` in context of generics is not described. ScalaCT can be seen as statically typed version of hybrid partial evaluation with support for parametric polymorphism. Due to the support for parametric polymorphism ScalaCT can express compile-time data structures with dynamic data.

Forge [Sujeeth et al., 2013b], by Sujeeth et al., uses a DSL to declare a specification of the libraries. Forge then generates both unannotated and annotated code based on the specification. Their language also supports generating staged code (comprised of terms different from multiple stages). Forge specification and code generation supports only a subset of Scala guided towards the Delite [Brown et al., 2011, Sujeeth et al., 2013a] framework.

[TODO: what to do with this] The Yin-Yang framework, by Jovanovic et al. [Jo-

²Name `ct` in ScalaCT is inspired by hybrid partial evaluation.

vanovic et al., 2014a], solves the problem of code duplication by generating reification and code generation logic based on Scala code of existing types. With their approach there is no code duplication for the supported language features. However, not all of the Scala language is supported and all generated terms are generated for the next stage, thus, making a stage distinction is impossible.

Bibliography

- Martin Abadi, Luca Cardelli, Benjamin Pierce, and Gordon Plotkin. Dynamic typing in a statically typed language. *ACM Transactions on Programming Languages and Systems (TOPLAS)*, 13(2):237–268, 1991.
- Kenichi Asai. Binding-time analysis for both static and dynamic expressions. *New Generation Computing*, 20(1):27–51, 2002.
- Edwin C Brady and Kevin Hammond. Scrapping your inefficient engine: using partial evaluation to improve domain-specific language implementation. In *International Conference on Functional Programming (ICFP)*, 2010.
- K. J Brown, A. K Sujeeth, H. J Lee, T. Rompf, H. Chafi, M. Odersky, and K. Olukotun. A heterogeneous parallel framework for domain-specific languages. In *Parallel Architectures and Compilation Techniques (PACT)*, 2011.
- Eugene Burmako. Scala macros: Let our powers combine! In *Workshop on Scala (SCALA)*, 2013.
- Cristiano Calcagno, Walid Taha, Liwen Huang, and Xavier Leroy. Implementing multi-stage languages using ASTs, gensym, and reflection. In *Generative Programming and Component Engineering*, 2003.
- Jacques Carette and Oleg Kiselyov. Multi-stage programming with functors and monads: Eliminating abstraction overhead from generic code. In *Generative Programming and Component Engineering (GPCE)*, 2005.
- Jacques Carette, Oleg Kiselyov, and Chung-chieh Shan. Finally tagless, partially evaluated: Tagless staged interpreters for simpler typed languages. *Journal of Functional Programming*, 19(05):509–543, 2009.
- D. Coutts, R. Leshchinskiy, and D. Stewart. Stream fusion: From lists to streams to nothing at all. In *International Conference on Functional Programming (ICFP)*, 2007.
- Krzysztof Czarnecki, John O'Donnell, Jörg Striegnitz, and Walid Taha. DSL implementation in MetaOCaml, Template Haskell, and C++. *Domain-Specific Program Generation*, 2004.

Bibliography

- Olivier Danvy. *Type-directed partial evaluation*. Springer, 1999.
- Rowan Davies. A temporal-logic approach to binding-time analysis. In *Symposium on Logic in Computer Science (LICS)*, 1996.
- Rowan Davies and Frank Pfenning. A modal analysis of staged computation. In *Symposium on Principles of Programming Languages (POPL)*, 1996.
- Zachary DeVito, James Hegarty, Alex Aiken, Pat Hanrahan, and Jan Vitek. Terra: a multi-stage language for high-performance computing. In *International Conference on Programming Language Design and Implementation (PLDI)*, 2013.
- Dirk Dussart, Fritz Henglein, and Christian Mossin. Polymorphic recursion and subtype qualifications: Polymorphic binding-time analysis in polynomial time. In *Static Analysis*, pages 118–135. Springer, 1995.
- Jeffrey S Foster, Manuel Fähndrich, and Alexander Aiken. A theory of type qualifiers. *International Conference on Programming Language Design and Implementation (PLDI)*, 1999.
- Yoshihiko Futamura. Partial evaluation of computation process—an approach to a compiler-compiler. *Higher-Order and Symbolic Computation*, 12(4):381–391, 1999.
- Steven E Ganz, Amr Sabry, and Walid Taha. Macros as multi-stage computations: type-safe, generative, binding macros in MacroML. In *International Conference on Functional Programming (ICFP)*, 2001.
- Miguel Guerrero, Edward Pizzi, Robert Rosenbaum, Kedar Swadi, and Walid Taha. Implementing DSLs in metaOCaml. In *Object-Oriented Programming Systems, Languages, and Applications (OOPSLA)*, 2004.
- Cordelia V. Hall, Kevin Hammond, Simon L. Peyton Jones, and Philip L. Wadler. Type classes in Haskell. *ACM Transactions on Programming Languages and Systems (TOPLAS)*, 18(2):109–138, 1996.
- Rogardt Heldal and John Hughes. Binding-time analysis for polymorphic types. In *Perspectives of System Informatics (PSI)*, 2001.
- Fritz Henglein and Christian Mossin. Polymorphic binding-time analysis. In *Programming Languages and Systems (ESOP)*, 1994.
- C. Hofer, K. Ostermann, T. Rendel, and A. Moors. Polymorphic embedding of DSLs. In *International Conference on Generative Programming and Component Engineering (GPCE)*, 2008.
- Paul Hudak. Building domain-specific embedded languages. *ACM Computing Surveys*, 28(4es):196, 1996.

- Paul Hudak. Modular domain specific languages and tools. In *International Conference on Software Reuse (ICSR)*, 1998.
- Neil D. Jones, Carsten K. Gomard, and Peter Sestoft. *Partial Evaluation and Automatic Program Generation*. Prentice Hall, 1993.
- Manohar Jonnalagedda, Thierry Coppey, Sandro Stucki, Tiark Rompf, and Martin Odersky. Staged parser combinators for efficient data processing. In *International Conference on Object Oriented Programming Systems Languages and Applications (OOPSLA)*, 2014.
- V. Jovanovic, A. Shaikhha, S. Stucki, V. Nikolaev, Koch C., and M Odersky. Yin-Yang: Concealing the deep embedding of DSLs. In *International Conference on Generative Programming and Component Engineering (GPCE)*, 2014a.
- Vojin Jovanovic, Amir Shaikhha, Sandro Stucki, Vladimir Nikolaev, Christoph Koch, and Martin Odersky. Yin-Yang: Concealing the deep embedding of DSLs. Technical Report EPFL-REPORT-200500, EPFL Lausanne, Switzerland, 2014b.
- Tom Lokhorst. Awesome prelude, 2012. Dutch Haskell User Group, <http://vimeo.com/9351844>.
- Russell McClure, Ingolf H Krüger, et al. Sql dom: compile time checking of dynamic sql statements. In *International Conference on Software Engineering (ICSE)*, 2005.
- Stefan Monnier and Zhong Shao. Inlining as staged computation. *Journal of Functional Programming*, 13(03):647–676, 2003.
- Flemming Nielson and Hanne Riis Nielson. *Two-level functional languages*, volume 34. Cambridge University Press, 2005.
- Vladimir Nikolaev. Sprinter. <http://vladimirk.github.io/sprinter/>.
- M. Odersky, P. Altherr, V. Cremet, B. Emir, S. Micheloud, N. Mihaylov, M. Schinz, E. Stenman, and M. Zenger. *The Scala Language Specification (Version 2.9)*. 2014.
- Martin Odersky and Konstantin Läufer. Putting type annotations to work. In *Symposium on Principles of Programming Languages (POPL)*, 1996.
- Martin Odersky and Matthias Zenger. Scalable component abstractions. In *Object-Oriented Programming Systems, Languages, and Applications (OOPSLA)*, 2005.
- Georg Ofenbeck, Tiark Rompf, Alen Stojanov, Martin Odersky, and Markus Püschel. Spiral in scala: towards the systematic construction of generators for performance libraries. In *International Conference on Generative Programming and Component Engineering (GPCE)*, 2013.

Bibliography

- Bruno C.d.S. Oliveira, Adriaan Moors, and Martin Odersky. Type classes as objects and implicits. In *Object-Oriented Programming Systems, Languages, and Applications (OOPSLA)*, 2010.
- T. Rompf, A.K. Sujeeth, H.J. Lee, K.J. Brown, H. Chafi, M. Odersky, and K. Olukotun. Building-blocks for performance oriented DSLs. In *IFIP Working Conference on Domain-Specific Languages (DSL)*, 2011.
- Tiark Rompf and Martin Odersky. Lightweight modular staging: a pragmatic approach to runtime code generation and compiled DSLs. *Communications of the ACM*, 55(6): 121–130, 2012a.
- Tiark Rompf and Martin Odersky. Lightweight modular staging: a pragmatic approach to runtime code generation and compiled DSLs. *Communications of the ACM*, 55(6): 121–130, June 2012b.
- Tiark Rompf, Nada Amin, Adriaan Moors, Philipp Haller, and Martin Odersky. Scala-virtualized: Linguistic reuse for deep embeddings. *Higher-Order and Symbolic Computation*, page 1–43, 2013a.
- Tiark Rompf, Arvind K. Sujeeth, Nada Amin, Kevin J. Brown, Vojin Jovanović, HyoukJoong Lee, Manohar Jonnalagedda, Kunle Olukotun, and Martin Odersky. Optimizing data structures in high-level programs: New directions for extensible compilers based on staging. In *Symposium on Principles of Programming Languages (POPL)*, 2013b.
- Tiark Rompf, Arvind K. Sujeeth, Kevin J. Brown, HyoukJoong Lee, Hassan Chafi, Kunle Olukotun, and Martin Odersky. Project Lancet: Surgical precision JIT compilers. In *International Conference on Programming Language Design and Implementation (PLDI)*, 2013c.
- Bernhard Rytz and Marc Gengler. A polyvariant binding time analysis. In *Workshop on Partial Evaluation and Program Manipulation (PEPM)*, 1992.
- Lukas Rytz, Martin Odersky, and Philipp Haller. Lightweight polymorphic effects. In *European Conference on Object-Oriented Programming (ECOOP)*, 2012.
- Maximilian Scherr and Shigeru Chiba. Implicit staging of EDSL expressions: A bridge between shallow and deep embedding. In *European Conference on Object-Oriented Programming (ECOOP)*, 2014.
- Amin Shali and William R. Cook. Hybrid partial evaluation. In *International Conference on Object Oriented Programming Systems Languages and Applications (OOPSLA)*, 2011.
- Amanj Sherwany, Nosheen Zaza, and Nathaniel Nystrom. A refactoring library for scala compiler extensions. In *Compiler Construction (CC)*, pages 31–48, 2015.

- Arvind Sujeeth, Tiark Rompf, Kevin Brown, HyoukJoong Lee, Hassan Chafi, Victoria Popic, Michael Wu, Aleksander Prokopec, Vojin Jovanović, Martin Odersky, and Kunle Olukotun. Composition and reuse with compiled domain-specific languages. In *European Conference on Object-Oriented Programming (ECOOP)*, 2013a.
- Arvind K. Sujeeth, HyoukJoong Lee, Kevin J. Brown, Tiark Rompf, Hassan Chafi, Michael Wu, Anand Atreya, Martin Odersky, and Kunle Olukotun. OptiML: An implicitly parallel domain-specific language for machine learning. In *International Conference on Machine Learning (ICML)*, 2011.
- Arvind K Sujeeth, Austin Gibbons, Kevin J Brown, HyoukJoong Lee, Tiark Rompf, Martin Odersky, and Kunle Olukotun. Forge: generating a high performance DSL implementation from a declarative specification. In *International Conference on Generative Programming and Component Engineering (GPCE)*, 2013b.
- Eijiro Sumii and Naoki Kobayashi. A hybrid approach to online and offline partial evaluation. *Higher-Order and Symbolic Computation*, 14(2-3):101–142, 2001.
- Josef Svenningsson and Emil Axelsson. Combining deep and shallow embedding for EDSL. In *Trends in Functional Programming (TFP)*, pages 21–36, 2013.
- Walid Taha. A gentle introduction to multi-stage programming. In *Domain-Specific Program Generation (DSPG)*. 2004.
- Walid Taha and Tim Sheard. Multi-stage programming with explicit annotations. In *Workshop on Partial Evaluation and Program Manipulation (PEPM)*, 1997.
- Typesafe. Slick. <http://slick.typesafe.com/>.
- Vlad Ureche, Tiark Rompf, Arvind Sujeeth, Hassan Chafi, and Martin Odersky. Staged-SAC: a case study in performance-oriented DSL development. In *Workshop on Partial Evaluation and Program Manipulation (PEPM)*, 2012.
- Philip Wadler and Stephen Blott. How to make ad-hoc polymorphism less ad hoc. In *Symposium on Principles of Programming Languages (POPL)*. ACM, 1989.
- Edwin Westbrook, Mathias Ricken, Jun Inoue, Yilong Yao, Tamer Abdelatif, and Walid Taha. Mint: Java multi-stage programming using weak separability. In *International Conference on Programming Language Design and Implementation (PLDI)*, 2010.
- Matei Zaharia, Mosharaf Chowdhury, Tathagata Das, Ankur Dave, Justin Ma, Murphy McCauley, Michael J Franklin, Scott Shenker, and Ion Stoica. Resilient distributed datasets: A fault-tolerant abstraction for in-memory cluster computing. In *Symposium on Networked Systems Design and Implementation (NSDI)*, 2012.

Curriculum Vitae

Personal Information

Full Name	Vojin Jovanovic		
Address	Rue St-Roch 21, 1004, Lausanne, Switzerland		
Telephone	+41 (0)21 69 37691	Mobile:	+41 (0)78 871 91 74
Email	vojin.jovanovic@epfl.ch		
Date of birth	14 th January 1985		
Goals and aspirations	I believe that programs can be written abstractly and yet execute as fast as their hand tuned counterparts. To this end, I am making a framework that allows effortless addition of domain-specific optimizations to existing libraries. I am also working on a high-level programming model for dynamic compilation where dynamic information is used to perform domain-specific optimizations at runtime; yet managing assumptions, deoptimization, and code caches is done behind the scenes.		

Selected Work Experience

Position and Dates	PhD Candidate	October 2010 – present
Employer	Scala Laboratory (LAMP), EPFL, Switzerland	
Main activities and responsibilities	Author and maintainer of the Yin-yang framework which is used for seamless embedding of DSLs. Yin-yang is used for generating and reifying queries in the new version of LegoBase . Co-author and initiator of Scala Records . Scala Records are used for type-safe manipulation of SparkSQL query results. Co-author of SIP 14 – Futures and Promises LMS contributor: implemented a loop fusion prototype, added record support, enabled and helped removal of the dependency to Virtualized Scala. Author of sbt-coursera which is used for automatic grading of Java based projects Coursera. Co-author of the Actors Migration Kit . Currently working on the Scala interpreter.	
Position and Dates	Research Intern	June 2013 – September 2013
Employer	Oracle Labs, Switzerland	
Main activities and responsibilities	Implemented the Graal backend for Lightweight Modular Staging with support for vectorization. Performance on all (at the time) supported vectorization features was within 10% of hand-written C.	
Position and Dates	Research Intern	April 2010 – September 2010
Employer	Network Systems Laboratory (NSL), EPFL, Switzerland	
Main activities and responsibilities	Implemented DiCE, a system that makes a snapshot of a network of BGP routers and uses concolic execution to explore the live system state. Exploration ensures that the faulty system states can not be reached. DiCE detects common errors in BGP networks like the cybernuke vulnerability.	
Position and Dates	Software Developer – Team Leader	March 2008 – September 2009
Employer	Margintech Corporation, Toronto Working for Taleo inc. on the TBE product	
Main activities and responsibilities	Developed software for a large SaaS system that is used daily by over 50.000 customers. Lead a team of 3 people on several enterprise projects. At the same time developed algorithms for cache re-balancing (10x improvement in memory utilization), fixed critical concurrency bugs and integrated a semantic search engine.	

Education

School and Dates	School of Electrical Engineering, University of Belgrade, Serbia	October 2008 – April 2010
Title	Engineer of Electrical Engineering and Computer Science – Master Thesis: Human Computer Interaction Device for Visually Impaired People	GPA 10.00/10.00
School and Dates	School of Electrical Engineering, University of Belgrade, Serbia	October 2003 – October 2008
Title	Engineer of Electrical Engineering Thesis: Tactile Web Browser Simulator	GPA 9.02/10.00

Selected Publications

V. Jovanovic, D. Shabalín, E. Burmako, and M. Odersky, Annotating the Previous Stage: Succinct Type-Driven Staging at Compile Time, Scala'15 (under submission)

V. Jovanovic, A. Shaikhha, S. Stucki, V. Nikolaev, C. Koch, and M. Odersky, [Yin-Yang: Concealing the deep embedding of DSLs](#), GPCE'14

A. Sujeeth, T. Rompf, K. Brown, H. Lee, H. Chafi, V. Popic, M. Wu, A. Prokopec, V. Jovanovic, M. Odersky, and K. Olukotun, [Composition and reuse with compiled domain-specific languages](#), ECOOP'13

T. Rompf, A. Sujeeth, N. Amin, K. Brown, V. Jovanovic, H. Lee, M. Jonnalagedda, K. Olukotun, and M. Odersky, [Optimizing Data Structures in High-Level Programs: New Directions for Extensible Compilers based on Staging](#), POPL '13

S. Ackermann, V. Jovanovic, T. Rompf, and M. Odersky, [Jet: An Embedded DSL for High-Performance Big Data Processing](#), BigData'12

M. Canini, V. Jovanovic, D. Venzano, D. Novakovic, and D. Kostic, [Online Testing of Federated and Heterogeneous Distributed Systems](#), Computer Communication Review, vol. 41, p. 434-435, 2011.

M. Canini, V. Jovanovic, D. Venzano, B. Spasojevic, and O. Crameri, [Toward Online Testing of Federated and Heterogeneous Distributed Systems](#), USENIX'11

Activities

Selected talks [Programming DSLs Made Simple](#), ScalaDays 2014
[Yin-Yang: Transparent Deep Embedding of DSLs](#), ScalaCamp 2013
[High-Performance DSLs Embedded in Scala](#), GeeCon 2013

Reviewing Artefact reviewer for OOPSLA'15
Subreviewer for HLPP'14, GPCE'14, and ICFP'14

Demos Yin-Yang: Concealing the Deep Embedding of DSLs, ECOOP'15

Organizing Summer School on Domain Specific Programming Languages, Lausanne, July 2015
Scala Workshop, 2013
PL Seminar at EPFL

Teaching Reactive Programming and Parallelism (2015)
[Functional Programming Principles in Scala](#) (2013, 2014, 2015)
[Principles of Reactive Programming](#) (2013, 2015)
Foundations of Software (2012)
Operating Systems (2011)

References

Martin Odersky, Professor of Computer Science at EPFL, martin.odersky@epfl.ch

Christoph Koch, Professor of Computer Science at EPFL, christoph.koch@epfl.ch

Tiark Rompf, Professor of Computer Science at Purdue University, tiark@purdue.edu

Leonid Igolink, VP of Engineering, App. Perf. Management at CA Technologies, lim@igolnik.com

Anjan Goswami, Head of Search Science Engineering at Walmart Labs, goswami.anjan@gmail.com