

## Practical 6

Name : Varun Khadayate

Roll No. : A016

### Basic Plotting-2D and 3D

#### Part A: Theory

`plot3` - plots curves in space,

`stem3` - creates discrete data plot with stems in 3-D,

`bar3` - plots 3-D bar graph,

`bar3h` - plots 3-D horizontal bar graph,

`pie3` - makes 3-D pie chart,

`comet3` - makes animated 3-D line plot,

`fill3` - draws filled 3-D polygons,

`contour3` - makes 3-D contour plots,

`quivers` - draws vector fields in 3-D,

`scatter3` - makes scatter plots in 3-D,

`mesh` - draws 3-D mesh surfaces (wire-frame),

`meshc` - draws 3-D mesh surfaces along with contours,

`meshz` - draws 3-D mesh surfaces with reference plane curtains,

`surf` - creates 3-D surface plots,

`surfc` - creates 3-D surface plots along with contours,

`surf1` - creates 3-D surface plots with specified light source,

`trimesh` - mesh plot with triangles,

`trisurf` - surface plot with triangles,

`slice` - draws a volumetric surface with slices,

`waterfall` - creates a waterfall plot of 3-D data,


`cylinder` - generates a cylinder,

`ellipsoid` - generates an ellipsoid, and

`sphere` - generates a sphere.


### plot3

```
t = linspace (0, 1, 100);  
x = t; y = t.^ 2; z = t.^ 3;  
plot3(x, y,z), grid  
xlabel ('x(t) = t' )  
ylabel ('y(t) = t^2')  
zlabel ('z(t) = t^3')
```

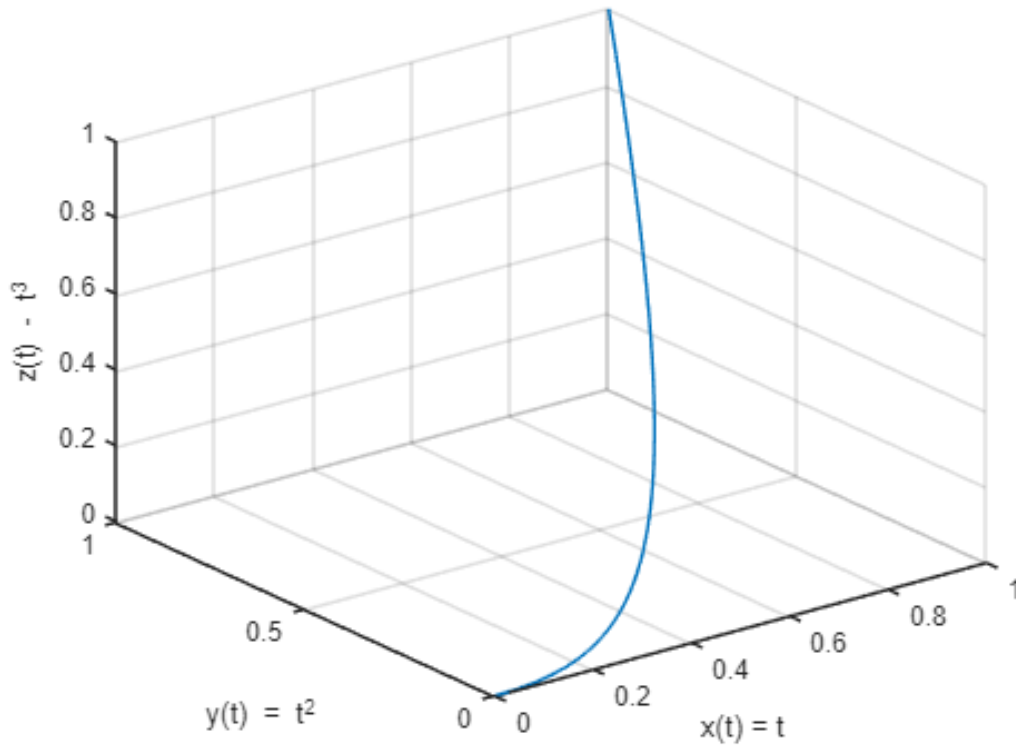

### fill3

```
X = [0 0 0 0; 1 1 -1 1;1 -1 -1 -1] ;  
Y = [0 0 0 0; 4 4 4 4;4 4 4 4] ;  
Z = [0 0 0 0; 1 1 -1 -1;-1 1 1 -1];  
fillcolor=rand(3,4);  
fill3(X,Y,Z,fillcolor)  
view(120,30)
```

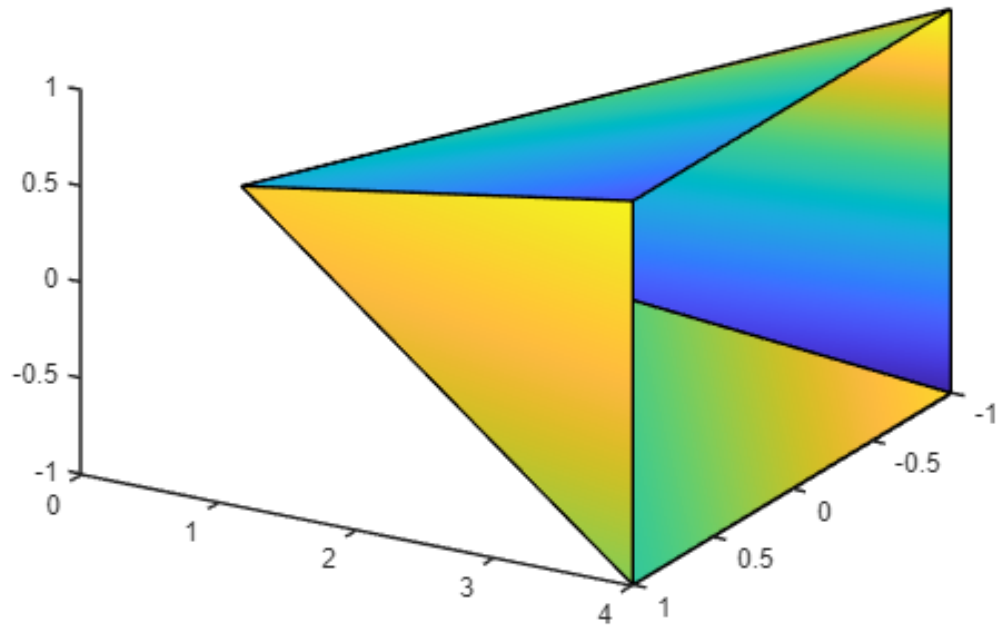


### contour3

```
r = linspace(-3,3,50);
[x,y] = meshgrid(r,r);
z = -5./(1+ x.^2 + y.^2)
```


```
z = 50x50
-0.2632 -0.2735 -0.2842 -0.2953 -0.3067 -0.3184 -0.3304 -0.3427 ...
-0.2735 -0.2847 -0.2964 -0.3084 -0.3209 -0.3337 -0.3469 -0.3604
-0.2842 -0.2964 -0.3090 -0.3221 -0.3358 -0.3498 -0.3644 -0.3793
-0.2953 -0.3084 -0.3221 -0.3364 -0.3513 -0.3668 -0.3828 -0.3993
-0.3067 -0.3209 -0.3358 -0.3513 -0.3676 -0.3845 -0.4022 -0.4204
-0.3184 -0.3337 -0.3498 -0.3668 -0.3845 -0.4031 -0.4225 -0.4427
-0.3304 -0.3469 -0.3644 -0.3828 -0.4022 -0.4225 -0.4439 -0.4663
-0.3427 -0.3604 -0.3793 -0.3993 -0.4204 -0.4427 -0.4663 -0.4910
-0.3551 -0.3742 -0.3946 -0.4162 -0.4392 -0.4637 -0.4895 -0.5169
-0.3676 -0.3881 -0.4101 -0.4335 -0.4586 -0.4853 -0.5137 -0.5438
⋮
```

```
contour3(x,y,z)
```

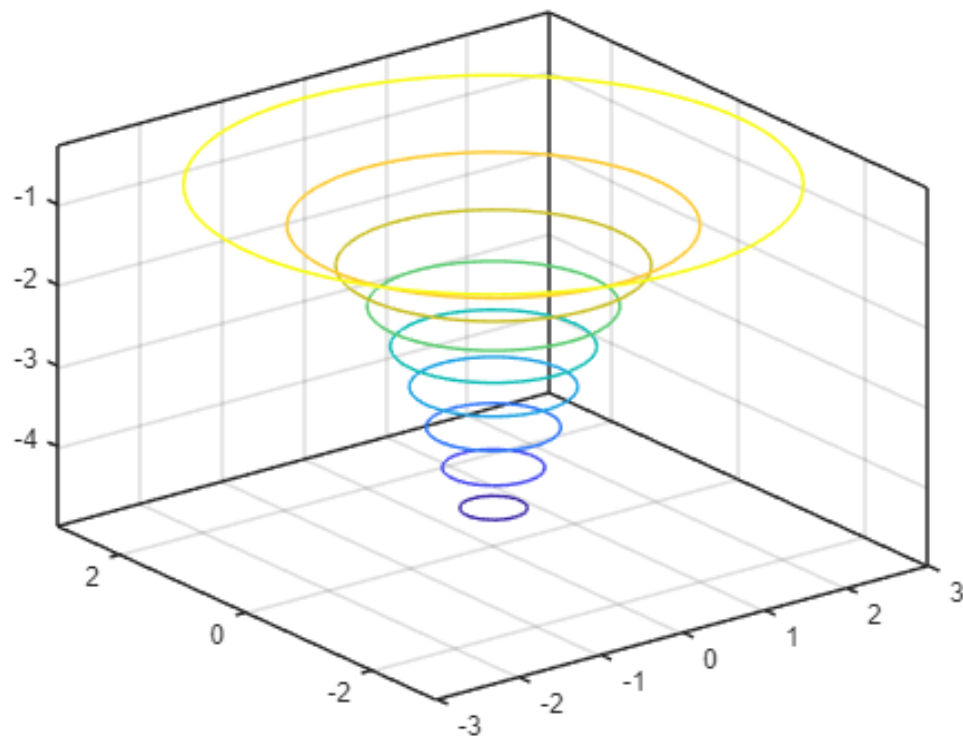


## surf

```
u = -5:.2:5;  
[X,Y] = meshgrid(u,u);  
Z = cos(X) .* cos(Y) .* exp(-sqrt(X.^2+ Y.^2)/4);  
surf(X,Y,Z)
```

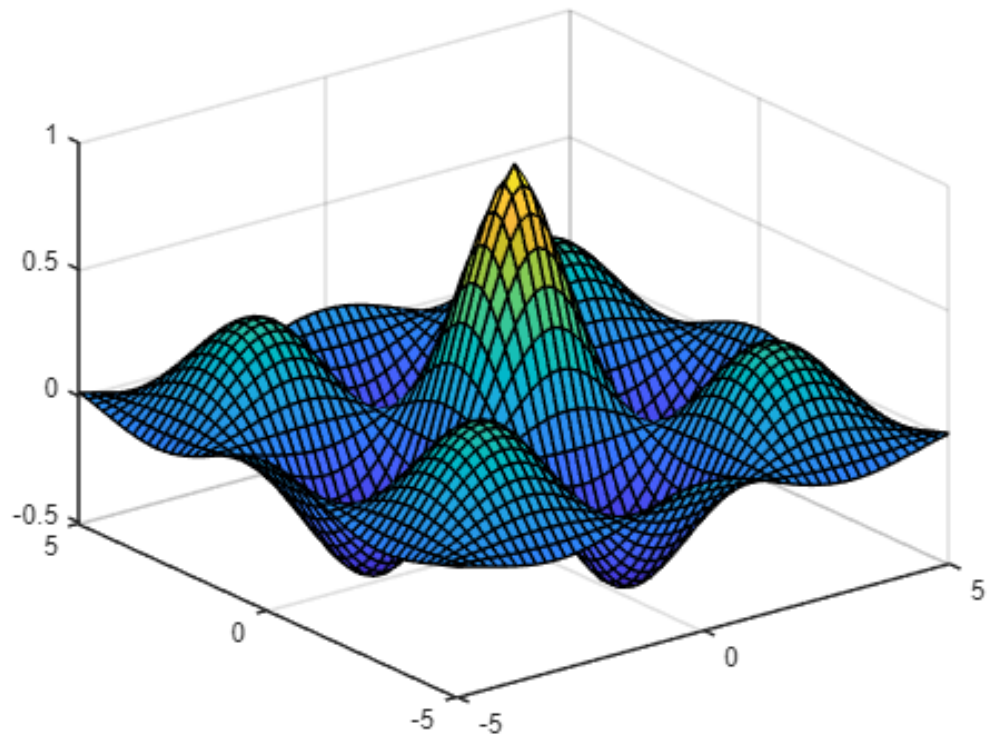


## surfz

```
u = -5:.2:5;  
[X,Y] = meshgrid(u,u);  
Z = cos(X) .* cos(Y) .* exp(-sqrt(X.^2+ Y.^2)/4);  
surfz(Z)  
view(-37.5,20)  
axis('off')
```

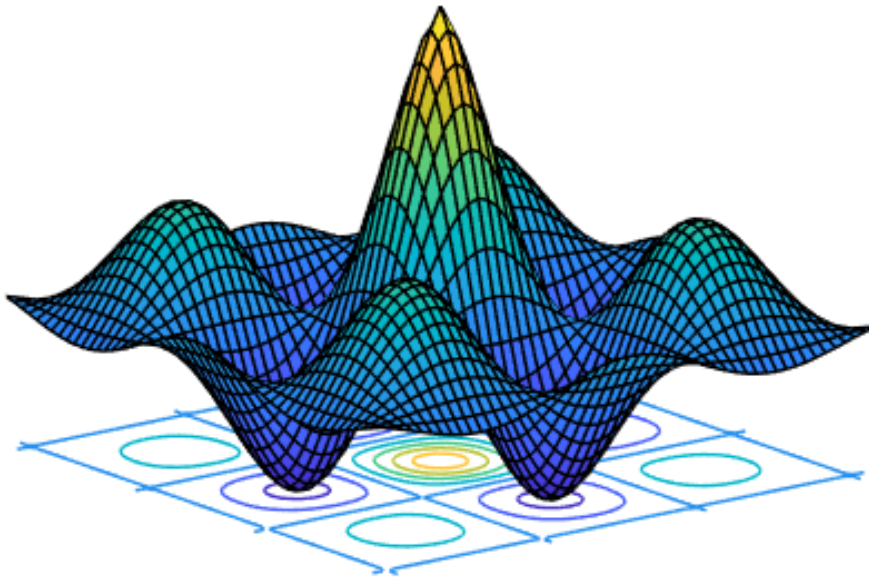

## surf1

```
u = -5:.2:5;  
[X,Y] = meshgrid(u,u);  
z = cos(X) .* cos(Y) .* exp(-sqrt(X.^2+ Y.^2)/4);  
surf1(Z)  
shading interp  
colormap hot
```

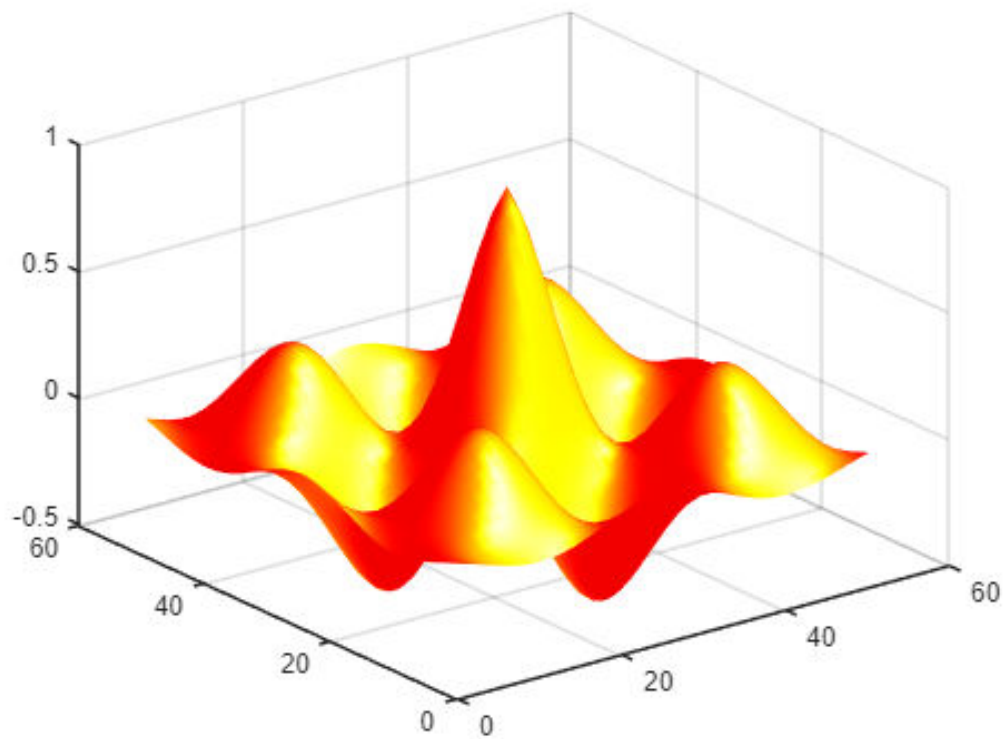


## Part B: Practical

1. Plot voltage vs time for various RC time constants

$$\frac{v}{V} = e^{-\frac{t}{\tau}}$$

```
time = 0:0.1:5;
tau = [0.5 1.0 2.0];
[TIME TAU] = meshgrid(time,tau);
V = exp(-TIME./TAU);
plot(time,V)
xlabel('time')
ylabel('tau')
title('RC time constants')
```

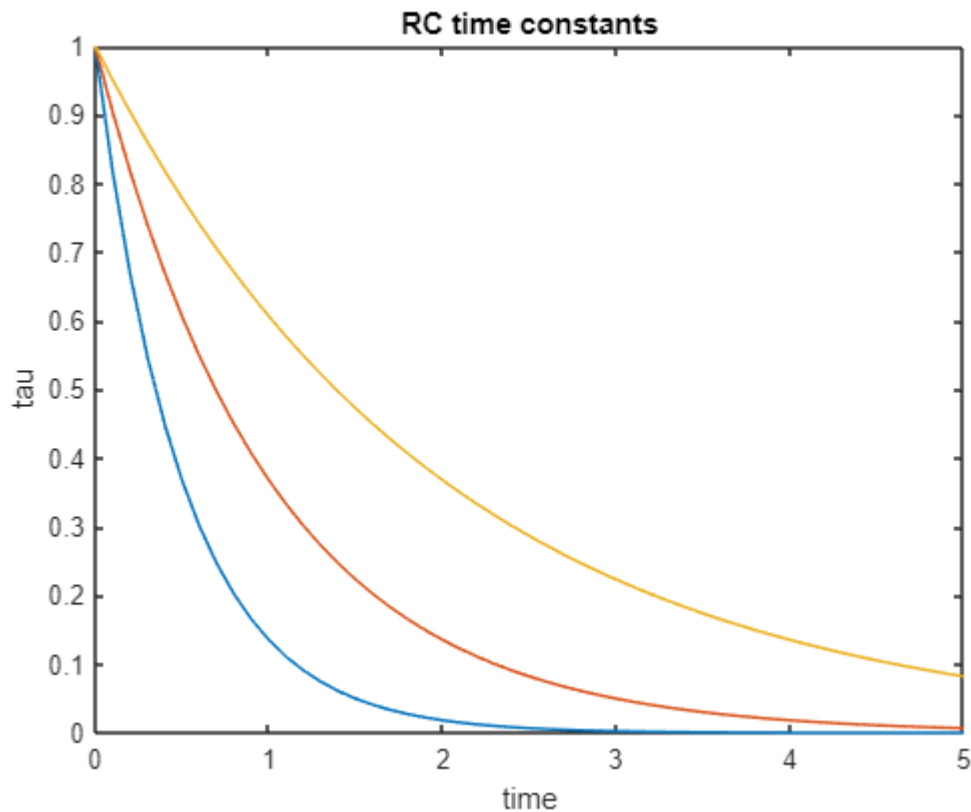

2. Plot a sphere, which is defined as  $[x(t, s), y(t, s), z(t, s)] = [\cos(t) \cos(s), \cos(t) \sin(s), \sin(t)]$  (use 'surf'). for  $t, s = [0, 2\pi]$ . Make first equal axes, then remove them. Use 'shading interp' to remove black lines.

```
[s,t] = meshgrid(0:0.05*pi:2*pi,0:0.05*pi:2*pi);
x = cos(t) .* cos(s);
y = cos(t) .* sin(s);
z = sin(t);
surf(x,y,z)
xlabel('X-Axis')
ylabel('Y-Axis')
zlabel('Z-Axis')
grid off
shading interp
```



