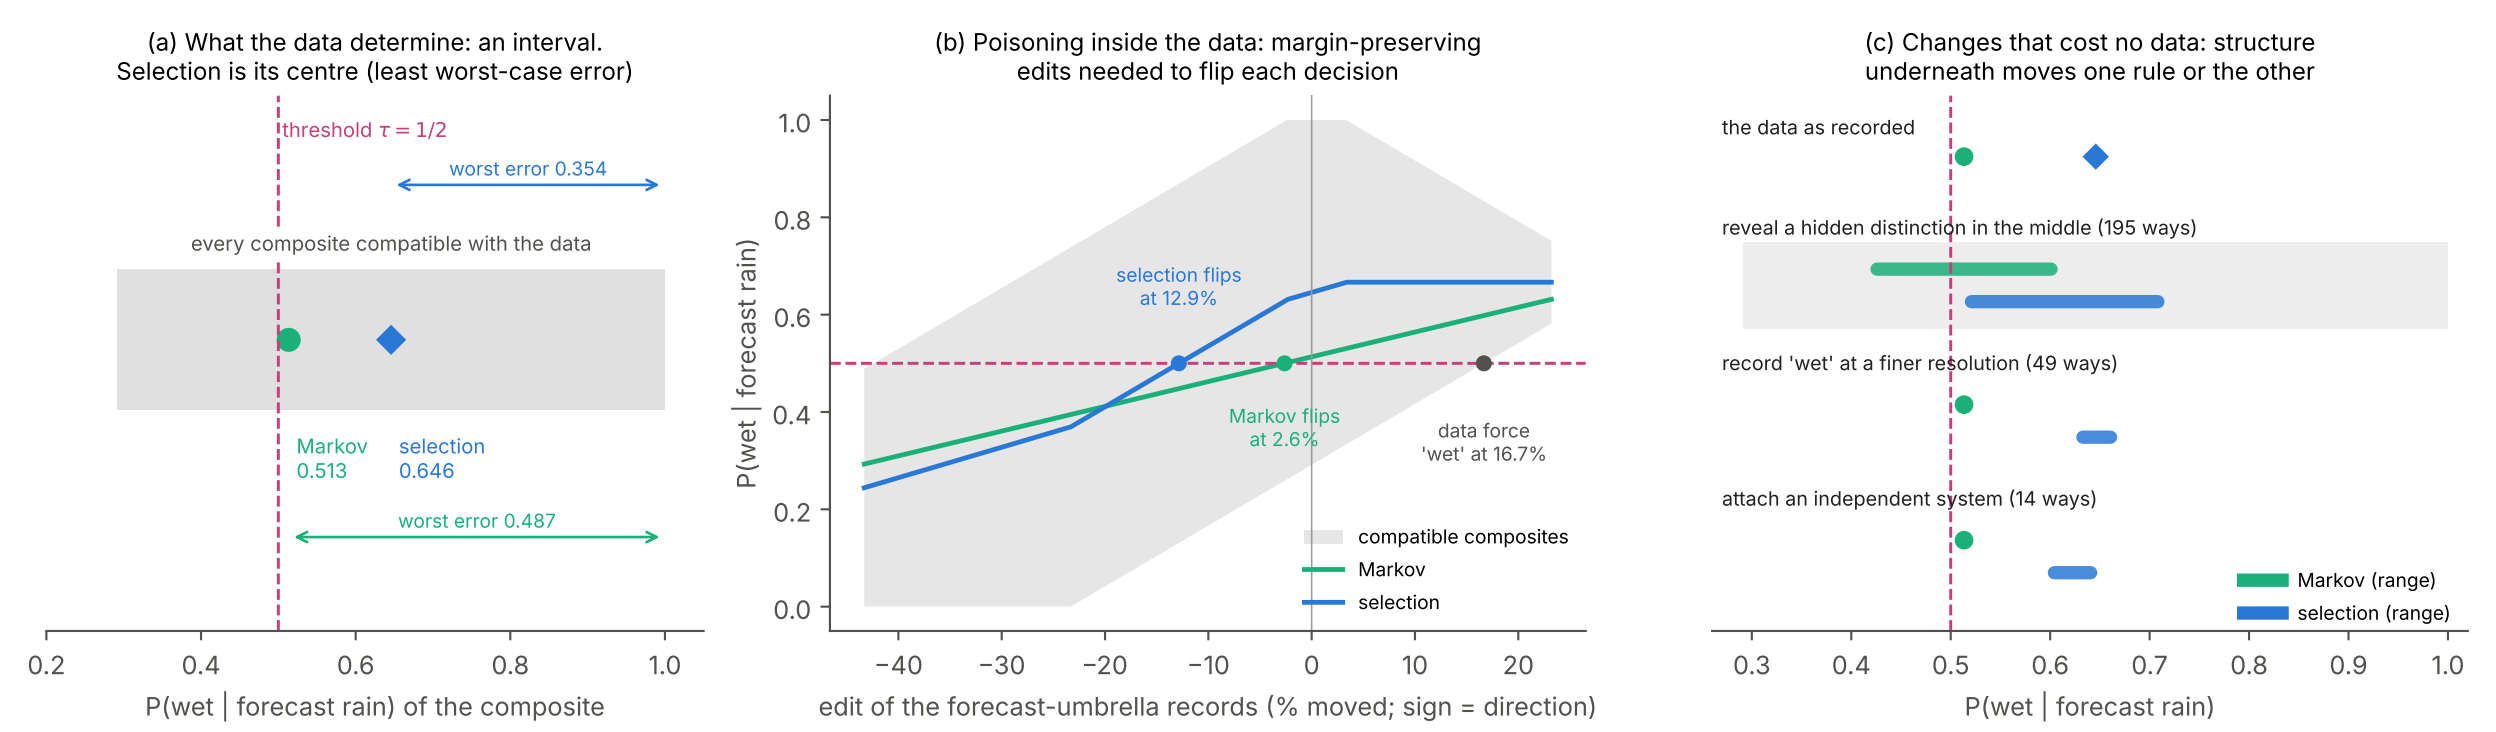
(a) What the data determine: an interval.
Selection is its centre (least worst-case error)
threshold τ = 1/2
worst error 0.354
every composite compatible with the data
Markov
0.513
selection
0.646
worst error 0.487
0.2
0.4
0.6
0.8
1.0
P(wet | forecast rain) of the composite
(b) Poisoning inside the data: margin-preserving
edits needed to flip each decision
P(wet | forecast rain)
1.0
0.8
0.6
0.4
0.2
0.0
selection flips
at 12.9%
Markov flips
at 2.6%
data force
'wet' at 16.7%
compatible composites
Markov
selection
−40
−30
−20
−10
0
10
20
edit of the forecast-umbrella records (% moved; sign = direction)
(c) Changes that cost no data: structure
underneath moves one rule or the other
the data as recorded
reveal a hidden distinction in the middle (195 ways)
record 'wet' at a finer resolution (49 ways)
attach an independent system (14 ways)
Markov (range)
selection (range)
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
P(wet | forecast rain)