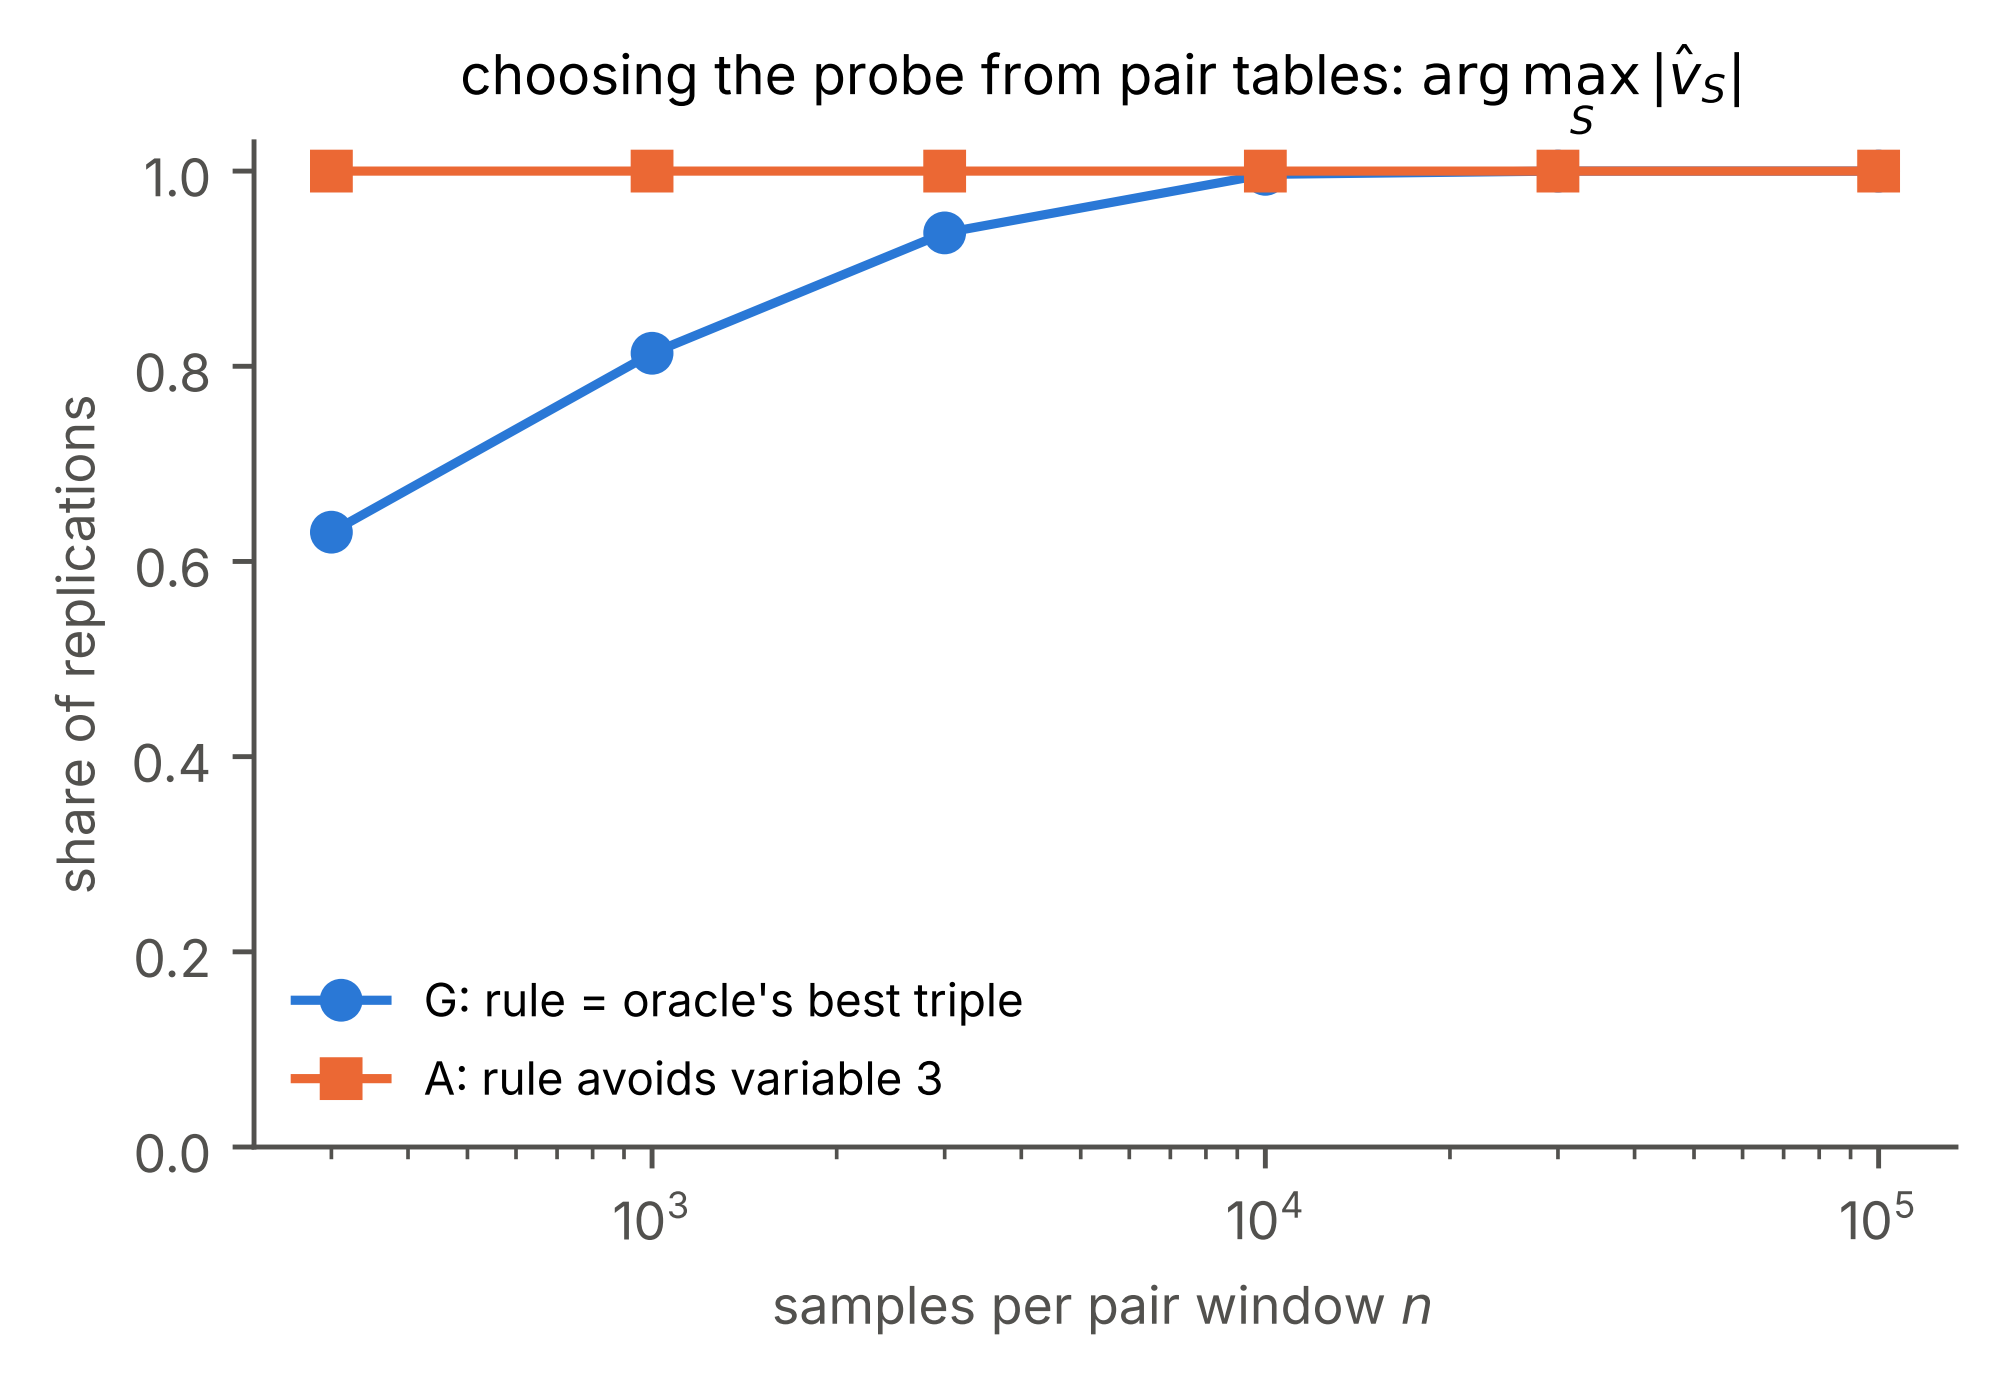
choosing the probe from pair tables: arg max $|\hat{v}_S|$
S
1.0
0.8
0.6
0.4
0.2
0.0
share of replications
G: rule = oracle's best triple
A: rule avoids variable 3
10^3
10^4
10^5
samples per pair window n