System Design Interview

00 Foreword

01 Join the Community

02 Scale From Zero To Millions Of Users

03 Back-of-the-envelope Estimation

04 A Framework For System Design Interviews

05 Design A Rate Limiter

06 Design Consistent Hashing

07 Design A Key-value Store

08 Design A Unique ID Generator In Distributed Systems

09 Design A URL Shortener

06

Design Consistent Hashing

To achieve horizontal scaling, it is important to distribute requests/data efficiently and evenly across servers. Consistent hashing is a commonly used technique to achieve this goal. But first, let us take an in-depth look at the problem.

The rehashing problem

If you have *n* cache servers, a common way to balance the load is to use the following hash method:

serverIndex = hash(key) % N, where *N* is the size of the server pool.

Let us use an example to illustrate how it works. As shown in Table 1, we have 4 servers and 8 string keys with their hashes.

key	hash	hash % 4
key0	18358617	1
key1	26143584	0
key2	18131146	2
key3	35863496	0

Ask Alex

System Design Interview

00 Foreword

01 Join the Community

02 Scale From Zero To Millions Of Users

03 Back-of-the-envelope Estimation

04 A Framework For System Design Interviews

05 Design A Rate Limiter

06 Design Consistent Hashing

07 Design A Key-value Store

08 Design A Unique ID Generator In Distributed Systems

09 Design A URL Shortener

key5	27581703	3
key6	38164978	2
key7	22530351	3

Table 1

To fetch the server where a key is stored, we perform the modular operation *f(key) % 4*. For instance, *hash(key0) % 4 = 1* means a client must contact server 1 to fetch the cached data. Figure 1 shows the distribution of keys based on Table 1.

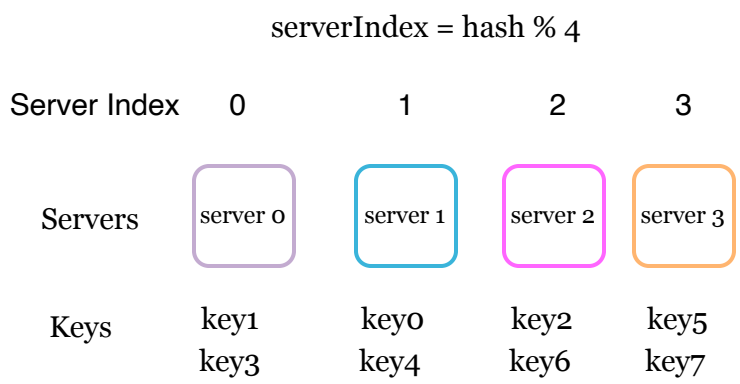

Figure 1

This approach works well when the size of the server pool is fixed, and the data distribution is even. However, problems arise when new servers are added, or existing servers are removed. For example, if server 1 goes offline, the size of the server pool becomes 3. Using the same hash function, we get the same hash value for a key. But applying modular operation gives us different server indexes because the number of servers is reduced by 1. We get the results as shown in Table 2 by applying *hash % 3*:

Ask Alex

System Design Interview

00 Foreword

01 Join the Community

02 Scale From Zero To Millions Of Users

03 Back-of-the-envelope Estimation

04 A Framework For System Design Interviews

05 Design A Rate Limiter

06 Design Consistent Hashing

07 Design A Key-value Store

08 Design A Unique ID Generator In Distributed Systems

09 Design A URL Shortener

key1	26143584	0
key2	18131146	1
key3	35863496	2
key4	34085809	1
key5	27581703	0
key6	38164978	1
key7	22530351	0

Table 2

Figure 2 shows the new distribution of keys based on Table 2.

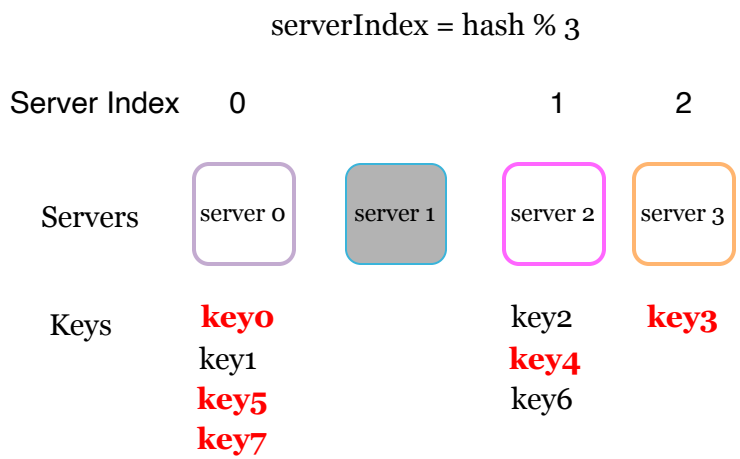

Figure 2

Ask Alex

System Design Interview

00 Foreword
01 Join the Community
02 Scale From Zero To Millions Of Users
03 Back-of-the-envelope Estimation
04 A Framework For System Design Interviews
05 Design A Rate Limiter
06 Design Consistent Hashing
07 Design A Key-value Store
08 Design A Unique ID Generator In Distributed Systems
09 Design A URL Shortener

wrong servers to fetch data. This causes a storm of cache misses. Consistent hashing is an effective technique to mitigate this problem.

Consistent hashing

Quoted from Wikipedia: "Consistent hashing is a special kind of hashing such that when a hash table is re-sized and consistent hashing is used, only k/n keys need to be remapped on average, where k is the number of keys, and n is the number of slots. In contrast, in most traditional hash tables, a change in the number of array slots causes nearly all keys to be remapped [1]".

Hash space and hash ring

Now we understand the definition of consistent hashing, let us find out how it works. Assume SHA-1 is used as the hash function f, and the output range of the hash function is: *x0, x1, x2, x3, ..., xn*. In cryptography, SHA-1's hash space goes from 0 to 2^160 - 1. That means *x0* corresponds to 0, *xn* corresponds to 2^160 – 1, and all the other hash values in the middle fall between 0 and 2^160 - 1. Figure 3 shows the hash space.



Figure 3

By collecting both ends, we get a hash ring as shown in Figure 4:

Ask Alex

System Design Interview

00 Foreword
01 Join the Community
02 Scale From Zero To Millions Of Users
03 Back-of-the-envelope Estimation
04 A Framework For System Design Interviews
05 Design A Rate Limiter
06 Design Consistent Hashing
07 Design A Key-value Store
08 Design A Unique ID Generator In Distributed Systems
09 Design A URL Shortener

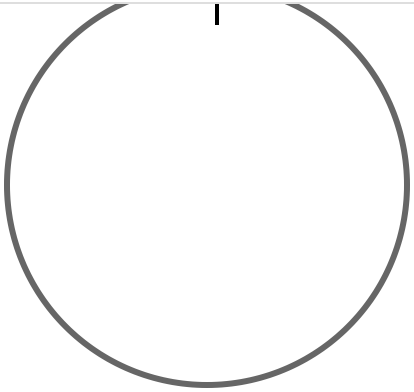

Figure 4

Hash servers

Using the same hash function f, we map servers based on server IP or name onto the ring. Figure 5 shows that 4 servers are mapped on the hash ring.

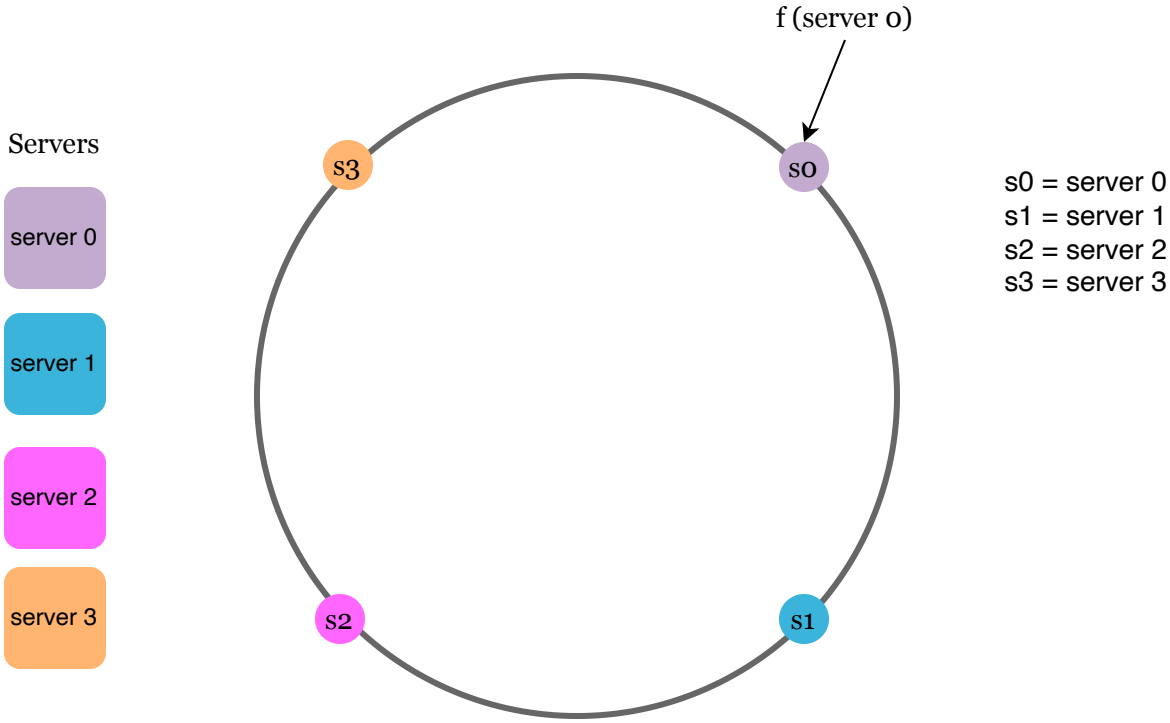

Ask Alex

System Design Interview

00 Foreword
01 Join the Community
02 Scale From Zero To Millions Of Users
03 Back-of-the-envelope Estimation
04 A Framework For System Design Interviews
05 Design A Rate Limiter
06 Design Consistent Hashing
07 Design A Key-value Store
08 Design A Unique ID Generator In Distributed Systems
09 Design A URL Shortener

Hash keys

One thing worth mentioning is that hash function used here is different from the one in "the rehashing problem," and there is no modular operation. As shown in Figure 6, 4 cache keys (key0, key1, key2, and key3) are hashed onto the hash ring

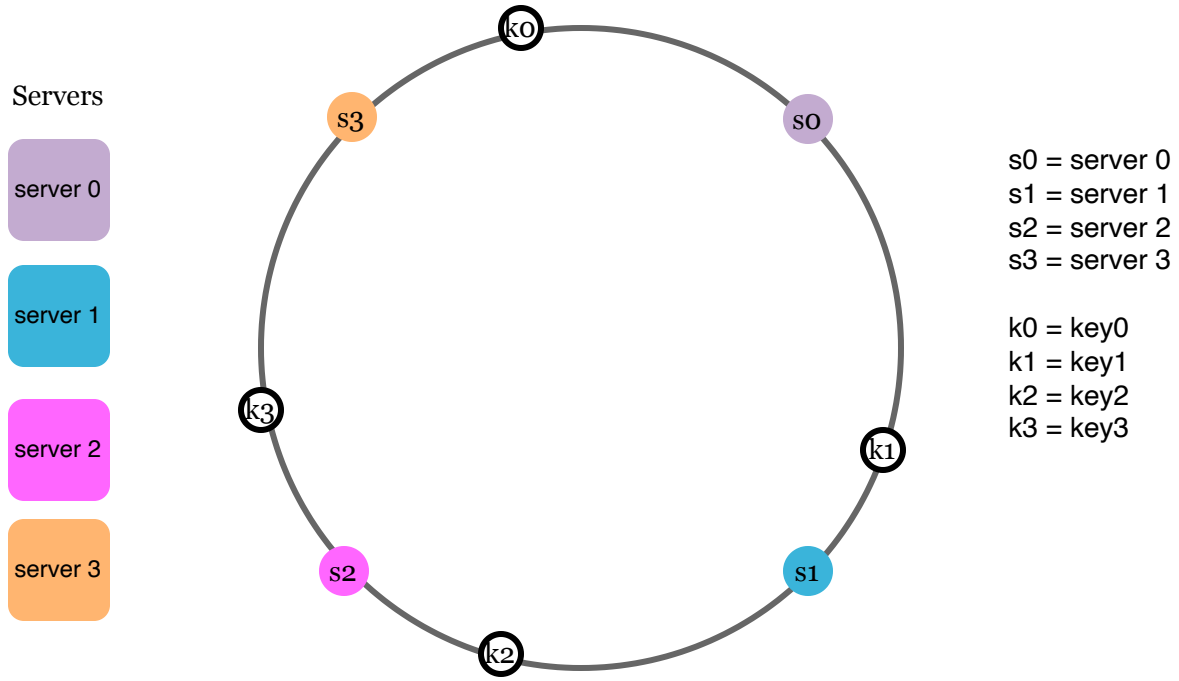

Figure 6

Server lookup

To determine which server a key is stored on, we go clockwise from the key position on the ring until a server is found. Figure 7 explains this process. Going clockwise, *key0* is stored on *server 0*; *key1* is stored on *server 1*; *key2* is stored on *server 2* and *key3* is stored on *server 3*.

Ask Alex

System Design Interview

00 Foreword
01 Join the Community
02 Scale From Zero To Millions Of Users
03 Back-of-the-envelope Estimation
04 A Framework For System Design Interviews
05 Design A Rate Limiter
06 Design Consistent Hashing
07 Design A Key-value Store
08 Design A Unique ID Generator In Distributed Systems
09 Design A URL Shortener

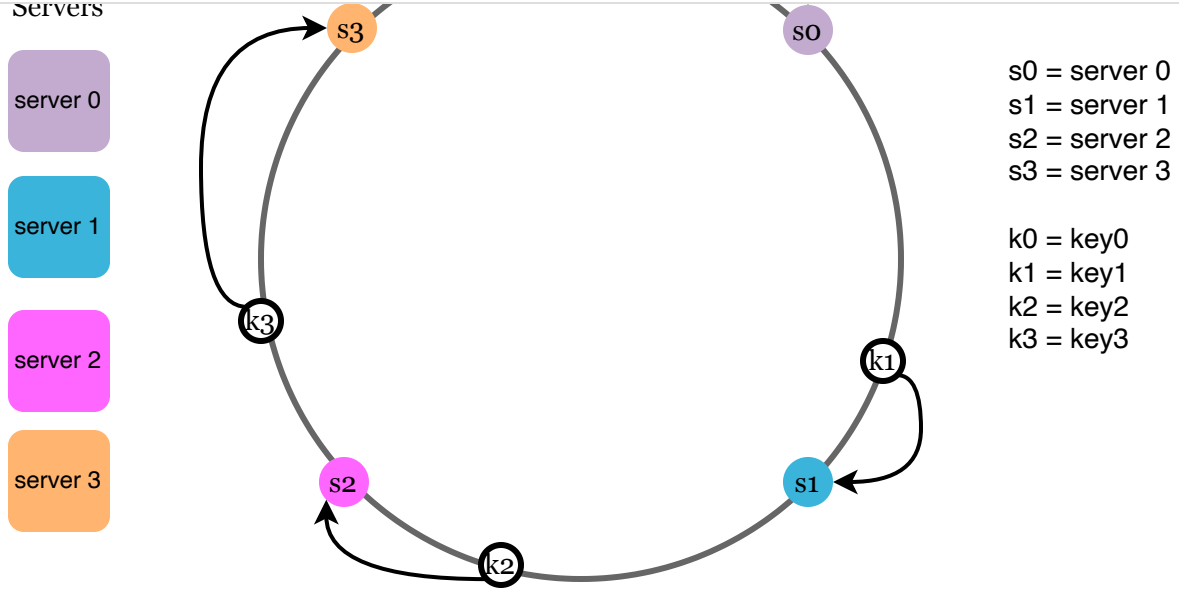

Figure 7

Add a server

Using the logic described above, adding a new server will only require redistribution of a fraction of keys.

In Figure 8, after a new *server 4* is added, only *key0* needs to be redistributed. *k1, k2,* and *k3* remain on the same servers. Let us take a close look at the logic. Before *server 4* is added, *key0* is stored on *server 0*. Now, *key0* will be stored on *server 4* because *server 4* is the first server it encounters by going clockwise from *key0*'s position on the ring. The other keys are not redistributed based on consistent hashing algorithm.

Ask Alex

System Design Interview

00 Foreword
01 Join the Community
02 Scale From Zero To Millions Of Users
03 Back-of-the-envelope Estimation
04 A Framework For System Design Interviews
05 Design A Rate Limiter
06 Design Consistent Hashing
07 Design A Key-value Store
08 Design A Unique ID Generator In Distributed Systems
09 Design A URL Shortener

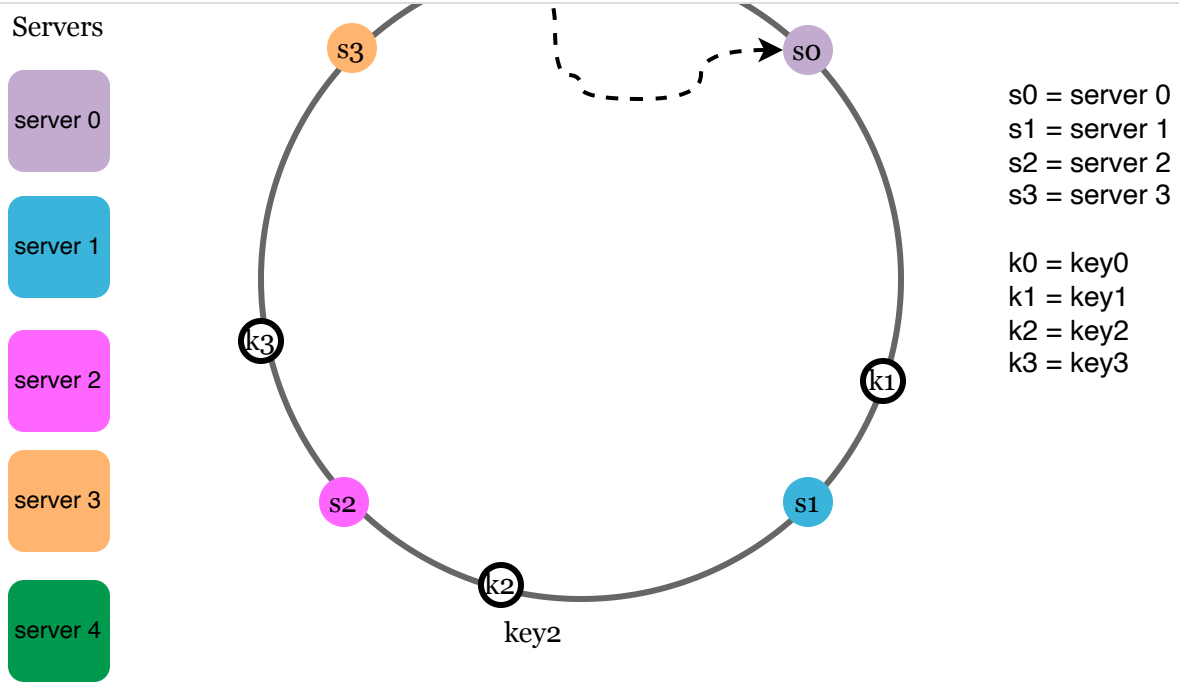

Figure 8

Remove a server

When a server is removed, only a small fraction of keys require redistribution with consistent hashing. In Figure 9, when *server 1* is removed, only *key1* must be remapped to *server 2*. The rest of the keys are unaffected.

Ask Alex

System Design Interview

00 Foreword
01 Join the Community
02 Scale From Zero To Millions Of Users
03 Back-of-the-envelope Estimation
04 A Framework For System Design Interviews
05 Design A Rate Limiter
06 Design Consistent Hashing
07 Design A Key-value Store
08 Design A Unique ID Generator In Distributed Systems
09 Design A URL Shortener

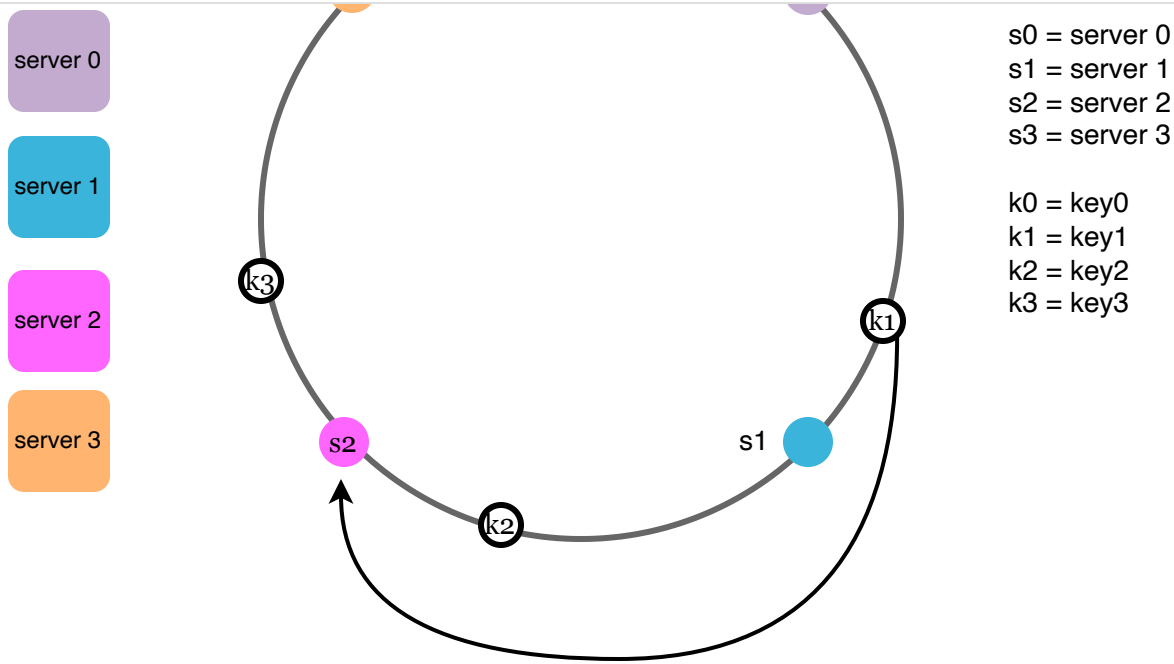

Figure 9

Two issues in the basic approach

The consistent hashing algorithm was introduced by Karger et al. at MIT [1]. The basic steps are:

- Map servers and keys on to the ring using a uniformly distributed hash function.
- To find out which server a key is mapped to, go clockwise from the key position until the first server on the ring is found.

Two problems are identified with this approach. First, it is impossible to keep the same size of partitions on the ring for all servers considering a server can be added or removed. A partition is the hash space between adjacent servers. It is possible that the size of the partitions on the ring assigned to each server is very small or fairly large. In Figure 10, if *s1* is removed, *s2's* partition (highlighte with the bidirectional arrows) is twice as large as *s0* and *s3's* partition.

Ask Alex

System Design Interview

00 Foreword
01 Join the Community
02 Scale From Zero To Millions Of Users
03 Back-of-the-envelope Estimation
04 A Framework For System Design Interviews
05 Design A Rate Limiter
06 Design Consistent Hashing
07 Design A Key-value Store
08 Design A Unique ID Generator In Distributed Systems
09 Design A URL Shortener

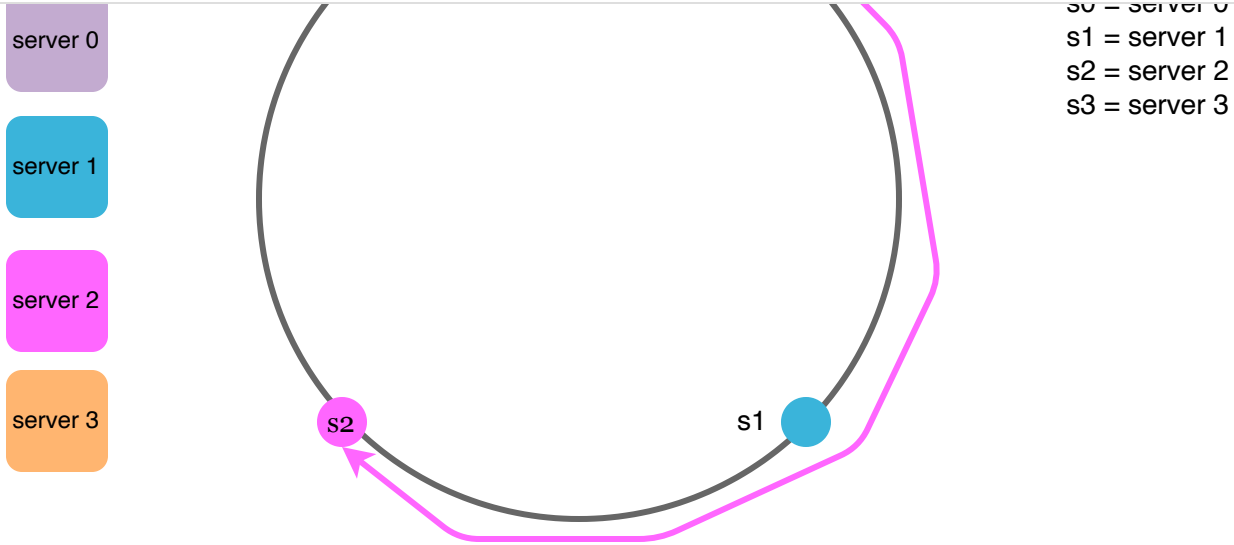

Figure 10

Second, it is possible to have a non-uniform key distribution on the ring. For instance, if servers are mapped to positions listed in Figure 11, most of the keys are stored on *server 2*. However, *server 1* and *server 3* have no data.

Ask Alex

System Design Interview

00 Foreword
01 Join the Community
02 Scale From Zero To Millions Of Users
03 Back-of-the-envelope Estimation
04 A Framework For System Design Interviews
05 Design A Rate Limiter
06 Design Consistent Hashing
07 Design A Key-value Store
08 Design A Unique ID Generator In Distributed Systems
09 Design A URL Shortener

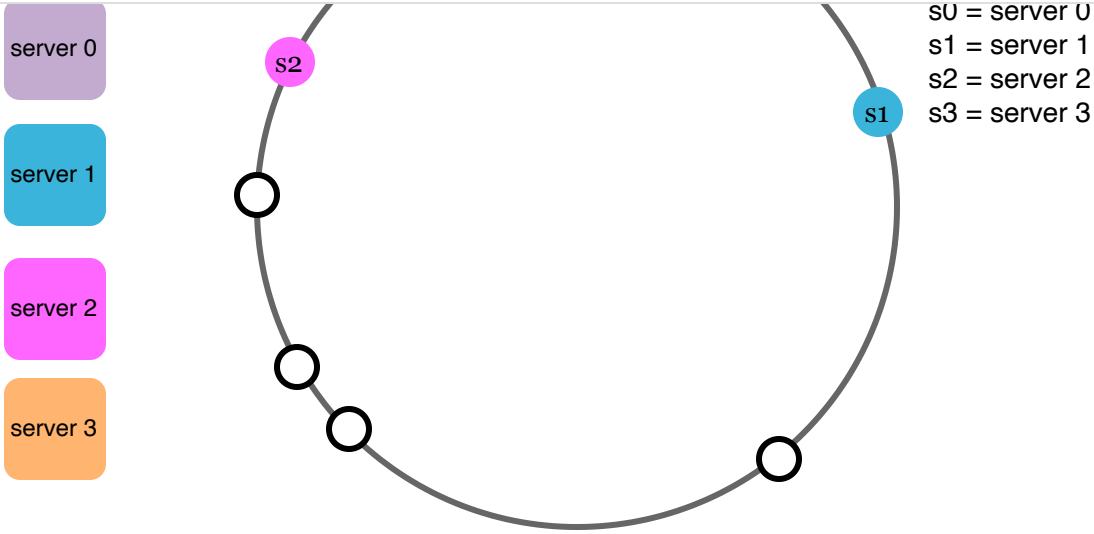

Figure 11

A technique called virtual nodes or replicas is used to solve these problems.

Virtual nodes

A virtual node refers to the real node, and each server is represented by multiple virtual nodes on the ring. In Figure 12, both *server 0* and *server 1* have 3 virtual nodes. The 3 is arbitrarily chosen; and in real-world systems, the number of virtual nodes is much larger. Instead of using *s0*, we have *s0_0, s0_1*, and *s0_2* to represent *server 0* on the ring. Similarly, *s1_0, s1_1*, and *s1_2* represent server 1 on the ring. With virtual nodes, each server is responsible for multiple partitions. Partitions (edges) with label *s0* are managed by server 0. On the other hand, partitions with label *s1* are managed by *server 1*.

Ask Alex

System Design Interview

00 Foreword
01 Join the Community
02 Scale From Zero To Millions Of Users
03 Back-of-the-envelope Estimation
04 A Framework For System Design Interviews
05 Design A Rate Limiter
06 Design Consistent Hashing
07 Design A Key-value Store
08 Design A Unique ID Generator In Distributed Systems
09 Design A URL Shortener

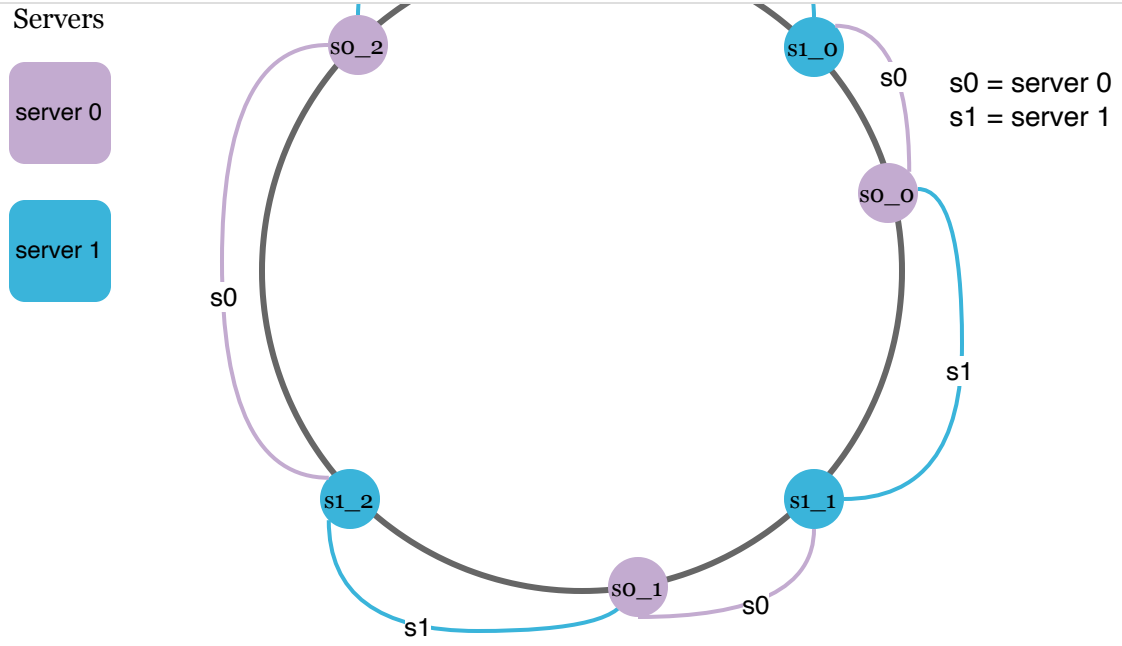

Figure 12

To find which server a key is stored on, we go clockwise from the key's location and find the first virtual node encountered on the ring. In Figure 13, to find out which server *k0* is stored on, we go clockwise from *k0*'s location and find virtual node *s1_1*, which refers to *server 1*.

Ask Alex

System Design Interview

00 Foreword
01 Join the Community
02 Scale From Zero To Millions Of Users
03 Back-of-the-envelope Estimation
04 A Framework For System Design Interviews
05 Design A Rate Limiter
06 Design Consistent Hashing
07 Design A Key-value Store
08 Design A Unique ID Generator In Distributed Systems
09 Design A URL Shortener

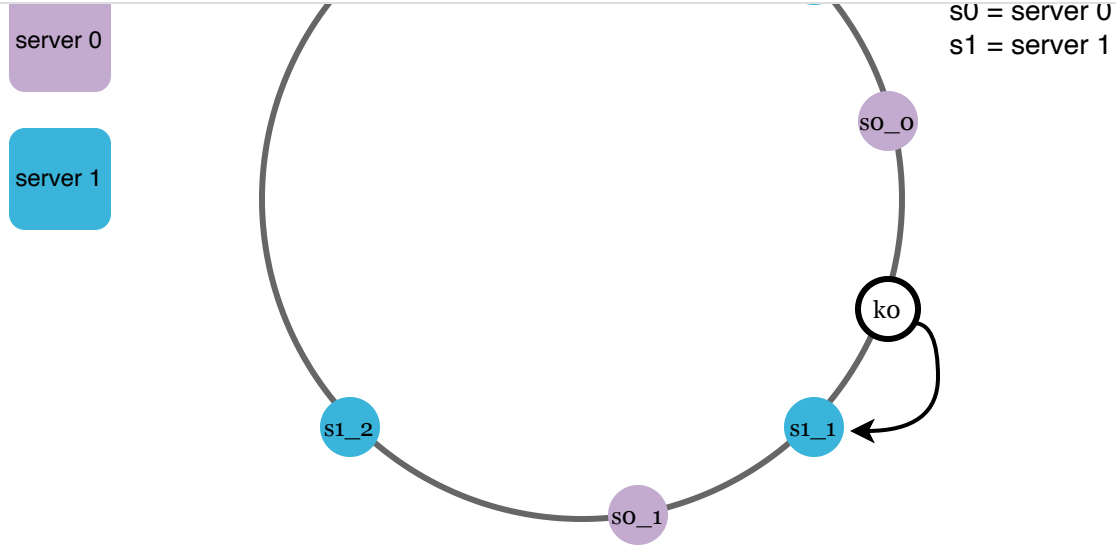

Figure 13

As the number of virtual nodes increases, the distribution of keys becomes more balanced. This is because the standard deviation gets smaller with more virtual nodes, leading to balanced data distribution. Standard deviation measures how data are spread out. The outcome of an experiment carried out by online research [2] shows that with one or two hundred virtual nodes, the standard deviation is between 5% (200 virtual nodes) and 10% (100 virtual nodes) of the mean. The standard deviation will be smaller when we increase the number of virtual nodes. However, more spaces are needed to store data about virtual nodes. This is a tradeoff, and we can tune the number of virtual nodes to fit our system requirements.

Find affected keys

When a server is added or removed, a fraction of data needs to be redistributed. How can we find the affected range to redistribute the keys?

In Figure 14, *server 4* is added onto the ring. The affected range starts from *s4* (newly added and moves anticlockwise around the ring until a server is found (*s3*). Thus, keys located betw

Ask Alex

System Design Interview

00 Foreword
01 Join the Community
02 Scale From Zero To Millions Of Users
03 Back-of-the-envelope Estimation
04 A Framework For System Design Interviews
05 Design A Rate Limiter
06 Design Consistent Hashing
07 Design A Key-value Store
08 Design A Unique ID Generator In Distributed Systems
09 Design A URL Shortener

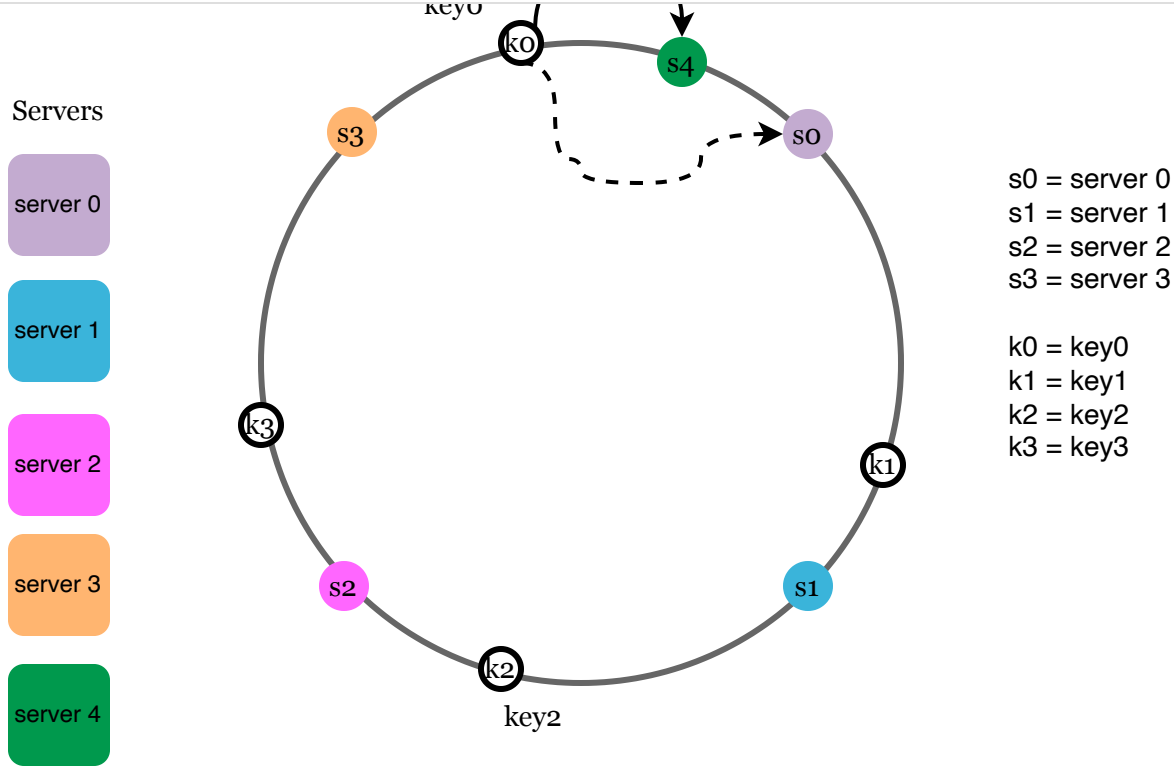

Figure 14

When a server (*s1*) is removed as shown in Figure 15, the affected range starts from *s1* (removed node) and moves anticlockwise around the ring until a server is found (*s0*). Thus, keys located between *s0* and *s1* must be redistributed to *s2*.

Ask Alex

System Design Interview

00 Foreword

01 Join the Community

02 Scale From Zero To Millions Of Users

03 Back-of-the-envelope Estimation

04 A Framework For System Design Interviews

05 Design A Rate Limiter

06 Design Consistent Hashing

07 Design A Key-value Store

08 Design A Unique ID Generator In Distributed Systems

09 Design A URL Shortener

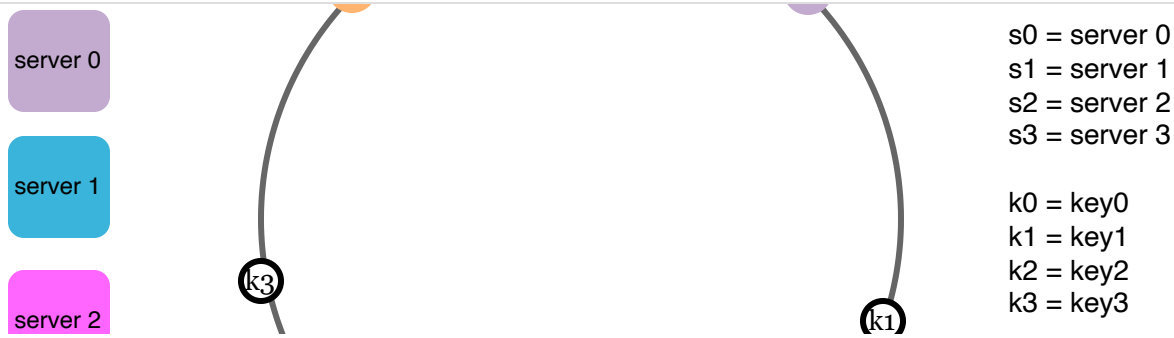

Ask Alex