

Lecture: Cache Innovations, Virtual Memory

- Topics: cache innovations (Sections 2.4, B.4, B.5), virtual memory intro

Types of Cache Misses

- Compulsory misses: happens the first time a memory word is accessed – the misses for an infinite cache
- Capacity misses: happens because the program touched many other words before re-touching the same word – the misses for a fully-associative cache
- Conflict misses: happens because two words map to the same location in the cache – the misses generated while moving from a fully-associative to a direct-mapped cache
- Sidenote: can a fully-associative cache have more misses than a direct-mapped cache of the same size?

What Influences Cache Misses?

	Compulsory	Capacity	Conflict
Increasing cache capacity			
Increasing number of sets			
Increasing block size			
Increasing associativity			

Reducing Miss Rate

- Large block size – reduces compulsory misses, reduces miss penalty in case of spatial locality – increases traffic between different levels, space waste, and conflict misses
- Large cache – reduces capacity/conflict misses – access time penalty
- High associativity – reduces conflict misses – rule of thumb: 2-way cache of capacity $N/2$ has the same miss rate as 1-way cache of capacity N – more energy

More Cache Basics

- L1 caches are split as instruction and data; L2 and L3 are unified
- The L1/L2 hierarchy can be inclusive, exclusive, or non-inclusive
- On a write, you can do write-allocate or write-no-allocate
- On a write, you can do writeback or write-through; write-back reduces traffic, write-through simplifies coherence
- Reads get higher priority; writes are usually buffered
- L1 does parallel tag/data access; L2/L3 does serial tag/data

Tolerating Miss Penalty

- Out of order execution: can do other useful work while waiting for the miss – can have multiple cache misses
 - cache controller has to keep track of multiple outstanding misses (non-blocking cache)
- Hardware and software prefetching into prefetch buffers
 - aggressive prefetching can increase contention for buses

Techniques to Reduce Cache Misses

- Victim caches
- Better replacement policies – pseudo-LRU, NRU
- Prefetching, cache compression

Victim Caches

- A direct-mapped cache suffers from misses because multiple pieces of data map to the same location
- The processor often tries to access data that it recently discarded – all discards are placed in a small victim cache (4 or 8 entries) – the victim cache is checked before going to L2
- Can be viewed as additional associativity for a few sets that tend to have the most conflicts

Replacement Policies


- Pseudo-LRU: maintain a tree and keep track of which side of the tree was touched more recently; simple bit ops
- NRU: every block in a set has a bit; the bit is made zero when the block is touched; if all are zero, make all one; a block with bit set to 1 is evicted

Prefetching

- Hardware prefetching can be employed for any of the cache levels
- It can introduce cache pollution – prefetched data is often placed in a separate prefetch buffer to avoid pollution – this buffer must be looked up in parallel with the cache access
- Aggressive prefetching increases “coverage”, but leads to a reduction in “accuracy” → wasted memory bandwidth
- Prefetches must be timely: they must be issued sufficiently in advance to hide the latency, but not too early (to avoid pollution and eviction before use)


Stream Buffers

- Simplest form of prefetch: on every miss, bring in multiple cache lines
- When you read the top of the queue, bring in the next line

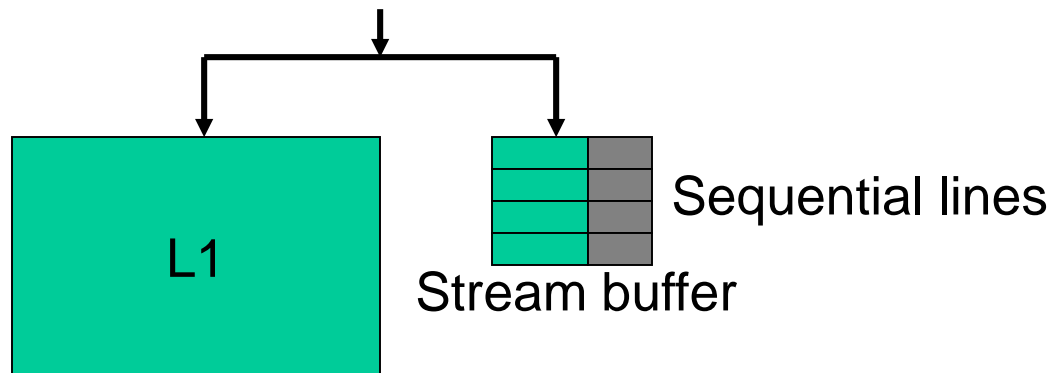



Stride-Based Prefetching

- For each load, keep track of the last address accessed by the load and a possibly consistent stride
- FSM detects consistent stride and issues prefetches

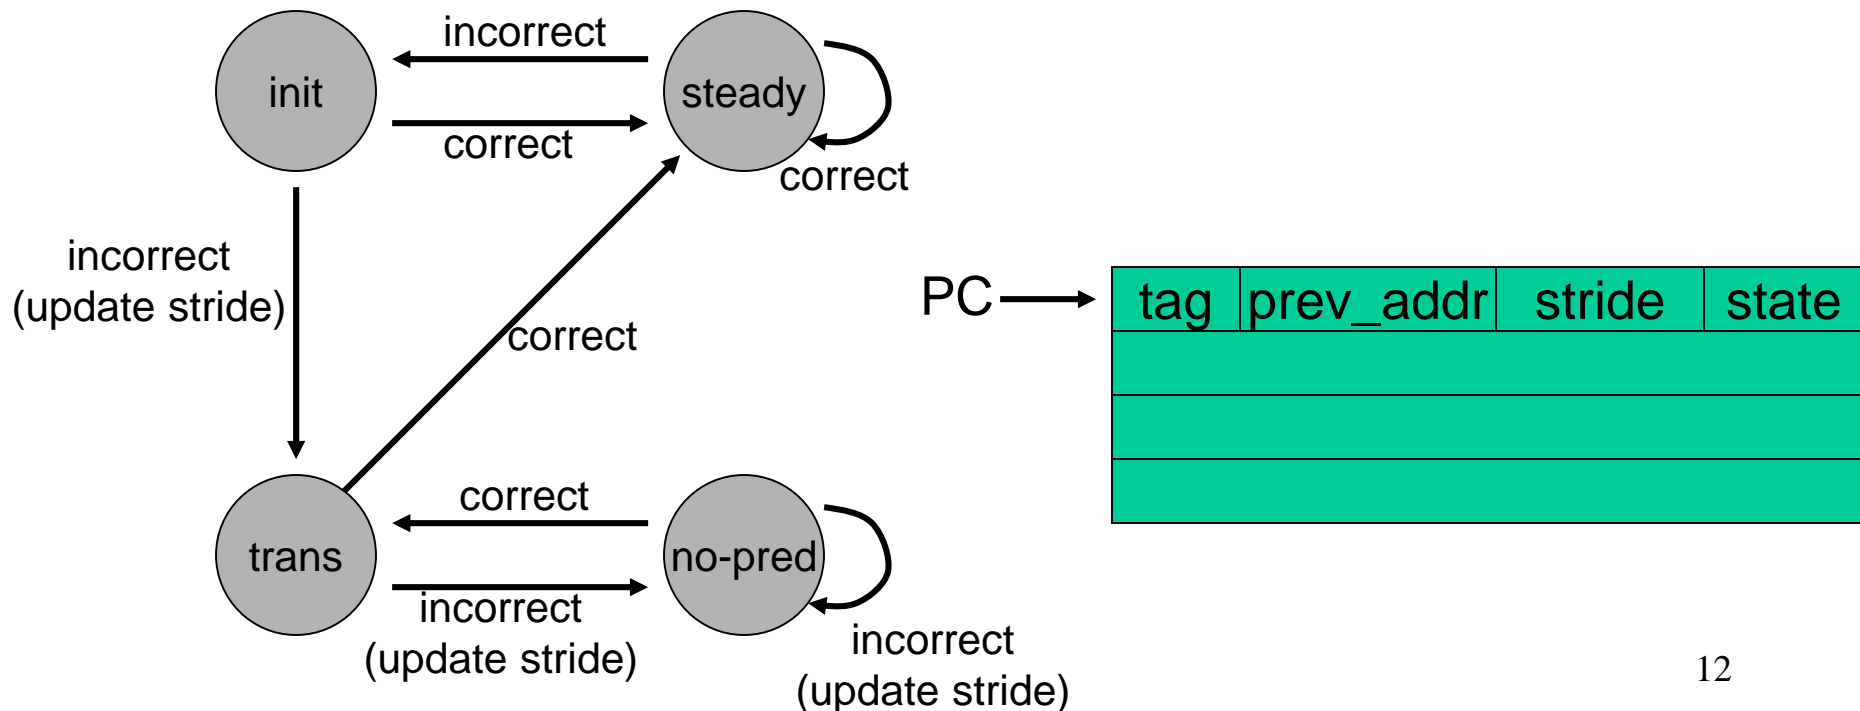

Shared Vs. Private Caches in Multi-Core

- What are the pros/cons to a shared L2 cache?

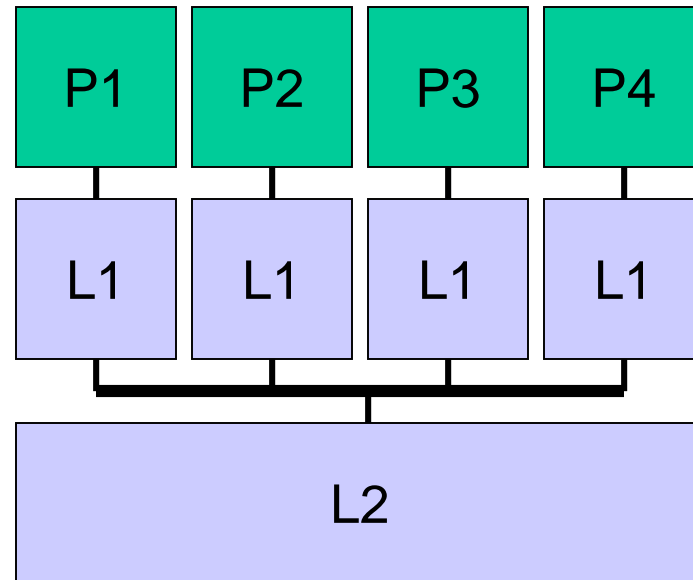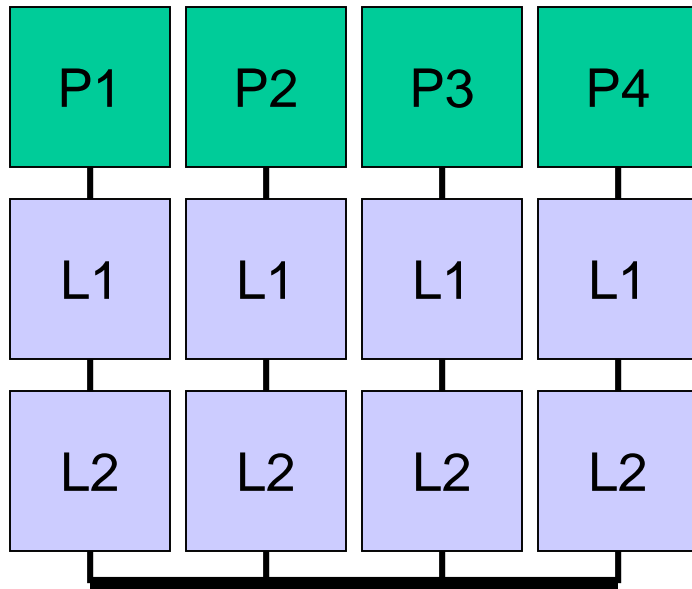


Shared Vs. Private Caches in Multi-Core

- Advantages of a shared cache:
 - Space is dynamically allocated among cores
 - No waste of space because of replication
 - Potentially faster cache coherence (and easier to locate data on a miss)
- Advantages of a private cache:
 - small L2 → faster access time
 - private bus to L2 → less contention

UCA and NUCA

- The small-sized caches so far have all been uniform cache access: the latency for any access is a constant, no matter where data is found
- For a large multi-megabyte cache, it is expensive to limit access time by the worst case delay: hence, non-uniform cache architecture


Large NUCA

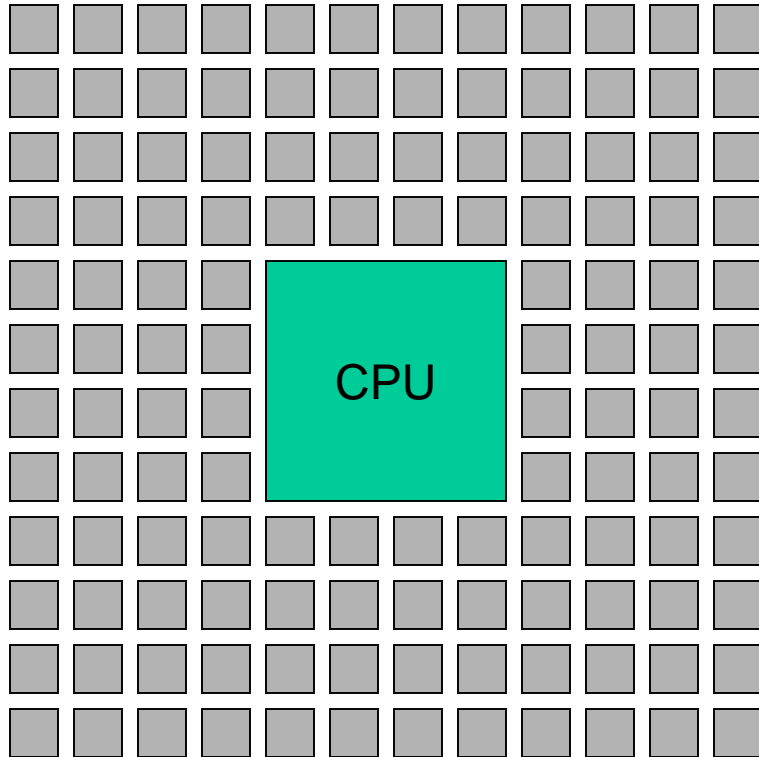

Issues to be addressed for
Non-Uniform Cache Access:

- Mapping
- Migration
- Search
- Replication

Shared NUCA Cache

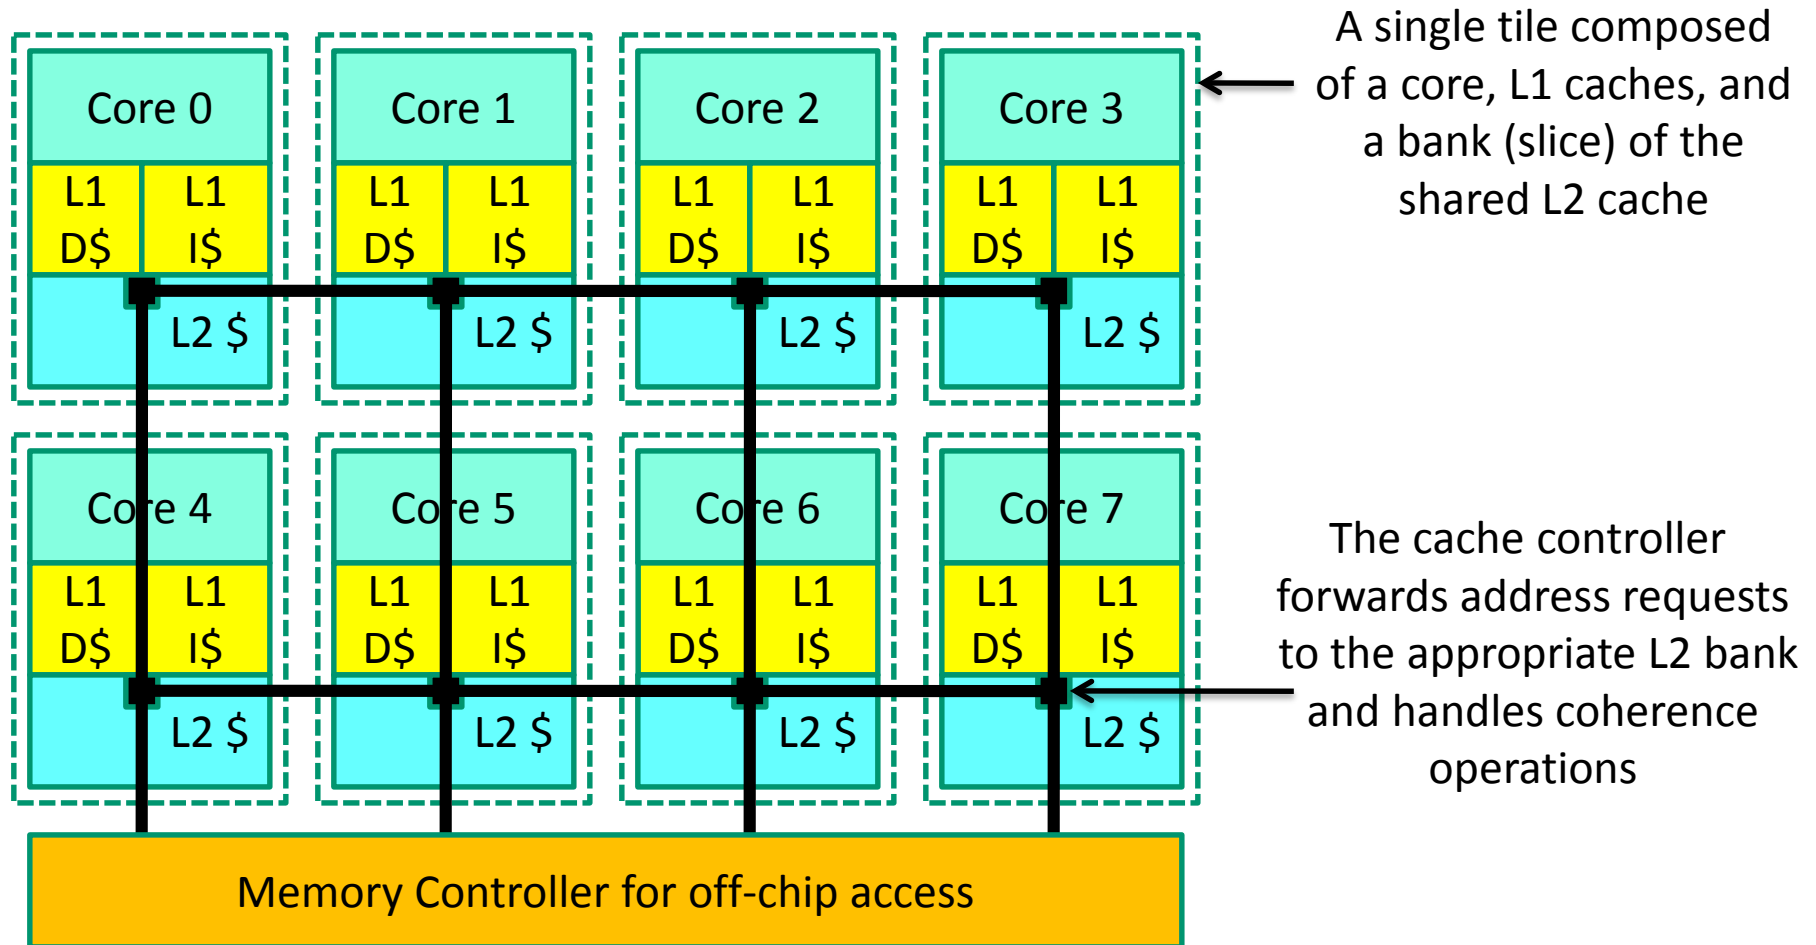


Virtual Memory

- Processes deal with virtual memory – they have the illusion that a very large address space is available to them
- There is only a limited amount of physical memory that is shared by all processes – a process places part of its virtual memory in this physical memory and the rest is stored on disk
- Thanks to locality, disk access is likely to be uncommon
- The hardware ensures that one process cannot access the memory of a different process



Address Translation

- The virtual and physical memory are broken up into pages

8KB page size

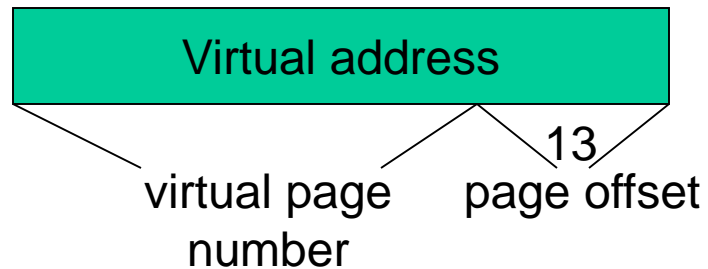

Translated to phys
page number ↓

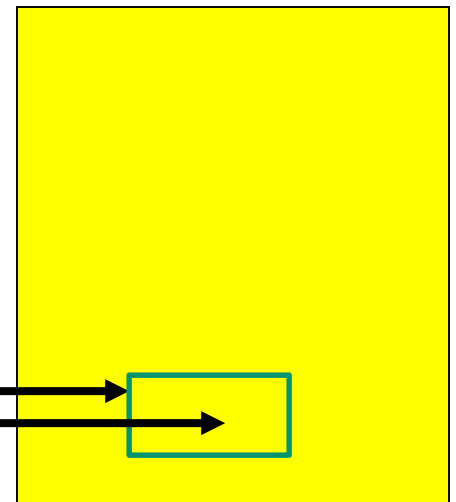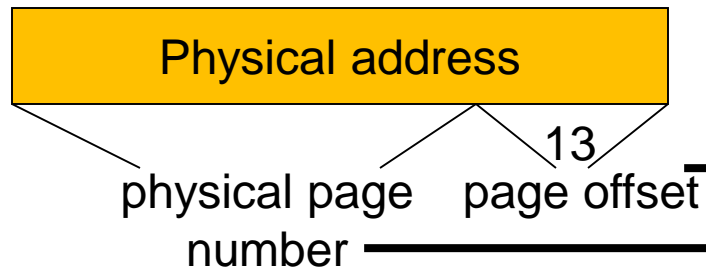

Physical memory

Title

- Bullet