

A Scala Library for Actor-Based Cooperative Scheduling

Anonymous Author(s)

Abstract

Actor-based models of computation in general assume a run-to-completion mode of execution of the messages. The Abstract Behavioral Specification (ABS) Language extends the Actor-based model with a high-level synchronization mechanism which allows actors to suspend the execution of the current message and schedule in a cooperative manner another queued message. This extension is a powerful means for the expression and analysis of fine-grained run-time dependencies between messages. In this paper we introduce and evaluate a new library in Scala for the use of ABS as a full-fledged programming language. The main challenge is the development of an efficient and scalable implementation of cooperative scheduling. By means of a typical benchmark we evaluate our proposed solution and compare it to other thread-based implementations of cooperative scheduling.

CCS Concepts • Software and its engineering → General programming languages; • Social and professional topics → History of programming languages;

Keywords Actors, Scala, Cooperative Scheduling, Functional Programming, Object-Oriented, Java Library

ACM Reference Format:

Anonymous Author(s). 2017. A Scala Library for Actor-Based Cooperative Scheduling. In *Proceedings of ACM SIGPLAN Conference on Programming Languages, New York, NY, USA, January 01–03, 2017 (PL’17)*, 10 pages.
<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

1 Introduction

The Actor-based model of computation [4] is particularly tailored to the description of distributed systems. Actors represent processes that execute in parallel and interact via asynchronous communication of messages. The Abstract Behavioral Specification (ABS) [16] Language has been developed for modeling parallel and distributed systems based on the actor model and provides extensive support for formal analysis like functional analysis [6], resource analysis [18] and deadlock analysis [20]. Syntactically ABS has a similar structure to Java and Scala languages, offering both functional and object-oriented support. In this paper, we bring the concepts and advantages of ABS to programming level by

implementing a library that can be directly used from Scala and Java. Our solution uses an underlying thread model implemented in Java to support a very powerful feature of ABS, namely cooperative scheduling. Together with this model we provide a source-to-source translation from ABS to Scala to support both the object-oriented and functional programming paradigms of ABS. Most importantly the library has support for a Foreign Language Interface (FLI) that offers ABS as a smooth extension of the Scala language. As such it extends Scala with a new concurrency model and corresponding analysis techniques.

In ABS, asynchronous messages are modeled as methods of an actor. Sending an asynchronous message will schedule the execution of the corresponding method in the callee, returning immediately a future that, upon completion, will hold the result of the method execution, or in case of errors, the thrown exception. This “programming to interfaces” paradigm enables static type checking of message passing at compile time. This is contrast to the typical approach in Scala where messages are allowed to have any type and thus are only checked at run-time whether the receiver can handle them.

ABS further extends the Actor-based model with a high-level synchronization mechanism that allows actors to suspend in a cooperative manner the execution of the current message and start another queued message. The continuation of the suspended message, which is automatically put back in the message queue, may also be assigned an enabling condition. A typical use case is awaiting the completion of a future in the same method that has sent the corresponding message. This simplifies the programming logic by enabling the programmer to process the outcome of an asynchronous method call in the same place where it was sent (in a way similar to dealing with synchronous calls). Bear in mind that the continuation will be executed in the same actor thread thus (unlike the onComplete hooks in Scala that may run in a different thread) pose no threat to actor semantics.

The main challenge is the development of an efficient and scalable source-to-source implementation of cooperative scheduling which, in the presence of synchronous calls, gives rise to the suspension of the entire call stack generated from a message. The continuation of the suspended message including the stack frame needs to be saved in order for execution to resume properly once the message is rescheduled. The basic feature of our proposed solution is the implementation of messages by means of lambda expressions (as provided by Java 8), i.e., the method call specified

A note.

PL’17, January 01–03, 2017, New York, NY, USA
2017. ACM ISBN 978-x-xxxx-xxxx-x/YY/MM...\$15.00
<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

in a message is translated into a corresponding lambda expression [31] which is passed and stored as an object of type Callable or Runnable (depending on whether it returns a result).

We describe how we implemented ABS actors and cooperative scheduling using Java thread pools and executor services. As elaborated in Section 5, we took an approach with negligible performance penalties regarding message passing and cooperative scheduling. We describe step by step how to support up to millions of messages, actors, and suspended continuations.

By means of a typical benchmark we evaluate our proposed solution and compare it to other thread-based implementations in Java or Erlang (a language that uses lightweight threads) of cooperative scheduling.

Related Work. Our main motivation is a Scala implementation of the ABS language as a full-fledged Actor-based programming language which fully supports the "programming to interfaces" paradigm. In contrast, Java libraries for programming actors like Akka [1] mainly provide pure asynchronous message passing which does not support the use of application programming interfaces (API) because, for example, in Akka/Java a message is only typed as a Java Object, so there is no static typing of messages, nor are they part of the actor interface. A first approach for supporting programming to interfaces was proposed in Takka library [26]. Distinguishing features of the ABS comprise of high-level constructs for cooperative scheduling which allow the application of formal methods, e.g., formal analysis of deadlock [11]. The Actor model in Scala [2] does provide a suspension mechanism, but its use is *not* recommended because it actually blocks the whole thread and causes degradation of performance. It is possible to register a *continuation* piece of code to run upon completion of a future, but that may run in a separate thread which however breaks the actor semantics and may cause race conditions inside the actor.

There exist various implementation attempts for cooperative scheduling in ABS. The approach followed in the Java backend of ABS [5, 16] and in the Erlang backend [7] is process-oriented in the sense that sending a message is implemented by the generation of a corresponding process. We will compare these backends with our solution in Java which allows to store messages (as objects of type Callable or Runnable) before executing them (data-oriented).

The focus of our paper is on an efficient implementation of cooperative scheduling in Java. Implementations in other languages allow for different approaches: In the Haskell backend for ABS [8], for example, the use of continuations allows to queue a message as a process and dequeue it for execution and the C implementation of cooperative scheduling for the Encore language [9] uses low-level (e.g., machine code) operations for storing and retrieving call stacks from memory.

In contrast, in the Actor-based modeling language Rebeca [3], for example, messages are queued and processed in a run-to-completion mode of execution. Cooperative scheduling is a powerful means for the expression and analysis of fine-grained run-time dependencies between messages.

The rest of this paper is organized as follows: In Section 2 we give an overview of the main features that the target actor-based model has. Section 3 presents how our solution transitions from a process-oriented approach to a data-oriented approach. Section 4 describes the implementation the run-time system for the actor-based model. In Section 5 we show the experimental evaluation of our solution followed by the conclusions drawn in Section 6.

2 ABS Language Concepts

In this section we informally describe the main features of the flow of control underlying the semantics of cooperative scheduling in the ABS language. For a detailed description of the syntax of the ABS language we refer to [16].

2.1 Actors and Method Invocations

In ABS the concept of an Actor is an object with its own queue and thread of execution. Abstracting from the syntax of the actual parameters, in ABS an asynchronous invocation of a method m of an actor a is described by a statement $\text{Future } f = a.m()$, where f is a future used to store the return value (assuming that m contains a return statement). In our backend this invocation will be stored in a queue of the called actor a . Futures can be passed around as references and provide a get operation described by $f.get$ which results in the value returned and blocks the current actor if the corresponding method invocation has not yet computed the return value.

Again, abstracting from the syntax of the actual parameters, ABS features synchronous method calls described in the standard manner by statements of the form $x = a.m()$ or $x = \text{this}.m()$ (also assuming here that the method m returns a value). In case of a call to a different actor a the semantics of such a synchronous call can be translated by $\text{Future } f = a.m(); x = f.get$, for some future f (of the appropriate type). In case the actor calls its own defined method m the translation depends on whether cooperative scheduling may be encountered and the implementation in our Java backend relies on a specific scheduling policy which preserves the synchronous call stack.

2.2 Await Construct

In ABS a statement of the form $\text{await } f?$ suspends the executing process which can only be rescheduled if the method invocation corresponding to the future f has computed the return value. Similarly, a statement of the form $\text{await } b$, where b denotes a boolean expression, suspends the executing process which can only be rescheduled if b evaluates

to true. Finally a suspend statement invokes cooperative scheduling without a condition. In all cases the executing process can be suspended and another (enabled) message can be scheduled for execution. In contrast, a statement like `f.get` does not allow the scheduling of another process of the same actor. It thus blocks the entire actor. Listing 1 gives an example of a pattern of method definitions which gives rise to a suspended stack of synchronous calls; observe an asynchronous call to `master ! recursive_m (5, i);` this generates a recursive call 5 times to `this.recursive_m(i - 1, id)` and subsequently this invocation may suspend on the future `f` created in the `else` branch. The main challenge addressed in this paper is to have an efficient implementation of such a suspended stack of synchronous calls.

Listing 1. ABS Example

```

1 interface Ainterface {
2   Int recursive_m(Int i, Int id);
3 }
4
5 class A() implements Ainterface{
6   Int result=0;
7   Int recursive_m(Int i, Int id){
8     if (i>0){
9       this.recursive_m(i - 1,id);
10    }
11    else{
12      Fut<Int> f = this ! compute();
13      await f ?;
14    }
15    return 1;
16  }
17
18  Int compute( ){
19    result = result + 1; //no significant computation
20    return result;
21  }}
22
23 { // Main block:
24   Int i = 0;
25   Ainterface master = new A ();
26   List<Fut<Int>> futures = Nil;
27   while( i < 2000){
28     Fut<Int> f = master ! recursive_m (5, i);
29     futures = Cons( f, futures );
30     i = i + 1 ;
31   }
32   while ( futures != Nil ){
33     Fut<Int> f1 = head(futures);
34     futures = tail(futures);
35     Int r = f1.get;
36   }}

```

3 Cooperative Scheduling Implementation Schemes

In this section we present how the Scala language is used as a backend for ABS and investigate the evolution of the scheme used to implement cooperative scheduling in the Java Runtime environment. We start from a very trivial approach to using several libraries and features that the latest version of Java SDK provides. The first feature we will use is

the Executor interface [27] that facilitates thread programming. The objects that implement this interface provide a queue of tasks and an efficient way of running those tasks on multiple threads. Throughout this section we will use the terms `executor` and `thread pool` interchangeably to refer to this feature. The second notion discussed in our solution was introduced starting with the Java 8 version, and it is the construct for a lambda expression [31]. This allows us to model a method call as a `Runnable` or `Callable` and we will refer to this model as a **task**. We will look at each solution in terms of four Actor features:

- Creation of the actor itself;
- Generation of asynchronous calls and message passing;
- Releasing control or suspension of a call when encountering an `await`;
- Saving the call stack of a synchronous call upon releasing control.

3.1 Every asynchronous call is a thread and each actor has a lock

The trivial straightforward approach for implementing cooperative scheduling in the library is for an asynchronous call to generate a new native thread with its own stack and context. We would then model each actor as an object with a lock for which threads compete. The disadvantage here is that this lock-per-actor must be checked by every message handler upon start, and freed upon completion. Whenever an `await` statement occurs the thread would be suspended by the JVM's normal behavior. When the release condition is enabled, a suspended thread would become available and in turn compete with the other threads in order to execute on the actor. The main drawback of this approach is the large number of threads that are created, which restricts any application from having more method calls than the number of live native threads. Figure 1 provides an illustration of this base *process-oriented* approach. Here the idea is that the threads in the circle belong to one actor, thus sharing a lock (the green thread holds the lock, while the red ones are waiting to acquire it). The four Actor features are implemented as follows:

- The actor is initialized as an object with a lock;
- Asynchronous calls are created as new threads that compete for the lock
- Suspension of a call suspends the thread;
- The call stack of a synchronous call is saved in the suspended thread.

3.2 Every actor is a thread pool.

To reduce the number of live threads in an application, we can model each invocation as a task using lambda expressions and organize each actor as a thread pool. This gives the actor an implicit queue to which tasks are submitted.




Figure 1. Basic process-oriented approach




Figure 2. Actor-as-executor approach

We obtain a small reduction in the number of threads corresponding to the number of tasks that have been submitted, but not started. Once they are started the threads still have to compete for the actor's lock in order to execute, but the number of live threads can be restricted to the number of threads allowed by each Thread Pool, while the rest of the invocations remain in the thread pool queue as tasks. This approach is illustrated in Figure 2. The implementation of the four Actor features is as follows:

- The actor is initialized as an object with a lock and a thread pool;
- Asynchronous calls are created as lambda expressions and assigned new threads that compete for the lock once they start;
- Suspension of a call suspends the thread;
- The call stack of a synchronous call is still saved in the suspended thread.

3.3 Every system has a thread pool.

In the previous two approaches we modeled the concept of an actor being restricted to one task at a time by introducing a lock on which threads compete. However as all invocations are modeled as tasks that don't need a thread before they start, there is no point in starting more than one task only to have it stuck on the actor's lock. Therefore we introduce *one thread pool per system* or *the system's executor*, and instead of submitting the messages directly to the thread pool, we add an indirection by storing them into an explicit queue first and introduce as a second phase the submission to the thread pool. We assign a separate task for each actor to iterate through its associated queue and submit the next available message to the system thread pool. We will refer to this task from now on as the **Main Task** of an actor. This removes the requirement to store every message handler as a thread, after it starts and attempts to acquire a lock, saving a task

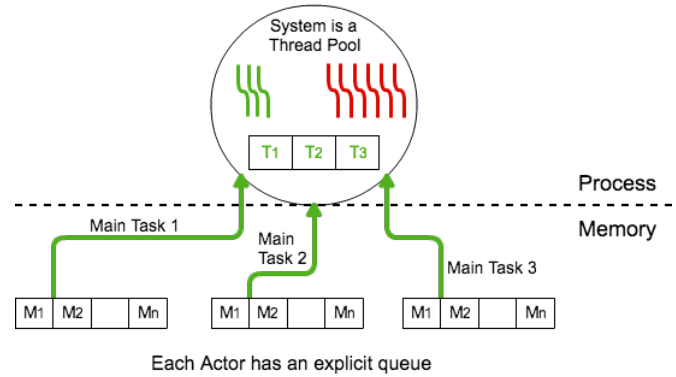


Figure 3. System as a thread pool

as data in the heap instead. However it comes at the cost of having to manage message queues manually as we need an explicit queue for all the messages that have not yet been submitted (to the thread pool).

When cooperative scheduling occurs, the executing task of an actor will be suspended and therefore still live in the system as a thread so the application's live threads will be equal to the number of "await" statements in the program. The system's executor can dynamically adjust the number of available threads to run subsequent available tasks, but the application will then still be limited by the maximum number of suspended threads that can exist in the main memory. Furthermore, we still require a lock to ensure that, upon release, the suspended thread will compete with the Main Task associated to the actor from which it originated. This design is presented in Figure 3 and it is important to observe the migration of messages into memory and that the red threads are only tasks that have been suspended by an "await". We observe the following changes in the four actor features:

- The actor is initialized as an object with a lock for threads that will be suspended by `await`, an explicit queue and an implementation of the **Main Task**;
- Asynchronous calls are created as new tasks that will be run by the **Main Task** and will compete for the lock only with suspended tasks;
- Suspension of a call restarts the **Main Task** to iterate the actor's queue and parks the current task as a thread;
- The call stack of a synchronous call is still saved in the suspended thread.

3.4 Fully asynchronous environment.

In the absence of synchronous calls, to eliminate the problem of having live threads when cooperative scheduling occurs, we can also use lambda expressions to turn the continuation of an `await` statement (which is determined by its lexical scope) into an internal method call and pass its current state

as parameters to this method. Essentially what we do is allocate memory for the continuation on the heap, instead of holding a stack and context for it. We will benchmark this trade-off between the memory footprint of a native thread and the customized encoding of a thread state in memory. As there are no more suspended threads in the system to compete with the actor's Main Task, we can eliminate the lock per actor. The four features of the Actor are as follows:

- The actor is initialized as an object with an explicit queue and an implementation of the of the **Main Task**, but without a lock;
- Asynchronous calls are created as new tasks that will be run by the **Main Task** and will compete for the lock only with suspended tasks;
- Suspension of a call first saves the continuation as a lambda expression guarded by the release condition, and the **Main Task** continues to iterate through the queue;
- The process of saving the call stack of a synchronous call is detailed in the next paragraph.

Synchronous calls context. In the presence of synchronous calls, the problem that remains is how to save this call stack without degrading performance? To do this we can try to alter the bytecode to resume execution at runtime from a particular point, but we want our approach to be independent of the runtime and be extensible to other programming languages. Therefore we try to approach the problem differently; if we can turn a continuation, that does not originate from a stack of calls, into a task, is it possible to extend this to synchronous calls as well? We know that this issue arises when methods that contain an "await" statement are called synchronously like the example in Listing 1. When the `await f?` is encountered, the continuation consists of both the lexical scope of the release statement that is followed by the a complete synchronous call chain that has been generated (i.e. $C(M_1)$ in Figure 4). At compile time, when translating source-to-source from ABS to Scala, we can identify all of these occurrences from the ABS code. We can mark them and transform them into asynchronous calls followed by an "await" statement on the future generated from the call. Now we can use the same approach for translating these continuations into tasks using lambda expressions and thus eliminating any suspended threads in the system. The final model of our solution is presented in Figure 4.

A fully asynchronous environment means to change a synchronous call `x = this.m()`; into an asynchronous call plus an await like `f = this!m(); x = await f?`;. There are two problems here. First, we still need to make sure that "m" must be the exact next method that will run. Second, when "m" finishes, the actor scheduler must immediately schedule the method that is waiting for its result. Both can be implemented by changing the non-deterministic behavior of the Main Task. There are two constraints that we have to

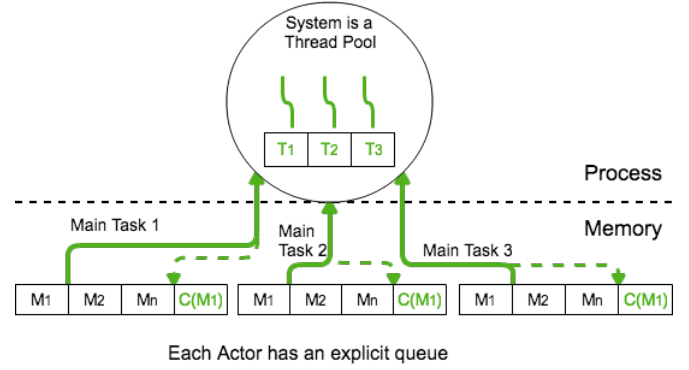


Figure 4. Full data-oriented approach

impose to preserve the chain of synchronous calls. First, we set a flag "isSyncCall" in the task that is calling "m" and when that flag is true, the Main Task will immediately execute the message that is to be enqueued instead of taking an arbitrary one from the queue. Second, assuming that there is no "message overtaking", the messages that are part of a synchronous call chain arrive in the Actor's queue in the FIFO order. We can label each call chain with a number "syncContext" and all messages part of that call chain will have this number. When the Main Task completes a message labeled with a particular number it will take from the queue the next available message with the same label and execute it. Finally, when the last message with that label is complete, then the call chain is complete and the next message will be selected arbitrarily.

4 Implementation

The implementation of the full data-oriented scheme is done through a library which contains a set of classes and interfaces that have a direct mapping to the ABS language concepts described in Section 2. The library provides an implementation of cooperative scheduling behavior, the suspension and release mechanisms while respecting the logic of synchronous calls. The library provides the solution and the optimizations discussed in Section 3. The library can be obtained as a maven project and is available online [30] (Local Actor branch) with the compiler [32] (Scala Writer branch).

4.1 Actor Implementation

The library offers an interface **Actor** containing several methods for implementing the behavior of synchronous (`sendSync`), asynchronous (`send`) method calls and await statements (`await`) from ABS. The `await` statement provided by the library is implemented in such a way that it supports an explicit continuation that can be either one generated by the compiler from ABS or written by the programmer directly in Scala using the library. The library currently supports an

Listing 2. Basic Synchronization Approach

```

1 // inside the task
2 class MainTask implements Runnable{
3     public void run() {
4         // iterate through queue and take one message and run it
5         mainTaskIsRunning.set(false);
6     }
7
8     // when inserting a new message
9     messageQueue.add(m);
10    if (!mainTaskIsRunning.compareAndSet(false, true)) {
11        DeploymentComponent.submit(new MainTask())
12    }

```

implementation of this interface called **LocalActor** for actors running on the same machine. An important advantage of having a task assigned to each actor and a manually processed queue is that we can start and stop the task depending on the queue state. To avoid keeping the Main Task alive, we make it part of the functionality of sending a message or completing a future to notify the Main Task. This is done by any other actor who sends an invocation to an empty queue and subsequently the Main Task stops when there are no more enabled messages in the queue.

Inside the **LocalActor** class there is a *messageQueue* defined which holds all the invocations (synchronous or asynchronous) that have been submitted to the actor as tasks. The implementation defines an inner class *MainTask* which is a Java Runnable that corresponds to the task responsible for taking messages from the queue and running them. When the queue is empty, we do not want to make this task busy-wait until a message arrives, and so, upon insertion of a new message into the queue, there is a check whether such a task exists already. This gives rise to some subtle synchronization points. For every actor, we keep a local atomic boolean flag *mainTaskIsRunning*. A first approach looks like in Listing 2:

Listing 3. Complete Synchronization Approach

```

1 private boolean takeOrDie() {
2     synchronized (mainTaskIsRunning) {
3
4         // iterate through queue and take one ready message
5         // if it exists set the next message for the main task and then
6         return true;
7
8         //if the queue is empty or no message is able to run
9         mainTaskIsRunning.set(false);
10        return false;
11    }
12    private boolean notRunningThenStart() {
13        synchronized (mainTaskIsRunning) {
14            return mainTaskIsRunning.compareAndSet(false, true);
15        }
16    }
17    // inside the task
18    class MainTask implements Runnable{
19
20        public void run() {
21            while (takeOrDie())

```

```

22        // proceed to take the next message message and run it
23    }
24
25    // when inserting a new message
26    messageQueue.add(m);
27    if (notRunningThenStart()) {
28        DeploymentComponent.submit(new MainTask());
29    }

```

The problem with the code in Listing 2 is that the check of the queue for emptiness and setting the flag to "false" is not atomic, and in between these two statements, a new message may be inserted into the queue without spawning a new Main Task. To remedy this, in Listing 3, we introduce a new method that can check the queue for emptiness and set the flag to "false" in a critical section, for example inside a "synchronized" block using the *messageQueue* or *mainTaskIsRunning* as the lock. Additionally, either the insertion into the *messageQueue* or *compareAndSet* of *mainTaskIsRunning* should also use the same lock. Another problem with this approach above is that, when there are more actors than available threads, there is no fairness policy when assigning a thread to an actor. To remedy this, we could change the while loop to an if statement like in Listing 4:

Listing 4. Fairness Between Actors

```

1 class MainTask implements Runnable{
2     public void run() {
3
4         if (!takeOrDie())
5             return;
6         // proceed to take the next message message and run it
7         DeploymentComponent.submit(this);
8     }
9 }

```

4.2 Deployment Component

In ABS there are two scenarios that re-enable tasks; an internal state of the actor is valid (i.e. a boolean condition that guard a continuation evaluates to true) or a future that guards a continuation is completed by another actor. These later release points require the system to have a notification mechanism for actors with empty queues and newly enabled messages. Therefore we maintain a global hash table, mapping every future to the set of actors that are awaiting on its completion.

ABS uses the concept of **Deployment Component** to describe a system or a machine on which actors run. Therefore in our library we use this class to manage the two elements that the solution requires at the system level. The first is the system executor which currently in the library is a *new-FixedThreadPool* singleton *ExecutorService* initialized with a fixed number of threads equal to the number of cores in the system. An actor may start a new Main Task by simply calling the static method *submit(new MainTask())* offered by the Deployment Component. Inside the class there is also support to safely call *shutdown()* when all the actors in the application have completed execution. The second

element is the notification mechanism together with a *ConcurrentHashMap* that contains mappings of futures that hold release points on actors in the system. Actors that complete a certain future can call the static method `releaseAll(f)` to notify actors that contain messages suspended on that particular future.

Eliminating busy waiting. Cooperative scheduling through the "await" statements may suspend the current message run by the actor based on either a particular inner state or future requiring completion on a different actor. We discussed how the Main Task can start or stop based on release points, but it is important to observe how exactly does an actor verify that a release point has completed. Having a task continuously iterate through all suspended messages (busy-waiting) is inefficient. We can separate the messages that are guarded by an incomplete future until that future completes such that the Main Task does not need to check them. Subsequently they can be put in the *messageQueue* once the future guard completes. The same procedure cannot be applied for a message which is released by a particular valid state, as its state can change again by the time it is run, so it always has to be verified before it is fetched. We assign this verification to the Main Task that iterates through the queue, and simply stop the task if no message is available after one iteration. If the task does stop, it means that the actor is in a state in which it is unable to execute any of its suspended messages. Therefore, it requires another actor to either send a new invocation that will change its state or the system to send a notification about a future that may release some of its messages and re-enable the Main Task.

Using JVM Garbage Collection Using the approach explained so far in this section, the only extra references we need for the actors are the ones inside the global hash-table required for the notification mechanism for futures. Once the future is completed and notifications are sent, the key is deleted and the actor references become unreachable. Therefore we can leave the entire garbage collection process to the Java Runtime Environment as no other bookkeeping mechanisms are required. This way we do not keep a registry of the actors like the context in Scala and Akka.

5 Benchmarking the Implementation Schemes

In this section we want to evaluate Scala library in terms of the impact that the cooperative scheduling feature has on performance. We will use a benchmark that involves heavy cooperative scheduling to compare the data-oriented approach to the process-oriented approach that ABS when translated to Java. Furthermore we will use a benchmark tailored towards CPU-intensive to evaluate the potential of this Scala library to support ABS as a software-development language. We will compare our solution with both the Erlang

backend of ABS which benefits from lightweight threads as well as the Akka Actor library for Scala.

5.1 Cooperative Scheduling Benchmark

The main problem that we encountered when implementing cooperative scheduling was saving the context of an execution and resuming from that context. To do this in Java using threads and context switches heavily limits the application to the number of native threads that can be created. To measure the improvement provided by our Scala library features using the simple example that is illustrated in Listing 1 that is translated into Scala as Listing 5.

Listing 5. Benchmark Example

```
1 trait Ainterface extends Actor with Ordered[Actor] {
2   def recursive_m(i : Int, id : Int): Int;
3 }
4
5 class A() extends LocalActor with Ainterface {
6
7   var result : Int = 0;
8   def recursive_m(i : Int, id : Int): Int = {
9     if ((i > 0)) {
10      var msg : Callable[Int] = () => this.recursive_m((i - 1), id);
11      var future_k : ABSFutureTask[Int]
12        = this.sendSync((future_k_par: ABSFutureTask[Int])=>
13          this.Arecursive_mAwait0(i, id, future_k_par, msg);
14      var k : Int = future_k.get();
15    }
16    else {
17      var msg : Callable[Int] = () => this.compute();
18      var f : ABSFutureTask[Int] = this.send(msg);
19      await(()=>this.Arecursive_mAwait1(f, i, id), Guard.convert(f));
20    }
21    return 1;
22  }
23
24  def compute(): Int = {
25    result = (result + 1);
26    return result;
27  }
28
29  def Arecursive_mAwait0(i : Int, id : Int, future_k : ABSFutureTask[Int]): Int = {
30    var k : Int = future_k.get();
31    return 1;
32  }
33
34  def Arecursive_mAwait1(f : ABSFutureTask[Int], i : Int, id : Int): Int = {
35    return 1;
36  }
37 }
38
39 object Main extends LocalActor {
40
41   def main(args : Array[String]): Unit = {
42     var i : Int = 0;
43     var master : Ainterface = new A();
44     var futures : List[ABSFutureTask[Int]] = Nil();
45
46     while ((i < 2000)) {
47       var msg : Callable[Int] = () => master.recursive_m(5, i);
48       var f : ABSFutureTask[Int] = master.send(msg);
49       futures = Cons(f, futures);
50       i = (i + 1);
51     }
52
53     while (!(Objects.equals(futures, Nil[ABSFutureTask[Int]]))) {
54
55     }
56   }
57 }
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
```

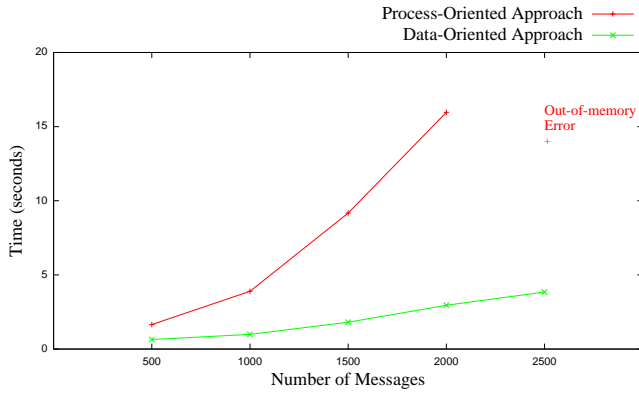


Figure 5. Performance figures for pure Cooperative Scheduling

```

78854 var f1 : ABSFutureTask[Int] = head(futures);
78955 futures = tail(futures);
79056 var r : Int = f1.get();
79157 }}}

```

The model creates an Actor of type "A" and sends a large number of messages to it to execute a method recursive_m(5,i). This method creates a call chain of size 5 before sending an asynchronous message to itself to execute a basic method compute() and awaits on its result. Although simple, this example allows us to benchmark the pure overhead that arises from having a runtime system with cooperative scheduling support, both in a data-oriented approach and a process-oriented approach. The results are shown in Figure 5. The performance figures presented are for one actor that is running 500-2500 method invocations. It is important to observe that each invocation generates 2 messages in the actor's queue, so as the number of calls increases the number of messages doubles. The figures show that the trade-off for storing continuations into memory instead of saving them in native threads removes limitations on the application and significantly reduces overhead.

5.2 NQueens Benchmark

While our solution is catered towards a widely-used software development language, we would like to also compare with other languages that implement ABS language concepts efficiently using threads and without these limitations. In Section 4 we listed several optimizations that were inferred from our implementation solution. What we want to do is compare this optimized solution to an ABS backend implemented in Erlang that uses the same process-oriented approach but does not suffer from any limitation of native threads. We want to observe if our data-oriented approach can be comparable to Erlang's lightweight threads. For this comparison, we use the Savina benchmark for programming with actors [29]. We chose the problem of arranging N queens on a $N \times N$ chessboard as it provides a master-slave model that

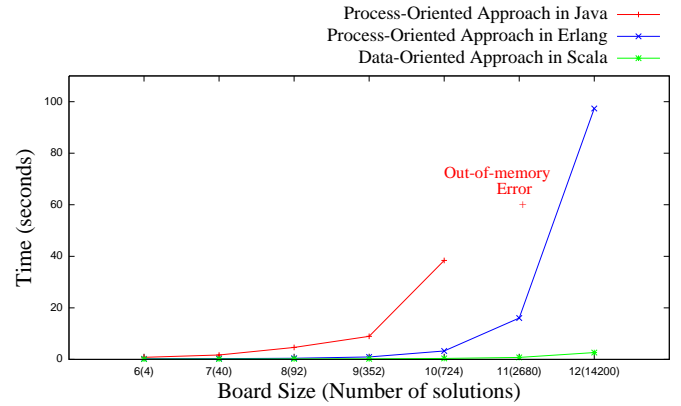


Figure 6. Performance figures for the NQueens problem in 3 ABS backends

relies heavily on the cooperative scheduling properties of the master model. The benchmark divides the task of finding all the valid solutions to the N queens problem to a fixed number of workers that at each step have to find an intermediary solution of placing a queen K on the board before relaying the message back to the master which then assigns the next job of placing queen $K + 1$ to another worker. As the search space becomes smaller, we impose a threshold where the worker has to find the complete solution up to N queens before sending a message back to the master.

We ran the benchmark with a board size varying from 6 to 12 with a fixed number of 4 workers on a core i5 machine which supports hyper-threading. The results are shown in Figure 5. It is important to observe that as the board size increases, the number of solutions grows from 40 to 2680. The result in Figure 6 show that our approach is better once the board size reaches 12 and the number of solutions to be found is 14200. This result also strengthens ABS purpose to provide a programming language for real applications.

Furthermore, we would like to observe the performance impact that support for cooperative scheduling adds to an application. This feature is a powerful programming concept, but we would like to see the cost of developing a benchmark in comparison to an existing actor implementation like the Akka Actor library. It is first important to observe that the ABS model for this benchmark is 154 lines of code, while the benchmark written directly in Scala using the Akka library is 351 lines of code. We compared the implementation offered by the Savina benchmark with our own for a board size from 10 to 15 on the same machine as before. The results in Figure 7 show that the cooperative scheduling feature does not have any added overhead compared to the Akka Actor library while offering a seamless programming experience.

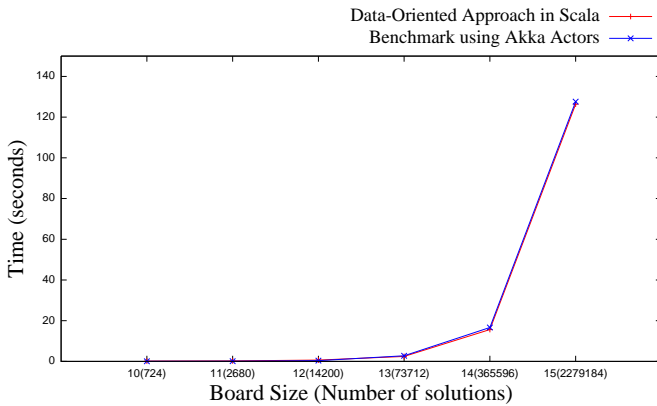


Figure 7. Performance figures for the NQueens problem implementations in Akka and Scala Library

6 Conclusions

In this paper we proposed a library for efficiently implementing the cooperative scheduling behavior of ABS. We observed significant improvements due to the trade-off of saving continuations including the call stack as data in memory instead of native Java threads. To provide support for the functional data types required by ABS we extended the backend to the Scala programming language together with this library. We want to study how well these models execute into the Java Runtime Environment compared to their direct implementations without the use of modeling languages. We provided one CPU-intensive benchmark that shows no penalties from implementing this feature. Furthermore having a portable JVM library gives us a basis for industrial adoption of the ABS language. For future work we plan to extend the ABS typechecker to verify the Foreign Language Interface constructs and provide a debugger directly for ABS. Finally this provides an opportunity to use ABS rich features in formal verification, resource analysis and deadlock detection as well as extensions that support real-time and distributed programming, in a software development context.

7 Acknowledgments

Partly funded by the EU project FP7-612985 UpSCALE: From Inherent Concurrency to Massive Parallelism through Type-based Optimizations (<http://www.upscale-project.eu>). We would like to thank the reviewers for the time and effort to provide a critical and constructive review to this paper.

References

- [1] Munish K. Gupta: Akka Essentials. Packt Publishing. p. 334. ISBN 1849518289, 2012.
- [2] Philipp Haller, Martin Odersky: Scala Actors: Unifying thread-based and event-based programming. *Theor. Comput. Sci.* 410(2-3): 202-220 (2009)

- [3] Marjan Sirjani, Ali Movaghar: An actor-based model for formal modelling of reactive systems: Rebeca. Technical Report. 2001.
- [4] Gul Agha: Actors: A model of concurrent computation in distributed systems. Massachusetts Institute of Technology Cambridge Artificial Intelligence Lab. 1985.
- [5] Jan Schäfer: A Programming Model and Language for Concurrent and Distributed Object-Oriented Systems. Dissertation. University of Kaiserslautern, 2010.
- [6] Din, C. C., Bubel, R., and HÄdhnle, R. (2015, August). KeY-ABS: a deductive verification tool for the concurrent modelling language ABS. In *International Conference on Automated Deduction* (pp. 517-526). Springer International Publishing.
- [7] Georg Göri, Einar Broch Johnsen, Rudolf Schlatte, Volker Stolz: Erlang-Style Error Recovery for Concurrent Objects with Cooperative Scheduling. *ISoLA* (2) 2014: 5-21.
- [8] Elvira Albert, Nikolaos Bezirgiannis, Frank S. de Boer, Enrique Martin-Martin: A Formal, Resource Consumption-Preserving Translation of Actors to Haskell. *Proceedings LOPSTR* 2016.
- [9] Stephan Brandauer, Elias Castegren, Dave Clarke, Kiko Fernandez-Reyes, Einar Broch Johnsen, Ka I Pun, Silvia Lizeth Tapia Tarifa, Tobias Wrigstad, Albert Mingkun Yang: Parallel Objects for Multicores: A Glimpse at the Parallel Language Encore. *SFM* 2015: 1-56
- [10] Elvira Albert, Frank S. de Boer, Reiner HÄdhnle, Einar Broch Johnsen, Rudolf Schlatte, Silvia Lizeth Tapia Tarifa, Peter Y. H. Wong: Formal modeling and analysis of resource management for cloud architectures: an industrial case study using Real-Time ABS. *Service Oriented Computing and Applications* 8(4): 323-339 (2014).
- [11] Elena Giachino, Cosimo Laneve, Michael Lienhardt: A framework for deadlock detection in core ABS. *Software and System Modeling* 15(4): 1013-1048 (2016)
- [12] Joakim Bjork, Frank S. de Boer, Einar Broch Johnsen, Rudolf Schlatte, Silvia Lizeth Tapia Tarifa: User-defined schedulers for real-time concurrent objects. *ISSE* 9(1): 29-43 (2013)
- [13] De Boer, Frank S., Dave Clarke, and Einar Broch Johnsen. "A complete guide to the future." *European Symposium on Programming*. Springer Berlin Heidelberg, 2007.
- [14] Nobakht, Behrooz, and Frank S. de Boer. "Programming with actors in Java 8." *International Symposium On Leveraging Applications of Formal Methods, Verification and Validation*. Springer Berlin Heidelberg, 2014.
- [15] Mehdi Dastani, Bas Testerink: Design patterns for multi-agent programming. *IJAOSSE* 5(2/3): 167-202 (2016)
- [16] Johnsen, Einar, Reiner HÄdhnle, Jan SchÄdfer, Rudolf Schlatte, and Martin Steffen. "ABS: A core language for abstract behavioral specification." In *Formal Methods for Components and Objects*, pp. 142-164. Springer Berlin/Heidelberg, 2012.
- [17] Nobakht, B., de Boer, F. S., Jaghoori, M. M., and Schlatte, R. (2012, March). Programming and deployment of active objects with application-level scheduling. In *Proceedings of the 27th Annual ACM Symposium on Applied Computing* (pp. 1883-1888). ACM.
- [18] Albert, Elvira, Puri Arenas, Antonio Flores-Montoya, Samir Genaim, Miguel GÄşmez-Zamalloa, Enrique Martin-Martin, GermÄn Puebla, and Guillermo RomÄn-DÄñez. "SACO: static analyzer for concurrent objects." In *International Conference on Tools and Algorithms for the Construction and Analysis of Systems*, pp. 562-567. Springer Berlin Heidelberg, 2014.
- [19] Albert, Elvira, Frank de Boer, Reiner HÄdhnle, Einar Broch Johnsen, and Cosimo Laneve. "Engineering virtualized services." In *Proceedings of the Second Nordic Symposium on Cloud Computing & Internet Technologies*, pp. 59-63. ACM, 2013.
- [20] Flores-Montoya, Antonio E., Elvira Albert, and Samir Genaim. "May-happen-in-parallel based deadlock analysis for concurrent objects." *Formal Techniques for Distributed Systems*. Springer Berlin Heidelberg, 2013. 273-288.

- [21] Serbanescu, Vlad, Keyvan Azadbakht, and Frank de Boer. "A java-based distributed approach for generating large-scale social network graphs." Resource Management for Big Data Platforms. Springer International Publishing, 2016. 401-417.
- [22] Bezirgiannis, Nikolaos, and Frank de Boer. "ABS: a high-level modeling language for cloud-aware programming." International Conference on Current Trends in Theory and Practice of Informatics. Springer Berlin Heidelberg, 2016.
- [23] Franco Zambonelli, Nicholas R. Jennings, Michael Wooldridge. Organisational Abstractions for the Analysis and Design of Multi-agent Systems Agent-Oriented Software Engineering. Volume 1957 of the series Lecture Notes in Computer Science pp 235-251
- [24] Johnsen, Einar Broch, Olaf Owe, and Ingrid Chieh Yu. "Creol: A type-safe object-oriented model for distributed concurrent systems." Theoretical Computer Science 365.1-2 (2006): 23-66.
- [25] Johnsen, Einar Broch, Olaf Owe, and Eyvind W. Axelsen. "A run-time environment for concurrent objects with asynchronous method calls." Electronic Notes in Theoretical Computer Science 117 (2005): 375-392.
- [26] He, Jansen, Philip Wadler, and Philip Trinder. "Typecasting actors: from Akka to TAKka." Proceedings of the Fifth Annual Scala Workshop. ACM, 2014.
- [27] <https://docs.oracle.com/javase/8/docs/api/java/util/concurrent/ExecutorService.html>
- [28] Hahnle, Reiner, and Muschevici, Radu (2016, October). Towards incremental validation of railway systems. In International Symposium on Leveraging Applications of Formal Methods (pp. 433-446). Springer International Publishing.
- [29] Imam, Shams., and Sarkar, Vivek. (2014). Savina-an actor benchmark suite. In 4th International Workshop on Programming based on Actors, Agents, and Decentralized Control, AGERE.
- [30] <https://github.com/vlad-serbanescu/abs-api-cwi.git>
- [31] <https://docs.oracle.com/javase/tutorial/java/javaOO/lambdaexpressions.html>
- [32] <https://github.com/CrispOSS/jabsc>