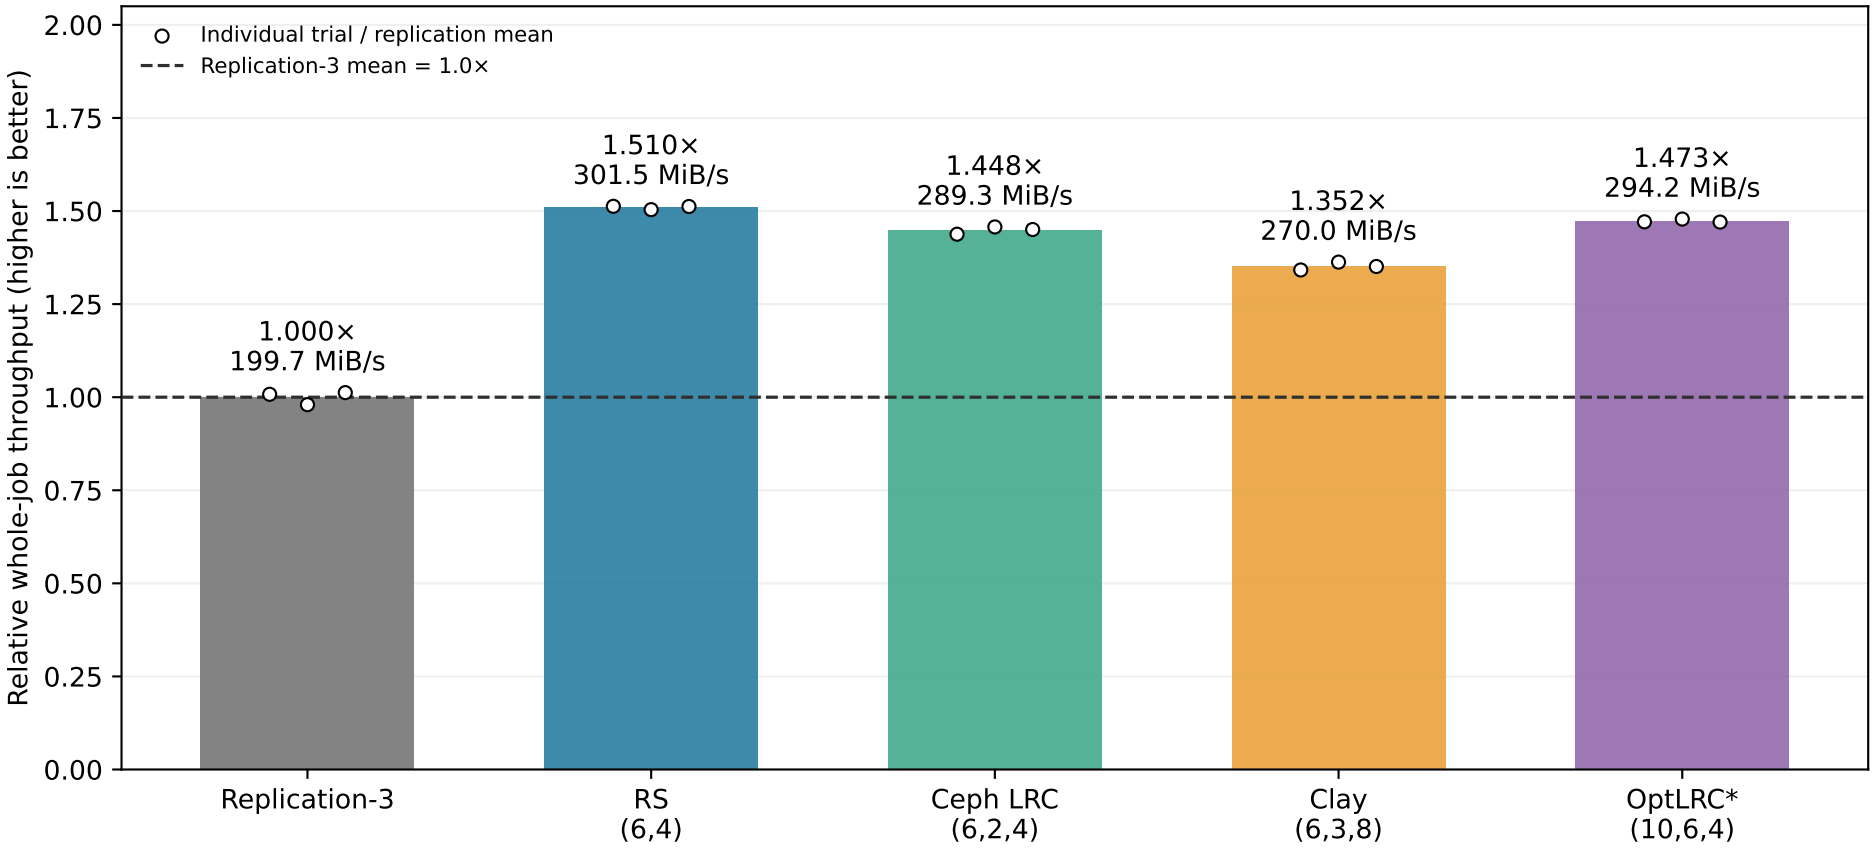

Three original trials per condition; two-client mean per trial. Bars: ratio of means; dots: individual trials.
* OptLRC uses a restricted local-only decoder. Fault rates cover the entire job, including before and after repair.