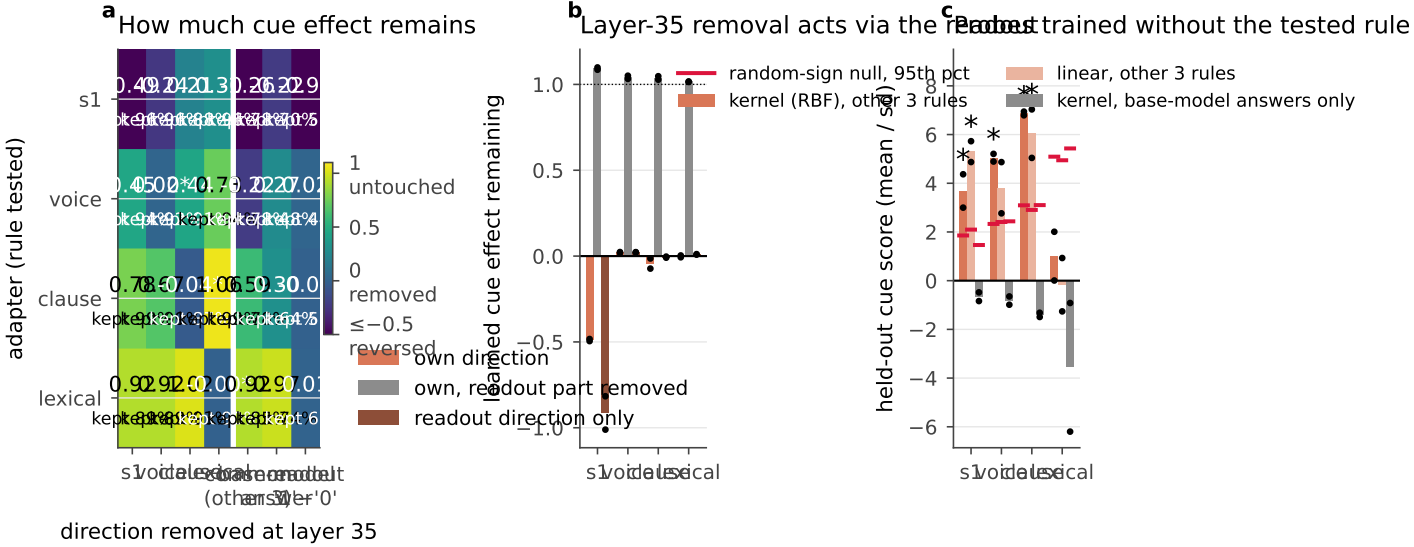

Qwen2.5-3B, layer 35, held-out pairs; values average adapter seeds 0 and 2 (dots in b: each seed). Remaining = (cue gap after − base gap) / (cue gap before − base gap). * = beats r-matched sign-flip random directions in both seed sets (Holm p<0.05). 'kept' = base-model answers unchanged by the same removal. c: probes trained without the tested rule, in the space with the readout and base-answer directions projected out; * = beats sign-flipped training data in both seed sets (Holm p<0.05).