

Oracle® Hospitality Suite8
XML Interface Specifications
Release 8.14.0.0
F17639-02

July 2019

Copyright © 2002, 2019, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

Preface.....	13
Audience	13
Customer Support.....	13
Documentation	13
Revision History.....	14
1 Introduction.....	18
XML Interface and OTA XML Interface	18
XML Interface and X64 Processors	18
2 System Overview.....	19
Provided functions.....	19
Communication.....	19
Message format	20
Data format	20
Communication Packing.....	21
Using Translation Tables	22
General Notes	22
Setup	22
Response Codes.....	23
Conditions definition.....	23
Licensing	23
3 Fields available for selection by request type.....	28
BonusCard	28
BonusPoint.....	28
BonusPointRedemption	28
BonusStatement.....	29
Departments	29
Reservation	29
Profile.....	32
Posting.....	36
SystemDate	36
SystemInfo	36
AvailabilityForWeb	36
ChildrenCategories.....	37

CreditCardTypes.....	37
Login (UserLogin).....	37
NoteCategory	37
Note.....	38
General note request.....	38
HtmlInfo	38
Event Info Board	38
Activity	39
Task.....	39
Group Template	40
Group.....	40
BlockHeader	40
BlockDetail.....	41
Country	41
CurrencyList	41
ConferenceStatusList	41
ConferencePackageList	41
HotelAvailability.....	42
Overbooking	42
Market.....	42
MainMarket	42
RateList.....	42
ReportList.....	43
ReportParameterList.....	43
ReportSectionList	44
RoomType.....	44
StatisticAndFuture	45
CalendarEvent.....	46
VoucherArticles.....	46
Voucher	47
BillingInstruction	47
Preference.....	48
Package	48
Suite8RemoteCheckinConfig.....	49
AvailableRooms	49
ValidateReservationPreCheckin	49
PreCheckinPaymentAmount.....	49

AssignRoom.....	49
PostCharges	49
PreCheckin.....	50
TableReservation.....	50
TableAvailability	50
AccountManager.....	50
ConferenceManager.....	51
Channel	51
Source	51
ConferenceStatusList	51
FunctionType.....	51
SeatingArrangments.....	51
EventType	51
EventStatus	52
FunctionSpace.....	52
FunctionSpaceSeating.....	52
FunctionSpaceRate	52
FunctionSpaceAvailability.....	53
ConferencePackagesList.....	54
CateringItem	55
CateringItemRate	56
StandardMenu.....	56
StandardMenuRate	57
MenuItem.....	57
MenuItemRate	58
ConferenceBooking.....	59
BookingPackage	60
BookingEvent	61
EventFunctionSpace	63
EventCateringItem.....	63
EventStandardMenu.....	64
StandardMenuMenuItem	66
4 Available search criteria by request type	67
BonusCard	67
BonusStatement.....	67
Departments	67

Reservation	67
Profile.....	68
SystemDate	69
SystemInfo	69
AvailabilityForWeb	69
Posting.....	69
ChildrenCategories.....	69
CreditCardTypes.....	69
HtmlInfo	70
SeatingArrangments	70
Event Info Board	70
Activity	70
Task.....	70
Group Template	70
Group.....	70
BlockHeader	71
BlockDetail.....	71
CurrencyList	71
HotelAvailability.....	71
Overbooking	71
Market.....	71
MainMarket	71
RateList.....	71
ReportList.....	72
ReportParameterList.....	72
ReportSectionList	72
StatisticAndFuture (planned functionality only).....	72
CalendarEvent.....	72
VoucherArticles.....	73
Voucher	73
BillingInstruction	73
Package.....	73
RoomType.....	73
AvailableRooms	73
TableReservation.....	73
TableAvailability.....	74
NoteCategory	74

Note.....	74
Conference and Catering: General available search criteria	74
FunctionType.....	75
ConfiguredStatusList.....	75
EventType	75
EventStatus	75
FunctionSpace.....	75
FunctionSpaceSeating.....	76
FunctionSpaceRate	76
FunctionSpaceAvailability.....	76
ConferencePackagesList.....	76
CateringItem	76
CateringItemRate	76
StandardMenu	77
MenuItem.....	77
ConferenceBooking.....	77
BookingPackage	77
BookingEvent	77
EventFunctionSpace	77
EventCateringItem.....	77
EventStandardMenu.....	77
StandardMenuMenuItem	77
5 Fields available to update / insert	78
BounsPoint.....	78
BonusPointRedemption	78
Reservation	79
Profile.....	81
Guest De-identification	87
Voucher	87
Profile Merge	87
ProfileAndReservation	88
BonusPointRedemption	89
BonusPointRedemption	90
FinancialAccount	90
Activity	90
Task.....	91

Group Template	91
Group.....	92
CreditCardApproval (Insert only).....	92
HurdleRate.....	92
Overbooking	93
BAR	93
BillingInstruction	93
Table Reservation.....	94
Postings	95
Cancellation of reservations	95
Note.....	95
Conference and Catering General.....	96
ConferenceBooking.....	97
BookingPackage	98
BookingEvent	99
EventFunctionSpace	100
EventCateringItem	101
EventStandardMenu.....	101
StandardMenuMenuItem	102
Voucher Redemption.....	103
6 Conference and Catering General.....	104
ConferenceBooking.....	104
BookingPackage	105
BookingEvent	105
EventFunctionSpace	106
EventCateringItem.....	106
EventStandardMenu.....	107
StandardMenuMenuItem	107
7 Schema FidelioXML.xsd.....	109
element fidelio	110
element fidelio/request.....	115
element fidelio/response	116
element fidelio/response/queryResponse.....	118
element fidelio/response/queryResponse/rows.....	118
element fidelio/response/insertResponse	119
element fidelio/response/insertResponse/rows	120

element fidelio/response/insertResponse/rows/ProfileID	121
element fidelio/response/insertResponse/rows/FANumber	121
element fidelio/response/insertResponse/rows/GuestNum	121
element fidelio/response/insertResponse/rows/ProfileGlobalID	121
element fidelio/response/insertResponse/rows/LastUpdateTime	121
element fidelio/response/insertResponse/rows/Addresses	121
element fidelio/response/insertResponse/rows/Addresses/Address	122
element fidelio/response/insertResponse/rows/Communications.....	122
element fidelio/response/insertResponse/rows/Communications/Communication	122
element fidelio/response/insertResponse/rows/Notes.....	122
element fidelio/response/insertResponse/rows/Notes/Note.....	123
element fidelio/response/insertResponse/rows/TaskID	123
element fidelio/response/insertResponse/rows/ActivityID	123
element fidelio/response/insertResponse/rows/GroupID	123
element fidelio/response/insertResponse/rows/GroupTemplateID	123
element fidelio/response/updateResponse.....	124
element fidelio/response/updateResponse/rows.....	124
complexType AvailabilityForWebType.....	124
element AvailabilityForWebType/fields.....	125
complexType BlockDetailConditionType	125
complexType BlockHeaderConditionType.....	126
complexType ccm_book_actualsType	127
element ccm_book_actualsType/bookingID	127
element ccm_book_actualsType/event_id.....	128
element ccm_book_actualsType/postingDate	128
element ccm_book_actualsType/menu_id	128
element ccm_book_actualsType/menu_item_id	128
element ccm_book_actualsType/misc_item_id	128
element ccm_book_actualsType/function_space_id	129
element ccm_book_actualsType/ResourceName	129
element ccm_book_actualsType/DepartmentCode	129
element ccm_book_actualsType/count	129
element ccm_book_actualsType/total_amount	129
element ccm_book_actualsType/OverrideReason	130
element ccm_book_actualsType/UserName	130
element ccm_book_actualsType/Covers.....	130

complexType ChildrenCategoriesConditionType	130
complexType commandType.....	131
element commandType/post.....	132
element commandType/checkIn.....	132
element commandType/checkIn/RoomNumber	132
element commandType/checkOut.....	132
element commandType/checkOut/RoomNumber	132
element commandType/cancel	133
element commandType/cancel/GuestNum.....	133
element commandType/cancel/Reason	133
element commandType/cancel/DeleteTraces.....	133
element commandType/cancel/SendEmail	134
element commandType/resetProfilePassword	134
element commandType/resetProfilePassword/userName.....	134
complexType conditionsType	134
element conditionsType/condition.....	135
element conditionsType/link.....	135
complexType conditionType.....	135
complexType ConditionType_ConfiguredStatusList	136
complexType ConditionType_InfoBoard	136
complexType CreditCardTypesConditionType	137
complexType crm_postType	138
element crm_postType/GuestNum	139
element crm_postType/PostingDate	139
element crm_postType/RoomNum	139
element crm_postType/Quantity	139
element crm_postType/Price	140
element crm_postType/Comment	140
element crm_postType/CheckNum	140
element crm_postType/CheckDate	140
element crm_postType/Check.....	141
element crm_postType/Description	141
element crm_postType/Currency	141
element crm_postType/ProfileID.....	141
complexType CurrencyListConditionType	142
complexType DepartmentCodeConditionType	142
complexType fieldsType.....	142

element fieldsType/field	143
complexType fieldType	143
complexType HotelAvailabilityType	146
element HotelAvailabilityType/fields.....	146
complexType importType	147
element importType/insert	147
element importType/insert/rows	147
element importType/update	148
element importType/delete	148
element importType/delete/conditions.....	148
complexType insertType	149
element insertType/fields	149
complexType linkType.....	150
element linkType/condition	150
complexType PostngConditionType	150
complexType postResponseType	151
complexType postType.....	151
element postType/ccm_book_actuals	152
element postType/crm_posting	153
element postType/crm_posting/DepartmentCode.....	154
element postType/crm_posting/ArticleCode.....	154
complexType ProfileConditionType.....	154
complexType queryType	155
element queryType/conditions	156
element queryType/fields	157
element queryType/froms	157
element queryType/froms/from.....	157
element queryType/orders	157
element queryType/orders/order	158
element queryType/groups	158
element queryType/groups/group	158
complexType ReportType	159
element ReportType/ReportID.....	159
element ReportType/ReportType	160
element ReportType/Parameter	160
element ReportType/Destination.....	160
element ReportType/ExportFormat	160

element ReportType/Email.....	161
element ReportType/ConfirmationArchiveRequest	161
complexType requestType	162
element requestType/query.....	163
element requestType/update.....	164
element requestType/insert	165
element requestType/command	165
element requestType/AvailabilityForWeb	166
element requestType/ValidateCreditCard	167
element requestType/import.....	167
element requestType/HotelAvailability	167
element requestType/Report.....	168
complexType ReservationConditionType.....	168
complexType rowsType.....	169
element rowsType/row	169
complexType rowType	170
element rowType/fields	170
complexType SystemDateConditionType.....	170
complexType SystemInformationConditionType	171
complexType updateType	171
element updateType/conditions	172
element updateType/fields	172
complexType ValidateCreditCardType.....	172
element ValidateCreditCardType/CreditCardNo	173
element ValidateCreditCardType/ExpiryMonth.....	173
element ValidateCreditCardType/ExpiryYear	173
element ValidateCreditCardType/CardholderName	173
element ValidateCreditCardType/CreditCardCode	173
simpleType binaryOperation	174
simpleType conditionSimpleType.....	174

Preface

The Suite8 XML Interface is a service allowing external applications to communicate with Suite8 based on a unified abstract interface. This interface detaches the concept from a physical database structure and provides additional business logic and security when accessing data. The XML interface cannot be used for any Central Reservation or Point of Sales development.

Audience

This interface specification is intended for the third party software vendors who are developing a system which needs connectivity to Suite8.

This document is intended for distribution to all vendors and developers of hotel software systems. The data contained herein is public information and is published for public use. However, if you have received this copy from a company other than Oracle Hospitality you may want to contact us to ensure that you have the most recent version of this document.

Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:

<https://support.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received and any associated log files
- Screenshots of each step you take

Documentation

Oracle Hospitality product documentation is available on the Oracle Help Center at <http://docs.oracle.com/en/industries/hospitality/>

Revision History

Date	Description of Change
26 June, 2004	1.0.0 - First Draft
01 November, 2004	Myfidelio Homepage support. Creation of FA via XML Interface
04 February, 2005	1.0.2 - CCM Actual Booking posting
14 July, 2005	1.0.3 - Profile interface extensions, additional CCM functions
07 March, 2006	1.0.4 - Operations with group reservations
21 September, 2006	1.0.5 - Blocks. Credit card approvals
10 October, 2006	1.0.6 - Allows to specify profile for postings
09 November, 2006	1.0.7 - Hurdle Rates Interface
22 March, 2007	1.0.8 - Conference booking messages
08 May, 2007	1.0.9 - Extended AvailabilityForWeb
11 May, 2007	1.0.10 - HotelAvailability
12 July, 2007	1.0.12 - Additional Profile Fields
19 July, 2007	1.0.13 - HotelAvailability request extended
30 August, 2007	1.0.15 - Additional reservation search criteria
10 October, 2007	1.0.16 - Additional reservation search criteria
25 October, 2007	1.1.1 - Added version 1.1.0 of the request/response specification
23 January, 2008	1.1.2 - Added Reservation Details request mode
20 March, 2008	1.1.3 - Added support of reservation share and parties
15 May, 2008	1.1.4 - Added maximum field length for the update/insert messages
16 June, 2008	1.1.5 - Added Translation Tables (currently 8.8 only)
25 June, 2008	1.1.6 - Added Information about required licenses
21 August, 2008	1.1.7 - Added RateList message
27 August, 2008	1.1.8 - Added BAR message, explained communication packing

Date	Description of Change
19 September, 2008	• 1.1.9 - Added messages to work with reports
07 October, 2008	• 1.1.10 - Added message to create profile and reservation within 1 message.
14 October, 2008	• 1.1.11 - Added additional fields to the ReportParameter request
17 October, 2008	• 1.1.12 - Additional Profile and Reservation fields / conditions
03 June, 2009	• 1.1.13 - Reservation packages and Version info
12 June ,2009	• 1.1.14 - Reservation and Profile custom fields
18 June, 2009	• 1.1.15 - Added description of profile communications
27 August, 2009	• 1.1.16 - Added StatisticAndFuture (planned functionality only)
31 August, 2009	• 1.1.17 - Added support of Guest 3rd Party IDs to the reservation message
17 September, 2009	• 1.1.18 - Extended AvailabilityForWeb
12 February, 2010	• 1.1.19 - HotelSegmentCode for AvailabilityForWeb
29 March, 2010	• 1.1.20 - Reservation data changes during the stay
October, 2010	• 8.8.4.0 - Added example for Profile Merge
February, 2011	• 8.8.4.3 - Added information about XML Interface & X64 processors
May, 2011	• 8.9.0.0 - Voucher Redemption Interface and Waitlist reservations
June, 2011	• 8.9.0.0 - Billing Instructions
August, 2011	• 8.9.0.0 - Package request
September, 2011	• 8.9.0.3 - Added 'Continuous Rooms'
December, 2011	• Added Table Reservations
June, 2012	• Added Table Reservation update

Date	Description of Change
June, 2012	• Encrypted password explained
August, 2012	• TableAvailability
August, 2013	• RoomType
August, 2013	• Table reservation waitlist
May, 2014	• 8.9.5.0 - Added NDA (non-disclosure agreement) information
November, 2014	• 8.9.5.3 - Added license request for rate list
February, 2015	• 8.9.6.1 - Added Conference and Catering requests
May, 2015	• 8.9.6.2 - Added the following: ○ StandardMenuItem; ○ MenuItem; ○ BookingEvent to Conference Booking; ○ BookingEvent to BookingPackage; EventFunctionSpace, EventResource and EventStandardMenu subsets to BookingEvent; ○ NoteCategory Request; ○ Note Request; Note subset to Booking, Event and Resources; ○ StandardMenu ○ MenuItem subset to EventStandardMenu; ○ Delete operations for Resources
May, 2015	• 8.9.6.2 - Applied Oracle /Micros intermediate template, corrected missing fields, general proof read and correction of numbering and formatting

Date	Description of Change
May, 2016	8.10.0.0 - Added profileID and profileGlobalID attribute to LinkedProfile Added examples and some business rules to documentation
June, 2017	8.10.2.10 – Added BedGuestNum to AccompanyingGuests of ReservationRequest-response. - Added BedReservation to ReservationRequest-response Added example for CheckIn BedReservation using BedGuestNum
December, 2017	- Licensing: added license table 8.11.0.0 – Added Guest De-identification
November 2018	Added hint field in the Request Type Reservation
March 2019	- Added Membership module - Added methods needed for Precheck-in
July 2019	Updated for terminology changes

1 Introduction

The Suite8 XML Interface is a service allowing external applications to communicate with Suite8 based on a unified abstract interface. This interface detaches the concept from a physical database structure and provides additional business logic and security when accessing data. The XML interface cannot be used for any Central Reservation or Point of Sales development.

XML Interface and OTA XML Interface

Should you require extra programming based on the XML Interface or OTA XML Interface then the local office needs to fill out the NDA (Non-disclosure agreement) Info sheet and each company needs to sign the Non-Disclosure Agreement. Please contact your local Oracle contact person to get more information about the topic.

XML Interface and X64 Processors

When running XML Interface on X64 processors, the following script needs to run from the command prompt:

```
cscript %SYSTEMDRIVE%\inetpub\adminscripts\adsutil.vbs SET  
W3SVC/AppPools/Enable32bitAppOnWin64 true
```

Please note: Crystal reports do not run on X64 processors.

2 System Overview

Provided functions

The XML interface provides the following functionality:

- Department lookup
- Reservation lookup (Including Financial Accounts)
- Profile Lookup
- Profile linkage
- Postings lookup
- Children Categories lookup
- Credit card types lookup
- Credit Card validation request
- System Info lookup (system date and license info)
- Availability (for WEB) retrieval
- Reservation update
- Profile Update
- Reservation Creation
- Financial Account Creation
- Profile Creation (profile merge could be used)
- Submitting postings
- Submitting CCM booking actual data
- Groups lookup
- Group templates lookup
- Groups update and creation
- Group templates update and creation
- Building of Suite8 HTML files
- Block Info lookup (headers and details)
- Conference statuses lookup
- Conference packages lookup
- Hotel availability retrieval
- Overbooking control
- Hurdle Rate control
- Reservation cancellation
- Rate lookup

Communication

Any operation with the XML interface is performed over TCP/IP or HTTP/HTTPS communication protocols. When using HTTP/HTTPS communication, the message must be sent using the POST method.

When a message is transmitted via HTTP/HTTPS protocol, it is possible to submit and receive a response in a packed format. This can significantly decrease bandwidth requirements (sometimes the message size can be decreased by 80-90%). Please refer to the “Communication Packing”

section in this document for further details, however, configuration and installation issues are not handled in this document.

Message format

The interface uses synchronous messaging type, all XML messages must conform to the schema described below. Each message must provide the mandatory attribute ID for the request element. The same ID will be returned as attribute for the response element.

Each message must provide the mandatory attribute Version for the Suite8 element.

Request/response behavior might be different depending on the value provided.

For further explanations please refer to the description of the particular request / response type.

The response contains the used version in the request message.

The message format supports multiple requests within the same message. In this case all the responses will be returned within one message. The responses could be distinguished by an optional attribute Name.

If a message contains multiple requests for data change and at least one of them fails, none of the change requests which were in this message will be processed.

If a message contains multiple requests for data retrieval and at least one of them fails, the response code will show the error cause and no other response data will be provided.

Each message contains username and password which will be provided to a vendor when installing the system. In addition to the username and password, the request can contain the optional attribute "PasswordEncrypted". If the value in this attribute is "true", the transmitted password should be encrypted. Password encryption can be performed by using the program **FidelioV8DBPasswordEncrypt.exe**.

Different types of request could be disabled or forbidden based on the user rights granted to the specified user and the properties licenses and policies.

The interface supports multiple vendors simultaneously; the vendors should use different credentials in order to restrict the available functionality.

If the Suite8 license **CRS XML Interface One/Two Way** is used, the message header should also contain the mandatory attribute **Vendor**. If the **Standard CRS XML Interface One/Two Way** license, the string has to be "Suite8".

Data format

In general, fields are either numeric (decimal digits '0' - '9'), monetary (this includes the decimal numeric characters, plus '-', and '.' as necessary), or alpha (all alphabetic letters).

Some schema elements contain the XML type definitions. In this event the schema definition should be considered. In other events, the data could be passed as a generic field Type or field element where no restriction is specified in the schema.

The following field types are supported:

- Strings (xs:string) Alpha characters, including all characters from 'A' - 'Z', 'a' - 'z', any common punctuation characters such as periods ('.'), commas (','), and dashes ('-'), and any characters from the extended ASCII character sets necessary to support local alphabets.
- Number (xs: integer) - Numeric characters, includes '0' - '9', the minus sign ('-') these fields always reflect integer values (no decimal positions). Leading zeros are ignored.
- Monetary characters (xs: double) – including all numeric characters and period ('.') used as decimal indicators where necessary. The PMS can handle monetary fields with an implied decimal point.
- Alphanumeric characters - all characters included above as Alpha or Numeric characters.
- Date - numeric characters, formatted as DD.MM.YYYY
- Time - numeric characters, formatted as HH:MM:SS

- DateTime – DD.MM.YYYY HH:MM:SS.MM UTC±MM (time with UTC shift info)

The same rules apply for the data returned by the interface.

Communication Packing

In order to work with packed messages there are a couple of necessary steps to be taken:

1. Notify the XML Interface that submitted data is packed.
This is done by setting a ContentType to "V8/ZIP"
2. Notify the XML Interface that the client can receive a packed data.
This is done by setting a custom HTML header "V8-supported" to "Zip/Msg"
3. If the client notifies an interface that it can receive a packed data, it should validate a content type of the response. If it is set to "V8/ZIP", it means that a response contains packed data.

Note: Submitting packed data and receiving packed data are independent and the user can decide to use only one of them.

For example when the request message is small, but the client expects to get a lot of data as a response, it can decide to submit a message as XML, but notify the XML interface to pack a response.

The following is a C# example of the procedure which submits a packed message and expects to get a packed response.

```
private XmlDocument submitRequest(string requestStr, string URL)
{
    req = WebRequest.Create(URL);
    req.Method = "POST";
    //Notify XML Interface that client can receive a packed data
    req.Headers["V8-supported"] = "Zip/Msg";
    //Notify XML Interface that submitted data is packed.
    req.ContentType = "V8/ZIP";
    StreamWriter sw = new StreamWriter(req.GetRequestStream());

    requestStr = doZip(requestStr);

    sw.Write(requestStr);
    sw.Close();

    WebResponse respStream = req.GetResponse();
    Stream resp = respStream.GetResponseStream();
    //Check if a response contains packed data.
    if (respStream.Headers["Content-type"].IndexOf("V8/ZIP") != -1)
    {
        resp = UnZip(resp);
    }

    XmlDocument doc = new XmlDocument();
    doc.Load(resp);
    return resp;
}
```

The packed data is a BASE64 encoded ZIP.

Submitted ZIP files should contain only one file with a filename "Msg".

The following is a C# example which prepares a message to be submitted:

```
private string doZip(string str)
{
    MemoryStream zipOut = new MemoryStream();
    string result;
    using (ZipOutputStream s = new ZipOutputStream(zipOut))
    {
        s.SetLevel(9);
        byte[] buffer = new byte[4096];

        ZipEntry entry = new ZipEntry("Msg");
        entry.DateTime = DateTime.Now;
        s.PutNextEntry(entry);

        System.Text.UTF8Encoding encoding=
            new System.Text.UTF8Encoding();
        byte[] b = encoding.GetBytes(str);
        s.Write(b, 0, b.Length);

        s.Finish();
        zipOut.Position = 0;
        result = Convert.ToBase64String(zipOut.ToArray());
    }
    return result;
}
```

Using Translation Tables

For third party systems, it is possible to use translation tables for matching data with the Suite 8 setup and the third party system. The setup of the translation table is performed in the Suite 8 configuration. (Please refer to the Suite 8 Setup Manual).

In the XML interface messages it is possible to specify an optional attribute **TranslationTable** for the elements such as query, insert, update, command. In this case all configuration data in the request and response will be translated according to the defined setup.

The XML should in this case contain the following: "TranslationTable="PD", indicated in the following example:

```
<insert ReqType="Reservation" TranslationTable="PD">
```

'PD' is the name of the configured XML Interface Translation definition.

General Notes

Please note that Suite8 is a very flexible system. Most of the data and codes are subject to the properties installation setup. The vendors using Suite 8 XML Interface have to be aware that the same type of data could have different codes depending on the setup. For example room types, department codes, currency codes, market codes, source codes etc. In some cases the vendors may want to setup their own conversion tables.

Setup

- 1 For configuring Suite 8 XML Interface to use TCP/IP Sockets, open **Fidelio Server** from the Suite8 Program directory, select **Properties**, select the service **Socket Server**, click **Setup** button and enter under **Interpreter GUID** the following: **FidelioXMLInterface.DataHandler**

-
- 2 If Suite 8 XML Interface should work via HTTP using **Microsoft Internet Information Server (IIS)**, open the program **FidelioWebAPPSetup** (usually in the Suite8 program directory) and select **Allowed Web Applications** from the **Options** Menu, click **New** and enter **FidelioXMLInterface.DataHandler** under **Object Name**, and make sure that **Allow** is selected.

Response Codes

- OK ->Command or request successful
- CO->Posting denied because overwrite CreditLimit is not allowed
- IA->Guest related requests Invalid account
- NG->Guest not found
- GA->Profile search is ambiguous
- NP->Posting denied because NoPost is set
- UR->Not possible to process this request, this request cannot be carried out, no retry
- IR->Invalid request or unsupported request type
- IC->Invalid credentials. Wrong username or password
- AD->Access denied. Not enough user rights or trying to make batch update when it is not allowed by configuration or feature is not allowed by the license
- GF->Globalize command failed. The profile is not qualified to be globalized (not enough data)

If the response code is not OK, please check the attribute Message in the element, additional information of the cause of the error is provided under this attribute.

Conditions definition

Following condition operators are available:

- lt = less
- le = less or equal
- gt = greater
- ge = greater or equal
- eq = equal
- neq = not equal
- like = Oracle like condition

Licensing

- The availability of areas and messages of the xml interface is license controlled.
- Please find following matrix which shows which licenses must be active. Per area minimum one of the licenses must be active. For some areas an additional license is needed: Conference and Catering, Voucher Management, Table reservations, CCM Board Info.

Table 1 – License table

Area	XML IFC Basic	XML IFC Advanced	XML IFC Variable Jet Web	Web Connect	Suite 8 Central	XML IFC Hurdle Rates	Table Reservations	Suite 8 Central Cross Reservations Availability	CRS XML One Way / Two Way	CCM	CCM Board Info	Loyalty and membership	Voucher Mgt
Departments	x	x											
Reservations	x	x	x	x	x	x							
Profile	x	x	x	x	x								
Posting	x	x	x		x								
System Date	x	x											
System Info	x	x											
Availability for Web		x		x				x	x				
Children categories	x	x											
Credit Card Types	x	x											
Login (Guest Login)		x		x									
Note Category	x	x		x						x			
Note	x	x		x						x			

Area	XML IFC Basic	XML IFC Advanced	XML IFC Vari Bon Vari Table Jet Web	Web Connect	Suite 8 Central	XML IFC Hurdle Rates	Table Reser v.	Suite 8 Central Cross Reservations Availability	CRS XML One Way / Two Way	CCM	CCM Board Info	Loyalty and membership	Voucher Mgt
Html Info	x	x		x	x								
Event Info Board	x	x									xx		
Activity	x	x		x									
Tasks	x	x		x									
Group Template	x	x											
Group	x	x											
Block Header		x				x		x					
Block Detail		x				x		x					
Country	x	x											
Currency List	x	x											
Conference Status List	x			x						xx			
Conference Package List	x			x						xx			
Hotel Availability		x				x		x					
Overbooking		x				x							

Area	XML IFC Basic	XML IFC Advanced	XML IFC Vari Bon Vari Table Jet Web	Web Connect	Suite 8 Central	XML IFC Hurdle Rates	Table Reservations	Suite 8 Central Cross Reservations Availability	CRS XML One Way / Two Way	CCM	CCM Board Info	Loyalty and membership	Voucher Mgt
Market	x	x											
Main Market	x	x											
RateList	x	x											
ReportList	x	x						x					
Report Parameter List	x	x						x					
Report Selection List	x	x						x					
Room Type	x	x											
StatisticAndFure		x				x							
Calendar Event	x	x		x									
Voucher Articles	x	x		x									xx
Voucher	x	x		x									xx
Billing Instructions	x	x	x		x								
Preference	x	x	x		x								
Package		x		x	x								

Area	XML L IFC Basic	XML IFC Advanced	XML IFC Vari Bon Vari Table Jet Web	Web Conn ect	Suite 8 Centr al	XML L IFC Hur dle Rate s	Tabl e Reser v.	Suite 8 Central Cross Reservat ions Availabi lity	CRS XML One Way / Two Way	CCM	CCM Boar d Info	Loyalty and membe rship	Voucher Mgt
Table Reservations		x		x			xx						
Table Availability		x		x			xx						
Conference & Catering	x	x		x						xx			
BonusStatement	x	x		x								xx	

xx= Extra license which is required.

3 Fields available for selection by request type

BonusCard

- a. MembershipNumber
- b. MembershipType
- c. Points
- d. LastPointtime
- e. Lastredemptiontime
- f. Moneyconversion
- g. Spendablemoney
- h. XmnrId
- i. TotalEarnedPoints
- j. RequestCentralPoints

BonusPoint

- a. Manual
- b. ReservationId
- c. PointType (0=% of total revenue 1=% of revenue per department code 2=per stay 3=for first stay 4=per night 5=redemption (payment rules with points))
- d. Arrival
- e. Departure
- f. Expiry
- g. MembersipValue
- h. MembersipType
- i. Points
- j. HotelId
- k. ProductId
- l. ProductQuantity
- m. Comment

BonusPointRedemption

- a. MembersipValue
- b. MembershipType
- c. Points
- d. HotelId
- e. ProductId
- f. ProductQuantity
- g. Comment
- h. Manual

BonusStatement

- a. StatementCardID
- b. StatementReservationID
- c. StatementTransactionType
- d. StatementTransactionMaster
- e. StatementValue
- f. StatementCollected
- g. StatementSpent
- h. StatementStayDetails
- i. StatementHotelName
- j. StatementTransactionDate
- k. StatementPointsExpiryDate
- l. StatementTransactionDescription
- m. RequestCentralPoints

Departments

- a. DepartmentCode
- b. DepartmentName
- c. DepartmentShortDesc
- d. DepartmentType (1 = debit, 2 = tax, 3 = credit)
- e. DepartmentArrangement

Reservation

- a. GuestFirstname
- b. GuestName
- c. Name2
- d. RoomType
- e. RoomNum
- f. GuestArrival (Arrival date)
- g. GuestDeparture (Departure date)
- h. GuestNum (Reservation Number)
- i. ReservationState - request version 1.1.0 and higher

The result can have the following definitions:

0= Reservation - future reservation or reservation which is checked in but not yet checked out

1 = Checked In (reservations checked in on the actual date (system date))

2 = Checked Out

3 = Canceled

4 = No Show

5 = Offer

- j. ReservationStatus

The result can have the following definitions:

0=tentative

1=definitive

3=not affecting availability

- k. ReservationComment1

-
- l. ReservationComment2
 - m. CheckinDateTime
 - n. CheckoutDateTime
 - o. ReservationType - FA for Financial account and RES for reservation
 - p. NoAvailReason (1 = Waitlist 2 = Offer 3 = Canceled 4 = No Show)
 - q. ProfileID
 - r. PaymentMethod – the department code associated with the payment
 - s. CrsSystem - ID of the CRS system the reservation originates from
 - t. CrsResNumber - Unique ID coming from the CRS System, linked to the CrsSystem in order to support multiple CRS systems
 - u. Notes
 - v. NoOfRooms
 - w. NoOfAdults
 - x. RateCode
 - y. RateValue
 - z. ForeignRateValue - Rate in foreign currency
 - aa. CurrencyCode (Please check this in the Suite8 Configuration of the property, the Currency code can be different than the ISO Code)
 - bb. MarketCode
 - cc. CompanyID
 - dd. TravelAgentID
 - ee. SourceID
 - ff. BookerID
 - gg. CompanyName
 - hh. TravelAgentName
 - ii. SourceName
 - jj. BookerName
 - kk. HasShare – the value is 1 if the reservation has related share reservations, 0 if there is no share
 - ll. ReservationAttribute - Could be used in conjunction with the optional attribute "attr" which contains the required attribute type
For Example <field name="ReservationAttribute" attr="ABC"/>
If the attribute is not specified, all available attributes are included in the response
 - mm. Child - Could be used in conjunction with the optional attribute "attr" containing the required child type
For Example <field name="Child" attr="JUN"/> for junior
If the attribute is not specified, all available attributes are included in the response
 - nn. SourceCode
 - oo. ChannelCode
 - pp. AccompanyingGuests. If this field is in the reservation request, the response contains multiple field elements of "AccompanyingGuest" with information about the accompanying guests. Each element has a node value with the profile ID and the attributes "name1", "name2", "name3" and "BedGuestNum". If additional profile information is required, an explicit profile search request should be sent. Please note that multiple profiles could be retrieved using one request message.
 - qq. GroupName
 - rr. GroupID
 - ss. Guarantee
 - tt. TotalStay
 - uu. ForeignTotalStay
 - vv. BlockCode

-
- ww. NetRoomRevenue – calculated based on the Revenue Forecast and the actual postings
- xx. ReservationDetails – if this field and the detail date field exist in the request, the result contains a separate record for each day of state, allowing retrieving reservation details which might change from day to day
- yy. DetailDate – when using ReservationDetails mode, the dates for which this detail is valid are indicated
- zz. PartyID – ID of the party, if the reservation participates in a party reservation
- aaa. PartyName – the name of the party, if the reservation participates in a party reservation
- bbb. PartyReservation - If this field is in the reservation request, the response contains multiple field elements of "PartyReservation" listing the IDs of all other reservations participating in the party
- ccc. PartyMember - If this field is present in the reservation request, the response will contain multiple field elements "PartyMember" with information of all persons attached to the other reservations participating in the party. Each element has as a node value the profile ID and the attributes "resID" (ID of the reservation), "name1", "name2" and "name3" – with the guest details.
- ddd. Share - If this field is in the reservation request, the response contains multiple field elements of "Share" with information of all reservations shared with this one. Each element has the node value reservation ID and the attributes "profileID" (ID of the main reservation profile), "name1", "name2" and "name3" – with the guest details.
- eee. ResStatusPriorCXL – the Reservation status before it was cancelled (0 – tentative, 1 – definitive)
- fff. OptionDate
- ggg. CustomField - If this field is present in the reservation request, the response will contain multiple field elements for each defined custom field on reservations (Please note, custom field details are not supported). Each field contains an attribute "attr" with a field name. The data format depends on the defined field format. Please note: for all Date fields, DateTime format is used.
- hhh. Guest3rdPartyID - If this exists in the request, the response contains multiple Guest3rdPartyID for every 3rd party profile ID. The attribute "attr" contains a type from the CRS system. Available only with "Third Party Suite8 Central Interface" or "CRS XML One Way" license.
- iii. ReservationPreferences – If this field is in the request, the response will contain for each defined reservation preference an element for "ReservationPreference". Each field contains an attribute "attr" with the preference short description. The node value includes a long description. For example: <field name="ReservationPreference" attr="NSM">Non Smoking</field>
- jjj. Policy – the short description of the Policy attached to the reservation
- kkk. BedReservation – If this field is in the request, the response will contain the information if the reservation is valid for a room or for beds.
The result can have the following definitions:
0=RoomTypeReservation
1=BedTypeReservation
- lll. Hints – If this field is in the request, the response will contain the list of all hints defined under Setup->Configuration->Reservation->Hints which are valid
- ```
<fields>
<field name="Hint" attr="htCheckIn" >Offer Welcome Drink</field>
<field name="Hint" attr="htCheckOut" >Ask for returnable items! </field>
<field name="Hint" attr="htCheckOutBeforePayment" >billing screen</field>
<field name="Hint" attr="htCheckOutAfterPayment" >Please say thank you and
good bye!!!</field>
```

```

<field name="Hint" attr="htAfterDepartureDate" >Guest is departing today</field>
<field name="Hint" attr="htAfterResRateCode" > Did you offer special rate</field>
<field name="Hint" attr="htRoomMove" >Room move reason</field>
<field name="Hint" attr="htEditingReservation" >Editing the reservation</field>
<field name="Hint" attr="htSaveReservation" >Saving the reservation</field>
</fields>

```

Attribute Name	Program state
htCheckIn	At check in
htCheckOut	At checkout
htCheckOutBeforePayment	On billing screen open
htCheckOutAfterPayment	After check out
htAfterDepartureDate	After Departure Date
htAfterResCode	After Rate code
htRoomMove	Room Move
htEditingReservation	EditReservation
htSaveReservation	SaveReservation

The reservation search returns reservation records as well as records for financial accounts according to the selected conditions.

If a profile was already de-identified, the fields **privacyMessage** and **privacyRemoved** are included in the response.

For example:

```

<field name="privacyMessage">Profile information no longer
available</field>
<field name="privacyRemoved">Yes</field>

```

## Profile

- a. ProfileID
- b. GuestFirstname
- c. GuestName
- d. ProfileType (1 - Company 2 - Individual 3 – Employee)
- e. ProfileCategory (1=Company 2=Travel Agent 3=Source 4=Individual 5=Vendors 6=Meeting Planner)
- f. Title
- g. AddressGreeting
- h. LetterGreeting
- i. Birthday
- j. City
- k. Street1
- l. Street2,
- m. Street3
- n. ZIP
- o. State
- p. CountryISO2
- q. CountryISO3
- r. Addresses – The response may contain multiple elements. Returns all addresses.
  - a. Attr. Address Type
  - b. addData. Address Id.



- c. 1 primary 0 non primary.

In order to query the values of fields like Street, city, a combination of fieldname Addresses and the fieldname(City,Street1 etc..) needs to be used. In response each field name will be grouped by means of the attribute addData which contains the address id.

Please note that for those field names (City, Street1 etc.) also the value of the primary address is returned.

Example:

```
<field name="Addresses"/>

returns

<fields>
<field name="PrimaryAddr" attr="BIL" addData="3449">1</field>
<field name="PrimaryAddr" attr="ADR" addData="3450">0</field>
</fields>

<field name="Addresses"/>
<field name="Street1"/>
<field name="City"/>

returns

<fields>
<field name="PrimaryAddr" attr="BIL" addData="3449">111</field>
<field name="Street1" attr="BIL" addData="3449">Main Street</field>
<field name="City" attr="BIL" addData="3449">Anytown</field>
<field name="PrimaryAddr" attr="ADR" addData="3450">0</field>
<field name="Street1" attr="ADR" addData="3450">Main Street</field>
<field name="City" attr="ADR" addData="3450">Anytown</field>
<field name="City">Anytown</field>
<field name="Street1">Main Street</field>
</fields>
```

- s. Telephone – Returns value of primary telephone
- t. Email – Returns value primary email.
- u. Fax – Returns value primary fax.
- v. Communication – Returns value of primary Home Page.
- w. Communications – The response may contain multiple elements. The field name Communications needs to be used in combination with the field name of the communication role. (Email-Telephone-Fax-Communication)
  - a. attr. Communication type code. Eg 'EBD' email business direct
  - b. addData. Communication ID.
  - c. Primary: defines if this communication is primary for this category.

Example:

Query all email, telephone and home page communications:

```
<field name="Communications"/>
<field name="Email"/>
<field name="Telephone"/>
<field name="Communication"/>

returns

<fields>
<field name="Email">name@example.com</field>
<field name="Telephone">1234567890</field>
<field name="Communication" attr="WEB" addData="2288"
Primary="1">www.example.com</field>
<field name="Email" attr="EBD" addData="2283"
Primary="0">name@example.com</field>
```

```

 <field name="Telephone" attr="PBM" addData="2284"
Primary="1">1234567890</field>
 <field name="Email" attr="EBD" addData="2285"
Primary="0">name@example.com</field>
 <field name="Email" attr="EPR" addData="2286"
Primary="1">name@example.com</field>
</fields>

```

#### Query value of primary email

```

<field name="Email"/>

<field name="Email">name@example.com</field>

```

For further details on communication types, please refer to the Suite8 Setup manual.

- x. Gender (M – male, F – Female)
- y. DeleteCode (0 –profile is active 1 – profile is not active)
- z. NationalityISO2
- aa. NationalityISO3
- bb. Language
- cc. VipCode
- dd. Notes
- ee. NotesByType.Only used for hotel connector. Please use NotesList
- ff. NotesList: The response may contain multiple elements.
  - a. attr: Note category
  - b. addData: 0 not guest viewable. 1 Guest Viewable
  - c. noteID: Unique id.

#### Example:

```

<field name="Notes" attr="PRF" addData="0" noteID="1476" >NewGuest
note</field>

```

- gg. ProfileGlobalID
- hh. CentralSyncTime
- ii. CreditStatus
- jj. CreditReason
- kk. CreditStatusChangeTime

- 
- ll. LinkedProfile. If this field is included in the request, the response will contain a list of the linked profiles. The response may contain multiple elements.
    - a. Attr: Linked profile category.
    - b. addData : Profile type
    - c. proflID (obsolete)
    - d. profileID
    - e. proflGlobalID(obsolete)
    - f. profileGlobalID
    - g. mailing
    - h. primary
    - i. name2
    - j. name3

Example:

```
<field name="LinkedProfile" attr="SPO" addData="2"
 proflID="30406" proflGlobalID="" mailing="0" primary="0"
 name2="" name3="Test">Test</field>
```
  - mm. BirthPlace
  - nn. Department
  - oo. Position
  - pp. ProfileExternalID
  - qq. Membership – the list of attached membership cards
    - a. Membership Card
    - b. LevelNumber
    - c. Type
    - d. Role
    - e. StartDate
    - f. ExpiryDate
    - g. SignupDate
    - h. Inactive
    - i. InactiveReason
    - j. TaxOffice
  - rr. Guest3rdPartyID - If this exists in the request, the response contains for each 3<sup>rd</sup> partyprofile ID, the element “Guest3rdPartyID “. The attribute “attr” contains the type of the CRS system. Available only with the licenses “Third Party Suite8 Central Interface” or “CRS XML One Way”.
  - ss. ProfileAttribute - If this exists in the request, the response contains for each available attribute, the element “ProfileAttribute”. Each element contains the attribute “attr” with the profile attribute type. For example <field name="ProfileAttribute" attr="INF">EA</field>
  - tt. LastUpdateTime – Time stamp when the profile was updated
  - uu. CreationTime - Time stamp when the profile was created
  - vv. CustomField - If this field is present in the request, the response contains for each defined custom field on profiles, the element “CustomField”, each field contains the attribute “attr” with the field name. The data format depends on the defined field format, all date fields use DateTime format.
  - ww. ProfilePreferences – If this field is present in the request, the response will contain multiple elements “ProfilePreference” for every defined profile preference. Every field contains an attribute “attr” with a preference short description. The node value includes a long description. For example:
 

```
<field name="ProfilePreference" attr="NSM">Non Smoking</field>
```
  - xx. NoMailing - returned values 1/0
  - yy. NoEMailing - returned values 1/0

- 
- zz. GuestComment – If this field is in the request, the response contains for each guest comment the element “GuestComment”.
- Each element contains the attribute “attr” with the comment type, the attribute “addData” with the comment ID (the comment ID can be used for update) and the attribute “Date” with the comment date. For Example
- ```
<field name="GuestComment" addData="1216" attr="COM"
Date="20.11.2014">This is my very important comment</field>
```
- aaa. IncludeNotCommitted - If this field with condition operation="eq">1< is in the request, the response contains information about the de-identification status. For Example
- ```
<field name="privacyMessage">Profile information no longer
available</field>
<field name="privacyRemoved">Yes</field>
```

## Posting

- a. PostingID
- b. ProfileID
- c. GuestNum
- d. DepartmentCode
- e. DepartmentType (1 = debit, 2 = tax, 3 = credit)
- f. PostingPrice
- g. PostingQuantity
- h. PostingDescription
- i. PostingDate
- j. CurrencyCode (Please note, the Currency Code can be different form the ISO Code, please refer to the Suite8 Setup of the property)
- k. PostingProfileOrigID
- l. PostingGuestNumOrig
- m. PostingComment
- n. PostingCheckNr
- o. PostingForeignPrice

## SystemDate

- a. SystemDate

## SystemInfo

- a. LicenseName
- b. LicenseNoOfRooms
- c. Version – Program version

## AvailabilityForWeb

- a. RateCode
- b. RoomType
- c. RoomTypeDesc
- d. RoomTypeLongDesc
- e. NoOfRooms
- f. Date
- g. Price
- h. Availability
- i. RateInfo
- j. CurrencyCode

- 
- k. CurrencyISO3
  - l. BaseCurrencyPrice
  - m. DepartmentCode
  - n. RateWebInfo
  - o. PackagePrice – indicates the price of included packages
  - p. AdultPrice – if “PricePerPerson” was specified in the request, the price per person
  - q. Child – if “PricePerPerson” was specified in the request, this field contains the attribute “attr” indicating the child age category.
  - r. ContinuousRooms – checks the room availability for the entire stay. If there is a request for continuous room assignment, the response contains 1 in the “ContinuousRooms” field, if not the result is 0.

## ChildrenCategories

- a. ChildrenCategoriesCode
- b. ChildrenCategoriesName
- c. ChildrenCategoriesFromAge
- d. ChildrenCategoriesToAge

## CreditCardTypes

- a. CreditCardCode
- b. CreditCardName
- c.

## Login (UserLogin)

The Request requires at least one of the following licenses:

- a. ProfileID
- b. GuestName

## NoteCategory

The Note Category request retrieves the configured note categories. This information is needed when using the Note insert request where the fields **NoteCategoryTableLinkedTo** and **NoteCategoryCode** or **NoteCategoryID** have to be supplied. Please refer to the Note request.

- a. NoteCategoryID
- b. NoteCategoryShortDescription  
The note category code
- c. NoteCategoryLongDescription
- d. NoteCategoryTableLinkedTo

The object types for which the notes are used:

- a. Reservations  
NoteCategoryTableLinkedTo used for Reservations request object type
- b. Profile  
NoteCategoryTableLinkedTo used for Profile request object type
- c. ConferenceBooking  
NoteCategoryTableLinkedTo used for ConferenceBooking request object type
- d. BookingEvent  
NoteCategoryTableLinkedTo used for BookingEvent request object type

- 
- e. EventResource  
EventResource is general for Conference and Catering resources. In the note insert request, one should use:
    - a. EventCateringItem for booked catering item notes
    - b. EventStandardMenu for notes to be linked to booked StandardMenus
    - c. EventFunctionSpace for notes to be linked to booked function spaces
  - f. BlockHeader  
NoteCategoryTableLinkedTo used for BlockHeader request object type  
TableReservation

## Note

The Request requires at least one of the following licenses:

### General note request.

The request enables to get notes from any object type, such as ConferenceBooking, BookingEvent, EventFunctionSpace, EventCateringItem, EventStandardMenu

- a. NoteID
- b. NoteTableLinkedTo  
Object type to which the notes are linked. Possible values are:
  - a. ConferenceBooking
  - b. BookingEvent
  - c. EventStandardMenu
  - d. EventCateringItem
  - e. EventFunctionSpace
  - f. Reservation
  - g. Profile
  - h. BlockHeader
  - i. TableReservation
- c. NoteTableID  
The Id of the object for which the notes are requested
- d. NoteDescription
- e. NoteCategoryCode
- f. NoteCategoryID
- g. NoteGuestViewable  
Defines if the note can be viewed by the customer (1) or for internal use (0)

## HtmlInfo

- a. HtmlName
- b. HtmlId
- c. HtmlContent

## Event Info Board

- a. Eventid
- b. EventName
- c. EventStartDate
- d. EventStartTime
- e. EventEndDate
- f. EventEndTime
- g. EventInfoBoard
- h. EventProfileName

- 
- i. EventRoomName
  - j. EventRoomId
  - k. EventPax
  - l. EventStatus
  - m. TimeStamp

## Activity

- a. ActivityID
- b. ActivityType
- c. ActivityTypeID
- d. ActivityDescription
- e. ActivityStartDate
- f. ActivityStartTime
- g. ActivityEndDate
- h. ActivityEndTime
- i. ActivityAllDay
- j. ActivityShowas
- k. ActivityReminder
- l. ActivityPriority
- m. ActivityCompletedPercentage
- n. ActivityCompletedDate
- o. ActivityNotes
- p. ActivityNotesID
- q. ActivityCompanyName
- r. ActivityContactName
- s. ActivityMangerName
- t. ActivityManagerID
- u. ActivityCompanyID
- v. ActivityContactID
- w. ActivityStatus
- x. MaintenanceManagerID
- y. MaintenanceEstimatedDurationMin

## Task

- a. TaskID
- b. TaskType
- c. TaskTypeID
- d. TaskDescription
- e. TaskStartDate
- f. TaskStartTime
- g. TaskEndDate
- h. TaskEndTime
- i. TaskAllDay
- j. TaskShowas
- k. TaskReminder
- l. TaskPriority
- m. TaskCompletedPercentage
- n. TaskCompletedDate
- o. TaskNotes
- p. TaskNotesID

- 
- q. TaskCompanyName
  - r. TaskContactName
  - s. TaskMangerName
  - t. TaskManagerID
  - u. TaskCompanyID
  - v. TaskContactID

## Group Template

- a. GroupTemplateID
- b. GroupTemplateName
- c. GroupTemplateContactID
- d. GroupTemplateComment
- e. GroupTemplateInactive
- f. CountryISO2
- g. CountryISO3
- h. Language
- i. State

## Group

- a. GroupID
- b. GroupName
- c. GroupContactID
- d. GroupFrom
- e. GroupTo
- f. GroupTemplate
- g. GroupTemplateID
- h. GroupInactive
- i. GroupCompanyName
- j. GroupCompanyID
- k. GroupTravelAgentName
- l. GroupTravelAgentID
- m. GroupSourceName
- n. GroupSourceID
- o. GroupIndividualName
- p. GroupIndividualID
- q. GroupVendorName
- r. GroupVendorID
- s. GroupMeetingPlannerName
- t. GroupMeetingPlannerID
- u. GroupComment
- v. CountryISO2
- w. CountryISO3
- x. Language
- y. State

## BlockHeader

- a. BlockHeaderID
- b. BlockHeaderCode
- c. BlockHeaderName
- d. BlockHeaderFrom



- 
- e. BlockHeaderTo
  - f. BlockHeaderStatusCode
  - g. BlockHeaderStatus
  - h. BlockHeaderReservationStatus - 0=tentative 1=definitive 3=not affecting availability
  - i. BlockHeaderRate
  - j. BlockHeaderElastic
  - k. BlockHeaderMarket
  - l. BlockHeaderSource
  - m. BlockHeaderChanel
  - n. BlockHeaderPackage – to retrieve a list of attached packages

## BlockDetail

- a. BlockDetailID
- b. BlockDetailDate
- c. BlockDetailRoomType
- d. BlockDetailCutOffDate
- e. BlockDetailInitNoOfRooms
- f. BlockDetailActualNoOfRooms
- g. BlockDetailPickedUp
- h. BlockDetailCancelled
- i. BlockDetailRateValue (for forecast only)
- j. BlockDetailNetRoomRevenue (based on forecast only)

## Country

- a. CountryISO2
- b. CountryISO3
- c. CountryShortdesc
- d. CountryName
- e. CountryNationality

## CurrencyList

- a. CurrencyShortdesc
- b. CurrencyName
- c. CurrencyISO3
- d. CurrencyDigits
- e. CurrencyDepartment

## ConferenceStatusList

- a. ConferenceStatusId
- b. ConferenceStatusShortdesc
- c. ConferenceStatusLongdesc
- d. ConferenceStatusDisplorder
- e. ConferenceStatusWebname

## ConferencePackageList

- a. ConferencePackageID
- b. ConferencePackageName
- c. ConferencePackagePrice
- d. ConferencePackageValidFrom

- e. ConferencePackageValidTo

## HotelAvailability

The Request requires at least one of the following licenses:

- XML Interface Enhanced Edition
- Suite8 Central Cross Reservations and Availability
- Hurdle Rates XML Interface
  - a. Date
  - b. RoomType
  - c. AvlDefinitive – definite Availability
  - d. AvlInclTentative – Availability including tentative
  - e. Overbooking
  - f. OccDefinitive – definite Occupancy
  - g. OccTentative – tentative Occupancy
  - h. OOO – Out of order rooms
  - i. OOS – Out of service rooms
  - j. Capacity - number of existing rooms per room type. The number might differ per dates, depending on the expiration date defined on the room configuration in Suite8.
  - k. AvlDefinitiveWithBookingPosition
  - l. AvlInclTentativeWithBookingPosition
  - m. OccDefinitiveWithBookingPosition
  - n. OccTentativeWithBookingPosition
  - o. NoOfPersonStd - standard number of persons (adult + child) allowed for this room type
  - p. NoOfPersonMax – maximum number of persons (adult + child) allowed for this room type

## Overbooking

- a. RoomType
- b. OverbookingDate
- c. OverbookingType - 1 = House Overbooking 2 = Room Type Overbooking
- d. OverbookingNoOfRooms - Number of Rooms for this overbooking

## Market

- a. MarketID
- b. MarketShortdesc
- c. MarketName
- d. MarketMainMarket – Short Description

## MainMarket

MainMarketID

- a. MainMarketShortdesc
- b. MainMarketName

## RateList

- a. RateCode
- b. RateName
- c. RateDepartment
- d. RateWeekendDepartment
- e. RateWebInfo

- 
- f. RateInfo
  - g. RateFolioText
  - h. RateStartSell
  - i. RateEndSell
  - j. RateMinLOS
  - k. RateMaxLOS
  - l. RatePublic
  - m. RateWebEnabled
  - n. RateBAR

## ReportList

- a. ReportID
- b. ReportSectionID
- c. ReportName
- d. ReportSectionName
- e. ReportSecurityLevel
- f. ReportCopies
- g. ReportSecondaryCopies
- h. ReportTitle
- i. ReportExternalID
- j. ReportType - the report type:
  - 0 =Crystal Report
  - 1 =Internal Editor RTF
  - 2 =OLAP Cube
  - 3 =HTML Report

## ReportParameterList

- a. ReportID
- b. ReportSectionID
- c. ReportName
- d. ReportParameterName
- e. ReportParameterDescription
- f. ReportParameterType – the report parameter
  - 0 = string
  - 1 = integer
  - 2 = date ( DD.MM.YYYY)
  - 3 = time ( HH:MM:SS)
  - 4 = date-time (DD.MM.YYYY HH:MM:SS.mmm UTC±MM)
  - 5 = Lookup
  - 6 = Multiselect lookup
  - 7 = Boolean
- g. ReportParameterLookupQuery
- h. ReportParameterLookupField
- i. ReportParameterLookupShowField
- j. ReportParameterLookupShowField2
- k. ReportParameterMandatory
- l. ReportParameterDisplayOrder
- m. ReportParameterInvisible
- n. ReportParameterShowSystemParam

- 
- o. ReportParameterDefault – If the date or time format is used, this field contains the value entered in Suite8, such as TODAY, BEGINNINGOFTHISWEEK ). Please refer to the Suite8 Report Manual for further information.
  - p. ReportParameterDefaultValue – contains a calculated value based on the definition (such as today's date or the date when the next week begins)

## ReportSectionList

- a. ReportSectionID
- b. ReportSectionName
- c. ReportSectionParentID - (refers to the tree structure)
- d. ReportSectionReportType - the following values are available:
  - 0 =Crystal Report
  - 1 =Internal Editor RTF
  - 2 =OLAP Cube
  - 3 =HTML Report
- e. ReportSectionPrintJob
- f. ReportSectionRole – defines the report section role and can be:
  - 1=Confirmation Letter
  - 2=Folio Layout
  - 3=Message Print
  - 4=Shift report
  - 5=Conference Confirmation
  - 6=Registration Card
  - 7=Currency Exchange
  - 8=AR Reminders
  - 9=Paid Outs
  - 10=Activities
- g. ReportSectionSecurityLevel

## RoomType

- a. RoomTypeShortDesc
- b. RoomTypeLongDesc
- c. RoomTypeDefaultPAX
- d. RoomTypeYieldable
- e. RoomTypeNoOfBeds
- f. RoomTypeExtraBeds
- g. RoomTypeTreshold
- h. RoomTypeWebInfo
- i. RoomTypeSuite
- j. RoomTypeMaxPAX
- k. RoomTypeMaxToSell
- l. RoomTypeMaxToSell
- m. RoomTypeDefaultRate
- n. RoomTypeLongWebInfo
- o. RoomTypeShortMobileWebInfo
- p. RoomTypeLongMobileWebInfo
- q. RoomTypeImage- (can be multiple please refer to the Suite8 Setup Manual for further information about Room Type images)

---

## StatisticAndFuture

- a. Date
- b. HotelName
- c. GuestNum – the reservation ID
- d. ActArrivalTime
- e. ActDepartureTime
- f. ExpArrivalTime – DateTime format
- g. ExpDepartureTime – DateTime format
- h. CreationTime – DateTime format, indicates the time when the reservation was created.
- i. ResStatus - 0=tentative 1=definitive 3=not effecting availability
- j. NoAvailReason - 1 = Waitlist 2 = Offer 3 = Canceled 4 = No Show
- k. ProfileID
- l. GuestName
- m. CompanyID
- n. CompanyName
- o. TravelAgentID
- p. TravelAgentName
- q. SourceID
- r. SourceName
- s. IndividualID
- t. IndividualName
- u. VendorsID
- v. VendorsName
- w. MeetingPlannerID
- x. MeetingPlannerName
- y. GroupID
- z. GroupName
- aa. BlockHeaderID
- bb. BlockHeaderCode
- cc. RoomNum
- dd. RoomType
- ee. RateCode
- ff. MarketCode
- gg. SourceCode
- hh. ChanelCode
- ii. NoOfAdults
- jj. ShareNum
- kk. TotalNoOfChildren
- ll. GrossRoomRev
- mm. NetRoomRev
- nn. GrossFBRev
- oo. NetFBRev
- pp. GrossMinibarRev
- qq. NetMinibarRev
- rr. GrossTeleRev
- ss. NetTeleRev
- tt. GrossMiscRev
- uu. NetMiscRev
- vv. NetRev
- ww. GrossRev
- xx. IsArrival – 1 if this is the arrival

---

yy. IsDeparture – 1 if this the departure  
zz. NoOfRooms  
aaa.CountryISO2  
bbb. CountryISO3

## CalendarEvent

- a. CalendarEventLongDesc
- b. CalendarEventNotes
- c. CalendarEventFromDate
- d. CalendarEventToDate
- e. CalendarEventTypeShortDesc
- f. CalendarEventTypeLongDesc
- g. CalendarEventType – the type of the event:
  - 0 = miscellaneous event
  - 1 = availability event
  - 2 = public holiday event
  - 3 = conference booking
- h. CalendarEventTypeShow – indicates where the Event Type is displayed in Suite8:
  - 0-show all;
  - 1-show diary;
  - 2-show F4;
  - 3-show CTRL-D;
  - 4-show diary+F4;
  - 5-show diary+CTRL-D;
  - 6-show F4+CTRL-D
- i. CalendarEventTypeWebEnabled
- j. CalendarEventWebEnabled
- k. CalendarEventShortWebInfo
- l. CalendarEventLongWebInfo
- m. CalendarEventShortMobileWebInfo
- n. CalendarEventLongMobileWebInfo
- o. CalendarEventImage

## VoucherArticles

- a. VoucherArticleID
- b. VoucherArticleName
- c. VoucherArticleText
- d. VoucherArticleDescription
- e. VoucherArticleWebName
- f. VoucherArticleWebShortDescription
- g. VoucherArticleWebLongDescription
- h. VoucherArticlePaymentDepartment
- i. VoucherArticlePrice
- j. VoucherArticleDefaultDuration
- k. VoucherArticleType 0 - Product voucher; 1 - Value Voucher; 2 - Arrangement voucher
- l. VoucherArticleImageID
- m. VoucherArticleImageTime
- n. VoucherArticleWebEnabled
- o. VoucherReservationTemplate
- p. VoucherWebCustomizable

---

## Voucher

- a. VoucherID
- b. VoucherArticleID
- c. VoucherProfileID
- d. VoucherNumber
- e. VoucherDescription
- f. VoucherText
- g. VoucherValidFrom
- h. VoucherValidUntil
- i. VoucherAmount
- j. VoucherAmountRedeemed
- k. VoucherFA
- l. VoucherPrinted
- m. VoucherFullyPaid
- n. VoucherType - 0 - Product voucher; 1 - Value Voucher; 2 - Arrangement voucher
- o. VoucherReservationID
- p. VoucherFinalized
- q. VoucherDedication
- r. VoucherPickupReservationID
- s. VoucherConsumingGuestID
- t. VoucherInternalInfo
- u. VoucherOrderReason
- v. VoucherOnHoldReason
- w. VoucherToBePaid
- x. VoucherIssueDate
- y. VoucherClearingDate
- z. VoucherProfileName
- aa. VoucherStatus – the following statuses are available:
  - 1=Valid
  - 2=Not yet valid
  - 3=Expired
  - 4=On Hold
  - 5= Inactive
  - 6=Redeemed
  - 7=Not yet paid

## BillingInstruction

- a. BillingInstructionID
- b. BillingInstructionFromDate
- c. BillingInstructionToDate
- d. BillingInstructionReservationID – the reservation id for the linked billing instruction items
- e. BillingInstructionToReservationID – the reservation the billing instruction routes to
- f. BillingInstructionFAID – the financial account, the billing instruction belongs to
- g. BillingInstructionToFAID - the financial account, the billing instruction is routed to
- h. BillingInstructionWindow
- i. BillingInstructionProfileID
- j. BillingInstructionBookingID - the booking the billing instruction is linked to
- k. BillingInstructionBlockID – the block the billing instruction belongs to
- l. BillingInstructionNote

- 
- m. BillingInstructionAuto – indicates if the billing instruction is created automatically by the reservation
  - n. BillingInstructionVideoCheckout
  - o. BillingInstructionBillView
  - p. BillingInstructionDepartment – for each included department the element is present. Each element contains the attribute “attr” with the following values:
    - 1 = include
    - 2 = exclude
    - 3 = all postings included (for Master Share)For example:  
`<field name="BillingInstructionDepartment" attr="1">260</field>`
  - q. BillingInstructionGroup – the element is present multiple times for each included group. Each element contains the attribute “attr” with the following values:
    - 1 = include
    - 2 = exclude
    - 3 = all postings included (for Master Share)For example:  
`<field name="BillingInstructionGroup" attr="1">AL</field>`

## Preference

- a. PreferenceID
- b. PreferenceShortdesc
- c. PreferenceName

## Package

- a. PackageCode
- b. PackageName
- c. PackageWebDescription
- d. PackageLongWebDescription
- e. PackageWebMobileDescription
- f. PackageLongWebMobileDescription
- g. PackageFrequencyCode
- h. PackageFrequencyName
- i. PackageFrequencyWebName
- j. PackageFrequencyWebMobileName
- k. PackageCurrency
- l. PackageStart
- m. PackageEnd
- n. PackagePrice
- o. PackagePriceType – the package price type:
  - 0=child
  - 1=adult
  - 2=flat
- p. PackageIncluded
- q. PackageSinglePerRes
- r. PackageShowInRes – indicates if the package is displayed in reservations:
  - 1=true
  - 0=not shown
- s. PackagePercentage – indicates if the package is a percentage package:
  - 1= true
- t. PackageDisplOrder



- 
- u. PackagePriceChildCategory – the child category for all records using “PackagePriceType = 0”
  - v. PackageImage – the linked image

## **Suite8RemoteCheckinConfig**

- a. RemoteCheckInEnabled
- b. AssingRoomDuringPreCheckIn
- c. AutoAssingRoomDuringPreCheckIn
- d. DisplayRegistrationCardDuringPreCheckIn
- e. RegistrationCardNumber
- f. EarlyArrivalMinutes
- g. RemoteCheckinPayOption
- h. RemoteCheckinStartTime
- i. AllowCheckinforPaidOnly
- j. AllowCheckinwithUserLogin
- k. AllowCheckinwithSuite8Token
- l. AllowCheckinwithResIDandLastName
- m. AllowCheckinwithExtResIDandLastName

## **AvailableRooms**

- a. RoomID
- b. RoomShortDesc
- c. RoomFloor
- d. RoomTypeShortDesc
- e. RoomFeature

## **ValidateReservationPreCheckin**

- a. PreCheckinAlreadyDone
- b. PrecheckinNotAllowed
- c. Reason
- d. PrecheckinNotPossible
- e. RoomNotAssigned
- f. PaymentDue
- g. PassportDataNotAvailable
- h. GuestDocumentDataNotAvailable

## **PreCheckinPaymentAmount**

- a. ReservationNumber
- b. PaymentAmount

## **AssignRoom**

- a. RoomID
- b. RoomShortDesc

## **PostCharges**

- a. PostEntireStay
- b. RoomShortDesc

---

## PreCheckin

- a. ReservationNumber
- b. PaymentAmount

## TableReservation

- a. TableReservationID
- b. TableReservationDate
- c. TableReservationDate
- d. TableReservationStartTime
- e. TableReservationEndTime
- f. TableReservationAdults
- g. TableReservationChildren
- h. TableReservationRestaurant
- i. TableReservationRestaurantID
- j. TableReservationAllTables –comma separated list of all tables
- k. TableReservationGuests – semicolon separated list of all guests
- l. TableReservationProfileID
- m. GuestFirstname
- n. GuestName
- o. VipCode

If more than one profile is attached, the response may contain multiple elements for 'GuestFirstname', 'GuestName' and 'VipCode'. All these elements have the attribute 'attr' containing the ID of the corresponding profile.

## TableAvailability

The following search criteria are available:

- a. RestaurantOccupiedTables – How many tables are occupied
- b. RestaurantFreeTables – How many tables are free
- c. RestaurantOccupiedPersons – Reservation for this amount of persons already exist
- d. RestaurantAvailStdPersons – Availability based on the standard number of persons
- e. RestaurantAvailMaxPersons – Availability based on the maximum number of persons
- f. RestaurantWebDescription – the short Web description of the restaurant
- g. RestaurantLongWebDescription – the Long Web description of the restaurant
- h. RestaurantWebMobileDescription – the Short mobile Web description of the restaurant
- i. RestaurantLongWebMobileDescription – the Long mobile Web description of the restaurant
- j. RestaurantID
- k. RestaurantShortDescription – the Short description of the restaurant
- l. RestaurantDefDuration – the configured default reservation duration
- m. RestaurantImage – (can be multiple) the information about the restaurant images

## AccountManager

- a. AccountManagerID
- b. AccountManagerShortDescription
- c. AccountManagerLongDescription

---

## ConferenceManager

- a. ConferenceManagerID
- b. ConferenceManagerShortDescription
- c. ConferenceManagerLongDescription

## Channel

- a. ChannelID
- b. ChannelCode
- c. ChannelName

## Source

- a. SourceID
- b. SourceCode
- c. SourceName

## ConferenceStatusList

- a. StatusID
- b. StatusShortDesc
- c. StatusLongDesc
- d. StatusWebEnabled
- e. StatusDisplayOrder
- f. StatusWebName

## FunctionType

- a. FunctionTypeID
- b. FunctionTypeShortDescription
- c. FunctionTypeLongDescription
- d. FunctionTypeShortWebInfo
- e. FunctionTypeLongWebInfo
- f. FunctionTypeWebEnabled

## SeatingArrangements

- a. SeatingID
- b. SeatingShortDesc
- c. SeatingLongDesc
- d. SeatingDisplayOrder
- e. SeatingWebEnabled

## EventType

- a. EventTypeID
- b. EventTypeShortDescription
- c. EventTypeLongDescription
- d. EventTypeShortWebInfo
- e. EventTypeLongWebInfo
- f. EventTypeWebEnabled

---

## EventStatus

- a. EventStatusID
- b. EventStatusShortDescription
- c. EventStatusLongDescription
- d. EventStatusShortWebInfo
- e. EventStatusLongWebInfo
- f. EventStatusWebEnabled

## FunctionSpace

- a. FunctionSpaceID
- b. FunctionSpaceShortDescription
- c. FunctionSpaceLongDescription
- d. FunctionSpaceShortWebInfo
- e. FunctionSpaceLongWebInfo
- f. FunctionSpaceWebEnabled  
Is function space is web enabled. 0 false, 1 trueg.
- g. FunctionSpaceTypeShortDescription
- h. FunctionSpaceTypeLongDescription
- i. FunctionSpaceShareable  
Is function space is web shareable. 0 false, 1 true
- j. FunctionSpaceCombined  
Is function space is a combination room. 0 false, 1 true
- k. FunctionSpaceMinCapacity
- l. FunctionSpaceMaxCapacity
- m. FunctionSpaceCostPrice

## FunctionSpaceSeating

- a. FunctionSpaceSeatingFunctionSpaceID
- b. FunctionSpaceSeatingID
- c. FunctionSpaceSeatingShortDescription
- d. FunctionSpaceSeatingLongDescription
- e. FunctionSpaceSeatingShortWebInfo
- f. FunctionSpaceSeatingLongWebInfo
- g. FunctionSpaceSeatingWebEnabled  
Is seating web enabled. 0 false, 1 true
- h. FunctionSpaceSeatingMinCapacity
- i. FunctionSpaceSeatingMaxCapacity
- j. FunctionSpaceSeatingSetupTime
- k. FunctionSpaceSeatingSetdownTime
- l. FunctionSpaceSeatingDefault.  
Default function space seating for this function space. 0 false, 1 true

## FunctionSpaceRate

- a. FunctionSpaceRateFunctionSpaceID
- b. FunctionSpaceRateID
- c. FunctionSpaceRateShortDescription
- d. FunctionSpaceRateLongDescription
- e. FunctionSpaceRateShortWebInfo
- f. FunctionSpaceRateLongWebInfo

- g. FunctionSpaceRateWebEnabled  
defines if the rate is web enabled. 0 false, 1 true
- h. FunctionSpaceRatePerHour  
defines if the rate is per hour. 0 false, 1 true
- i. FunctionSpaceRateValue
- j. FunctionSpaceRateDefault  
defines if the is the default rate. 0 false, 1 true.
- k. FunctionSpaceRateValidFrom
- l. FunctionSpaceRateValidTo

## FunctionSpaceAvailability

- a. FunctionSpaceID
- b. FunctionSpaceShortDescription
- c. FunctionSpaceLongDescription
- d. FunctionSpaceWebEnabled  
defines if the function space is web enabled. 0 false, 1 true
- e. FunctionSpaceShortWebInfo
- f. FunctionSpaceLongWebInfo
- g. FunctionSpaceTypeShortDescription
- h. FunctionSpaceTypeLongDescription
- i. FunctionSpaceShareable  
defines if the function space is shareable:  
0= false  
1= true
- j. FunctionSpaceCombined  
defines if the function space is a combination room:  
0= false  
1= true
- k. FunctionSpaceMinCapacity
- l. FunctionSpaceMaxCapacity
- m. FunctionSpaceCostPrice
- n. FunctionSpaceRate.  
The Function space rates list. The response may contain multiple elements. The rates are being displayed as attributes.  
See also FunctionSpaceRate Request

- a. ID  
The Id of the rate configuration record
  - b. FunctionSpaceID
  - c. ShortDescription
  - d. LongDescription
  - e. WebEnabled
  - f. ShortWebInfo
  - g. LongWebInfo
  - h. PerHour
  - i. Value
  - j. Default
  - k. ValidFrom
  - l. ValidTo
- For Example:
- ```
<field name="FunctionSpaceRate" ID="100"
FunctionSpaceID="1008" ShortDescription="FUL"
```

```

LongDescription="full day" WebEnabled="1" ShortWebInfo=""
LongWebInfo="" PerHour="1" Value="1200" Default="1"
ValidFrom="20.02.2012" ValidTo="18.02.2021" CostPrice="0"/>

```

- o. **FunctionSpaceSeating**
the Function space seating list. The response may contain multiple elements. Seatings are displayed as attributes

See also FunctionSpaceSeating Request

- a. ID
the Id of the seating configuration record
- b. FunctionSpaceID
- c. ShortDescription
- d. LongDescription
- e. WebEnabled
- f. ShortWebInfo
- g. LongWebInfo
- h. MinCapacity
- i. MaxCapacity
- j. SetupTime
- k. SetdownTime
- l. Default

For Example:

```

<field name="FunctionSpaceSeating" ID="1127"
FunctionSpaceID="1012" ShortDescription="TOP"
LongDescription="Top Tables" WebEnabled="1"
ShortWebInfo="Short web info " LongWebInfo=""
MinCapacity="10" MaxCapacity="300" SetupTime="0"
SetdownTime="0" Default="1"/>

```

ConferencePackagesList

- a. ConferencePackageID
- b. ConferencePackageShortDescription
- c. ConferencePackageShortWebInfo
- d. ConferencePackageLongWebInfo
- e. ConferencePackageWebEnabled
Defines if the ConferencePackage is web enabled. 0 false, 1 true.
- f. ConferencePackageValidFrom
- g. ConferencePackageValidTo
- h. ConferencePackageRateValue
- i. ConferencePackageEvents
the List of the linked events to the package. The response may contain multiple elements.
Events are displayed as attributes
 - a. ID
the Id of the event configuration record
 - b. ConferencePackageID
 - c. TypeID
the Id of the event type.
 - d. TypeShortDescription
The Event type short description
 - e. StartTime
 - f. EndTime

- g. FromDay
Starting day = 1
- h. ToDay
the Length of the package. 1= one day, 2= 2 days
- i. WebEnabled
For Example:

```
<field name="ConferencePackageEvents" ID="1008"
ConferencePackageID="1006" TypeID="117"
TypeShortDescription="MET" StartTime="09:00:00"
EndTime="18:00:00" FromDay="1" ToDay="1" WebEnabled="1"/>
<field name="ConferencePackageEvents" ID="1009"
ConferencePackageID="1006" TypeID="114"
TypeShortDescription="CBM" StartTime="10:00:00"
EndTime="10:30:00" FromDay="1" ToDay="1" WebEnabled="1"/>
```

CateringItem

- a. CateringItemID
- b. CateringItemLongDescription
Catering Item Name
- c. CateringItemDescription
Additional description.
- d. CateringItemShortWebInfo
- e. CateringItemLongWebInfo
- f. CateringItemWebEnabled
defines if the catering item is web enabled. 0 false, 1 true.
- g. CateringItemDescription
- h. CateringItemExternal
- i. CateringItemQuantity
- j. CateringItemArticleNumber
- k. CateringItemLeadDays
- l. CateringItemShowFO
defines if the item is used in PMS. 0 false, 1 true.
- m. CateringItemShowSC
defines if the item is used in CCM. 0 false, 1 true
- n. CateringItemTrackInventory
defines if the Inventory is tracked on the catering item. 0 false, 1 true.
- o. CateringItemSetupTime
- p. CateringItemSetdownTime
- q. CateringItemCostPrice
- r. CateringItemRate
the Catering item rate list. The response may contain multiple elements. Rates are displayed as attributes
See also CateringItemRate request
 - a. ID
the Id of the rate configuration record.
 - b. CateringItemID
 - c. ShortDescription
 - d. LongDescription
 - e. WebEnabled
 - f. ShortWebInfo
 - g. LongWebInfo
 - h. PerHour

- i. Value
- j. Default
- k. ValidFrom
- l. ValidTo

For Example:

```
<field name="CateringItemRate" ID="108" CateringItemID="1027"
ShortDescription="HOU" LongDescription="" WebEnabled="1"
ShortWebInfo="" LongWebInfo="" PerHour="1" Value="30"
Default="0" ValidFrom="20.02.2012" ValidTo="18.02.2021"/>
<field name="CateringItemRate" ID="101" CateringItemID="1027"
ShortDescription="HAL" LongDescription="" WebEnabled="1"
ShortWebInfo="" LongWebInfo="" PerHour="0" Value="100"
Default="0" ValidFrom="20.02.2012" ValidTo="18.02.2021"/>
```

CateringItemRate

- a. CateringItemRateID
- b. CateringItemRateCateringItemID
- c. CateringItemRateShortDescription
- d. CateringItemRateLongDescription
- e. CateringItemRateShortWebInfo
- f. CateringItemRateLongWebInfo
- g. CateringItemRateWebEnabled
Is rate web enabled. 0 false, 1 true
- h. CateringItemRatePerHour
Is rate an hourly rate. 0 false, 1 true.
- i. CateringItemRateDefault
Is this rate default. 0 false, 1 true.
- j. CateringItemRateValue
- k. CateringItemRateValidFrom
- l. CateringItemRateValidTo

StandardMenu

- a. StandardMenuID
- b. StandardMenuLongDescription
the name of standard menu
- c. StandardMenuDescription
the additional description.
- d. StandardMenuShortWebInfo
- e. StandardMenuLongWebInfo
- f. StandardMenuWebEnabled
defines if the standard menu is web enabled. 0 false, 1 true
- g. StandardMenuMinimumAmount
- h. StandardMenuMaximumAmount
- i. StandardMenuServedPerPerson
defines if this menu is served per person. 0 false, 1 true
- j. StandardMenuArticleNumber
- k. StandardMenuChargedOnConsumption
defines if this menu is charged under consumption. 0 false, 1 true.
- l. StandardMenuCostPrice
- m. StandardMenuRate
the Menu Rate list of the standard menu. The response may contain multiple elements.

Menu rates are displayed as attributes

See also StandardMenuRate request

- a. ID
- b. StandardMenuID
- c. ShortDescription
- d. LongDescription
- e. ShortWebInfo
- f. LongWebInfo
- g. WebEnabled
- h. ValidFrom
- i. ValidTo
- j. Value
- k. CostPrice
- l. Default

For Example:

```
<field name="StandardMenuRate" ID="1002"
StandardMenuID="1006" ShortDescription="BAR"
LongDescription="Bar" ShortWebInfo="short web for rate for
bar" LongWebInfo="Long short web for rate for bar"
WebEnabled="1" ValidFrom="30.04.2013" ValidTo="27.09.2023"
Value="35" CostPrice="15" Default="1"/>
<field name="StandardMenuRate" ID="0" StandardMenuID="1006"
ShortDescription="" LongDescription="&lt;General Rate&gt;"
ShortWebInfo="Rate short web info" LongWebInfo=""
WebEnabled="1" ValidFrom="30.04.2013" ValidTo="29.04.2023"
Value="30" CostPrice="15" Default="0"/>
```

StandardMenuRate

- a. StandardMenuRateID
- b. StandardMenuRateStandardMenuID
- c. StandardMenuRateShortDescription
Outlet name.
- d. StandardMenuRateLongDescription
Returns the general rate or the outlet name if this rate is used for an outlet.
- e. StandardMenuRateShortWebInfo
- f. StandardMenuRateLongWebInfo
- g. StandardMenuRateWebEnabled
defines if the standard menu rate is web enabled. 0 false, 1 true
- h. StandardMenuRateDefault
defines if this rate is the default. 0 false, 1 true.
- i. StandardMenuRateValidFrom
- j. StandardMenuRateValidTo
- k. StandardMenuRateValue
- l. StandardMenuRateCostPrice

MenuItem

- a. MenuItemID
- b. MenuItemLongDescription
- c. MenuItemShortWebInfo
- d. MenuItemLongWebInfo
- e. MenuItemWebEnabled
defines if the menu item is web enabled. 0 false, 1 true

-
- f. MenuItemMinimumAmount
 - g. MenuItemMaximumAmount
 - h. MenuItemOrigin
 - i. MenuItemArticleNumber
 - j. MenuItemCostPrice
 - k. MenuItemPortion
 - l. MenuItemLeadDays
 - m. MenuItemAvailableFrom
 - n. MenuItemAvailableTo
 - o. MenuItemInclMenu
defines if the menu item is included when adding it to a standard menu
0 false, 1 true
 - p. MenuItemLongDescription2
 - q. MenuItemLongDescription3
 - r. MenuItemLongDescription4
 - s. MenuItemOrigin2
 - t. MenuItemOrigin3
 - u. MenuItemVintage
 - v. MenuItemDescription
 - w. MenuItemRate
the Menu item rates list. The response may contain multiple elements. The rates linked to the menu item are being displayed as attributes.
See also Menu ItemRate Request

- a. ID
- b. MenuItemID
- c. ShortDescription
- d. LongDescription
Returns the general rate or the outlet name if the rate is used for an outlet
- e. ShortWebInfo
- f. LongWebInfo
- g. WebEnabled
- h. Value
- i. ValidFrom
- j. ValidTo
- k. Default
- l. CostPrice

For Example:

```
<field name="MenuItemRate" ID="1189" MenuItemID="1062"
ShortWebInfo="" LongWebInfo="" WebEnabled="1" Value="4"
ValidFrom="20.05.2012" ValidTo="19.05.2023" Default="1"
CostPrice="0"/>
<field name="MenuItemRate" ID="1230" MenuItemID="1062"
ShortWebInfo="Short rate info for web" LongWebInfo=""
WebEnabled="1" Value="5" ValidFrom="20.05.2012"
ValidTo="19.05.2023" Default="0" CostPrice="0"/>
```

MenuItemRate

- a. MenuItemRateID
- b. MenuItemRateMenuItemID
- c. MenuItemRateShortDescription
the Outlet Name

-
- d. MenuItemRateLongDescription
Returns the general rate or the outlet name if this rate is used for an outlet
 - e. MenuItemRate ShortWebInfo
 - f. MenuItemRate LongWebInfo
 - g. MenuItemRate WebEnabled
 - h. MenuItemRateValue
 - i. MenuItemRate RateValidFrom
 - j. MenuItemRate RateValidTo
 - k. MenuItemRateDefault
 - l. MenuItemRateCostPrice

ConferenceBooking

- a. Booking_CompanyID
- b. Booking_ContactID
- c. Booking_ArrivalDate
- d. Booking_DepartureDate
- e. Booking_Name
- f. Booking_ConferenceStatus
- g. Booking_RoomStatus
- h. Booking_RoomStatusID
- i. Booking_ConferenceOnly
defines if the booking is for conference only, 0 false, 1 true
- j. Booking_RoomsOnly
defines if the booking is for rooms only, 0 false, 1 true
- k. Booking_ConferenceAndRooms
defines if the booking is for both: conference and guest rooms, 0 false, 1 true
- l. Booking_Notes
returns the first note entered on the booking – not longer used, please refer to the **Note request**
- m. Booking_NoOfAttendes
- n. Booking_MarketCode
- o. Booking_SourceCode
- p. Booking_NoteCategory
- q. Booking_ID
- r. Booking_ContactOnSite
- s. Booking_AccountManagerID
- t. Booking_AccountManagerCode
- u. Booking_MarketCodeID
- v. Booking_SourceCodeID
- w. Booking_ChannelCodeID
- x. Booking_ChannelCode
- y. Booking_ConferenceStatusID
- z. Booking_ConferenceManagerID
- aa. Booking_ConferenceManagerCode
- bb. Booking_DecisionDate
- cc. Booking_FollowupDate
- dd. Booking_CutoffDate
- ee. Booking_Infoboard
- ff. Booking_FunctionTypeID
- gg. Booking_FunctionTypeCode
- hh. Booking_CurrencyID

- ii. Booking_CurrencyCode
- jj. BookingEvent
the BookingEvent list. The response may contain multiple elements. The data of the BookingEvents is displayed as attributes "attr".

See also BookingEvent

- a. BookingID
- b. ID
- c. StatusID
- d. StatusCode
- e.TypeID
- f. TypeCode
- g. EventName
- h. NumberOfAttendees
- i. StartTime
- j. EndTime
- k. Infoboard
- l. BookingPackageID

For Example:

```
<field name="BookingEvent" BookingID="1411" ID="1797"
StatusID="4" StatusCode="DEF"TypeID="117" TypeCode="MET"
EventName="Meeting" NumberOfAttendees="50"
StartTime="29.02.2016 14:30:00" EndTime="29.02.2016 17:00:00"
Infoboard=" Sales Event" BookingPackageID="0"/>
<field name="BookingEvent" BookingID="1411" ID="1799"
StatusID="4" StatusCode="DEF"TypeID="106" TypeCode="REC"
EventName="Reception" NumberOfAttendees="2"
StartTime="29.02.2016 09:00:00" EndTime="01.03.2016 22:00:00"
Infoboard="" BookingPackageID="0"/>
<field name="BookingEvent" BookingID="1411" ID="1798"
StatusID="4" StatusCode="DEF"TypeID="117" TypeCode="MET"
EventName="Meeting" NumberOfAttendees="50"
StartTime="02.03.2016 09:00:00" EndTime="02.03.2016 12:00:00"
Infoboard="Sales Event" BookingPackageID="0"/>
```

- kk. Note
the Note list. The response may contain multiple elements. The data of the notes is displayed as attributes "attr". Please refer to the **Note Request**

- a. ID
- b. CategoryID
- c. CategoryCode
- d. Description
- e. Guest Viewable
- f. TableLinkedTo
the object (table, the note is linked to)

For example:

```
<field name="Note" ID="1395" CategoryID="5"
CategoryCode="BOO" Description="This is a booking note"
TableID="1425" TableLinkedTo="ConferenceBooking"
GuestViewable="1"/>
```

BookingPackage

Packages linked to a booking

- a. BookingPackageID
- b. BookingPackageConfigID
- c. BookingPackageConfigCode

- d. BookingPackageStartTime
- e. BookingPackageEndTime
- f. BookingPackageNumberOfAttendees
- g. BookingPackageRateValue
- h. BookingEvent

The response may contain multiple elements. The data of the linked events is displayed as attributes "attr".

- a. BookingID
- b. ID
- c. StatusID
- d. StatusCode
- e.TypeID
- f. TypeCode
- g. EventName
- h. NumberOfAttendees
- i. StartTime
- j. EndTime
- k. InfoBoard
- l. BookingPackageID

For example:

```
<field name="BookingEvent" BookingID="1425" ID="1823"
StatusID="4" StatusCode="DEF"TypeID="117" TypeCode="MET"
EventName="Meeting" NumberOfAttendees="20"
StartTime="22.02.2016 09:00:00" EndTime="22.02.2016 17:00:00"
Infoboard="" BookingPackageID="1287"/>
```

BookingEvent

Events linked to a booking

- a. BookingEventID
- b. BookingID
- c. BookingEventStatusID
- d. BookingEventStatusCode
- e. BookingEventTypeID
- f. BookingEventTypeCode
- g. BookingEventName
- h. BookingEventNumberOfAttendees
- i. BookingEventStartTime
- j. BookingEventEndTime
- k. BookingEventInfoboard
- l. BookingEventBookingPackageID
- m. EventFunctionSpace

The EventFunctionSpace listThe response may contain multiple elements. The data of linked function spaces is displayed as attributes "attr". Please refer also to

EventFunctionSpace

- a. ID
- b. EventID
- c. ConfigID
- d. ConfigCode
- e. ConfigSeatingID
- f. ConfigSeatingCode
- g. ConfigRateID
- h. ConfigRateCode

- i. SpaceStartTime
- j. SpaceEndTime
- k. RateValue

For Example:

```
<field name="EventFunctionSpace" ID="1759" EventID="1787"
ConfigID="1008" ConfigCode="Ball I" ConfigSeatingID="100"
ConfigSeatingCode="CLA" ConfigRateID="100"
ConfigRateCode="FUL" StartTime="28.02.2015 09:00:00"
EndTime="28.02.2015 12:00:00" RateValue="1200"/>
```

n. **EventCateringItem**

The EventCateringItem list. The response may contain multiple elements. The data of the EventCateringItem is displayed as attributes "attr". Please refer also to **EventCateringItem**

- a. ID
- b. EventID
- c. Name
- d. Description
- e. ConfigID
- f. ConfigName
- g. ConfigRateID
- h. ConfigRateCode
- i. StartTime
- j. EndTime
- k. Quantity
- l. RateValue

For Example:

```
<field name="EventCateringItem" ID="3140" EventID="1787"
ConfigID="1008" ConfigName="Overhead Projector"
CateringItemName="Overhead Projector" Description=""
ConfigRateID="0" ConfigRateRateCode="" StartTime="28.02.2015
09:00:00" EndTime="28.02.2015 12:00:00" Quantity="1"
RateValue="0"/>
```

o. **EventStandardMenu**

The EventStandardMenu list. The response may contain multiple elements. The data of the EventStandardMenu is displayed as attributes "attr". Please refer also to

EventStandardMenu

- a. ID
- b. EventID
- c. Name
- d. Description
- e. ConfigID
- f. ConfigName
- g. ConfigRateID
- h. ConfigRateCode
- i. StartTime
- j. EndTime
- k. MenuQuantity
- l. RateValue

For Example:

```
<field name="EventStandardMenu" ID="1699" EventID="1787"
ConfigID="1006" ConfigName="Menu I" Description=""
StandardMenuName="Menu I" ConfigRateID="1002"
ConfigRateCode="" StartTime="28.02.2015 09:00:00"
EndTime="28.02.2015 12:00:00" Quantity="20" RateValue="35"/>
```

-
- p. Note
the Note list. The response may contain multiple elements. The data of the notes is displayed as attributes "attr".
- a. ID
 - b. CategoryID
 - c. CategoryCode
 - d. Description
 - e. TableID
the Id of the record in the table to which the note is linked. In this example it is the booked event id
 - f. TableLinkedTo
the object to which the note is linked
 - g. GuestViewable
For Example:

```
<field name="Note" ID="1399" CategoryID="8"
CategoryCode="EVE" Description="This note is about the event"
TableID="1823" TableLinkedTo="BookingEvent"
GuestViewable="1"/>
```

EventFunctionSpace

Booked function spaces linked to an event

- a. EventFunctionSpaceID –required only for update requests in the condition
- b. EventFunctionSpaceEventID*
- c. EventFunctionSpaceConfigID or
- d. EventFunctionSpaceConfigCode* - either one is mandatory, the ID or the Code
- e. EventFunctionSpaceConfigSeatingID or
- f. EventFunctionSpaceConfigSeatingCode - either one is possible, the ID or the Code
- g. EventFunctionSpaceConfigRateID or
- h. EventFunctionSpaceConfigRateCode* - either one is mandatory, the ID or the Code
- i. EventFunctionSpaceStartTime – should be in the range of the event start and end time
- j. EventFunctionSpaceEndTime– should be in the range of the event start and end time
- k. EventFunctionSpaceRateValue – only required if different than the configured rate value, if not transmitted or blank the value of the configured Function Space Rate Value is taken
- l. Note
the Note list. The response may contain multiple elements. The data of the notes is displayed as attributes "attr".
 - a. ID
 - b. CategoryID
 - c. CategoryCode
 - d. Description
 - e. GuestViewable
For example:

```
<field name="Note" CategoryID="10" CategoryCode="REN"
Description="This is a resource note for function space"
GuestViewable="1" TableLinkedTo="EventFunctionSpace"/>
```

EventCateringItem

Booked catering items linked to an event

- a. EventCateringItemID – only required for update in the condition of the update request
- b. EventCateringItemEventID*

- c. EventCateringItemConfigID or
- d. EventCateringItemConfigCode* -either one ID or Code is mandatory
- e. EventCateringItemName – maximum 60 characters, only required if different than the configured Catering Item Name, if this field is not transmitted or with blank value, the configured Catering Item Name is used
- f. EventCateringItemDescription
- g. EventCateringItemConfigRateID or
- h. EventCateringItemConfigRateCode* - either one ID or Code is mandatory
- m. EventCateringItemStartTime– should be in the range of the event start and end time
- n. EventCateringItemEndTime– should be in the range of the event start and end time
- i. EventCateringItemQuantity*
- j. EventCateringItemRateValue - only required if different than the configured Catering Item Rate Value, if this field is not transmitted or with blank value the configured Catering Item Rate Value is used
- k. Note -the Note list, the response may contain multiple elements. The data of the notes is displayed as attributes “attr”.
 - a. ID- only required for update
 - b. CategoryID
 - c. CategoryCode
 - d. Description
 - e. TableID –the ID of the record in the table to which the note is linked to, in this case it is the catering item id
 - f. TableLinkedTo – the table to which the note is linked to
 - g. GuestViewable

For Example:

```
<field name="Note" ID="1400" CategoryID="10"
CategoryCode="REN" Description="This note is attached to the
function space" TableID="1787"
TableLinkedTo="EventFunctionSpace" GuestViewable="1"/>
```

EventStandardMenu

Booked Standard Menus linked to an event

- a. EventStandardMenuID
- b. EventStandardMenuEventID
- c. EventStandardMenuName
- d. EventStandardMenuDescription
- e. EventStandardMenuConfigID
- f. EventStandardMenuConfigName
- g. EventStandardMenuConfigRateID
- h. EventStandardMenuConfigRateCode
- i. EventStandardMenuStartTime
- j. EventStandardMenuEndTime
- k. EventStandardMenuQuantity
- l. EventStandardMenuRateValue
- m. StandardMenuMenuItem -The menu items of the standard menu, the response may contain multiple elements. The data of the StandardMenuMenuItem is displayed as attributes “attr”. Please refer also to **StandardMenuMenuItem**.
 - a. ID
 - b. StandardMenuID
 - c. EventID
 - d. ConfigID

- e. ConfigName
- f. LongDescription
- g. LongDescription2
- h. LongDescription3
- i. LongDescription4
- j. Description
- k. Origin
- l. Origin2
- m. Origin3
- n. Vintage
- o. ConfigRateID
- p. ConfigRateCode
- q. Quantity
- r. RateValue
- s. Included
- t. Course
- u. CourseOrder
- v. Portion
- w. FoodOrBeverage
- x. CostPrice

For Example:

```
<field name="StandardMenuMenuItem" ID="3491"
StandardMenuID="1700" EventID="1790" ConfigID="1005"
ConfigName="Parfait of coffee with oranges"
LongDescription="Parfait of coffee with oranges"
LongDescription2="" LongDescription3="" LongDescription4=""
Description="" Origin="" Origin2="" Origin3="" Vintage=""
ConfigRateID="0" ConfigRateCode="" Quantity="30"
RateValue="10" Included="1" Course="3" CourseOrder="0"
Portion="" FoodOrBeverage="1" CostPrice="5"/>
<field name="StandardMenuMenuItem" ID="3492"
StandardMenuID="1700" EventID="1790" ConfigID="1007"
ConfigName="&apos;Caesar Salad&apos; with Dijon-mustard
dressing" LongDescription="&apos;Caesar Salad&apos; with
Dijon-mustard dressing" LongDescription2="and roasted chicken
breast" LongDescription3="Third menu item name"
LongDescription4=" menu item name 4" Description="This is the
description&#xD;&#xA;" Origin="" Origin2="" Origin3=""
Vintage="" ConfigRateID="0" ConfigRateCode="" Quantity="30"
RateValue="10" Included="1" Course="1" CourseOrder="0"
Portion="" FoodOrBeverage="1" CostPrice="5"/>
<field name="StandardMenuMenuItem" ID="3493"
StandardMenuID="1700" EventID="1790" ConfigID="1008"
ConfigName="Red Snapper with red curry and limes"
LongDescription="Red Snapper with red curry and limes"
LongDescription2="fennel and rice" LongDescription3=""
LongDescription4="" Description="" Origin="" Origin2=""
Origin3="" Vintage="" ConfigRateID="0" ConfigRateCode=""
Quantity="30" RateValue="10" Included="1" Course="2"
CourseOrder="0" Portion="" FoodOrBeverage="1" CostPrice="5"/>
<field name="StandardMenuMenuItem" ID="3495"
StandardMenuID="1700" EventID="1790" ConfigID="1137"
ConfigName="Chateau Lafleur &apos;78"
LongDescription="Chateau Lafleur &apos;78"
LongDescription2="" LongDescription3="" LongDescription4=""
Description="" Origin="" Origin2="" Origin3="Bordeaux"
Vintage="1978" ConfigRateID="0" ConfigRateCode=""
```

```
Quantity="30" RateValue="10" Included="0" Course="0"
CourseOrder="0" Portion="" FoodOrBeverage="0" CostPrice="5"/>
```

n. Note

the Note list. The response may contain multiple elements. The data of the notes is displayed as attributes "attr".

- a. ID
- b. CategoryID
- c. CategoryCode
- d. Description
- e. TableID
the Id of the record in the table to which the note is linked. In this case the booked standard menu id
- f. TableLinkedTo
the resource to which the note is linked. In this case the booked standard menu ID
- g. GuestViewable

For Example:

```
<field name="Note" ID="1402" CategoryID="10"
CategoryCode="REN" Description="This note is attached to the
booked Standard Menu" TableID="1704"
TableLinkedTo="EventStandardMenu" GuestViewable="1"/>
```

StandardMenuMenuItem

Booked Menu items linked to a standard menu

- a. StandardMenuMenuItemID
- b. StandardMenuMenuItemStandardMenuID
- c. StandardMenuMenuItemEventID
- d. StandardMenuMenuItemConfigID
- e. StandardMenuMenuItemConfigName
- f. StandardMenuMenuItemLongDescription
- g. StandardMenuMenuItemLongDescription2
- h. StandardMenuMenuItemLongDescription3
- i. StandardMenuMenuItemLongDescription4
- j. StandardMenuMenuItemDescription
- k. StandardMenuMenuItemOrigin
- l. StandardMenuMenuItemOrigin2
- m. StandardMenuMenuItemOrigin3
- n. StandardMenuMenuItemVintage
- o. StandardMenuMenuItemConfigRateID
- p. StandardMenuMenuItemConfigRateCode
- q. StandardMenuMenuItemQuantity
- r. StandardMenuMenuItemRateValue
- s. StandardMenuMenuItemIncluded
- t. StandardMenuMenuItemCourse
- u. StandardMenuMenuItemPortion
- v. StandardMenuMenuItemFoodOrBeverage
- w. StandardMenuMenuItemCostPrice

4 Available search criteria by request type

BonusCard

- a. ProfileID
- b. BonusCardTypeWebEnabled
- c. MembershipNumber
- d. MembershipType

BonusStatement

- a. StatementCardID
- b. StatementProfileID
- c. StatementCardNumber
- d. StatementTransactionDate

Departments

- a. DepartmentCode
- b. DepartmentName
- c. DepartmentShortDesc

Reservation

- a. GuestFirstname
- b. GuestName
- c. RoomType
- d. RoomNum
- e. GuestArrival (Arrival date)
- f. GuestDeparture (Departure date)
- g. GuestNum (Reservation Number)
- h. ProfileID
- i. ReservationState - request version 1.1.0 and higher
Allowed values are:
 - 0 – Reservation - returns all future reservations and reservations which are checked in but not yet checked out
 - 1 - Checked In (checked in today reservations)
 - 2 - Checked Out (checked out today reservations)
 - 3 – Canceled
 - 4 - No Show
 - 5 - Offer
- j. ReservationStatus
The behavior is different and depends on the request version.
For request version prior 1.1.0 allowed values are:
 - 0 – Reservation - returns all future reservations and reservations which are checked in but not yet checked out
 - 1 - Checked In (checked in today reservations)

-
- 2 - Checked Out (checked out today reservations)
 - 3 - Canceled
 - 4 - No Show
- For request version 1.1.0 and higher allowed values are:
- 0 -tentative
 - 1 -definitive
 - 3 -not affecting availability
- k. CrsSystem
 - l. CrsResNumber
 - m. CompanyID
 - n. TravelAgentID
 - o. SourceID
 - p. BookerID
 - q. AccompanyingGuest – Same as ProfileID, but search also performed in the profiles linked to reservation
 - r. AccompanyingGuestLastName Last name of the accompanying guest
 - s. AccompanyingGuestFirstName First name of the accompanying guest
 - t. PartyID – ID of the party the reservation is attached to
 - u. Share – ShareID of the shared reservations
 - v. LastUpdateTime
 - w. CreationTime
 - x. Guest3rdPartyID and Guest3rdPartyType – must be used together. Available only with “Third Party Hotel Connector” or “CRS XML One Way” license.

Profile

- a. ProfileID
- b. GuestFirstname
- c. GuestName
- d. Name2
- e. ProfileType(1 - Company 2 - Individual 3 – Employee)
- f. ProfileCategory
(1=Company 2=Travel Agent 3=Source 4=Individual 5=Vendors 6=Meeting Planner)
- g. LoginName (Requires Suite8 webConnect or Suite8 Homepage CCM or CRS XML ONE/TWO WAY license)
- h. LoginPassword (Requires Suite8 webConnect or Suite8 Homepage CCM or CRS XML ONE/TWO WAY license). This is a Base64 encoded SHA1 hash of the real password
- i. ProfileGlobalID
- j. CentralSyncTime
- k. City
- l. ZIP
- m. CorporateID
- n. EMail
- o. ProfileExternalID
- p. Membership – membership number
- q. MembershipType
- r. Guest3rdPartyID and Guest3rdPartyType – must be used together. Available only with “Third Party Suite8 Central” or “CRS XML One Way” license.
- s. LastUpdateTime
- t. CreationTime

SystemDate

All conditions and fields list are ignored

SystemInfo

All conditions and fields list are ignored

AvailabilityForWeb

- a. GuestArrival (Arrival date)
- b. GuestDeparture (Departure date)
- c. Child – Number of children by category. Has to be used with conjunction with attribute "attr" which contains the required child type.
For Example `<field name="Child" attr="JUN">2</field>` means 2 juniors.
- d. NoOfAdults
- e. NoOfRooms
- f. RateCode
- g. RoomType
- h. WebOnly if the value is 1, only rates opened for web will be returned. Default value is 1
- i. MultipleRates – Needed only in conjunction with WebOnly = 1. If MultipleRates = 0, only the lowest rate will be returned. Default value is 0.
- j. GetRateWebInfo (if specified, RateWebInfo will be returned instead of RateInfo)
- k. ProfileID – Limits rates to profile linked rates. In case linked rates exist, WebOnly flag will be ignored.
- l. AvailabilityLimit – validates rates against defined availability limit. If AvailabilityLimit field contains value MFHP, the availability limit defined for Suite 8 webConnect is taken, otherwise the limit with the selected name will be used
- m. PricePerPerson – if specified, price break down per adult / child age category will be returned. Please note that package price will be returned without these details
- n. HotelSegmentCode - if specified, only room types which belong to the defined Segment Code, will be returned
- o. WebSalesCategory - if specified Web Sales category info for every rate will be returned

Posting

- a. PostingID
- b. ProfileID
- c. GuestNum
- d. DepartmentCode
- e. PostingDescription
- f. PostingDate
- g. PostingProfileOrigID
- h. PostingGuestNumOrig
- i. PostingComment
- j. PostingCheckNr

ChildrenCategories

- a. ChildrenCategoriesCode

CreditCardTypes

- a. CreditCardCode

HtmlInfo

- a. HtmlName
- b. HtmlParameter

All parameters are mandatory

SeatingArrangments

- a. SeatingID
- b. SeatingShortDesc

Event Info Board

- a. Eventid
- b. EventStartDate
- c. EventEndDate
- d. EventStatusIsDEF
- e. EventStatusIsDEFForTEN
- f. EventRoomID

Activity

- a. ActivityStartDate
- b. ActivityEndDate
- c. ActivityTypeID
- d. ActivityManagerID
- e. MaintenanceManagerID
- f. MaintenanceEstimatedDurationMin

Task

- a. TaskStartDate
- b. TaskEndDate
- c. TaskTypeID
- d. TaskManagerID

Group Template

- a. GroupTemplateID
- b. GroupTemplateName
- c. GroupTemplateContactID
- d. GroupTemplateInactive

Group

- a. GroupID
- b. GroupName
- c. GroupContactID
- d. GroupFrom
- e. GroupTo
- f. GroupTemplateID
- g. GroupInactive

BlockHeader

- a. BlockHeaderID
- b. BlockHeaderCode
- c. BlockHeaderName
- d. BlockHeaderFrom
- e. BlockHeaderTo
- f. BlockHeaderStatus
- g. BlockHeaderOpenForPickup

BlockDetail

- a. BlockHeaderID
- b. BlockDetailStartDate
- c. BlockDetailEndDate

CurrencyList

- a. CurrencyShortdesc
- b. CurrencyISO3
- c. CurrencyDepartment

HotelAvailability

The request should be performed using HotelAvailability type (see example)

- a. StartDate
- b. EndDate
- c. CalculateFO
- d. Overbooking
- e. CalculateDefinitive
- f. CalculateTentative
- g. CalculateOOO – Result will include Out of Orders and Out of service rooms figures
- h. BookingPosition – Result will include additional fields for Availability and Occupancy inclusive booking positions.

Overbooking

- a. OverbookingDate
- b. OverbookingType - 1 = House Overbooking 2 = Room Type Overbooking

Market

- a. MarketID
- b. MarketShortdesc
- c. MarketMainMarket – Short Description

MainMarket

- a. MainMarketID
- b. MainMarketShortdesc

RateList

- a. RateCode
- b. RateStartSell

-
- c. RateEndSell
 - d. RatePublic
 - e. RateWebEnabled

ReportList

- a. ReportID
- b. ReportSectionID
- c. ReportName
- d. ReportExternalID

ReportParameterList

- a. ReportID
- b. ReportSectionID
- c. ReportParameterName

ReportSectionList

- a. ReportSectionID
- b. ReportSectionParentID
- c. ReportSectionReportType

StatisticAndFuture (planned functionality only)

- a. Date
- b. GuestNum – reservation ID
- c. ExpArrivalTime
- d. ExpDepartureTime
- e. ResStatus - 0=tentative 1=definitive 3=not effecting availability
- f. NoAvailReason - 1 = Waitlist 2 = Offer 3 = Canceled 4 = No Show
- g. ProfileID
- h. CompanyID
- i. TravelAgentID
- j. SourceID
- k. IndividualID
- l. VendorID
- m. MeetingPlannerID
- n. GroupID
- o. BlockHeaderID
- p. RoomType

CalendarEvent

- a. CalendarEventFromDate
- b. CalendarEventToDate
- c. CalendarEventType - 0 = miscellaneous event 1 = availability event 2 = public holiday event 3= conference booking
- d. CalendarEventTypeShow - 0-show all;1-show diary; 2-show F4; 3-show CTRL-D; 4-show diary+F4; 5-show diary+CTRL-D; 6-show F4+CTRL-D
- e. CalendarEventTypeWebEnabled
- f. CalendarEventWebEnabled

VoucherArticles

- a. VoucherArticleID
- b. VoucherArticleName
- c. VoucherArticleWebEnabled

Voucher

- a. VoucherID
- b. VoucherArticleID
- c. VoucherProfileID
- d. VoucherNumber
- e. VoucherType
- f. VoucherPickupReservationID
- g. VoucherFinalized

BillingInstruction

- a. BillingInstructionID
- b. BillingInstructionReservationID – The BI item belongs to this Reservation
- c. BillingInstructionToReservationID - The BI routes to this reservation
- d. BillingInstructionFAID - The BI item belongs to this Financial Account
- e. BillingInstructionToFAID - The BI routes to this Financial Account
- f. BillingInstructionProfileID
- g. BillingInstructionBookingID - The BI item belongs to this Booking
- h. BillingInstructionBlockID - The BI item belongs to this Block

Package

- a. StartDate
- b. EndDate
- c. PackageCode
- d. PackageIncluded
- e. PackageShowInRes
- f. ExcludeRateCode – all packages attached to the specified rate will be excluded
- g. ExcludeBlockCode – all packages attached to the specified block will be excluded
- h. WebOnly

RoomType

- a. RoomTypeShortDesc

AvailableRooms

- a. ReservationNumber
- b. RemoteCheckinConfigCode

TableReservation

- a. TableReservationID
- b. TableReservationDate
- c. TableReservationStartTime – Data format HH:MM:SS
- d. TableReservationEndTime – Data format HH:MM:SS
- e. TableReservationRestaurantID
- f. ProfileID

- g. TableReservationGuestLastName
- h. TableReservationGuestFirstName
- i. Communication – any email / phone etc. Always searches for the substring. Not case sensitive
- j. RoomNum – Room number of the attached PMS reservation
- k. SeatingAt – Data format HH:MM:SS. To find out which reservation is actual on this time. Should work together with condition

TableAvailability

- a. StartDate - mandatory
- b. StartTime - mandatory
- c. EndTime
- d. Restaurant – Restaurant ID
- e. Persons
- f. Child - Number of children by category. Has to be used with conjunction with mandatory attribute "attr" which contains the required child type
For Example <field name="Child" attr="JUN">2</field> means 2 juniors.
- g. WebOnly – By default only Web Enabled restaurants are returned. If WebEnabled is 0, all restaurants will be returned
- h. AlternativeSuggestions – if multiple suggestions are required, this parameter can be set. So requester doesn't send a request for 5 time frames, but instead asking the interface to return suggestions. The Interface looks to the restaurant config and returns either intervals with 30 min difference or web enabled intervals

NoteCategory

All fields as described in **Fields available for selection by request type**, in the section NoteCategory can be used as optional conditions.

Note

All fields as described in **Fields available for selection by request type**, in the section Note can be used as optional conditions.

Conference and Catering: General available search criteria.

The fields mentioned under the chapter: **Fields available for selection by request type under Conference and Catering** can be used as optional conditions

All optional and mandatory parameters have to be defined as conditions in the conditions node.

For Example:

```
<fidelio Version="1.0.0">
  <request ID="25" UserName="XMLInterface" Password="REMOVED" PasswordEncrypted="true">
    <query ReqType="FunctionSpaceAvailability" TranslationTable="XML">
      <conditions>
        <condition name="FromTime" operation="eq">16.02.2015 12:27:00</condition>
        <link operator="AND">
          <condition>
            <condition name="ToTime" operation="eq">16.02.2015 12:27:09</condition>
            <link operator="AND">
              <condition>
                <condition name="Capacity" operation="eq">10</condition>
                <link operator="AND">
                  <condition>
                    <condition name="WebOnly" operation="eq">0</condition>
                    <link operator="AND">
                      <condition>
```

FunctionSpaceSeating

The optional parameter condition **WebOnly** can be used. The default value for this condition is 1 and returns all function space seatings marked as open for web, 0 returns all

FunctionSpaceRate

The optional parameter condition **WebOnly** can be used. The default value for this condition is 1 and returns function space rates marked as open for web, if the value is set to 0, all function space rates are returned

FunctionSpaceAvailability

The following parameter conditions are mandatory

- a. FromTime
- b. ToTime
- c. Capacity

The following parameter conditions are optional:

- a. WebOnly
the default value for this condition is 1, then all capacities for function spaces, marked as open for web are returned, if the condition is set to 0, all capacity are returned. The Capacity is taking effect on the FunctionSpaceRate and the FunctionSpaceSeating. 1 returns only rates and seatings open for the web, 0 returns all
- b. EventTypesCodes. Comma separated list of even types
- c. SeatingsCodes. Comma separated list of seatings
- d. PackagesCodes. Comma separated list of seating.
- e. HotelSegmentCodes. Comma separated list of hotel segments

ConferencePackagesList

The following parameter conditions are optional:

- a. WebOnly
1 is the default and returns conference packages marked as open for web. 0 returns all all conference packages. ConferencePackageEvents are affected as well with this parameter, if the condition is 1 then all events linked to the package and with an event type marked as open for web, are returned. If the condition is 0 all events linked to the package are returned

CateringItem

The optional paramter condition **WebOnly** can be used.

The default value for the condition is 1 and returns catering items marked as open for web, if it is set to 0 all catering items are returned. If the condition is used for fCateringItem, it affects the field CateringItemRate as well.

CateringItemRate

The optional parameter condition WebOnly can be used.

The default value for the condition is 1 and returns catering item rates marked as open for web, 0 returns all catering item rates

StandardMenu

The optional condition **WebOnly** can be used.

The default value for the condition is 1 and returns standard menus marked as open for web, 0 returns all standard menus

MenuItem

The optional parameter condition **WebOnly** can be used.

The default value for the condition is 1 and returns all menu items marked as open for web, 0 returns all menu items

ConferenceBooking

The fields described in the chapter **Fields available for selection by request type** under **Conference and Catering** can be used as optional conditions.

BookingPackage

The fields described in the chapter **Fields available for selection by request type**, in the section **Conference and Catering** can be used additionally as optional conditions.

BookingEvent

The fields described in the chapter **Fields available for selection by request type**, in the section **Conference and Catering** can be used additionally as optional conditions.

EventFunctionSpace

The fields described in the chapter **Fields available for selection by request type**, in the section **Conference and Catering** can be used additionally as optional conditions.

EventCateringItem

The fields described in the chapter **Fields available for selection by request type**, in the section **Conference and Catering** can be used additionally as optional conditions.

EventStandardMenu

The fields described in the chapter **Fields available for selection by request type**, in the section **Conference and Catering** can be used additionally as optional conditions.

StandardMenuMenuItem

The fields described in the chapter **Fields available for selection by request type**, in the section **Conference and Catering** can be used additionally as optional conditions.

5 Fields available to update / insert

The search conditions can include the same fields as for the regular search type. The following is the list of fields allowed to be changed:

BounsPoint

- a. Manual
- b. ReservationId
- c. PointType (0=% of total revenue 1=% of revenue per department code 2=per stay 3=for first stay 4=per night 5=redemption (payment rules with points))
- d. Arrival
- e. Departure
- f. Expiry
- g. MembersipValue
- h. MembersipType
- i. Points
- j. HotelId
- k. ProductId
- l. ProductQuantity
- m. Comment

For Example: inserting a bonus point into Bonuspointcard with value 2002_20091251

```
<insert ReqType="BonusPoint" Language="E"><fields>
<field name="Manual">1</field>
<field name="ReservationId">1732</field>
<field name="PointType">4</field>
<field name="Arrival">30.01.2019</field>
<field name="Departure">02.02.2019</field>
<field name="Expiry">30.01.2022</field>
<field name="MembersipValue" >2002_20091251</field>
<field name="MembersipType" >BPS</field>
<field name="Points">10</field>
<field name="HotelId">BER</field>
<field name="ProductId">Com</field>
<field name="ProductQuantity">10</field>
<field name="Comment">Inserted from SocketTest</field>
</fields></insert>
```

BonusPointRedemption

- a. MembersipValue
- b. MembershipType
- c. Points
- d. HotelId
- e. ProductId
- f. ProductQuantity
- g. Comment

Reservation

The Request requires at least one of the following licenses:

- XML Interface Standard Edition
- Suite8 webConnect
- XML Interface Enhanced Edition
- Suite8 Central
- XML Interface for Varibon/VariTable/JetWeb
- CRS XML ONE/TWO WAY

On reservations, some data, such as the rate, the room type the market code can change. To submit this type of data, each reservation field element can contain optional attributes, for example "startDate" and "endDate" indicating a date range for when the submitted data is valid. If the 'startDate' is omitted, the arrival date is taken. If the 'endDate' is omitted, the departure date is taken:

- a. RoomType (max 5 char)
- b. RoomNum (max 10 char)
- c. GuestArrival (Arrival date)
- d. GuestDeparture (Departure date)
- e. ReservationComment1 (max 100 char)
- f. ReservationComment2 (max 100 char)
- g. ProfileID
- h. PaymentMethod – the department code which is associated with the payment
- i. CrsSystem - Only for Insert- it is the ID of the CRS system where the reservation originates from (max 30 char)
- j. CrsResNumber - Only for Insert – This is the unique ID coming from the CRS System it is related to the field CrsSystem, to support multiple CRS systems. (max 30 char)
- k. NoOfRooms
- l. NoOfAdults
- m. RateCode
- n. RateValue
- o. ForeignRateValue
- p. CurrencyCode (This field can be different from the ISO Standard. Please refer to the Suite8 Configuration of the property)
- q. MarketCode
- r. CompanyID
- s. TravelAgentID
- t. SourceID
- u. BookerID
- v. ReservationAttribute – this must be used in conjunction with a mandatory attribute "attr" containing the required attribute type.
For Example `<field name="ReservationAttribute" attr="ABC"/>`
- w. Child – this must be used in conjunction with a mandatory attribute "attr" containing the required child type.
For Example `<field name="Child" attr="JUN"/>` for junior
- x. SourceCode
- y. ChannelCode
- z. Guarantee
- aa. GroupID

- bb. CreditCardNo – this is mandatory if there is any other credit card detail sent, such as number, CreditCardCode
- cc. ExpiryMonth – this is mandatory if there is any other credit card detail sent
- dd. ExpiryYear - this is mandatory if there is any other credit card detail sent
- ee. CardholderName (max 30 char) – this is mandatory if there is any other credit card detail sent
- ff. CreditCardCode – this is mandatory if there is any other credit card detail sent, such as credit card number, expiration date
- gg. ApprovalCode
- hh. ApprovalAmount
- ii. BlockCode. When attaching a block, the interface can be instructed to use the Market, Source and Channel code defined on the block. If this functionality is used, the element contains the attributes "UseMarket", "UseSource" and "UseChannel" with the value "1"
- jj. Notes - the Attribute "attr" must contain the note category (length is not limited)
- kk. OptionDate
- ll. PackageCode.

Following attributes are supported:

- Included (allowed values are 0 and 1)
- Price (if manual price is required)

When sending an update message and the attribute: 'addData' contains the string "DELETE", the package is detached. For Example:

```
<field name="PackageCode" Price="9.99" Included="1">ZB</field>
```

- mm. CustomField – the details of custom fields are not supported currently. Each field must contain an attribute "attr" with a field name. The data format depends on the defined field format. All date fields must use the format: 'dateTime'

For example

```
<field name="CustomField" attr="textfield">custom text</field>
```

```
<field name="CustomField" attr="doublefield">568.88</field>
```

```
<field name="CustomField" attr="integerfield">10</field>
```

```
<field name="CustomField" attr="datefield">25.05.2008 11:25:00.000 UTC-60</field>
```

- nn. Waitlist. If the value 1 is passed, for example:

```
<field name="Waitlist">1</field>
```

 – the reservation status is set to 'WaitList'. Only 1 is allowed. It is not possible to move a reservation to affective availability.
- oo. RateRoomType – room type used by rate calculation. I can also be specified per date
- pp. AllowHouseOverbooking - Only for Insert. This forces a reservation creation in the event that the House is overbooked. The User right under Reservation for 'House Overbooking' is then required for the XML Interface user.
- qq. AllowRoomOverbooking - Only for Insert. This forces a reservation creation even if the room type is overbooked. The User right under Reservation for 'Overbooking' is then required for the XML Interface user.
- rr. SendConfirmation -
Only for Insert. If this is present in the message, a confirmation letter will be sent. The Confirmation report is taken form the rate configuration on the XML Interface. Optional attributes of the message are:
TO – Recipient address. If not present, the email of the main reservation profile will be taken
CC – Carbon copy address
BCC – Blind carbon copy address
For example:

```
<field name="SendConfirmation" TO="name@example.com" CC="" BCC="">1</field>
```


ss. AccompanyingGuest – allows adding or removing the accompanying guest to or from the reservation. The profile ID should be send as a node value. If required, the age of the guest can be sent as an attribute "attr".

```
<field name="AccompanyingGuest" attr="6">1556</field>
```

in case of update, if Attribute addData contains a string "DELETE", the profile will be unlinked:

```
<field name="AccompanyingGuest" addData="DELETE">1556</field>
```

tt. ReservationPreference – The preference is specified as a mandatory attribute "attr". For example:

```
<field name="ReservationPreference" attr="NSM"></field>
```

In order to unlink the preference, the addtribute "addData" has to be set to "DELETE"

```
<field name="ProfilePreference" attr="NOS" addData="DELETE"/>
```

uu. Policy – The short description of the Policy. If this is empty, the Policy will be removed from the reservation

Profile

The Request requires at least one of the following licenses:

- XML Interface Standard Edition
 - Suite8 webConnect
 - XML Interface Enhanced Edition
 - Suite8 Central
 - XML Interface for Varibon/VariTable/JetWeb
 - CRS XML ONE/TWO WAY
 - a. GuestFirstname (max 35 char)
 - b. GuestName (max 35 char)
 - c. Name2 (max 35 char)
 - d. ProfileType Only for Insert (1 - Company 2 - Individual 3 – Employee)
 - e. ProfileCategory
Only for Insert (1=Company,2=Travel Agent,3=Source,4=Individua,5=Vendors, 6=Meeting Planner)
 - f. Title
 - g. AddressGreeting (max 30 char)
 - h. LetterGreeting (max 30 char)
 - i. Birthday
- The following fields for address updates insert or deletions are supported.
- j. City (max 30 char)
 - k. Street1 (max 60 char)
 - l. Street2 (max 60 char)
 - m. Street3 (max 60 char)
 - n. ZIP (max 15 char)
 - o. State – In case of profile insert or if updating both: state and country, this field must be sent after Country filed in the XML element sequence.
 - p. CountryISO2
 - q. CountryISO3
 - r. Addresses
 - s. PrimaryAddr: is address primary
 - t. CreateBonusCard

To delete a complete address use the field name Address.
 The attribute attr must contain "DELETE" and addDate the id of address.
 For Example

```
<field name="Address" attr="DELETE" addData="3434"></field>
```

To add an address, the field name PrimaryAddr must be used in combination with the name fields for Street1, City etc.. Use the attribute addDate to group the address together. -1 for first address to add, -2 for second address to add etc..
 Use the attribute attr for the address type.

For Example: adding 2 addresses to a profile.

```
<fields>
  <field name="PrimaryAddr" attr="ADR" addData="-1">111</field>
  <field name="Street1" attr="ADR" addData="-1">MainStreet</field>
  <field name="City" attr="ADR" addData="-1">Anytown</field>
  <field name="PrimaryAddr" attr="BIL" addData="-2">111</field>
  <field name="Street1" addData="-2">MainStreet</field>
  <field name="City" addData="-2">Anytown</field>
</fields>
```

Response

```
<response ID="15" Status="OK">
<updateResponse>
  <rows>
    <row>
      <fields>
        <field name="ProfileID">30621</field>
        <field name="Address" initID="-1"
newID="3456"/>
        <field name="Address" initID="-2"
newID="3457"/>
      </fields>
    </row>
  </rows>
</updateResponse>
</response>
```

To update an address use the attribute addDate to group by address id.
 For Example:

```
<fields>
  <field name="PrimaryAddr" attr="ADR"
addData="3456">0</field>
  <field name="Street1" attr="ADR" addData="3456">Update the
street2.</field>
  <field name="City" attr="ADR"
addData="3456">UpdateCity.</field>
</fields>
```

To insert a bonus card into the profile with membership type BPS and profile ID

For Example:

```
<update ReqType="Profile"><conditions><condition name="ProfileID"
operation="eq">1471</condition></conditions><fields><field
name="CreateBonusCard">BPS</field></fields></update>
```

The following fields for communication are supported:

- u. Telephone (max 60 char)
- v. Email (max 60 char)
- w. Fax (max 60 char)
- x. Communication (max 60 char)

All operations for updating or deleting communications require the communication ID. It can be retrieved using the query message. The ID and the ID of the new created communication are also returned within an insert / update message response.

For Example

```
<?xml version="1.0" encoding="utf-8" ?><fidelio Version="1.1.0">
<response ID="{0D30FACF-6454-462C-93CE-8E69C4BD0712}" status="OK">
<updateResponse>
<rows>
<row>
<fields><field name="ProfileID">1526</field><field
name="Communication" newID="1287"/></fields>
</row>
</rows>
</updateResponse>
</response>
</fidelio>
```

Communication fields support the following:

In order to delete the Communication, the attribute "attr" should contain the string "DELETE", the attribute "addData" must contain a communication ID

In order to update the Communication, the attribute "attr" should contain a communication type, the attribute "addData" must contain a communication ID, the attribute Primary may contain a Primary communication indicator.

For Example: Request to add, update and delete a communication.

```
<update ReqType="Profile" TranslationTable="XML">
  <conditions>
    <condition name="ProfileID"
operation="like">30621</condition>
  </conditions>
  <fields>
    <field name="Communication" attr="WEB"
Primary="1">www.example.com</field>  ADD
    <field name="Email"
addData="2283">name@example.com</field>  Update
    <field name="Telephone" attr="DELETE" addData="2290"/>
Delete
  </fields>
</update>

Response

<response ID="15" Status="OK">
  <updateResponse>
    <rows>
      <row>
        <fields>
          <field name="ProfileID">30621</field>
```

```

newID="2291"/>
</fields>
</row>
</rows>
</updateResponse>
</response>

```

- y. Gender (M – male, F – Female)
- z. DeleteCode (0 –profile is active 1 – profile is not active)
- aa. NationalityISO2
- bb. NationalityISO3
- cc. Language
- dd. LoginName - only for Insert (max 20 char) (Requires Suite8 webConnect or Suite8 CCM Homepage or CRS XML ONE/TWO WAY license)
- ee. LoginPassword (the length is not limited because the system calculates and stores only hash code, so the stored length is always the same) (Requires the Suite8 webConnect or CCM Homepage or CRS XML ONE/TWO WAY license)
- ff. CreditCardNo
- gg. ExpiryMonth
- hh. ExpiryYear
- ii. CardholderName (max 30 char)
- jj. CreditCardCode
- kk. TryToMerge Only for Insert
Values 1 - true, 0 – false
If the value is 1, the XML interface searches for existing profiles with similar data (according to the profile merge setup in Suite8)
- ll. TryToGlobalize Only for Insert
(Requires Third Party Suite8 Central license)
Values 1 - true, 0 – false
If the value is 1, the XML interface searches existing profiles with similar data (according to the profile merge setup in Suite8). If a profile is found, then it is merged if not a new record is created. A GlobalID is assigned to the profile and returned in the response message
- mm. CreditStatus - empty=normal 'C'=cash only' 'B'=blacklist 'A'=City ledger authorization
- nn. CreditReason (max 60 char)
- oo. CreditStatusChangeTime
- pp. Notes (length is not limited)
Use the attribute noteID for the id of the note. The attribute ""addData"" is used to determine if the note is guest viewable or not. Use attribute Delete=""1"" to delete a note record.

For Example: Request to add, update and delete notes.

```

<update ReqType="Profile" TranslationTable="XML">
<conditions>
  <condition name="ProfileID"
operation="like">30495</condition>
</conditions>
  <fields>
    <field name="Notes" attr="PRF">New note</field>
    <field name="Notes" attr="PRF" addData="0"
noteID="1508">Update Me</field>
    <field name="Notes" noteID="1500" Delete="1"/>
  </fields>

```

```
</update>
```

```
Response
```

```
<response ID="15" Status="OK">
```

```
<updateResponse>
```

```
  <rows>
```

```
    <row>
```

```
      <fields>
```

```
        <field name="ProfileID">30495</field>
```

```
        <field name="Note" newID="1513"/>
```

```
      </fields>
```

```
    </row>
```

```
  </rows>
```

```
</updateResponse>
```

```
</response>
```

qq. BirthPlace (max 30 char)

rr. Department (max 60 char)

ss. Position (max 60 char)

tt. Membership.

The attribute "attr" always contains the card ID. If this is submitted, the card is added to the profile.

In order to delete the card attribute "addData" should contain the value DELETE.

Additional attributes which could be used dependant on the card type are:

Level, Type, StartDate, ExpiryDate, SignupDate, TaxOffice

For Example:

```
<field name="Membership" Type="CON" StartDate="01.01.2007"
```

```
TaxOffice="Anytown">123456</field>
```

uu. ProfileExternalID – If the field is specified in the insert message, and the same ProfileExternalID already exists in the DB and the option 'TryToMerge' field is used, the interface will merge the profiles. Otherwise the request will be ignored and the ID of the existing profile will be returned.

vv. ProfileAttribute – this must be used in conjunction with a mandatory attribute "attr" containing the required attribute type.

In order to delete the attribute, the element "addData" should contain the string "DELETE".

ww. ProfilePreference – The preference is specified as a mandatory attribute "attr". For example:

```
<field name=" ProfilePreference" attr="NOS"/>
```

In order to unlink the preference, the attribute "addData" has to be set to "DELETE"

```
<field name=" ProfilePreference" attr="NOS" addData="DELETE"/>
```

xx. Guest3rdPartyID – ID of the guest in the 3rd party system. This must be used in conjunction with the attribute "attr" containing the code of the CRS system. Available only with the licenses: "Third Party Suite8 Central" or "CRS XML One Way".

yy. PersonalDocument

The attribute "attr" always contains the document ID. If this is submitted, the document will be added to the profile.

The node value of the element must contain the document number with a maximum length of 30 characters

In order to delete the document the attribute "addData" should contain the value DELETE.

Additional supported attributes are:

- a. Type – Document type
- b. Name (maximum 30 characters)
- c. CountryISO2

-
- d. CountryISO3
 - e. NationalityISO2
 - f. NationalityISO3
 - g. ValidFrom
 - h. ValidTo
 - i. IssuedBy (maximum 30 characters)
 - j. PlaceOfIssue (maximum 30 characters)
 - k. IssuerCountryISO2
 - l. IssuerCountryISO3
 - m. IssuerState
 - n. FatherName (maximum 30 characters)
 - o. MotherName (maximum 30 characters)
 - p. RegCity (maximum 30 characters)
 - q. RegMunicipality (maximum 30 characters)
 - r. RegStreet (maximum 30 characters)
 - s. BornInISO2
 - t. BornInISO3
 - u. BornState
 - v. BirthPlace (maximum 30 characters)
- For Example : `<field name="PersonalDocument" attr="REI" Name="Smith" CountryISO2="DE" NationalityISO2="DE" ValidFrom="01.01.2004" ValidTo="01.01.2014" IssuedBy="Issuer">123456</field>`
- ww. AddProfileLink.
The following attributes are required:
 - a. ProfileID or ProfileGlobalID
 - b. Attr – role
 - c. addData – defines if this link is primary. Allowed values 1(true) or 0(false)
 - xx. DeleteProfileLink
The following attributes are required:
 - a. ProfileID or ProfileGlobalID
 - yy. EditProfileLink
The following attributes are required:
 - a. ProfileID or ProfileGlobalID
 - b. attr – role
 - c. addData – defines if this link is primary. Allowed values are 1=true or 0=false
 - zz. CustomField –Each field must contain the attribute “attr” with the field name. The data format depends on the defined field format. All Date fields must use DateTime format
For Example

```

<field name="CustomField" attr="textfield">custom text</field>
<field name="CustomField" attr="doublefield">568.88</field>
<field name="CustomField" attr="integerfield">10</field>
<field name="CustomField" attr="datefield">25.05.2008
11:25:00.000 UTC-60</field>

```
 - aaa.NoMailing - acceptable values are 1= true/0=false
 - bbb. NoEMailing - acceptable values are 1= true/0=false
 - ccc. GuestComment – Updating / Inserting Guest Comments
If the attribute “addData” contains the comment ID, the comment is updated, if not a new comment is inserted. The ID of the inserted comment is returned in the response message. The attribute “attr” should contain the comment type, the attribute Date – the comment date.
For Example

```
<field name="GuestComment" addData="1216" attr="COM"
Date="20.11.2014">This is the comment</field>
```

In order to delete a comment, the attribute “addData” should contain the value DELETE and the “comment ID” in the “attr”

For Example

```
<field name="GuestComment" addData="DELETE"
attr="1216"></field>.
```

ddd. StorePrivateData – Updating / Inserting De-identification Status
acceptable values are 0 = Normal, 1 = Store private Data

Guest De-identification

- ProfileID – Updating, to be used to de-identify guest profiles

Fields in response are:

-De-identificationStatus

0 = already de-identified

1 = flagged as permanent

2 = has Activity

3 = success

4 = other failure

5 = not an individual profile

- De-identificationMessage

Voucher

The Request requires at least one of the following licenses:

- XML Interface Standard Edition
- XML Interface Enhanced Edition
- Suite8 Central
- Voucher Management
 - a. VoucherArticleID – mandatory, for Insert only
 - b. VoucherProfileID - mandatory
 - c. VoucherDescription
 - d. VoucherText
 - e. VoucherValidFrom
 - f. VoucherValidUntil
 - g. VoucherDedication
 - h. VoucherOnHoldReason

Note: The voucher amount is taken based on the voucher type setup and cannot be changed.

Profile Merge

Since Suite8 Version 8.8.3.2 Profile Merge is available for Suite8 XML Interface. The merge is based on the defined local merge rule in the Suite8 Configuration. The following is an example of a profile update message:

```
<?xml version="1.0" encoding="UTF-8"?>
<fidelio xmlns="V8XMLInterface"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="V8XMLInterface"
<request ID="55555" UserName="XMLInterface" Password="xxx">
<update ReqType="Profile">
<fields>
<field name="MergeTo">921056</field>
</fields>
```

```

<conditions>
<condition name="ProfileID" operation="eq"
xsi:type="ProfileConditionType">921051</condition>
</conditions>
</update>
</request>
</fidelio>

```

All profiles returned by these conditions (might be multiple) will be merged to the one specified as 'MergeTo'. If the field list contains the field 'MergeTo', all other fields are ignored.

ProfileAndReservation

The Request requires at least one of the following licenses:

- XML Interface Standard Edition
- Suite8 webConnect
- XML Interface Enhanced Edition
- Suite8 Central
- XML Interface for Varibon/VariTable/JetWeb
- CRS XML ONE/TWO WAY

This request accepts all fields from the BounsPoint

- n. Manual
- o. ReservationId
- p. PointType (0=% of total revenue 1=% of revenue per department code 2=per stay 3=for first stay 4=per night 5=redemption (payment rules with points))
- q. Arrival
- r. Departure
- s. Expiry
- t. MembersipValue
- u. MembersipType
- v. Points
- w. HotelId
- x. ProductId
- y. ProductQuantity
- z. Comment

For Example: inserting a bonus point into Bonuspointcard with value 2002_20091251

```

<insert ReqType="BonusPoint" Language="E"><fields>
<field name="Manual">1</field>
<field name="ReservationId">1732</field>
<field name="PointType">4</field>
<field name="Arrival">30.01.2019</field>
<field name="Departure">02.02.2019</field>
<field name="Expiry">30.01.2022</field>
<field name="MembersipValue" >2002_20091251</field>
<field name="MembersipType" >BPS</field>
<field name="Points">10</field>
<field name="HotelId">BER</field>
<field name="ProductId">Com</field>
<field name="ProductQuantity">10</field>
<field name="Comment">Inserted from SocketTest</field>
</fields></insert>

```

BonusPointRedemption

- i. MembershipValue
- j. MembershipType
- k. Points
- l. HotelId
- m. ProductId
- n. ProductQuantity
- o. Comment
- p. Manual

Reservation and the Profile insert messages. It creates both profile and reservation referencing to this profile. The Response message contains the ID of the created reservation as well as the profile ID. For more details please refer to the example of the insert BounsPoint

- aa. Manual
- bb. ReservationId
- cc. PointType (0=% of total revenue 1=% of revenue per department code 2=per stay 3=for first stay 4=per night 5=redemption (payment rules with points))
- dd. Arrival
- ee. Departure
- ff. Expiry
- gg. MembershipValue
- hh. MembershipType
- ii. Points
- jj. HotelId
- kk. ProductId
- ll. ProductQuantity
- mm. Comment

For Example: inserting a bonus point into Bonuspointcard with value 2002_20091251

```
<insert ReqType="BonusPoint" Language="E"><fields>
<field name="Manual">1</field>
<field name="ReservationId">1732</field>
<field name="PointType">4</field>
<field name="Arrival">30.01.2019</field>
<field name="Departure">02.02.2019</field>
<field name="Expiry">30.01.2022</field>
<field name="MembershipValue" >2002_20091251</field>
<field name="MembershipType" >BPS</field>
<field name="Points">10</field>
<field name="HotelId">BER</field>
<field name="ProductId">Com</field>
<field name="ProductQuantity">10</field>
<field name="Comment">Inserted from SocketTest</field>
</fields></insert>
```

BonusPointRedemption

- q. MembershipValue
- r. MembershipType
- s. Points
- t. HotelId
- u. ProductId
- v. ProductQuantity
- w. Comment
- x. Manual

Reservation and insert Profile messages available under XML Interface Specifications.

FinancialAccount

The Request requires at least one of the following licenses:

- XML Interface Standard Edition
- Suite8 webConnect
- XML Interface Enhanced Edition
 - a. ProfileID
 - b. MarketCode
 - c. FANumber
 - d. FAGroup – optional parameter. It is ignored if FANumber is specified. If group configuration has AUTONUMBER flag, then new financial account with auto number will be created.
 - e. FADescription (maximum 30 characters)
 - f. ExpArrival
 - g. ExpDeparture
 - h. ActArrival
 - i. ActDeparture
 - j. CreditLimitType
 - k. CreditLimitAmount

Activity

The Request requires at least one of the following licenses:

- XML Interface Standard Edition
- MyCCM Homepage
- Suite8 webConnect
- XML Interface Enhanced Edition
- Suite8 Central
 - a. ActivityCompanyID
 - b. ActivityCompanyGlobalID
 - c. ActivityContactID
 - d. ActivityContactGlobalID
 - e. ActivityManagerID
 - f. ActivityManagerGlobalID
 - g. ActivityTypeID
 - h. ActivityAllDayID
 - i. ActivityShowasID

-
- j. ActivityReminderID
 - k. ActivityNeedReminder
 - l. ActivityPrivate
 - m. ActivityDescription (max 60 char)
 - n. ActivityStartDateTime
 - o. ActivityEndDateTime
 - p. ActivityCompletedDate
 - q. ActivityLinkedBookingId
 - r. ActivityLinkedCommunicationID
 - s. ActivityCheckAvailability
 - t. ActivityNotes (length is not limited)

Task

The Request requires at least one of the following licenses:

- XML Interface Standard Edition
- MyCCM Homepage
- Suite8 webConnect
- XML Interface Enhanced Edition
- Suite8 Central
 - a. TaskCompanyID
 - b. TaskCompanyGlobalID
 - c. TaskContactID
 - d. TaskContactGlobalID
 - e. TaskManagerID
 - f. TaskManagerGlobalID
 - g. TaskTypeID
 - h. TaskDescription (maximum 60 characters)
 - i. TaskStartDate
 - j. TaskEndDate
 - k. TaskCompletedDate
 - l. TaskLinkedBookingID
 - m. TaskLinkedCommunicationID
 - n. TaskStatusID
 - o. TaskPriorityID
 - p. TaskCompletedPercentageID
 - q. TaskNotes (length is not limited)

Group Template

The Request requires at least one of the following licenses:

- XML Interface Standard Edition
- XML Interface Enhanced Edition
- Suite8 Central
 - a. GroupTemplateName (maximum 60 characters)
 - b. GroupTemplateContactID
 - c. GroupTemplateComment (not limited)
 - d. GroupTemplateInactive
 - e. CountryISO2
 - f. CountryISO3

- g. Language
- h. State

Group

The Request requires at least one of the following licenses:

- XML Interface Standard Edition
- XML Interface Enhanced Edition
- Suite8 Central
 - a. GroupName (maximum 60 characters)
 - b. GroupContactID
 - c. GroupFrom
 - d. GroupTo
 - e. GroupTemplate
 - f. GroupTemplateID
 - g. GroupInactive
 - h. GroupComment (maximum 200 characters)
 - i. CountryISO2
 - j. CountryISO3
 - k. Language
 - l. State

CreditCardApproval (Insert only)

The Request requires at least one of the following licenses:

- XML Interface Standard Edition
- XML Interface Enhanced Edition
 - a. GuestNum (Reservation number)
 - b. CreditCardNo
 - c. ExpiryMonth
 - d. ExpiryYear
 - e. CardholderName (max 30 char)
 - f. CreditCardCode
 - g. ApprovalCode
 - h. ApprovalAmount

HurdleRate

The Request requires at least one of the following licenses:

- Hurdle Rates XML Interface

The available method for this request is: update only

The system updates existing records and inserts a new record if there is no record found for the combination of "Day", "Length of Stay" and "Room type":

- a. RoomType
- b. GuestArrival – Arrival Date
- c. HurdleLOS - the Length of Stay. If no explicit LOS is given, the reservation days with LOS = 0 are added up to a hurdle value
- d. HurdleRateAmount – the amount which should be exceeded for the given arrival date and Length of Stay to pass the hurdle
- e. HurdleDelta – the variation of the hurdle rate each time a reservation is made. If the Length of Stay is not "0", this is not allowed

-
- f. HurdleClosed – the value 1 defines: Closed for this arrival day and this length of stay
 - g. HurdleMaxRateAmount- Maximum amount of the hurdle rate

Overbooking

The Request requires at least one of the following licenses:

- XML Interface Enhanced Edition
- Hurdle Rates XML Interface

The system will update existing records and insert a new record if no record is found for this combination of Day and Room type

- a. RoomType
- b. OverbookingDate
- c. OverbookingType - 1 = House Overbooking 2 = Room Type Overbooking
- d. OverbookingNoOfRooms - Number of Rooms for this overbooking

BAR

The Request requires at least one of the following licenses:

- Hurdle Rates XML Interface

The available method for this request is: update only

The system will update existing records and insert a new one if the record for this combination of Day, Length of Stay and BAR code is not found.

- a. BarCode
- b. RoomType
- c. GuestArrival – Arrival Date
- d. BARLOS - Length of Stay for this BAR Code
- e. BarDeleteDay – If included in the request, all BAR records for selected day for all lengths of stay will be deleted

BillingInstruction

The Request requires at least one of the following licenses:

- XML Interface Standard Edition
- XML Interface Enhanced Edition
- Suite8 Central
- XML Interface for Varibon/VariTable/JetWeb
 - a. BillingInstructionFromDate
 - b. BillingInstructionToDate
 - c. BillingInstructionReservationID – The BI item belongs to this Reservation
 - d. BillingInstructionToReservationID - The BI routes to this reservation
 - e. BillingInstructionFAID - The BI item belongs to this Financial Account
 - f. BillingInstructionToFAID - The BI routes to this Financial Account
 - g. BillingInstructionProfileID
 - h. BillingInstructionBookingID - The BI item belongs to this Booking
 - i. BillingInstructionBlockID - The BI item belongs to this Block
 - j. BillingInstructionNote
 - k. BillingInstructionVideoCheckout
 - l. BillingInstructionBillView
 - m. BillingInstructionDelete – if this field is present in the request, the billing instruction will be deleted

- n. BillingInstructionDepartment – this element is in the request for each included department code and for each element a mandatory attribute “attr” is required with the following values: 1 = include, 2 = exclude, 3 = all postings included (used for Master Share)
For example:
`<field name="BillingInstructionDepartment" attr="1">260</field>`
- o. BillingInstructionGroup – the element is repeated per included group. Each element requires the mandatory attribute “attr” with the following values: 1 = include, 2 = exclude, 3 = all postings included (used for Master Share)
For example:
`<field name="BillingInstructionGroup" attr="1">AL</field>`
- p. BillingInstructionDelete – if this field is in the request, the billing instruction will be deleted. For example:
`<update ReqType="BillingInstruction"><fields>
<fieldname="BillingInstructionDelete">1</field></fields><conditions><condition name="BillingInstructionID"
operation="eq">4630</condition>
</conditions>
</update>`

If at least one element “BillingInstructionDepartment” or “BillingInstructionGroup” exists in the update request, the values in the request overwrite existing lists (the values provided in the request will be deleted)

Table Reservation

The Request requires at least one of the following licenses:

- Suite8 webConnect
- XML Interface Enhanced Edition
- Table Reservation license
 - a. RestaurantID
 - b. Date
 - c. StartTime
 - d. EndTime
 - e. NumberOfPerson
 - f. Description
 - g. ReservationID – links a new PMS reservation to the table reservation. There can be multiple elements in the same message.
 - h. ProfileID - links a profile to the table reservation. There can be multiple elements in the same message
 - i. TableNumber – adds a table to the table reservation. There can be multiple elements in the same message
 - j. TableList - comma separated list of all tables. If there are tables assigned to the reservation, they will be removed.
 - k. Sharable
 - l. Seated – flags the reservation as seated. The “seated” time is set to the current time.
 - m. SeatedTime – flags the reservation as seated. The “seated time” is set as content of the field. Data format HH:MM:SS
 - n. Left – flags the reservation as left. The “Left” time is set to the current time
 - o. LeftTime – flags the reservation as left. The “Left” time is set as content of the field. Data format HH:MM:SS
 - p. CrsSystem – the name of the submitting CRS system

- q. Child – the number of children by category. This has to be used in conjunction with the attribute "attr" containing the required child type
- r. Cancel – if this is submitted in the update request, the table reservation is cancelled
- s. WaitList – if the value is 1, the reservation is set to the status wait list. In the update message, if the value is set to 0, the reservation status is set to "Definite"
- t. WaitListIfFull – if this is submitted and the value is 1, then a definitive reservation is not possible, the reservation is moved to the status wait list. The Response message contains an element "WaitList" indicating the reservation status

Postings

The Request requires at least one of the following licenses:

- XML Interface Standard Edition
- XML Interface Enhanced Edition
- XML Interface for Varibon/VariTable/JetWeb
- Hurdle Rates XML Interface

There are two ways to submit CRM postings:

1. Using reservation ID (field GuestNum)
2. Using Room number / Financial account number (using field RoomNum)

Please note that the fields GuestNum and RoomNum cannot be used together.

The system works as follows way:

- If the request contains the field GuestNum system submits the posting for the specified reservation
- If the request contains the field RoomNum system tries to find financial account with specified number. If the find is failed, the it is looking for the checked in reservation with the specified room number

The system also accepts only one the two parameters 'DepartmentCode' or 'ArticleCode'. They can not be used together.

If more than one crm_posting element is detected in the message, all crm_posting elements are considered as belonging to the same posting (e.g. split details). The posting sum up amount will be equal to the sum of all details.

For the details on the acceptable fields, please refer to the schema (FidelioXML.xsd)

Cancellation of reservations

The Request requires at least one of the following licenses:

- Suite8 webConnect
- XML Interface Enhanced Edition
- Suite8 Central Cross Reservations and Availability

For cancelling reservations, the command -> cancel is used.

- a. GuestNum– reservation id to cancel
- b. Reason– text description
- c. DeleteTraces– pass 1 for deleting traces attached to the reservation
- d. SendEmail– pass 1 for sending cancelling via Email

Note

- a. NoteTableLinkedTo*

The object type to which the notes are linked, the following values are accepted:

- a. ConferenceBooking
 - b. BookingEvent
 - c. EventStandardMenu
 - d. EventCateringItem
 - e. EventFunctionSpace
 - f. Reservation
 - g. Profile
 - h. BlockHeader
 - i. TableReservation
- b. NoteTableID*
- The table ID of the table which the note is linked
- c. NoteDescription*
- d. NoteCategoryCode*
- e. NoteCategoryID or NoteCategoryCode has to be passed
- f. NoteGuestViewable*
- Defines if the note can be viewed by the customer, then the value is 1 or if it is used internally, then the value is 0

Conference and Catering General

In the Conference and Catering Module of Suite8 the following request types are available for Insert, Update and Delete:

Insert:

- Main XML request
- Attributes of a main XML request

Update:

- Main XML request with condition and XML ID as parameter
- As attributes of a main XML using XML ID field

Delete:

The following delete command can be used for some of the CCM Resources:

```
<fields><field name="Command">DELETE</field> </fields>
```

Delete operations are restricted to the following fields or their attributes used in a main Event of a Conference Booking:

- a. EventCateringItem
- b. EventFunctionSpace
- c. EventStandardMenu
- d. StandardMenuMenuItem

Delete operations are not allowed in CCM for Conference Bookings or Booking Events.

Cancellation of Conference Bookings or Events is driven by changing the status, such as a cancelled or a lost status, depending on the configured status of the property. For further details, please refer to the Conference and Catering Request and Response examples in this document.

The following example is an update of a main request using events attributes:

```
<fidelio Version="1.0.0">
<request ID="15" UserName="s" Password="s" PasswordEncrypted="false">
<update ReqType="ConferenceBooking" TranslationTable="XML">
  <conditions>
    <condition name="Booking_ID" operation="eq">1428</condition>
  </conditions>
  <fields>
    <field name="Booking_Name"> I updated the booking
name</field>
```

```

<field name="BookingEvent" ID="1840" StatusID="4" StatusCode="DEF"
TypeID="117" TypeCode="MET" EventName="Meeting" NumberOfAttendees="6"
StartTime="22.02.2016 14:30:00" EndTime="22.02.2016 17:00:00"
Infoboard="I Updated you"/>
    </fields>
</update>
</request>
</fidelio>

```

ConferenceBooking

- a. Booking_ID
Only necessary for update request in the condition, delete is not available for Conference Booking
- b. Booking_CompanyID or
- c. Booking_ContactID * -either one is mandatory, the ID of the Company or the ID of the Contact, the ID of the Contact is mandatory if the booking is linked to guest rooms
- d. Booking_ArrivalDate *
- e. Booking_DepartureDate *
- f. Booking_Name - maximum 60 characters
- g. Booking_ConferenceStatus or
- h. Booking_ConferenceStatusID * -either one is mandatory if booking is linked to a conference
- i. Booking_RoomStatus or
- j. Booking_RoomStatusID * - either one is mandatory room status code or ID if the booking is linked to guest rooms
- k. Booking_ConferenceOnly - defines if the booking is for conference only, 0 false, 1 true
- l. Booking_RoomsOnly- defines if the booking is for guest rooms only, 0 false, 1 true
- m. Booking_ConferenceAndRooms – defines if the booking is for conference and guest rooms, 0 false, 1 true
- n. Booking_Notes – No longer used, since 8.9.6.2, Notes are supplied as separate element
- o. Booking_NoOfAttendes * - if the booking has booking events, all attendees of the booking are updated when an update request is received
- p. Booking_MarketCode or
- q. Booking_MarketCodeID* - either one, the code or ID is mandatory
- r. Booking_SourceCode or
- s. Booking_SourceCodeID*- either one, the code or ID is mandatory
- t. Booking_NoteCategory
- u. Booking_ContactOnSite- maximum 60 characters
- v. Booking_AccountManagerID
- w. Booking_AccountManagerCode
- x. Booking_ChannelCode or
- y. Booking_ChannelCodeID - - either one, the code or ID can be passed
- z. Booking_ConferenceManagerID
- aa. Booking_ConferenceManagerCode
- bb. Booking_DecisionDate
- cc. Booking_FollowupDate
- dd. Booking_CutoffDate
- ee. Booking_Infoboard - maximum 60 characters
- ff. Booking_FunctionTypeID
- gg. Booking_FunctionTypeCode
- hh. Booking_CurrencyID
- ii. Booking_CurrencyCode

- jj. BookingEvent
 - a. StatusID
 - b. StatusCode
 - c.TypeID
 - d. TypeCode
 - e. EventName
 - f. NumberOfAttendees
 - g. StartTime
 - h. EndTime
 - i. Infoboard
 - j. BookingPackageID

For example:

```
<field name="BookingEvent" StatusID="4" StatusCode="DEF"
TypeID="117" TypeCode="MET" EventName="Meeting"
NumberOfAttendees="50" StartTime="29.02.2016 14:30:00"
EndTime="29.02.2016 17:00:00" Infoboard="Sales Event"
BookingPackageID="0"/><field name="BookingEvent" StatusID="4"
StatusCode="DEF"TypeID="106" TypeCode="REC"
EventName="Reception" NumberOfAttendees="2"
StartTime="29.02.2016 09:00:00" EndTime="01.03.2016 22:00:00"
Infoboard="" BookingPackageID="0"/><field name="BookingEvent"
StatusID="4" StatusCode="DEF"TypeID="117" TypeCode="MET"
EventName="Meeting" NumberOfAttendees="50"
StartTime="02.03.2016 09:00:00" EndTime="02.03.2016 12:00:00"
Infoboard="Micros Sales Event" BookingPackageID="0"/>
```

- kk. Note

The request may contain multiple elements. The data is indicated in the attributes “attr” element.

- a. ID – only used for the update request
- b. CategoryID
- c. CategoryCode
- d. Description
- e. GuestViewable
- f. TableLinkedTo

Example:

```
<field name="Note" CategoryID="5" CategoryCode="BOO" Description="This is
a booking note" GuestViewable="1" TableLinkedTo="ConferenceBooking"/>
```

BookingPackage

When inserting a package all configured events linked to the package are inserted automatically.

Please refer to ConferencePackageList -> ConferencePackageEvents.

- a. BookingPackageID- needs only to be passed in the condition for the update request
- b. BookingPackageBookingID*
- c. BookingPackageName- only required if different than the name defined on the package configuration The same rule applies to the ConferencePackage Request
- d. BookingPackageConfigID
- e. BookingPackageConfigID or
- f. BookingPackageConfigCode*- either ID of Code is mandatory and has to be provided
- g. BookingPackageStartTime* - has to be in the range between booking arrival and booking departure date
- h. BookingPackageEndTime*- has to be in the range between booking arrival and booking departure date
- i. BookingPackageNumberOfAttendees*
- j. BookingPackageRate – not possible to override this value

-
- k. BookingEvent -the response may contain multiple elements.The data of the linked events is displayed as attributes "attr"
 - a. BookingID
 - b. ID – only needed for update request
 - c. StatusID
 - d. StatusCode
 - e. TypeID
 - f. TypeCode
 - g. EventName
 - h. NumberOfAttendees
 - i. StartTime
 - j. EndTime
 - k. InfoBoard
 - l. BookingPackageID

BookingEvent

The booked events, the delete command can not be used

- a. BookingEventID- needs only to be provided in the condition of the update request
- b. BookingID *
- c. BookingEventStatusID or
- d. BookingEventStatusCode *- either one is mandatory, the ID or the Code
- e. BookingEventTypeID or
- f. BookingEventTypeCode - either one can be used ID or Code
- g. BookingEventName – maximum 60 characters, only required if different than the Event Name of the configured Event Type, if not transmitted or a blank value, then the EventTypeLongDescription is used
- h. BookingEventNumberOfAttendees*
- i. BookingEventStartTime* - the start and end time has to be in the range of the Booking Arrival and the Booking Departure Date
- j. BookingEventEndTime* - the start and end time has to be in the range of the Booking Arrival and the Booking Departure Date
- k. BookingEventInfoboard – maximum 60 characters
- l. BookingEventBookingPackageID- the ID of the Booking Package the Event is linked to
- m. EventFunctionSpace - The request may contain multiple elements.The data is displayed as attributes "attr"
 - a. ID – only required for update
 - b. ConfigID
 - c. ConfigCode
 - d. ConfigSeatingID
 - e. ConfigSeatingCode
 - f. ConfigRateID
 - g. ConfigRateCode
 - h. SpaceStartTime
 - i. SpaceEndTime
 - j. RateValue
- n. EventStandardMenu - The request may contain multiple elements.The data is displayed as attributes "attr"
 - a. ID– only required for update
 - b. StandardMenuName
 - c. Description
 - d. ConfigID

-
- e. ConfigName
 - f. ConfigRateID
 - g. ConfigRateCode
 - h. StartTime
 - i. EndTime
 - j. MenuQuantity
 - k. RateValue
- o. EventCateringItem - The request may contain multiple elements. The data is displayed as attributes "attr"
- a. ID - only required for update
 - b. Description
 - c. ConfigID
 - d. ConfigName
 - e. ConfigRateID
 - f. ConfigRateCode
 - g. CateringItemName
 - h. StartTime
 - i. EndTime
 - j. Quantity
 - k. RateValue
- p. Note – the note list, the request may contain multiple elements. The data of the notes is displayed as attributes "attr".
- a. ID- only required for update
 - b. CategoryID
 - c. CategoryCode
 - d. Description
 - e. GuestViewable
 - f. TableLinkedTo

EventFunctionSpace

- a. EventFunctionSpaceID – required only in the update request condition
- b. EventFunctionSpaceEventID* - mandatory
- c. EventFunctionSpaceConfigID - or
- d. EventFunctionSpaceConfigCode* - either one is mandatory ID or Code
- e. EventFunctionSpaceConfigSeatingID or
- f. EventFunctionSpaceConfigSeatingCode* - either one ID or Code is mandatory
- g. EventFunctionSpaceConfigRateID or
- h. EventFunctionSpaceConfigRateCode - either one ID or Code is mandatory
- i. EventFunctionSpaceStartTime – the start time has to be in the range between start and end time of the event
- j. EventFunctionSpaceEndTime - the start time has to be in the range between start and end time of the event
- k. EventFunctionSpaceRateValue – only required if different than the rate entered on the function space definition
- l. Note - the request may contain multiple elements. The data is displayed as attributes in the "attr" element.
 - a. ID – required only in the update request
 - b. CategoryID
 - c. CategoryCode
 - d. Description
 - e. GuestViewable

-
- f. TableLinkedTo
For example:<field name="Note" CategoryID="10" CategoryCode="REN"
Description="This is a resource note for function space" GuestViewable="1"
TableLinkedTo="EventFunctionSpace"/>

EventCateringItem

- a. EventCateringItemID– required only in the update request condition
- b. EventCateringItemEventID*
- c. EventCateringItemConfigID or
- d. EventCateringItemConfigCode* - either ID or Code is mandatory
- e. EventCateringItemName – maximum of 60 characters; only required if different than the configured Catering Item LongDescription
- f. EventCateringItemConfigRateID or
- g. EventCateringItemConfigRateCode* - either ID or Code is mandatory
- h. EventCateringItemStartTime* - the start time has to be in the range between start and end time of the event
- i. EventCateringItemEndTime* - the start time has to be in the range between start and end time of the event
- j. EventCateringItemQuantity*
- k. EventCateringItemRateValue - only required if different than the configured rate
- l. Note - the request may contain multiple elements.The data is displayed as attributes in the “attr” element.
 - a. ID – required only in the update request
 - b. CategoryID
 - c. CategoryCode
 - d. Description
 - e. GuestViewable
 - f. TableLinkedTo

EventStandardMenu

- a. EventStandardMenuID required only in the update request condition
- b. EventStandardMenuEventID*
- c. EventStandardMenuConfigID or
- d. EventStandardMenuName* - maximum of 60 characters; either one ID or Name is mandatory, if the name is blank or not transmitted, the Name of the configured standard menu is used
- e. EventStandardMenuConfigName
- f. EventStandardMenuConfigRateID or
- g. EventStandardMenuConfigRateCode* -either one is mandatory either ID or Code
- h. EventStandardMenuStartTime*
- i. EventStandardMenuEndTime*
- j. EventStandardMenuQuantity*
- k. EventStandardMenuRateValue – only required if different than the configured rate value
- l. StandardMenuMenuItem – the data of the elements is displayed as attributes “attr”
 - a. ID – required only for update requests
 - b. ConfigID
 - c. ConfigName
 - d. LongDescription
 - e. LongDescription2
 - f. LongDescription3

-
- g. LongDescription4
 - h. Description
 - i. Origin
 - j. Origin2
 - k. Origin3
 - l. Vintage
 - m. ConfigRateID
 - n. ConfigRateCode
 - o. Quantity
 - p. RateValue
 - q. Included
 - r. Course
 - s. CourseOrder
 - t. Portion
 - u. FoodOrBeverage
 - v. CostPrice
- m. Note - The request may contain multiple elements. The data is displayed as attributes in the "attr" element
- a. ID – only required for update
 - b. CategoryID
 - c. CategoryCode
 - d. Description
 - e. GuestViewable
 - f. TableLinkedTo

StandardMenuMenuItem

Booked Menu items linked to a standard menu

- a. StandardMenuMenuItemID -only required for update in the condition
- b. StandardMenuMenuItemStandardMenuID or
- c. StandardMenuMenuItemConfigID or
- d. StandardMenuMenuItemConfigName - maximum 55 characters; either one is mandatory, the ID or Name, this is the link to the configured item and is required also for a custom menu item
- e. StandardMenuMenuItemLongDescription – maximum 55 characters; only required if different than the configured menu item long description
- f. StandardMenuMenuItemLongDescription2 - maximum 55 characters; only required if different than the configured menu item long description2
- g. StandardMenuMenuItemLongDescription3- maximum 55 characters;only required if different than the configured menu item long description3
- h. StandardMenuMenuItemLongDescription4 maximum 55 characters; only required if different than the configured menu item long description4
- i. StandardMenuMenuItemDescription – long field; only required if different than the configured menu item long description
- j. StandardMenuMenuItemOrigin - maximum 100 characters; only required if different than the configured menu item origin
- a. StandardMenuMenuItemOrigin2 - maximum 55 characters; only required if different than the configured menu item origin2
- b. StandardMenuMenuItemOrigin3 - maximum 55 characters; only required if different than the configured menu item origin3
- c. StandardMenuMenuItemVintage – maximum 4 characters; only required if different than the configured menu item

-
- d. StandardMenuMenuItemConfigRateID or
 - e. StandardMenuMenuItemConfigRateCode* - either one, ID or Code is mandatory
 - f. StandardMenuMenuItemQuantity*
 - g. StandardMenuMenuItemRateValue –only required if different than the configured rate value

Voucher Redemption

The Request requires at least one of the following licenses:

- XML Interface Standard Edition
- XML Interface Enhanced Edition
- The Request also requires the Voucher Management license.

For voucher redemption, the command -> RedeemVoucher is used.

Following fields should be passed:

- a. VoucherNumber – voucher to redeem
- b. ReservationID or
- c. FinancialAccountID* - Either one: the reservation ID or the ID of the financial account is allowed and must be specified.
- d. Amount – optional. In case it is not specified, the whole available amount will be redeemed. Partial redemption will be performed only if voucher type is configured to allow this.
- e. ForceRedemption – optional. The flag is valid only for the Value vouchers. If value 1 is sent, the voucher will be redeemed even when there is no consumption. If the “Amount” element is specified in the request for the value voucher, it also works as “ForceRedemption” , then the specified amount is redeemed even if there is no consumptions

The response contains the amount which was redeemed.

6 Conference and Catering General

ConferenceBooking

Depending on the internal business processes of the site, more fields can be mandatory. Please check with your Oracle Hospitality contact person.

- a. Booking_CompanyID
- b. Booking_ContactID – either Company or Contact Id is mandatory, the Id is mandatory if the booking is linked to guest rooms
- c. Booking_ArrivalDate *¹
- d. Booking_DepartureDate *
- e. Booking_Name
Maximum 60 Characters.
- f. Booking_ConferenceStatus
Mandatory if booking contains conference. Supply Booking_ConferenceStatus (Code) or Booking_ConferenceStatusID.
- g. Booking_ConferenceStatusID
- h. Booking_RoomStatus
Mandatory if booking contains guest rooms. Supply Booking_RoomStatus (Code) or Booking_RoomStatusID
- i. Booking_RoomStatusID.
- j. Booking_ConferenceOnly
1 if booking is conference only. Else leave blank.
- k. Booking_RoomsOnly
1 if booking is guest rooms only. Else leave blank
- l. Booking_ConferenceAndRooms
1 if booking containing both conference and guest rooms. Else leave blank.
- m. Booking_Notes
- n. Booking_NoOfAttendes *
- o. Booking_MarketCode *
Supply Booking_MarketCode or Booking_MarketCodeID
- p. Booking_MarketCodeID
- q. Booking_SourceCode *
Supply Booking_MarketCode or Booking_MarketCodeID
- r. Booking_SourceCodeID
- s. Booking_NoteCategory
- t. Booking_ContactOnSite
Maximum 60 characters.
- u. Booking_AccountManagerID
- v. Booking_AccountManagerCode
- w. Booking_ChannelCode
Supply Booking_ChannelCode or Booking_ChannelCodeID
- x. Booking_ChannelCodeID
- y. Booking_ConferenceManagerID
- z. Booking_ConferenceManagerCode
- aa. Booking_DecisionDate
- bb. Booking_FollowupDate
- cc. Booking_CutoffDate

¹ Fields marked with * are mandatory.

- dd. Booking_Infoboard
Maximum 60 characters
- ee. Booking_FunctionTypeID
- ff. Booking_FunctionTypeCode
- gg. Booking_CurrencyID
- hh. Booking_CurrencyCode

BookingPackage

When inserting a package all configured events linked to the package will be inserted automatically. See ConferencePackageList->ConferencePackageEvents.

- a. BookingPackageBookingID*
- b. BookingPackageName
Supply the field only to override the Package Name from the package configuration.
Supply the field only to override the Package Name from the Conference Package configuration.
If field is not supplied or blank the ConferencePackageName is taken.
See also ConferencePackage Request.
- c. BookingPackageConfigID
- d. BookingPackageConfigID*
Supply BookingPackageConfigID or BookingPackageConfigCode
- e. BookingPackageConfigCode
- f. BookingPackageStartTime*
Must fall within Booking_ArrivalDate & Booking_DepartureDate
- g. BookingPackageEndTime*
Must fall within Booking_ArrivalDate & Booking_DepartureDate
- h. BookingPackageNumberOfAttendees*

Please note: The BookingPackageRateValue can not be overridden

BookingEvent

Depending on the internal business processes of the site, more fields can be mandatory. Please check with your Oracle Hospitality contact person.

- a. BookingID *
- b. BookingEventStatusID *
Supply BookingEventStatusID or BookingEventStatusCode
- c. BookingEventStatusCode *
- d. BookingEventTypeID
Supply BookingEventTypeID or BookingEventTypeCode
- e. BookingEventTypeCode
- f. BookingEventName
Supply the field only to override the Event Name from the Event Type configuration.
If the field is not supplied or blank the EventTypeLongDescription is taken
see also EventType Request.
Maximum 60 characters
- g. BookingEventNumberOfAttendees*
- h. BookingEventStartTime*
Must fall within Booking_ArrivalDate & Booking_DepartureDate
- i. BookingEventEndTime*
Must fall within Booking_ArrivalDate & Booking_DepartureDate

-
- j. BookingEventInfoBoard
Maximum 60 characters
 - k. BookingEventBookingPackageID
the Id of the BookingPackage to which the event is linked

EventFunctionSpace

- a. EventFunctionSpaceEventID*
- b. EventFunctionSpaceConfigID*
Supply the EventFunctionSpaceConfigID or the EventFunctionSpaceConfigCode
- c. EventFunctionSpaceConfigCode
- d. EventFunctionSpaceConfigSeatingID*Supply the EventFunctionSpaceSeatingID or the EventFunctionSpaceConfigSeatingCode
- e. EventFunctionSpaceConfigSeatingCode
- f. EventFunctionSpaceConfigRateID*
Supply the EventFunctionSpaceRateID or the EventFunctionSpaceConfigRateCode
- g. EventFunctionSpaceConfigRateCode
- h. EventFunctionSpaceStartTime
In most cases this is the same start and end time as the BookingEvent.
- i. EventFunctionSpaceEndTime
Between start and end time of event, in most cases it is the same start and end time as the BookingEvent.
- j. EventFunctionSpaceRateValue
Supply the field only to override the rate value from the rate configuration.
If field is not supplied or blank the rate value of the rate configuration is taken. See also FunctionSpaceRate request

EventCateringItem

- a. EventCateringItemEventID*
- b. EventCateringItemConfigID*
Supply the EventCateringItemConfigID or EventCateringItemConfigCode
- c. EventCateringItemConfigCode
- d. EventCateringItemName
Supply only the field to override the Catering Item Name from the Catering Item configuration.
If the field is not supplied or blank the CateringItemLongDescription is taken.
See also CateringItem Request.
Maximum 60 Characters
- e. EventCateringItemConfigRateID*
Supply the EventCateringItemRateID or the EventCateringItemRateCode
- f. EventCateringItemConfigRateCode
- g. EventCateringItemStartTime*
between start and end time of event, in most cases it is the same start and end time as the BookingEvent
- h. EventCateringItemEndTime*
between start and end time of event, in most cases it is the same start and end time as the BookingEvent.
- i. EventCateringItemQuantity*
- j. EventCateringItemRateValue
Supply only the field to override the rate value from the rate configuration.

If the field is not supplied or blank the rate value of the rate configuration is taken. See also CateringItemRate request

EventStandardMenu

- a. EventStandardMenuEventID*
- b. EventStandardMenuConfigID*
Supply EventStandardMenuConfigID or EventStandardMenuConfigName
- c. EventStandardMenuName
Supply only the field to override the Name from the standard menu configuration if field is not supplied or blank the StandarMenuLongDescription is taken. See also StandardMenu Request.
Maximum 60 Characters
- d. EventStandardMenuConfigName
- e. EventStandardMenuConfigRateID*
Supply the EventStandardMenuConfigRateID or the EventStandardMenuConfigRateCode
- f. EventStandardMenuConfigRateCode
- g. EventStandardMenuStartTime*
- h. EventStandardMenuEndTime*
- i. EventStandardMenuQuantity*
- j. EventStandardMenuRateValue
Supply only the field to override the rate value from the rate configuration. If field is not supplied or blank the rate value of the rate configuration is taken. See also StandardMenuRate request

StandardMenuMenuItem

Booked Menu items linked to a standard menu.

- a. StandardMenuMenuItemStandardMenuID*
- b. StandardMenuMenuItemConfigID or
StandardMenuMenuItemConfigName* - Either one is mandatory: ID of Name – It is the link to the configured item. Needs to be passed also in the event of a custom menu item
- c. StandardMenuMenuItemLongDescription
- d. StandardMenuMenuItemLongDescription2
- e. StandardMenuMenuItemLongDescription3
StandardMenuMenuItemLongDescription4
all description fields support a maximum of 55 characters – pass only the field which should be used as description
- f. StandardMenuMenuItemDescription
pass only the field which should be used as description. The same applies to MenuItem Request- Long Field
- g. StandardMenuMenuItemOrigin
maximum 100 characters. Pass only the required field from the menu item configuration. The same applies to MenuItem Request.
- h. StandardMenuMenuItemOrigin2
maximum 55 characters
- i. StandardMenuMenuItemOrigin3
maximum 55 characters

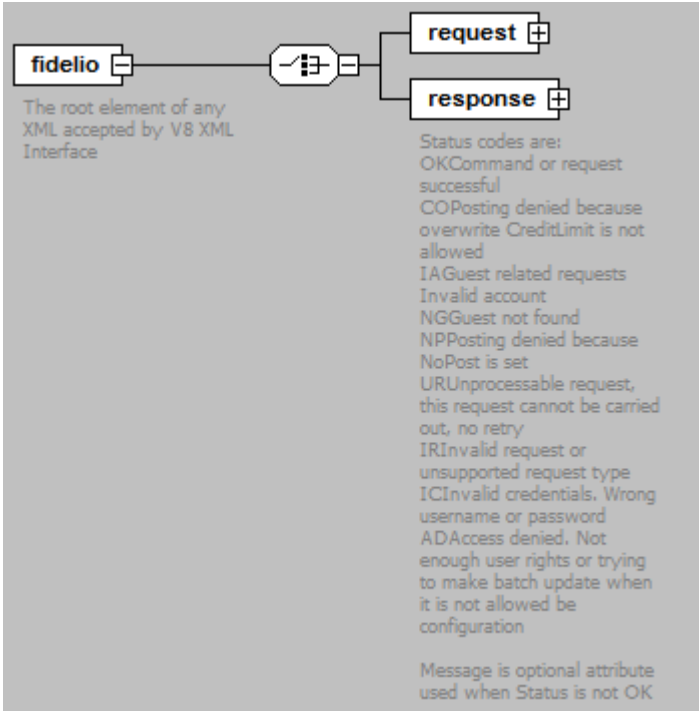
-
- j. StandardMenuMenuItemVintage
maximum 4 characters. Used only if overriding the menu item configuration is required. The same applies to the MenuItem Request.
 - k. StandardMenuMenuItemConfigRateID or
 - l. StandardMenuMenuItemConfigRateCode*- either one is mandatory ID or Code
 - m. StandardMenuMenuItemQuantity*
 - n. StandardMenuMenuItemRateValue- If the field is not passed or blank, the rate value of the rate configuration is used. This applies also the the MenuItemRate request

7 Schema FidelioXML.xsd

Schema FidelioXML.xsd

schema location:	FidelioXML.xsd	
targetNamespace:	V8XMLInterface	
Elements	Complex types	Simple types
<u>fidelio</u>	<u>AvailabilityForWebType</u>	<u>binaryOperation</u>
	<u>BlockDetailConditionType</u>	<u>conditionSimpleType</u>
	<u>BlockHeaderConditionType</u>	
	<u>ccm_book_actualsType</u>	
	<u>ChildrenCategoriesConditionType</u>	
	<u>commandType</u>	
	<u>conditionsType</u>	
	<u>conditionType</u>	
	<u>ConditionType_ConfiguredStatusList</u>	
	<u>ConditionType_InfoBoard</u>	
	<u>CreditCardTypesConditionType</u>	
	<u>crm_postType</u>	
	<u>CurrencyListConditionType</u>	
	<u>DepartmentCodeConditionType</u>	
	<u>fieldsType</u>	
	<u>fieldType</u>	
	<u>HotelAvailabilityType</u>	
	<u>importType</u>	
	<u>insertType</u>	
	<u>linkType</u>	
	<u>PostngConditionType</u>	
	<u>postResponseType</u>	
	<u>postType</u>	
	<u>ProfileConditionType</u>	
	<u>queryType</u>	
	<u>ReportType</u>	
	<u>requestType</u>	
	<u>ReservationConditionType</u>	
	<u>rowsType</u>	
	<u>rowType</u>	
	<u>SystemDateConditionType</u>	
	<u>SystemInformationConditionType</u>	
	<u>updateType</u>	
	<u>ValidateCreditCardType</u>	

element fidelio

diagram	 The root element of any XML accepted by V8 XML Interface Status codes are: OKCommand or request successful COPosting denied because overwrite CreditLimit is not allowed IAGuest related requests Invalid account NGGuest not found NPPosting denied because NoPost is set URUnprocessable request, this request cannot be carried out, no retry IRInvalid request or unsupported request type ICInvalid credentials. Wrong username or password ADAccess denied. Not enough user rights or trying to make batch update when it is not allowed be configuration Message is optional attribute used when Status is not OK						
namespace	V8XMLInterface						
children	<u>request</u> <u>response</u>						
attributes	Name Version	Type xs:NMTOKEN	Use required	Default	Fixed	Annotation documentation	Specifies the version of the interface. Could be changed and in the future accept more values
annotation	documentation The root element of any XML accepted by V8 XML Interface						
source	<pre><xs:element name="fidelio"> <xs:annotation> <xs:documentation>The root element of any XML accepted by V8 XML Interface</xs:documentation> </xs:annotation> <xs:complexType> <xs:choice> <xs:element name="request"> <xs:complexType> <xs:complexContent> <xs:extension base="requestType"> <xs:attribute name="ID" type="xs:string" use="required"/> <xs:attribute name="UserName" type="xs:string" use="required"/> </xs:extension> </xs:complexContent> </xs:complexType> </xs:element> <xs:element name="response"> <xs:complexType> <xs:complexContent> <xs:extension base="responseType"> <xs:attribute name="ID" type="xs:string" use="required"/> <xs:attribute name="UserName" type="xs:string" use="required"/> </xs:extension> </xs:complexContent> </xs:complexType> </xs:element> </xs:choice> </xs:complexType> </xs:element></pre>						

```

<xs:attribute name="Password" type="xs:string" use="required"/>
<xs:attribute name="Vendor" type="xs:string" use="optional"/>
<xs:annotation>
  <xs:documentation>Required when one of the licenses
CRSXMLONEWAY_NCM, CRSXMLTOWAY_NCM, CRSXMLONEWAY_FIDELIO8 or
ftCRSXMLTOWAY_FIDELIO8 is used</xs:documentation>
</xs:annotation>
</xs:attribute>
</xs:extension>
</xs:complexContent>
</xs:complexType>
</xs:element>
<xs:element name="response">
  <xs:annotation>
    <xs:documentation>Status codes are:
OK      Command or request successful
CO      Posting denied because overwrite CreditLimit is not allowed
IA      Guest related requests Invalid account
NG      Guest not found
NP      Posting denied because NoPost is set
UR      Unprocessable request, this request cannot be carried out, no retry
IR      Invalid request or unsupported request type
IC      Invalid credentials. Wrong username or password
AD      Access denied. Not enough user rights or trying to make batch update when it is not allowed be
configuration
  </xs:documentation>
  Message is optional attribute used when Status is not OK</xs:documentation>
</xs:annotation>
<xs:complexType>
  <xs:complexContent>
    <xs:extension base="postResponseType">
      <xs:choice minOccurs="0" maxOccurs="unbounded">
        <xs:element name="queryResponse" minOccurs="0" maxOccurs="unbounded">
          <xs:annotation>
            <xs:documentation>Provided only when request contains the "query" section
          </xs:documentation>
        </xs:element>
      </xs:choice>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
  <xs:annotation>
    <xs:documentation>Attribute name exists only when was passed in the request</xs:documentation>
  </xs:annotation>
<xs:complexType>
  <xs:all>
    <xs:element name="rows" type="rowsType"/>
  </xs:all>
  <xs:attribute name="Name" type="xs:string" use="optional"/>
</xs:complexType>
</xs:element>
<xs:element name="insertResponse" minOccurs="0" maxOccurs="unbounded">

```

```
<xs:annotation>  
  <xs:documentation>Provided when request contains the "insert" section and contains the IDs of  
  the created objects
```

Attribute name exists only when was passed in the request</xs:documentation>

```
</xs:annotation>  
<xs:complexType>  
  <xs:all>  
    <xs:element name="rows">  
      <xs:complexType>  
        <xs:sequence>  
          <xs:element name="ProfileID" type="xs:integer" minOccurs="0"/>  
          <xs:element name="FANumber" minOccurs="0"/>  
          <xs:element name="GuestNum" type="xs:integer" minOccurs="0"/>  
          <xs:element name="ProfileGlobalID" type="xs:integer" minOccurs="0"/>  
          <xs:element name="LastUpdateTime" type="xs:string" minOccurs="0"/>  
          <xs:choice minOccurs="0">  
            <xs:element name="Addresses">  
              <xs:complexType>  
                <xs:sequence>  
                  <xs:element name="Address" maxOccurs="unbounded">  
                    <xs:complexType>  
                      <xs:attribute name="initID" type="xs:integer" use="required"/>  
                      <xs:attribute name="newID" type="xs:integer" use="required"/>  
                    </xs:complexType>  
                  </xs:element>  
                </xs:sequence>  
              </xs:complexType>  
            </xs:element>  
          </xs:choice>  
          <xs:choice minOccurs="0">  
            <xs:element name="Communications">  
              <xs:complexType>  
                <xs:sequence>  
                  <xs:element name="Communication" maxOccurs="unbounded">  
                    <xs:complexType>  
                      <xs:attribute name="newID" type="xs:integer" use="required"/>  
                    </xs:complexType>  
                  </xs:element>  
                </xs:sequence>  
              </xs:complexType>  
            </xs:element>  
          </xs:choice>  
          <xs:choice minOccurs="0">  
            <xs:element name="Notes">
```



```

<xs:complexType>
  <xs:sequence>
    <xs:element name="Note" maxOccurs="unbounded">
      <xs:complexType>
        <xs:attribute name="newID" type="xs:integer" use="required"/>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>
</xs:element>
</xs:choice>
<xs:choice minOccurs="0">
  <xs:element name="GuestComments">
    <xs:complexType>
      <xs:sequence>
        <xs:element name="GuestComment" maxOccurs="unbounded">
          <xs:complexType>
            <xs:attribute name="newID" type="xs:integer" use="required"/>
          </xs:complexType>
        </xs:element>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:choice>
    <xs:element name="TaskID" type="xs:integer" minOccurs="0"/>
    <xs:element name="ActivityID" type="xs:integer" minOccurs="0"/>
    <xs:element name="GroupID" type="xs:integer" minOccurs="0"/>
    <xs:element name="GroupTemplateID" type="xs:integer" minOccurs="0"/>
  </xs:choice>
  </xs:sequence>
</xs:complexType>
</xs:element>
</xs:all>
  <xs:attribute name="Name" type="xs:string" use="optional"/>
</xs:complexType>
</xs:element>
<xs:element name="updateResponse" minOccurs="0" maxOccurs="unbounded">
  <xs:annotation>
    <xs:documentation>Provided when request contains the "update" section and contains
    requested data of the updated objects created objects
  </xs:documentation>
  Attribute name exists only when was passed in the request</xs:documentation>
  </xs:annotation>
</xs:complexType>
<xs:all>
  <xs:element name="rows" type="rowsType"/>

```



```

</xs:simpleType>
</xs:attribute>
</xs:complexType>
</xs:element>

```

element fidelio/request

diagram						
namespace	V8XMLInterface					
type	extension of requestType					
children	<u>query</u> <u>update</u> <u>insert</u> <u>command</u> <u>AvailabilityForWeb</u> <u>ValidateCreditCard</u> <u>import</u> <u>HotelAvailability</u> <u>Report</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	ID	xs:string	required			
	UserName	xs:string	required			
	Password	xs:string	required			
	Vendor	xs:string	optional			documentation Required when one of the licenses

	CRSXMLONEWAY_NCM, CRSXMLTWOWAY_NCM, CRSXMLONEWAY_FIDELIO8 or ftCRSXMLTWOWAY_FIDELIO8 is used
SOURCE	<pre> <xs:element name="request"> <xs:complexType> <xs:complexContent> <xs:extension base="requestType"> <xs:attribute name="ID" type="xs:string" use="required"/> <xs:attribute name="UserName" type="xs:string" use="required"/> <xs:attribute name="Password" type="xs:string" use="required"/> <xs:attribute name="Vendor" type="xs:string" use="optional"/> <xs:annotation> <xs:documentation>Required when one of the licenses CRSXMLONEWAY_NCM, CRSXMLTWOWAY_NCM, CRSXMLONEWAY_FIDELIO8 or ftCRSXMLTWOWAY_FIDELIO8 is used</xs:documentation> </xs:annotation> </xs:extension> </xs:complexContent> </xs:complexType> </xs:element> </pre>

element fidelio/response

diagram	response 0..∞ Status codes are: OKCommand or request successful COWriting denied because overwrite CreditLimit is not allowed IAGuest related requests Invalid account NGGuest not found NPPosting denied because NoPost is set URUnprocessable request, this request cannot be carried out, no retry IRInvalid request or unsupported request type ICInvalid credentials. Wrong username or password ADAccess denied. Not enough user rights or trying to make batch update when it is not allowed be configuration Message is optional attribute used when Status is not OK queryResponse 0..∞ Provided only when request contains the "query" section Attribute name exists only when was passed in the request insertResponse 0..∞ Provided when request contains the "insert" section and contains the IDs of the created objects Attribute name exists only when was passed in the request updateResponse 0..∞ Provided when request contains the "update" section and contains requested data of the updated objects created objects Attribute name exists only when was passed in the request
namespace	V8XMLInterface

type	extension of postResponseType					
children	queryResponse insertResponse updateResponse					
attributes	Name ID	Type xs:string	Use required	Default	Fixed	Annotation
	Status	xs:NMTOKENS	required			
	Message	xs:string	optional			
annotation	documentation Status codes are:OK Command or request successfulCO Posting denied because overwrite CreditLimit is not allowedIA Guest related requests Invalid accountNG Guest not foundNP Posting denied because NoPost is setUR Unprocessable request, this request cannot be carried out, no retryIR Invalid request or unsupported request typeIC Invalid credentials. Wrong username or passwordAD Access denied. Not enough user rights or trying to make batch update when it is not allowed be configurationMessage is optional attribute used when Status is not OK					
source	<xs:element name="response"> <xs:annotation> <xs:documentation>Status codes are:OK Command or request successfulCO Posting denied because overwrite CreditLimit is not allowedIA Guest related requests Invalid accountNG Guest not foundNP Posting denied because NoPost is setURUnprocessable request, this request cannot be carried out, no retryIR Invalid request or unsupported request typeIC Invalid credentials. Wrong username or passwordADAccess denied. Not enough user rights or trying to make batch update when it is not allowed be configurationMessage is optional attribute used when Status is not OK</xs:documentation> </xs:annotation> <xs:complexType> <xs:complexContent> <xs:extension base="postResponseType"> <xs:choice minOccurs="0" maxOccurs="unbounded"> <xs:element name="queryResponse" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Provided only when request contains the "query" sectionAttribute name exists only when was passed in the request</xs:documentation> </xs:annotation> <xs:complexType> <xs:all> <xs:element name="rows" type="rowsType"/> </xs:all> <xs:attribute name="Name" type="xs:string" use="optional"/> </xs:complexType> </xs:element> <xs:element name="insertResponse" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Provided when request contains the "insert" section and contains the IDs of the created objectsAttribute name exists only when was passed in the request</xs:documentation> </xs:annotation> <xs:complexType> <xs:all> <xs:element name="rows"> <xs:complexType> <xs:sequence> <xs:element name="ProfileID" type="xs:integer" minOccurs="0"/> <xs:element name="FANumber" minOccurs="0"/> <xs:element name="GuestNum" type="xs:integer" minOccurs="0"/> <xs:element name="ProfileGlobalID" type="xs:integer" minOccurs="0"/> <xs:element name="LastUpdateTime" type="xs:string" minOccurs="0"/> <xs:choice minOccurs="0"> <xs:element name="Addresses"> <xs:complexType> <xs:sequence> <xs:element name="Address" maxOccurs="unbounded"> <xs:complexType> <xs:attribute name="initID" type="xs:integer" use="required"/> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> <xs:choice minOccurs="0"> <xs:element name="Communications"> <xs:complexType> <xs:sequence> <xs:element name="Communication" maxOccurs="unbounded"> <xs:complexType> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> <xs:choice minOccurs="0"> <xs:element name="Notes"> <xs:complexType> <xs:sequence> <xs:element name="Note" maxOccurs="unbounded"> <xs:complexType> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> <xs:element name="TaskID" type="xs:integer" minOccurs="0"/> <xs:element name="ActivityID" type="xs:integer" minOccurs="0"/> <xs:element name="GroupID" type="xs:integer" minOccurs="0"/> <xs:element name="GroupTemplateID" type="xs:integer" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </xs:all> <xs:attribute name="Name" type="xs:string" use="optional"/> </xs:complexType> </xs:element> </xs:choice> name="updateResponse" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Provided when request contains the "update" section and contains requested data of the updated objects created objectsAttribute name exists only when was passed in the request</xs:documentation> </xs:annotation> <xs:complexType> <xs:all> <xs:element name="rows" type="rowsType"/> </xs:all> <xs:attribute name="Name" type="xs:string" use="optional"/> </xs:complexType> </xs:element> </xs:choice> <xs:attribute name="ID" type="xs:string" use="required"/> <xs:attribute name="Status" use="required"> <xs:simpleType> <xs:restriction base="xs:NMTOKENS"> <xs:enumeration value="OK"> <xs:annotation> <xs:documentation>Command or request successful</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="CO"/>					

	<pre> <xs:enumeration value="IA"/> <xs:enumeration value="UR"/> <xs:attribute name="Message" type="xs:string" use="optional"/> </xs:complexType></xs:element> </pre>
--	--

element fidelio/response/queryResponse

diagram	queryResponse </
---------	--

element fidelio/response/queryResponse/rows

diagram	
namespace	V8XMLInterface
type	<u>rowsType</u>
children	<u>row</u>
source	<pre> <xs:element name="rows" type="rowsType"/> </pre>

element fidelio/response/insertResponse

diagram	insertResponse rows Provided when request contains the "insert" section and contains the IDs of the created objects Attribute name exists only when was passed in the request												
namespace	V8XMLInterface												
children	rows												
attributes	<table><tr><td>Name</td><td>Type</td><td>Use</td><td>Default</td><td>Fixed</td><td>Annotation</td></tr><tr><td>Name</td><td>xs:string</td><td>optional</td><td></td><td></td><td></td></tr></table>	Name	Type	Use	Default	Fixed	Annotation	Name	xs:string	optional			
Name	Type	Use	Default	Fixed	Annotation								
Name	xs:string	optional											
annotation	documentation Provided when request contains the "insert" section and contains the IDs of the created objects Attribute name exists only when was passed in the request												
source	<pre><xs:element name="insertResponse" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Provided when request contains the "insert" section and contains the IDs of the created objectsAttribute name exists only when was passed in the request</xs:documentation> </xs:annotation> <xs:complexType> <xs:all> <xs:element name="rows"> <xs:complexType> <xs:sequence> <xs:element name="ProfileID" type="xs:integer" minOccurs="0"/> <xs:element name="FANumber" minOccurs="0"/> <xs:element name="GuestNum" type="xs:integer" minOccurs="0"/> <xs:element name="ProfileGlobalID" type="xs:integer" minOccurs="0"/> <xs:element name="LastUpdateTime" type="xs:string" minOccurs="0"/> <xs:choice minOccurs="0"> <xs:element name="Addresses"> <xs:complexType> <xs:sequence> <xs:element name="Address" maxOccurs="unbounded"> <xs:complexType> <xs:attribute name="initID" type="xs:integer" use="required"/> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> <xs:choice minOccurs="0"> <xs:element name="Communications"> <xs:complexType> <xs:sequence> <xs:element name="Communication" maxOccurs="unbounded"> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:sequence> </xs:complexType> </xs:sequence> </xs:element> </xs:choice> <xs:choice minOccurs="0"> <xs:element name="Notes"> <xs:complexType> <xs:sequence> <xs:element name="Note" maxOccurs="unbounded"> <xs:complexType> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> <xs:element name="TaskID" type="xs:integer" minOccurs="0"/> <xs:element name="ActivityID" type="xs:integer" minOccurs="0"/> <xs:element name="GroupID" type="xs:integer" minOccurs="0"/> <xs:element name="GroupTemplateID" type="xs:integer" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </xs:all> <xs:attribute name="Name" type="xs:string" use="optional"/> </xs:complexType></xs:element></pre>												


element fidelio/response/insertResponse/rows

diagram	
namespace	V8XMLInterface
children	<u>ProfileID</u> <u>FANumber</u> <u>GuestNum</u> <u>ProfileGlobalID</u> <u>LastUpdateTime</u> <u>Addresses</u> <u>Communications</u> <u>Notes</u> <u>TaskID</u> <u>ActivityID</u> <u>GroupID</u> <u>GroupTemplateID</u>
source	<pre> <xs:element name="rows"> <xs:complexType> <xs:sequence> <xs:element name="ProfileID" type="xs:integer" minOccurs="0"/> <xs:element name="FANumber" minOccurs="0"/> <xs:element name="GuestNum" type="xs:integer" minOccurs="0"/> <xs:element name="ProfileGlobalID" type="xs:integer" minOccurs="0"/> <xs:element name="LastUpdateTime" type="xs:string" minOccurs="0"/> <xs:choice minOccurs="0"> <xs:element name="Addresses"> <xs:complexType> <xs:sequence> <xs:element name="Address" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:attribute name="initID" type="xs:integer" use="required"/> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> <xs:choice minOccurs="0"> <xs:element name="Communications"> <xs:complexType> <xs:sequence> <xs:element name="Communication" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> <xs:choice minOccurs="0"> <xs:element name="Notes"> <xs:complexType> <xs:sequence> <xs:element name="Note" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> <xs:element name="TaskID" type="xs:integer" minOccurs="0"/> <xs:element name="ActivityID" type="xs:integer" minOccurs="0"/> <xs:element name="GroupID" type="xs:integer" minOccurs="0"/> <xs:element name="GroupTemplateID" type="xs:integer" minOccurs="0"/> </xs:sequence> </xs:complexType></xs:element> </pre>

element fidelio/response/insertResponse/rows/ProfileID

diagram	
namespace	V8XMLInterface
type	xs:integer
source	<code><xs:element name="ProfileID" type="xs:integer" minOccurs="0"/></code>

element fidelio/response/insertResponse/rows/FANumber

diagram	
namespace	V8XMLInterface
source	<code><xs:element name="FANumber" minOccurs="0"/></code>


element fidelio/response/insertResponse/rows/GuestNum

diagram	
namespace	V8XMLInterface
type	xs:integer
source	<code><xs:element name="GuestNum" type="xs:integer" minOccurs="0"/></code>


element fidelio/response/insertResponse/rows/ProfileGlobalID

diagram	
namespace	V8XMLInterface
type	xs:integer
source	<code><xs:element name="ProfileGlobalID" type="xs:integer" minOccurs="0"/></code>

element fidelio/response/insertResponse/rows/LastUpdateTime

diagram	
namespace	V8XMLInterface
type	xs:string
source	<code><xs:element name="LastUpdateTime" type="xs:string" minOccurs="0"/></code>

element fidelio/response/insertResponse/rows/Addresses


diagram	
namespace	V8XMLInterface

children	<u>Address</u>
source	<pre> <xs:element name="Addresses"> <xs:complexType> <xs:sequence> <xs:element name="Address" maxOccurs="unbounded"> <xs:complexType> <xs:attribute name="initID" type="xs:integer" use="required"/> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType></xs:element> </pre>

element fidelio/response/insertResponse/rows/Addresses/Address

diagram	Address					
namespace	V8XMLInterface					
attributes	Name	Type	Use	Default	Fixed	Annotation
	initID	xs:integer	required			
	newID	xs:integer	required			
source	<pre><xs:element name="Address" maxOccurs="unbounded"> <xs:complexType> <xs:attribute name="initID" type="xs:integer" use="required"/> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType></xs:element></pre>					


element fidelio/response/insertResponse/rows/Communications

diagram	
namespace	V8XMLInterface
children	<u>Communication</u>
source	<pre> <xs:element name="Communications"> <xs:complexType> <xs:sequence> <xs:element name="Communication" maxOccurs="unbounded"> <xs:complexType> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType></xs:element> </pre>

element fidelio/response/insertResponse/rows/Communications/Communication


diagram	Communication					
namespace	V8XMLInterface					
attributes	Name newID	Type xs:integer	Use required	Default	Fixed	Annotation
source	<pre><xs:element name="Communication" maxOccurs="unbounded"> <xs:complexType> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType></xs:element></pre>					

element fidelio/response/insertResponse/rows/Notes

diagram	
namespace	V8XMLInterface
children	<u>Note</u>
source	<pre> <xs:element name="Notes"> <xs:complexType> <xs:sequence> <xs:element name="Note" </pre>

	<code>maxOccurs="unbounded"> <xs:complexType> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType></xs:element></code>
--	--

element fidelio/response/insertResponse/rows/Notes/Note

diagram						
namespace	V8XMLInterface					
attributes	Name	Type	Use	Default	Fixed	Annotation
	newID	xs:integer	required			
source	<code><xs:element name="Note" maxOccurs="unbounded"> <xs:complexType> <xs:attribute name="newID" type="xs:integer" use="required"/> </xs:complexType></xs:element></code>					

element fidelio/response/insertResponse/rows/TaskID

diagram						
namespace	V8XMLInterface					
type	xs:integer					
source	<code><xs:element name="TaskID" type="xs:integer" minOccurs="0"/></code>					

element fidelio/response/insertResponse/rows/ActivityID

diagram						
namespace	V8XMLInterface					
type	xs:integer					
source	<code><xs:element name="ActivityID" type="xs:integer" minOccurs="0"/></code>					

element fidelio/response/insertResponse/rows/GroupID

diagram						
namespace	V8XMLInterface					
type	xs:integer					
source	<code><xs:element name="GroupID" type="xs:integer" minOccurs="0"/></code>					

element fidelio/response/insertResponse/rows/GroupTemplateID

diagram						
namespace	V8XMLInterface					
type	xs:integer					
source	<code><xs:element name="GroupTemplateID" type="xs:integer" minOccurs="0"/></code>					

element fidelio/response/updateResponse

diagram	Provided when request contains the "update" section and contains requested data of the updated objects created objects Attribute name exists only when was passed in the request					
namespace	V8XMLInterface					
children	<u>rows</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	Name	xs:string	optional			
annotation	documentation Provided when request contains the "update" section and contains requested data of the updated objects created objectsAttribute name exists only when was passed in the request					
source	<pre><xs:element name="updateResponse" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Provided when request contains the "update" section and contains requested data of the updated objects created objectsAttribute name exists only when was passed in the request</xs:documentation> </xs:annotation> <xs:complexType> <xs:all> <xs:element name="rows" type="rowsType"/> </xs:all> <xs:attribute name="Name" type="xs:string" use="optional"/> </xs:complexType></xs:element></pre>					

element fidelio/response/updateResponse/rows

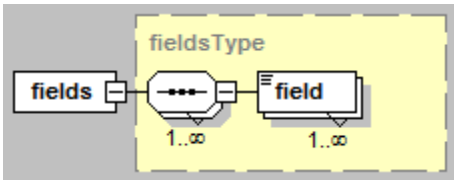
diagram						
namespace	V8XMLInterface					
type	<u>rowsType</u>					
children	<u>row</u>					
source	<pre><xs:element name="rows" type="rowsType"/></pre>					

complexType AvailabilityForWebType

diagram						
namespace	V8XMLInterface					
children	<u>fields</u>					
used by	element <u>requestType/AvailabilityForWeb</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	Name	xs:string	optional			
	Language	xs:string	optional			

	TranslationTable xs:string optional	documentation If present in the request, short descriptions in request and response will be translated based on the specified translation table
source	<pre><xs:complexType name="AvailabilityForWebType"> <xs:all> <xs:element name="fields" type="fieldsType"/> </xs:all> <xs:attribute name="Name" type="xs:string" use="optional"/> <xs:attribute name="Language" type="xs:string" use="optional"/> <xs:attribute name="TranslationTable" type="xs:string" use="optional"/> <xs:annotation> <xs:documentation>If present in the request, short descriptions in request and response will be translated based on the specified translation table</xs:documentation> </xs:annotation> </xs:attribute></xs:complexType></pre>	


element AvailabilityForWebType/fields

diagram		
namespace	V8XMLInterface	
type	<u>fieldsType</u>	
children	<u>field</u>	
source	<pre><xs:element name="fields" type="fieldsType"/></pre>	

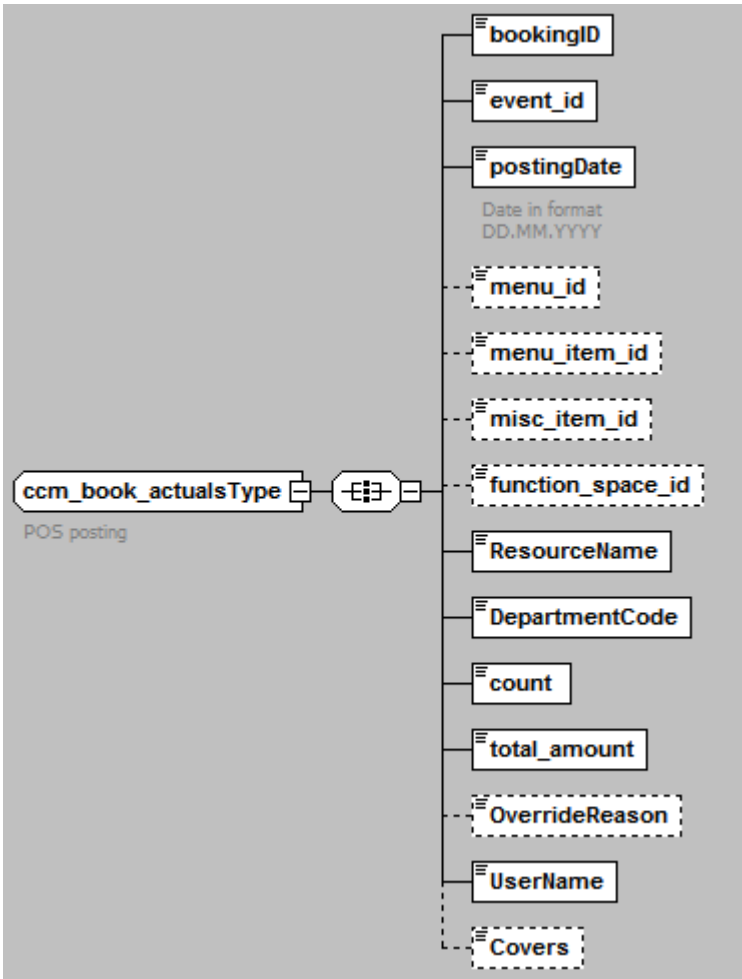
complexType BlockDetailConditionType

diagram	BlockDetailConditionType Used to define condition for BlockDetail search request					
namespace	V8XMLInterface					
type	restriction of <u>conditionType</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	name	xs:NMTOKEN	required			
	operation	binaryOperation	required			
	dataType	xs:NMTOKEN	optional			
annotation	documentation Used to define condition for BlockDetail search request					
source	<pre><xs:complexType name="BlockDetailConditionType"> <xs:annotation> <xs:documentation>Used to define condition for BlockDetail search request</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:restriction base="conditionType"> <xs:attribute name="name" use="required"> <xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="BlockHeaderID"/> <xs:enumeration value="BlockDetailStartDate"/> <xs:enumeration value="BlockDetailEndDate"/> </xs:restriction> </xs:simpleType> </xs:attribute> </xs:restriction> </xs:simpleContent></xs:complexType></pre>					

complexType BlockHeaderConditionType

diagram						
namespace	V8XMLInterface					
type	restriction of <u>conditionType</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	name	xs:NMTOKEN	required			
	operation	binaryOperation	required			
	dataType	xs:NMTOKEN	optional			
annotation	documentation Used to define condition for BlockHeader search request					
source	<pre> <xs:complexType name="BlockHeaderConditionType"> <xs:annotation> <xs:documentation>Used to define condition for BlockHeader search request</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:restriction base="conditionType"> <xs:attribute name="name" use="required"> <xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="BlockHeaderID"/> <xs:enumeration value="BlockHeaderCode"/> <xs:enumeration value="BlockHeaderFrom"/> <xs:enumeration value="BlockHeaderName"/> <xs:enumeration value="BlockHeaderReservationStatus"/> <xs:enumeration value="BlockHeaderOpenForPickup"/> <xs:enumeration value="BlockHeaderTo"/> </xs:restriction> </xs:simpleType> </xs:attribute> </xs:restriction> </xs:simpleContent> </xs:complexType> </pre>					

complexType ccm_book_actualsType

diagram	
namespace	V8XMLInterface
children	<u>bookingID</u> <u>event_id</u> <u>postingDate</u> <u>menu_id</u> <u>menu_item_id</u> <u>misc_item_id</u> <u>function_space_id</u> <u>ResourceName</u> <u>DepartmentCode</u> <u>count</u> <u>total_amount</u> <u>OverrideReason</u> <u>UserName</u> <u>Covers</u>
used by	element <u>postType/ccm_book_actuals</u>
annotation	documentation POS posting
source	<pre><xs:complexType name="ccm_book_actualsType"> <xs:annotation> <xs:documentation>POS posting</xs:documentation> </xs:annotation> <xs:all> <xs:element name="bookingID" type="xs:integer"/> <xs:element name="event_id" type="xs:integer"/> <xs:element name="postingDate" type="xs:string"> <xs:annotation> <xs:documentation>Date in format DD.MM.YYYY</xs:documentation> </xs:annotation> <xs:element name="menu_id" type="xs:integer" minOccurs="0"/> <xs:element name="menu_item_id" type="xs:integer" minOccurs="0"/> <xs:element name="misc_item_id" type="xs:integer" minOccurs="0"/> <xs:element name="function_space_id" type="xs:integer" minOccurs="0"/> <xs:element name="ResourceName" type="xs:string"/> <xs:element name="DepartmentCode" type="xs:string"/> <xs:element name="count" type="xs:integer"/> <xs:element name="total_amount" type="xs:string"/> <xs:element name="OverrideReason" type="xs:string" minOccurs="0"/> <xs:element name="UserName" type="xs:string"/> <xs:element name="Covers" type="xs:integer" minOccurs="0"/> </xs:all></xs:complexType></pre>

element ccm_book_actualsType/bookingID


diagram	
namespace	V8XMLInterface

type	xs:integer
source	<code><xs:element name="bookingID" type="xs:integer"/></code>

element ccm_book_actualsType/event_id

diagram	
namespace	V8XMLInterface
type	xs:integer
source	<code><xs:element name="event_id" type="xs:integer"/></code>


element ccm_book_actualsType/postingDate

diagram	
namespace	V8XMLInterface
type	xs:string
annotation	documentation Date in format DD.MM.YYYY
source	<code><xs:element name="postingDate" type="xs:string"> <xs:annotation> <xs:documentation>Date in format DD.MM.YYYY</xs:documentation> </xs:annotation></xs:element></code>


element ccm_book_actualsType/menu_id

diagram	
namespace	V8XMLInterface
type	xs:integer
source	<code><xs:element name="menu_id" type="xs:integer" minOccurs="0"/></code>

element ccm_book_actualsType/menu_item_id

diagram	
namespace	V8XMLInterface
type	xs:integer
source	<code><xs:element name="menu_item_id" type="xs:integer" minOccurs="0"/></code>

element ccm_book_actualsType/misc_item_id

diagram	
namespace	V8XMLInterface
type	xs:integer

source	<code><xs:element name="misc_item_id" type="xs:integer" minOccurs="0"/></code>
--------	--

element ccm_book_actualsType/function_space_id

diagram	 A diagram showing a box with the text "function_space_id" inside, with a small icon of three horizontal lines to the left.
namespace	V8XMLInterface
type	xs:integer
source	<code><xs:element name="function_space_id" type="xs:integer" minOccurs="0"/></code>


element ccm_book_actualsType/ResourceName

diagram	 A diagram showing a box with the text "ResourceName" inside, with a small icon of three horizontal lines to the left.
namespace	V8XMLInterface
type	xs:string
source	<code><xs:element name="ResourceName" type="xs:string"/></code>


element ccm_book_actualsType/DepartmentCode

diagram	 A diagram showing a box with the text "DepartmentCode" inside, with a small icon of three horizontal lines to the left.
namespace	V8XMLInterface
type	xs:string
source	<code><xs:element name="DepartmentCode" type="xs:string"/></code>

element ccm_book_actualsType/count

diagram	 A diagram showing a box with the text "count" inside, with a small icon of three horizontal lines to the left.
namespace	V8XMLInterface
type	xs:integer
source	<code><xs:element name="count" type="xs:integer"/></code>

element ccm_book_actualsType/total_amount

diagram	 A diagram showing a box with the text "total_amount" inside, with a small icon of three horizontal lines to the left.
namespace	V8XMLInterface
type	xs:string
source	<code><xs:element name="total_amount" type="xs:string"/></code>

element ccm_book_actualsType/OverrideReason

diagram	
namespace	V8XMLInterface
type	xs:string
source	<pre><xs:element name="OverrideReason" type="xs:string" minOccurs="0"/></pre>


element ccm_book_actualsType/UserName

diagram	
namespace	V8XMLInterface
type	xs:string
source	<pre><xs:element name="UserName" type="xs:string"/></pre>

element ccm_book_actualsType/Covers

diagram	
namespace	V8XMLInterface
type	xs:integer
source	<pre><xs:element name="Covers" type="xs:integer" minOccurs="0"/></pre>

complexType ChildrenCategoriesConditionType

diagram						
namespace	V8XMLInterface					
type	restriction of conditionType					
attributes	Name	Type	Use	Default	Fixed	Annotation
	name	xs:NMTOKEN	required			
	operation	binaryOperation	required			
	dataType	xs:NMTOKEN	optional			
annotation	documentation Used to define condition for Children Categories search request.					
source	<pre><xs:complexType name="ChildrenCategoriesConditionType"> <xs:annotation> <xs:documentation>Used to define condition for Children Categories search request.</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:restriction base="conditionType"> <xs:attribute name="name" use="required"> <xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="ChildrenCategoriesCode"/> </xs:restriction> </xs:simpleType> </xs:attribute> </xs:restriction> </xs:simpleContent></xs:complexType></pre>					

complexType commandType

diagram	
namespace	V8XMLInterface
children	<u>post</u> <u>checkIn</u> <u>checkOut</u> <u>cancel</u> <u>resetProfilePassword</u>
used by	element <u>requestType/command</u>
source	<pre> <xs:complexType name="commandType"> <xs:choice> <xs:element name="post" type="postType"/> <xs:element name="checkIn"> <xs:complexType> <xs:sequence> <xs:element name="RoomNumber"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="checkOut"> <xs:complexType> <xs:sequence> <xs:element name="RoomNumber"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="cancel"> <xs:annotation> <xs:documentation>Cancel the reservation</xs:documentation> </xs:annotation> <xs:complexType> <xs:all> <xs:element name="GuestNum" type="xs:integer"/> <xs:element name="Reason" type="xs:string" minOccurs="0"/> <xs:element name="DeleteTraces" type="xs:int" minOccurs="0"/> <xs:element name="SendEmail" minOccurs="0"/> <xs:complexType> <xs:simpleContent> <xs:extension base="xs:int"> <xs:attribute name="TO" type="xs:string" use="required"/> <xs:attribute name="CC" type="xs:string" use="optional"/> <xs:attribute name="BCC" type="xs:string" use="optional"/> </xs:extension> </xs:simpleContent> </xs:complexType> </xs:element> </xs:all> </xs:complexType> </xs:element> <xs:element name="resetProfilePassword"> <xs:annotation> <xs:documentation>Resets the user password. New password sent by email. Used from myFidelio Homepage</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="userName" type="xs:string"/> </xs:sequence> </xs:complexType> </xs:element> </xs:choice></xs:complexType> </pre>
source	<pre> <xs:complexType name="commandType"> <xs:choice> <xs:element name="post" type="postType"/> <xs:element name="checkIn"> <xs:complexType> <xs:sequence> <xs:element name="RoomNumber"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="checkOut"> <xs:complexType> <xs:sequence> <xs:element name="RoomNumber"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="cancel"> <xs:annotation> <xs:documentation>Cancel the reservation</xs:documentation> </xs:annotation> <xs:complexType> <xs:all> <xs:element name="GuestNum" type="xs:integer"/> <xs:element name="Reason" type="xs:string" minOccurs="0"/> <xs:element name="DeleteTraces" type="xs:int" minOccurs="0"/> <xs:element name="SendEmail" minOccurs="0"/> <xs:complexType> <xs:simpleContent> <xs:extension base="xs:int"> <xs:attribute name="TO" type="xs:string" use="required"/> <xs:attribute name="CC" type="xs:string" use="optional"/> <xs:attribute name="BCC" type="xs:string" use="optional"/> </xs:extension> </xs:simpleContent> </xs:complexType> </xs:element> </xs:all> </xs:complexType> </xs:element> <xs:element name="resetProfilePassword"> <xs:annotation> <xs:documentation>Resets the user password. New password sent by email. Used from myFidelio Homepage</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="userName" type="xs:string"/> </xs:sequence> </xs:complexType> </xs:element> </xs:choice></xs:complexType> </pre>

element commandType/post

diagram	
namespace	V8XMLInterface
type	<u>postType</u>
children	<u>ccm_book_actuals</u> <u>crm_posting</u>
source	<code><xs:element name="post" type="postType"/></code>

element commandType/checkIn

diagram	
namespace	V8XMLInterface
children	<u>RoomNumber</u>
source	<code><xs:element name="checkIn"> <xs:complexType> <xs:sequence> <xs:element name="RoomNumber"/> </xs:sequence> </xs:complexType></xs:element></code>

element commandType/checkIn/RoomNumber

diagram	
namespace	V8XMLInterface
source	<code><xs:element name="RoomNumber"/></code>

element commandType/checkOut

diagram	
namespace	V8XMLInterface
children	<u>RoomNumber</u>
source	<code><xs:element name="checkOut"> <xs:complexType> <xs:sequence> <xs:element name="RoomNumber"/> </xs:sequence> </xs:complexType></xs:element></code>

element commandType/checkOut/RoomNumber

diagram	
namespace	V8XMLInterface

source	<code><xs:element name="RoomNumber"/></code>
--------	--

element commandType/cancel

diagram	
namespace	V8XMLInterface
children	<u>GuestNum Reason DeleteTraces SendEmail</u>
annotation	documentation Cancel the reservation
source	<pre><xs:element name="cancel"> <xs:annotation> <xs:documentation>Cancel the reservation</xs:documentation> </xs:annotation> <xs:complexType> <xs:all> <xs:element name="GuestNum" type="xs:integer"/> <xs:element name="Reason" type="xs:string" minOccurs="0"/> <xs:element name="DeleteTraces" type="xs:int" minOccurs="0"/> <xs:element name="SendEmail" type="xs:string" minOccurs="0"/> </xs:all> </xs:complexType> </xs:element></pre>

element commandType/cancel/GuestNum

diagram	
namespace	V8XMLInterface
type	xs:integer
source	<code><xs:element name="GuestNum" type="xs:integer"/></code>


element commandType/cancel/Reason

diagram	
namespace	V8XMLInterface
type	xs:string
source	<code><xs:element name="Reason" type="xs:string" minOccurs="0"/></code>

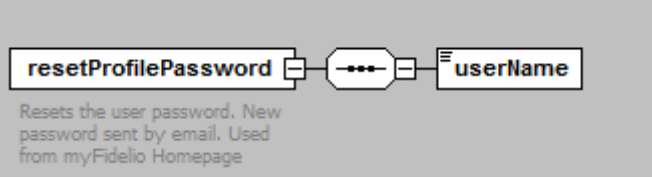
element commandType/cancel/DeleteTraces

diagram	
namespace	V8XMLInterface
type	xs:int
source	<code><xs:element name="DeleteTraces" type="xs:int" minOccurs="0"/></code>

element commandType/cancel/SendEmail

diagram						
namespace	V8XMLInterface					
type	extension of xs:int					
attributes	Name	Type	Use	Default	Fixed	Annotation
	TO	xs:string	required			
	CC	xs:string	optional			
	BCC	xs:string	optional			
source	<pre><xs:element name="SendEmail" minOccurs="0"> <xs:complexType> <xs:simpleContent> <xs:extension base="xs:int"> <xs:attribute name="TO" type="xs:string" use="required"/> <xs:attribute name="CC" type="xs:string" use="optional"/> <xs:attribute name="BCC" type="xs:string" use="optional"/> </xs:extension> </xs:simpleContent> </xs:complexType></xs:element></pre>					


element commandType/resetProfilePassword

diagram						
namespace	V8XMLInterface					
children	<u>userName</u>					
annotation	documentation Resets the user password. New password sent by email. Used from myFidelio Homepage					
source	<pre><xs:element name="resetProfilePassword"> <xs:annotation> <xs:documentation>Resets the user password. New password sent by email. Used from myFidelio Homepage</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="userName" type="xs:string"/> </xs:sequence> </xs:complexType></xs:element></pre>					

element commandType/resetProfilePassword/userName


diagram						
namespace	V8XMLInterface					
type	xs:string					
source	<pre><xs:element name="userName" type="xs:string"/></pre>					

complexType conditionsType


diagram						
namespace	V8XMLInterface					
children	<u>condition</u> <u>link</u>					
used by	elements <u>linkType/condition</u> <u>queryType/conditions</u> <u>updateType/conditions</u>					

	<u>importType/delete/conditions</u>
annotation	documentation Defines list of conditions for search
source	<pre><xs:complexType name="conditionsType"> <xs:annotation> <xs:documentation>Defines list of conditions for search</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="condition" type="conditionType"/> <xs:element name="link" type="linkType" minOccurs="0"/> </xs:sequence></xs:complexType></pre>


element conditionsType/condition

diagram						
namespace	V8XMLInterface					
type	<u>conditionType</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	name	xs:anySimpleType	required			
	operation	binaryOperation	required			
	dataType	xs:NMTOKEN	optional			
source	<pre><xs:element name="condition" type="conditionType"/></pre>					

element conditionsType/link


diagram						
namespace	V8XMLInterface					
type	<u>linkType</u>					
children	<u>condition</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	operator	xs:NMTOKENS	required			
source	<pre><xs:element name="link" type="linkType" minOccurs="0"/></pre>					

complexType conditionType

diagram						
namespace	V8XMLInterface					
type	extension of <u>conditionSimpleType</u>					
used by	element <u>conditionsType/condition</u> complexTypes <u>BlockDetailConditionType</u> <u>BlockHeaderConditionType</u> <u>ChildrenCategoriesConditionType</u> <u>ConditionType</u> <u>ConfiguredStatusList</u>					

	<u>ConditionType</u> <u>InfoBoard</u> <u>CreditCardTypesConditionType</u> <u>CurrencyListConditionType</u> <u>DepartmentCodeConditionType</u> <u>PostngConditionType</u> <u>ProfileConditionType</u> <u>ReservationConditionType</u> <u>SystemDateConditionType</u> <u>SystemInformationConditionType</u>					
attributes	Name name	Type xs:anySimpleType	Use required	Default	Fixed	Annotation
	operation	binaryOperation	required			
	dataType	xs:NMTOKEN	optional			
annotation	documentation defines a condition set on a single field. This is abstract type. The real type should be selected according to the request type (ReservationConditionType, ProfileConditionType etc.)					
source	<pre> <xs:complexType name="conditionType"> <xs:annotation> <xs:documentation>defines a condition set on a single field. This is abstract type. The real type should be selected according to the request type (ReservationConditionType, ProfileConditionType etc.)</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:extension base="conditionSimpleType"> <xs:attribute name="name" type="xs:anySimpleType" use="required"/> <xs:attribute name="operation" type="binaryOperation" use="required"/> <xs:attribute name="dataType" use="optional"/> <xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="String"/> <xs:enumeration value="Date"/> <xs:enumeration value="Int"/> <xs:enumeration value="Float"/> <xs:enumeration value="Plain"/> </xs:restriction> </xs:simpleType> </xs:attribute> </xs:extension> </xs:simpleContent></xs:complexType> </pre>					

complexType ConditionType_ConfiguredStatusList


diagram						
namespace	V8XMLInterface					
type	restriction of <u>conditionType</u>					
attributes	Name name	Type xs:NMTOKEN	Use optional	Default	Fixed	Annotation
	operation	binaryOperation	required			
	dataType	xs:NMTOKEN	optional			
annotation	documentation Used to include an Inactive Status ID in the list of StatusID's					
source	<pre> <xs:complexType name="ConditionType_ConfiguredStatusList"> <xs:annotation> <xs:documentation>Used to include an Inactive Status ID in the list of StatusID's</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:restriction base="conditionType"> <xs:attribute name="name" use="optional"/> <xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="StatusInactiveID"/> </xs:restriction> </xs:simpleType> </xs:attribute> </xs:restriction> </xs:simpleContent></xs:complexType> </pre>					

complexType ConditionType_InfoBoard

diagram						
namespace	V8XMLInterface					
type	extension of <u>conditionType</u>					
attributes	Name name	Type xs:anySimpleType	Use required	Default	Fixed	Annotation
	operation	binaryOperation	required			

	dataType xs:NMTOKEN optional
source	<code><xs:complexType name="ConditionType_InfoBoard"> <xs:simpleContent> <xs:extension base="conditionType"/> </xs:simpleContent></xs:complexType></code>

complexType CreditCardTypesConditionType

diagram						
namespace	V8XMLInterface					
type	restriction of <u>conditionType</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	name	xs:NMTOKEN	required			
	operation	binaryOperation	required			
	dataType	xs:NMTOKEN	optional			
annotation	documentation Used to define condition for Credit Cards search request.					
source	<pre><xs:complexType name="CreditCardTypesConditionType"> <xs:annotation> <xs:documentation>Used to define condition for Credit Cards search request.</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:restriction base="conditionType"> <xs:attribute name="name" use="required"> <xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="CreditCardCode"/> </xs:restriction> </xs:simpleType> </xs:attribute> </xs:restriction> </xs:simpleContent></xs:complexType></pre>					

complexType crm_postType


diagram	
namespace	V8XMLInterface
children	<u>GuestNum</u> <u>PostingDate</u> <u>RoomNum</u> <u>Quantity</u> <u>Price</u> <u>Comment</u> <u>CheckNum</u> <u>CheckDate</u> <u>Check</u> <u>Description</u> <u>Currency</u> <u>ProfileID</u>
used by	element <u>postType/crm_posting</u>
annotation	documentation Used to submit a posting
source	<pre> <xs:complexType name="crm_postType"> <xs:annotation> <xs:documentation>Used to submit a posting</xs:documentation> </xs:annotation> <xs:all> <xs:element name="GuestNum" type="xs:integer"> <xs:annotation> <xs:documentation>Reservation number</xs:documentation> </xs:annotation> </xs:element> <xs:element name="PostingDate" type="xs:string"> <xs:annotation> <xs:documentation>Date in format DD.MM.YYYY</xs:documentation> </xs:annotation> </xs:element> <xs:element name="RoomNum" type="xs:string"/> <xs:element name="Quantity" type="xs:integer"/> <xs:element name="Price" type="xs:string"/> <xs:element name="Comment" type="xs:string" minOccurs="0"/> <xs:element name="CheckNum" type="xs:string" minOccurs="0"> <xs:annotation> <xs:documentation>Is mandatory if Check element is submitted</xs:documentation> </xs:annotation> </xs:element> <xs:element name="CheckDate" type="xs:string" minOccurs="0"> <xs:annotation> <xs:documentation>Used only together with Check. It is mandatory if Check element is submitted. Must contain date and time part</xs:documentation> </xs:annotation> </xs:element> <xs:element name="Check" type="xs:string" minOccurs="0"> <xs:annotation> <xs:documentation>POS Guest Checks</xs:documentation> </xs:annotation> </xs:element> <xs:element name="Description" type="xs:string" minOccurs="0"/> <xs:element name="Currency" type="xs:string" minOccurs="0"> <xs:annotation> <xs:documentation>Optional currency code short description. If not provided, posting made in system default currency</xs:documentation> </xs:annotation> </xs:element> <xs:element name="ProfileID" type="xs:string" minOccurs="0"> <xs:annotation> <xs:documentation>Allows to make a posting for specific guest in multi guest reservation. Not supported for FA postings</xs:documentation> </xs:annotation> </xs:element> </xs:all> </xs:complexType> </pre>

	<code><xs:documentation>Used only together with Check. It is mandatory if Check element is submitted. Must contain date and time part</xs:documentation> </xs:annotation> </xs:element> <xs:element name="Check" minOccurs="0"> </xs:annotation> <xs:documentation> POS Guest Checks</xs:documentation> </xs:annotation> </xs:element> <xs:element name="Description" type="xs:string" minOccurs="0"/> </xs:annotation> <xs:documentation>Optional currency code short description. If not provided, posting made in system default currency</xs:documentation> </xs:annotation> </xs:element> <xs:element name="ProfileID" type="xs:integer" minOccurs="0"> </xs:annotation> <xs:documentation>Allows to make a posting for specific guest in multi guest reservation. Not supported for FA postings</xs:documentation> </xs:annotation> </xs:element> </xs:all></xs:complexType></code>
--	---

element crm_postType/GuestNum

diagram	
namespace	V8XMLInterface
type	xs:integer
annotation	documentation Reservation number
source	<code><xs:element name="GuestNum" type="xs:integer"> </xs:annotation> <xs:documentation>Reservation number</xs:documentation> </xs:annotation></xs:element></code>


element crm_postType/PostingDate

diagram	
namespace	V8XMLInterface
type	xs:string
annotation	documentation Date in format DD.MM.YYYY
source	<code><xs:element name="PostingDate" type="xs:string"> </xs:annotation> <xs:documentation>Date in format DD.MM.YYYY</xs:documentation> </xs:annotation></xs:element></code>

element crm_postType/RoomNum

diagram	
namespace	V8XMLInterface
type	xs:string
source	<code><xs:element name="RoomNum" type="xs:string"/></code>

element crm_postType/Quantity

diagram	
namespace	V8XMLInterface
type	xs:integer

source	<code><xs:element name="Quantity" type="xs:integer"/></code>
--------	--

element crm_postType/Price

diagram	
namespace	V8XMLInterface
type	xs:string
source	<code><xs:element name="Price" type="xs:string"/></code>


element crm_postType/Comment

diagram	
namespace	V8XMLInterface
type	xs:string
source	<code><xs:element name="Comment" type="xs:string" minOccurs="0"/></code>


element crm_postType/CheckNum

diagram	
namespace	V8XMLInterface
type	xs:string
annotation	documentation Is mandatory if Check element is submitted
source	<code><xs:element name="CheckNum" type="xs:string" minOccurs="0"> <xs:annotation> <xs:documentation>Is mandatory if Check element is submitted</xs:documentation> </xs:annotation></xs:element></code>

element crm_postType/CheckDate

diagram	
namespace	V8XMLInterface
type	xs:string
annotation	documentation Used only together with Check. It is mandatory if Check element is submitted. Must contain date and time part
source	<code><xs:element name="CheckDate" type="xs:string" minOccurs="0"> <xs:annotation> <xs:documentation>Used only together with Check. It is mandatory if Check element is submitted. Must contain date and time part</xs:documentation> </xs:annotation></xs:element></code>


element crm_postType/Check

diagram	
namespace	V8XMLInterface
annotation	documentation POS Guest Checks
source	<pre><xs:element name="Check" minOccurs="0"> <xs:annotation> <xs:documentation> POS Guest Checks</xs:documentation> </xs:annotation></xs:element></pre>


element crm_postType/Description

diagram	
namespace	V8XMLInterface
type	xs:string
source	<pre><xs:element name="Description" type="xs:string" minOccurs="0"/></pre>


element crm_postType/Currency

diagram	
namespace	V8XMLInterface
type	xs:string
annotation	documentation Optional currency code short description. If not provided, postig made in system default currency
source	<pre><xs:element name="Currency" type="xs:string" minOccurs="0"> <xs:annotation> <xs:documentation>Optional currency code short description. If not provided, postig made in system default currency</xs:documentation> </xs:annotation></xs:element></pre>


element crm_postType/ProfileID

diagram	
namespace	V8XMLInterface
type	xs:integer
annotation	documentation Allows to make a posting for specific guest in multi guest reservation. Not supported for FA postings
source	<pre><xs:element name="ProfileID" type="xs:integer" minOccurs="0"> <xs:annotation> <xs:documentation>Allows to make a posting for specific guest in multi guest reservation. Not supported for FA postings</xs:documentation> </xs:annotation></xs:element></pre>


complexType CurrencyListConditionType

diagram						
namespace	V8XMLInterface					
type	restriction of <u>conditionType</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	name	xs:NMTOKEN	required			
	operation	binaryOperation	required			
	dataType	xs:NMTOKEN	optional			
annotation	documentation Used to define condition for CurrencyList search request					
source	<pre><xs:complexType name="CurrencyListConditionType"> <xs:annotation> <xs:documentation>Used to define condition for CurrencyList search request</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:restriction base="conditionType"> <xs:attribute name="name" use="required"> <xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="CurrencyShortdesc"/> <xs:enumeration value="CurrencyISO3"/> <xs:enumeration value="CurrencyDepartment"/> </xs:restriction> </xs:simpleType> </xs:attribute> </xs:restriction> </xs:simpleContent></xs:complexType></pre>					

complexType DepartmentCodeConditionType

diagram						
namespace	V8XMLInterface					
type	restriction of <u>conditionType</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	name	xs:NMTOKEN	required			
	operation	binaryOperation	required			
	dataType	xs:NMTOKEN	optional			
annotation	documentation Used to define condition for department code search request.					
source	<pre><xs:complexType name="DepartmentCodeConditionType"> <xs:annotation> <xs:documentation>Used to define condition for department code search request.</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:restriction base="conditionType"> <xs:attribute name="name" use="required"> <xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="DepartmentCode"> <xs:annotation> <xs:documentation>DepartmentCode means 3 letter short description</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="DepartmentName"/> <xs:enumeration value="DepartmentShortDesc"/> </xs:restriction> </xs:simpleType> </xs:attribute> </xs:restriction> </xs:simpleContent></xs:complexType></pre>					

complexType fieldsType

diagram						
namespace	V8XMLInterface					
children	<u>field</u>					

used by	elements <u>insertType/fields</u> <u>queryType/fields</u> <u>rowType/fields</u> <u>AvailabilityForWebType/fields</u> <u>updateType/fields</u> <u>HotelAvailabilityType/fields</u>
source	<code><xs:complexType name="fieldsType"> <xs:sequence maxOccurs="unbounded"> <xs:element name="field" type="fieldType" maxOccurs="unbounded"/> </xs:sequence></xs:complexType></code>

element fieldsType/field

diagram						
namespace	V8XMLInterface					
type	<u>fieldType</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	name	xs:NMTOKEN	required			
	attr	xs:string	optional			documentation Could be used as additional identifier for the field. For example Chaild category ot type of reservation attribute
	addData	xs:string	optional			
source	<code><xs:element name="field" type="fieldType" maxOccurs="unbounded"/></code>					

complexType fieldType

diagram						
namespace	V8XMLInterface					
type	extension of xs:string					
used by	element <u>fieldsType/field</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	name	xs:NMTOKEN	required			
	attr	xs:string	optional			documentation Could be used as additional identifier for the field. For example Chaild category ot type of reservation attribute
	addData	xs:string	optional			
annotation	documentation Fields which can be requested					

source	<pre> <xs:complexType name="fieldType"> <xs:annotation> <xs:documentation>Fields which can be requested</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:extension base="xs:string"> <xs:attribute name="name" use="required"> <xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="GuestArrival"> <xs:annotation> <xs:documentation>Arrival date</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="ReservationComment1"> <xs:enumeration value="ReservationComment2"/> <xs:enumeration value="CheckinDateTime"> <xs:enumeration value="NoAvailReason"> <xs:annotation> <xs:documentation>1 = Waitlist 2 = Offer 3 = Canceled 4 = No Show</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="ProfileID"> <xs:enumeration value="PaymentMethod"> <xs:annotation> <xs:documentation>The department code which is associated with the payment</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="GuestDeparture"> <xs:annotation> <xs:documentation>Departure date</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="GuestFirstname"> <xs:enumeration value="GuestName"> <xs:enumeration value="Name2"> <xs:enumeration value="GuestNum"> <xs:annotation> <xs:documentation>Reservation Number</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="ReservationStatus"> <xs:annotation> <xs:documentation>0=tentative 1=definitive 3=not affecting availability</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="RoomNum"> <xs:enumeration value="RoomType"> <xs:enumeration value="ProfileType"> <xs:annotation> <xs:documentation>1 - Company 2 - Individual 3 - Employee</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="ProfileCategory"> <xs:annotation> <xs:documentation>1=Company 2=Travel Agent 3=Source 4=Individual 5=Vendors 6=Meeting Planner</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="DepartmentCode"> <xs:enumeration value="DepartmentName"> <xs:enumeration value="DepartmentShortDesc"> <xs:enumeration value="DepartmentType"> <xs:annotation> <xs:documentation>1 = debit value="CountryISO2"> <xs:enumeration value="CountryISO3"> <xs:enumeration value="Email"> <xs:enumeration value="Fax"> <xs:enumeration value="Gender"> <xs:annotation> <xs:documentation>M – male, F – Female</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="DeleteCode"> <xs:annotation> <xs:documentation>Prfile delete code. 0 –profile is active 1 – profile is not active</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="GuestType"> <xs:enumeration value="LangISO2"> <xs:enumeration value="LangISO3"> <xs:enumeration value="LetterGreeting"> <xs:enumeration value="NationalityISO2"> <xs:enumeration value="NationalityISO3"> <xs:enumeration value="VipCode"> <xs:enumeration value="ProfileID"> <xs:enumeration value="Street1"> <xs:enumeration value="Street2"> <xs:enumeration value="Street3"> <xs:enumeration value="State"> <xs:enumeration value="Telephone"> <xs:enumeration value="Title"> <xs:enumeration value="ZIP"> <xs:enumeration value="SystemDate"> <xs:enumeration value="LicenseName"> <xs:enumeration value="LicenseNoOfRooms"> <xs:enumeration value="CrsSystem"> <xs:annotation> <xs:documentation>ID of the CRS system the reservation originates from</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="CrsResNumber"> <xs:annotation> <xs:documentation>Unique ID coming from CRS System, linked to CrsSystem in order to support multiple CRS systems.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="Notes"> <xs:enumeration value="NoOfRooms"> <xs:enumeration value="NoOfAdults"> <xs:enumeration value="RateCode"> <xs:enumeration value="RateValue"> <xs:enumeration value="ForeignRateValue"> <xs:annotation> <xs:documentation>Rate in foreign currency</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="CurrencyCode"> <xs:enumeration value="MarketCode"> <xs:enumeration value="CompanyID"> <xs:enumeration value="TravelAgentID"> <xs:enumeration value="SourceID"> <xs:enumeration value="CompanyName"> <xs:enumeration value="TravelAgentName"> <xs:enumeration value="SourceName"> <xs:enumeration value="ReservationAttribute"> <xs:annotation> <xs:documentation>Could be use with conjunction with optional attribute "attr" which contains the required attribute type.For Example <field name="ReservationAttribute" attr="ABC"/> If the attribute is not specified than all available attributes will be included in the responsel self this element used in the update or insert than user must specify attribute attr</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="Child"> <xs:annotation> <xs:documentation>Could be used with conjunction with optional attribute "attr" which contains the required child type.For Example <field name="Child" attr="JUN"/> for juniorIf the attribute is not specified than all available attributes will be included in the responseThe attr mandatory for update / insert statements</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="SourceCode"> <xs:enumeration value="ChannelCode"> <xs:enumeration value="PostingPrice"> <xs:enumeration value="PostingID"> <xs:enumeration value="PostingQuantity"> <xs:enumeration value="PostingForeignPrice"> <xs:enumeration value="PostingGuestNumOrig"> <xs:enumeration value="PostingGuestNumOrig"> <xs:enumeration value="PostingProfileOrigID"> <xs:enumeration value="PostingComment"> <xs:enumeration value="PostingCheckNr"> <xs:enumeration value="PostingDescription"> <xs:enumeration value="PostingDate"> <xs:enumeration value="LoginName"> <xs:enumeration value="LoginPassword"> <xs:enumeration value="ChildrenCategoriesCode"> <xs:enumeration value="ChildrenCategoriesName"> <xs:enumeration value="ChildrenCategoriesFromAge"> <xs:enumeration value="ChildrenCategoriesToAge"> <xs:enumeration value="CreditCardCode"> </pre>
--------	--


```

<xs:enumeration value="CreditCardName"/>      <xs:enumeration value="FANumber"/>
<xs:enumeration value="FADescription"/>      <xs:enumeration value="ExpArrival"/>
<xs:enumeration value="ExpDeparture"/>      <xs:enumeration value="ActArrival"/>
<xs:enumeration value="ActDeparture"/>      <xs:enumeration value="CreditLimitType"/>
<xs:enumeration value="CreditLimitAmount"/>  <xs:enumeration value="CreditCardNo"/>
<xs:enumeration value="ExpiryMonth"/>      <xs:enumeration value="ExpiryYear"/>
<xs:enumeration value="CardholderName"/>    <xs:enumeration value="CreditCardCode"/>
<xs:enumeration value="FAGroup"/>          <xs:enumeration value="TryToMerge"/>      <xs:annotation>
<xs:documentation>Can be used with Profile -> Insert command only.Values 1 - true, 0 - false Value is 1
XML interface will try to find existing profiles which has similar data (according to profile merge
setup)</xs:documentation>      </xs:annotation>      </xs:enumeration>      <xs:enumeration
value="HtmlId"/>      <xs:enumeration value="HtmlName"/>      <xs:enumeration
value="HtmlContent"/>      <xs:enumeration value="ProfileGlobalID"/>      <xs:enumeration
value="CentralSyncTime"/>      <xs:enumeration value="SeatingID"/>      <xs:enumeration
value="SeatingShortDesc"/>      <xs:enumeration value="SeatingLongDesc"/>      <xs:enumeration
value="SeatingDisplayOrder"/>      <xs:enumeration value="StatusID"/>      <xs:enumeration
value="StatusShortDesc"/>      <xs:enumeration value="StatusLongDesc"/>      <xs:enumeration
value="StatusDisplayOrder"/>      <xs:enumeration value="StatusWebName"/>      <xs:enumeration
value="StatusInactiveID"/>      <xs:enumeration value="Booking_CompanyID"/>      <xs:enumeration
value="Booking_ContactID"/>      <xs:enumeration value="Booking_ArrivalDate"/>
<xs:enumeration value="Booking_DepartureDate"/>      <xs:enumeration value="Booking_Name"/>
<xs:enumeration value="Booking_ConferenceStatus"/>      <xs:enumeration
value="Booking_RoomStatus"/>      <xs:enumeration value="Booking_ConferenceOnly"/>
<xs:enumeration value="Booking_RoomsOnly"/>      <xs:enumeration
value="Booking_ConferenceAndRooms"/>      <xs:enumeration value="Booking_Notes"/>
<xs:enumeration value="Booking_NoOfAttendes"/>      <xs:enumeration value="Booking_MarketCode"/>
<xs:enumeration value="Booking_SourceCode"/>      <xs:enumeration value="Booking_NoteCategory"/>
<xs:enumeration value="ConferencePackageID"/>      <xs:enumeration
value="ConferencePackageName"/>      <xs:enumeration value="ConferencePackageValidFrom"/>
<xs:enumeration value="ConferencePackageValidTo"/>      <xs:enumeration value="Eventid"/>
<xs:enumeration value="EventName"/>      <xs:enumeration value="EventStartDate"/>
<xs:enumeration value="EventStartTime"/>      <xs:enumeration value="EventEndDate"/>
<xs:enumeration value="EventEndTime"/>      <xs:enumeration value="EventInfoBoard"/>
<xs:enumeration value="EventProfileName"/>      <xs:enumeration value="EventPax"/>
<xs:enumeration value="EventRoomName"/>      <xs:enumeration value="TimeStamp"/>
<xs:enumeration value="EventStatus"/>      <xs:enumeration value="EventRoomId"/>
<xs:enumeration value="ActivityId"/>      <xs:enumeration value="ActivityCompanyName"/>
<xs:enumeration value="ActivityContactName"/>      <xs:enumeration value="ActivityDescription"/>
<xs:enumeration value="ActivityStartDate"/>      <xs:enumeration value="ActivityEndDate"/>
<xs:enumeration value="ActivityManager"/>      <xs:enumeration value="CreditStatus"/>
<xs:enumeration value="CreditReason"/>      <xs:enumeration value="CreditStatusChangeTime"/>
<xs:enumeration value="LinkedProfile"/>      <xs:enumeration value="AddProfileLink"/>
<xs:enumeration value="DeleteProfileLink"/>      <xs:enumeration value="EditProfileLink"/>
<xs:enumeration value="ActivityCompanyID"/>      <xs:enumeration value="ActivityCompanyGlobalID"/>
<xs:enumeration value="ActivityContactID"/>      <xs:enumeration value="ActivityContactGlobalID"/>
<xs:enumeration value="ActivityManagerID"/>      <xs:enumeration value="ActivityTypeID"/>
<xs:enumeration value="ActivityAllDayID"/>      <xs:enumeration value="ActivityShowasID"/>
<xs:enumeration value="ActivityReminderID"/>      <xs:enumeration value="ActivityNeedReminder"/>
<xs:enumeration value="ActivityPrivate"/>      <xs:enumeration value="ActivityStartDateTime"/>
<xs:enumeration value="ActivityEndDateTime"/>      <xs:enumeration value="ActivityCompletedDate"/>
<xs:enumeration value="ActivityLinkedBookingId"/>      <xs:enumeration
value="ActivityLinkedCommunicationId"/>      <xs:enumeration value="ActivityCheckAvailability"/>
<xs:enumeration value="ActivityNotes"/>      <xs:enumeration value="BirthPlace"/>
<xs:enumeration value="Department"/>      <xs:enumeration value="Position"/>      <xs:enumeration
value="GroupID"/>      <xs:enumeration value="GroupName"/>      <xs:enumeration
value="GroupContactID"/>      <xs:enumeration value="GroupFrom"/>      <xs:enumeration
value="GroupTo"/>      <xs:enumeration value="GroupTemplate"/>      <xs:enumeration
value="GroupTemplateID"/>      <xs:enumeration value="GroupInactive"/>      <xs:enumeration
value="GroupCompanyName"/>      <xs:enumeration value="GroupCompanyID"/>
<xs:enumeration value="GroupTravelAgentName"/>      <xs:enumeration value="GroupTravelAgentID"/>
<xs:enumeration value="GroupSourceName"/>      <xs:enumeration value="GroupSourceID"/>
<xs:enumeration value="GroupIndividualName"/>      <xs:enumeration value="GroupIndividualID"/>
<xs:enumeration value="GroupVendorName"/>      <xs:enumeration value="GroupVendorID"/>
<xs:enumeration value="GroupMeetingPlannerName"/>      <xs:enumeration
value="GroupMeetingPlannerID"/>      <xs:enumeration value="GroupComment"/>
<xs:enumeration value="BlockDetailID"/>      <xs:enumeration value="BlockDetailDate"/>
<xs:enumeration value="BlockDetailRoomType"/>      <xs:enumeration value="BlockDetailCutOffDate"/>
<xs:enumeration value="BlockDetailInitNoOfRooms"/>      <xs:enumeration
value="BlockDetailActualNoOfRooms"/>      <xs:enumeration value="BlockDetailPickedUp"/>
<xs:enumeration value="BlockDetailCancelled"/>      <xs:enumeration value="BlockHeaderID"/>
<xs:enumeration value="BlockHeaderCode"/>      <xs:enumeration value="BlockHeaderName"/>
<xs:enumeration value="BlockHeaderFrom"/>      <xs:enumeration value="BlockHeaderTo"/>
<xs:enumeration value="BlockHeaderStatusCode"/>      <xs:enumeration value="BlockHeaderStatus"/>
<xs:enumeration value="BlockHeaderReservationStatus"/>      <xs:enumeration

```

value="BlockHeaderRate"/>	<xs:enumeration value="BlockHeaderElastic"/>	<xs:enumeration value="Guarantee"/>	<xs:enumeration value="TotalStay"/>	<xs:enumeration value="ForeignTotalStay"/>	<xs:enumeration value="RoomTypeDesc"/>	<xs:enumeration value="RoomTypeLongDesc"/>	<xs:enumeration value="Date"/>	<xs:enumeration value="Price"/>	<xs:enumeration value="BaseCurrencyPrice"/>	<xs:enumeration value="Availability"/>	<xs:enumeration value="RateInfo"/>	<xs:enumeration value="ApprovalAmount"/>	<xs:enumeration value="ApprovalCode"/>	<xs:enumeration value="CurrencyShortdesc"/>	<xs:enumeration value="CurrencyName"/>	<xs:enumeration value="CurrencyISO3"/>	<xs:enumeration value="CurrencyDigits"/>	<xs:enumeration value="CurrencyDepartment"/>	<xs:enumeration value="HurdleLOS"/>	<xs:enumeration value="HurdleRateAmount"/>	<xs:annotation>	<xs:documentation> Amount which could be exceeded for given arrival date and LOS to pass the hurdle </xs:documentation>	</xs:annotation>	</xs:enumeration>	<xs:enumeration value="HurdleDelta"/>	<xs:annotation>	<xs:documentation>variation of the hurdle rate each time a reservation is made. Not allowed if LOS is not 0</xs:documentation>	</xs:annotation>	</xs:enumeration>	<xs:enumeration value="HurdleClosed"/>	<xs:annotation>	<xs:documentation> 1 - closed for this arrival day and this length of stay</xs:documentation>	</xs:annotation>	</xs:enumeration>	<xs:enumeration value="HurdleMaxRateAmount"/>	<xs:annotation>	<xs:documentation>maximal value of the hurdle rate</xs:documentation>	</xs:annotation>	</xs:enumeration>	<xs:enumeration value="OverbookingDate"/>	<xs:enumeration value="OverbookingType"/>	<xs:annotation>	<xs:documentation> 1 = House Overbooking</xs:documentation>	</xs:annotation>	<xs:enumeration value="PackageCode"/>	<xs:enumeration value="PackageName"/>	<xs:enumeration value="PackageFrequencyCode"/>	<xs:enumeration value="PackageFrequencyName"/>	<xs:enumeration value="PackageCurrency"/>	<xs:enumeration value="PackageStart"/>	<xs:enumeration value="PackageEnd"/>	<xs:enumeration value="PackagePrice"/>	<xs:enumeration value="PackageIncluded"/>	<xs:enumeration value="PackageSinglePerRes"/>	<xs:enumeration value="PackageShowInRes"/>	<xs:enumeration value="PackagePriceType"/>	<xs:annotation>	<xs:documentation>0 - per child category 1 - per adult 2 - flat</xs:documentation>	</xs:annotation>	</xs:enumeration>	<xs:enumeration value="PackagePriceChildCategory"/>	<xs:annotation>	<xs:documentation>Presented only PackagePriceType is 0</xs:documentation>	</xs:annotation>	</xs:enumeration>	</xs:restriction>	</xs:simpleType>	</xs:attribute>	</xs:attribute name="attr" type="xs:string" use="optional"/>	<xs:annotation>	<xs:documentation>Could be used as additional identifier for the field. For example Child category or type of reservation attribute</xs:documentation>	</xs:annotation>	</xs:attribute>	<xs:attribute name="addData" type="xs:string" use="optional"/>	</xs:extension>	</xs:simpleContent>	</xs:complexType>
---------------------------	--	-------------------------------------	-------------------------------------	--	--	--	--------------------------------	---------------------------------	---	--	------------------------------------	--	--	---	--	--	--	--	-------------------------------------	--	-----------------	---	------------------	-------------------	---------------------------------------	-----------------	--	------------------	-------------------	--	-----------------	---	------------------	-------------------	---	-----------------	---	------------------	-------------------	---	---	-----------------	---	------------------	---------------------------------------	---------------------------------------	--	--	---	--	--------------------------------------	--	---	---	--	--	-----------------	--	------------------	-------------------	---	-----------------	---	------------------	-------------------	-------------------	------------------	-----------------	--	-----------------	--	------------------	-----------------	--	-----------------	---------------------	-------------------

complexType HotelAvailabilityType

diagram						
namespace	V8XMLInterface					
children	fields					
used by	element requestType/HotelAvailability					
attributes	Name	Type	Use	Default	Fixed	Annotation
	Name	xs:string	optional			
	TranslationTable	xs:string	optional			
source	<pre><xs:complexType name="HotelAvailabilityType"> <xs:all> <xs:element name="fields" type="fieldsType"/> </xs:all> <xs:attribute name="Name" type="xs:string" use="optional"/> <xs:attribute name="TranslationTable" type="xs:string" use="optional"/></xs:complexType></pre>					

element HotelAvailabilityType/fields

diagram	
namespace	V8XMLInterface

type	<u>fieldsType</u>
children	<u>field</u>
source	<code><xs:element name="fields" type="fieldsType"/></code>

complexType importType

diagram						
namespace	V8XMLInterface					
children	<u>insert</u> <u>update</u> <u>delete</u>					
used by	element <u>requestType/import</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	TableName	xs:string	required			
	HotelID	xs:string	required			
	Name	xs:string	optional			
source	<pre> <xs:complexType name="importType"> <xs:choice> <xs:element name="insert"> <xs:complexType> <xs:sequence> <xs:element name="rows" type="rowsType"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="update" type="updateType"/> <xs:element name="delete"> <xs:complexType> <xs:sequence> <xs:element name="conditions" type="conditionsType" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> <xs:attribute name="TableName" type="xs:string" use="required"/> <xs:attribute name="HotelID" type="xs:string" use="required"/> <xs:attribute name="Name" type="xs:string" use="optional"/></xs:complexType> </pre>					

element importType/insert

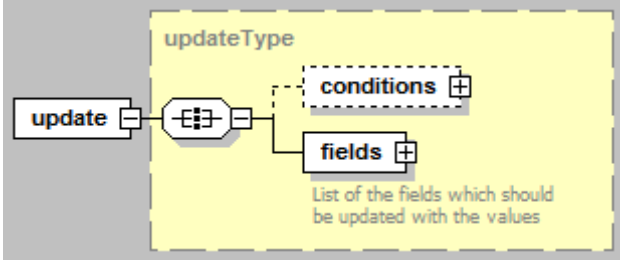
diagram						
namespace	V8XMLInterface					
children	<u>rows</u>					
source	<pre> <xs:element name="insert"> <xs:complexType> <xs:sequence> <xs:element name="rows" type="rowsType"/> </xs:sequence> </xs:complexType></xs:element> </pre>					

element importType/insert/rows


diagram						
namespace	V8XMLInterface					
type	<u>rowsType</u>					
children	<u>row</u>					

source	<code><xs:element name="rows" type="rowsType"/></code>
--------	--

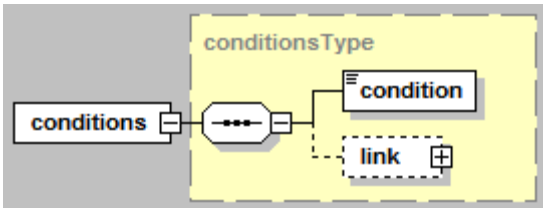
element importType/update

diagram						
namespace	V8XMLInterface					
type	updateType					
children	conditions fields					
attributes	Name	Type	Use	Default	Fixed	Annotation
	ReqType	xs:NMTOKEN	required			
	Name	xs:string	optional			
	TranslationTable	xs:string	optional			documentation If present in the request, short descriptions in request and response will be translated based on the specified translation table
source	<code><xs:element name="update" type="updateType"/></code>					

element importType/delete


diagram						
namespace	V8XMLInterface					
children	conditions					
source	<code><xs:element name="delete"> <xs:complexType> <xs:sequence> <xs:element name="conditions" type="conditionsType" minOccurs="0"/> </xs:sequence> </xs:complexType></xs:element></code>					

element importType/delete/conditions

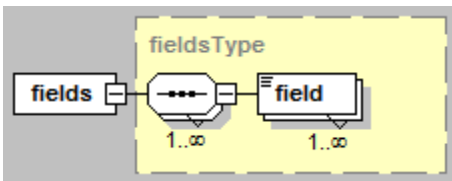
diagram						
namespace	V8XMLInterface					

type	<u>conditionsType</u>
children	<u>condition link</u>
source	<code><xs:element name="conditions" type="conditionsType" minOccurs="0"/></code>

complexType insertType


diagram						
namespace	V8XMLInterface					
children	<u>fields</u>					
used by	element <u>requestType/insert</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	ReqType	xs:NMTOKEN	required			
	Name	xs:string	optional			
	TranslationTable	xs:string	optional			documentation If present in the request, short descriptions in request and response will be translated based on the specified translation table
annotation	documentation Not described yet					
source	<pre> <xs:complexType name="insertType"> <xs:annotation> <xs:documentation>Not described yet</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="fields" type="fieldsType"/> </xs:sequence> <xs:attribute name="ReqType" use="required" type="xs:NMTOKEN" base="xs:NMTOKEN" <xs:enumeration value="Profile"/> <xs:enumeration value="Reservation"/> <xs:enumeration value="FinancialAccount"/> <xs:enumeration value="ConferenceBooking"/> <xs:enumeration value="Activity"/> <xs:enumeration value="Task"/> <xs:enumeration value="Group"/> <xs:enumeration value="GroupTemplate"/> <xs:enumeration value="CreditCardApproval"/> <xs:enumeration value="Report"/> </xs:restriction> </xs:attribute> <xs:attribute name="Name" type="xs:string" use="optional"/> <xs:attribute name="TranslationTable" type="xs:string" use="optional"/> <xs:annotation> <xs:documentation>If present in the request, short descriptions in request and response will be translated based on the specified translation table</xs:documentation> </xs:annotation> </xs:complexType> </pre>					

element insertType/fields

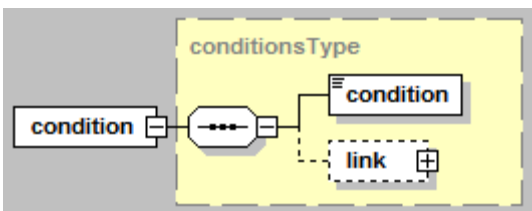
diagram						
namespace	V8XMLInterface					
type	<u>fieldsType</u>					
children	<u>field</u>					

source	<code><xs:element name="fields" type="fieldsType"/></code>
--------	--


complexType linkType

diagram						
namespace	V8XMLInterface					
children	<u>condition</u>					
used by	element <u>conditionsType/link</u>					
attributes	Name operator	Type xs:NMTOKENS	Use required	Default	Fixed	Annotation
annotation	documentation links to conditions to form a hierarchy					
source	<pre><xs:complexType name="linkType"> <xs:annotation> <xs:documentation>links to conditions to form a hierarchy</xs:documentation> </xs:annotation> <xs:sequence minOccurs="0"> <xs:element name="condition" type="conditionsType"/> </xs:sequence> <xs:attribute name="operator" use="required"> <xs:simpleType> <xs:restriction base="xs:NMTOKENS"> <xs:enumeration value="AND"/> <xs:enumeration value="OR"/> <xs:enumeration value="NOT"/> </xs:restriction> </xs:simpleType> </xs:attribute> </xs:complexType></pre>					

element linkType/condition


diagram						
namespace	V8XMLInterface					
type	<u>conditionsType</u>					
children	<u>condition</u> <u>link</u>					
source	<code><xs:element name="condition" type="conditionsType"/></code>					

complexType PostngConditionType

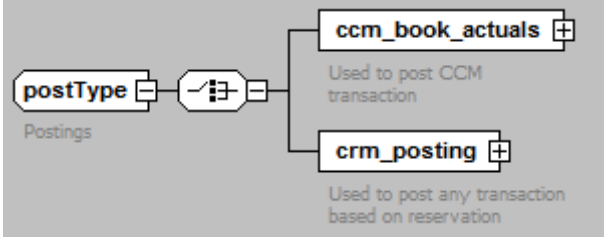
diagram						
namespace	V8XMLInterface					
type	restriction of <u>conditionType</u>					
attributes	Name name	Type xs:NMTOKEN	Use required	Default	Fixed	Annotation
	operation	binaryOperation	required			
	dataType	xs:NMTOKEN	optional			

annotation	documentation Used to define condition for postings search request.
source	<pre> <xs:complexType name="PostngConditionType"> <xs:annotation> <xs:documentation>Used to define condition for postings search request. </xs:documentation> </xs:annotation> <xs:simpleContent> <xs:restriction base="conditionType"> <xs:attribute name="name" use="required"> <xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="PostingID"/> <xs:enumeration value="ProfileID"/> <xs:enumeration value="GuestNum"/> <xs:enumeration value="DepartmentCode"/> <xs:enumeration value="PostingDescription"/> <xs:enumeration value="PostingDate"/> <xs:enumeration value="PostingProfileOrigID"/> <xs:enumeration value="PostingGuestNumOrig"/> <xs:enumeration value="PostingComment"/> <xs:enumeration value="PostingCheckNr"/> </xs:restriction> </xs:simpleType> </xs:attribute> </xs:restriction> </xs:simpleContent></xs:complexType> </pre>

complexType postResponseType

diagram	
namespace	V8XMLInterface
used by	element <u>fidelio/response</u>
annotation	documentation Returning by XML interface as a response for posting
source	<pre> <xs:complexType name="postResponseType"> <xs:annotation> <xs:documentation>Returning by XML interface as a response for posting</xs:documentation> </xs:annotation></xs:complexType> </pre>

complexType postType

diagram	
namespace	V8XMLInterface
children	<u>ccm_book_actuals</u> <u>crm_posting</u>
used by	element <u>commandType/post</u>
annotation	documentation Postings
source	<pre> <xs:complexType name="postType"> <xs:annotation> <xs:documentation>Postings</xs:documentation> </xs:annotation> <xs:choice> <xs:element name="ccm_book_actuals" type="ccm_book_actualsType"> <xs:annotation> <xs:documentation>Used to post CCM transaction</xs:documentation> </xs:annotation> </xs:element> <xs:element name="crm_posting"> <xs:annotation> <xs:documentation>Used to post any transaction based on reservation</xs:documentation> <xs:documentation>Used to post any transaction based on reservation</xs:documentation> </xs:annotation> <xs:complexType id="PostingDepartmentChoice"> <xs:complexContent> <xs:extension base="crm_postType"> <xs:choice> <xs:element name="DepartmentCode" type="xs:string"/> <xs:element name="ArticleCode" type="xs:string"/> </xs:choice> </xs:extension> </xs:complexContent> </xs:complexType> </xs:element> </xs:choice></xs:complexType> </pre>

element postType/ccm_book_actuals

diagram	The diagram illustrates the structure of the <code>ccm_book_actualsType</code>. It is a sequence of the following elements: <code>bookingID</code> <code>event_id</code> <code>postingDate</code> (Date in format DD.MM.YYYY) <code>menu_id</code> <code>menu_item_id</code> <code>misc_item_id</code> <code>function_space_id</code> <code>ResourceName</code> <code>DepartmentCode</code> <code>count</code> <code>total_amount</code> <code>OverrideReason</code> <code>UserName</code> <code>Covers</code> The element <code>ccm_book_actuals</code> is used to post CCM transactions.
namespace	V8XMLInterface
type	<u>ccm_book_actualsType</u>
children	<u>bookingID event_id postingDate menu_id menu_item_id misc_item_id function_space_id ResourceName DepartmentCode count total_amount OverrideReason UserName Covers</u>
annotation	documentation Used to post CCM transaction
source	<code><xs:element name="ccm_book_actuals" type="ccm_book_actualsType"> <xs:annotation> <xs:documentation>Used to post CCM transaction</xs:documentation> </xs:annotation></xs:element></code>

element postType/crm_posting

diagram	
namespace	V8XMLInterface
type	extension of <u>crm_postType</u>
children	<u>GuestNum</u> <u>PostingDate</u> <u>RoomNum</u> <u>Quantity</u> <u>Price</u> <u>Comment</u> <u>CheckNum</u> <u>CheckDate</u> <u>Check</u> <u>Description</u> <u>Currency</u> <u>ProfileID</u> <u>DepartmentCode</u> <u>ArticleCode</u>
annotation	documentation Used to post any transaction based on reservation documentation Used to post any transaction based on reservation

source	<pre> <xs:element name="crm_posting"> <xs:annotation> <xs:documentation>Used to post any transaction based on reservation</xs:documentation> </xs:annotation> <xs:complexType id="PostingDepartmentChoice"> <xs:complexContent> <xs:extension base="crm_postType"> <xs:choice> <xs:element name="DepartmentCode" type="xs:string"/> <xs:element name="ArticleCode" type="xs:string"/> </xs:choice> </xs:extension> </xs:complexContent> </xs:complexType> </xs:element> </pre>
--------	--

element postType/crm_posting/DepartmentCode

diagram	
namespace	V8XMLInterface
type	xs:string
source	<pre> <xs:element name="DepartmentCode" type="xs:string"/> </pre>

element postType/crm_posting/ArticleCode

diagram	
namespace	V8XMLInterface
type	xs:string
source	<pre> <xs:element name="ArticleCode" type="xs:string"/> </pre>

complexType ProfileConditionType

diagram	ProfileConditionType Used to define condition for profile search request																								
namespace	V8XMLInterface																								
type	restriction of <u>conditionType</u>																								
attributes	<table><tr><td>Name</td><td>Type</td><td>Use</td><td>Default</td><td>Fixed</td><td>Annotation</td></tr><tr><td>name</td><td>xs:NMTOKEN</td><td>required</td><td></td><td></td><td></td></tr><tr><td>operation</td><td>binaryOperation</td><td>required</td><td></td><td></td><td></td></tr><tr><td>dataType</td><td>xs:NMTOKEN</td><td>optional</td><td></td><td></td><td></td></tr></table>	Name	Type	Use	Default	Fixed	Annotation	name	xs:NMTOKEN	required				operation	binaryOperation	required				dataType	xs:NMTOKEN	optional			
Name	Type	Use	Default	Fixed	Annotation																				
name	xs:NMTOKEN	required																							
operation	binaryOperation	required																							
dataType	xs:NMTOKEN	optional																							
annotation	documentation Used to define condition for profile search request																								
source	<pre><xs:complexType name="ProfileConditionType"> <xs:annotation> <xs:documentation>Used to define condition for profile search request</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:restriction base="conditionType"> <xs:attribute name="name" use="required"> <xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="ProfileID"/> <xs:enumeration value="GuestName"/> <xs:enumeration value="GuestFirstname"/> <xs:enumeration value="ProfileType"> <xs:annotation> <xs:documentation>1 - Company 2 - Individual 3 - Employee</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="ProfileCategory"> <xs:annotation> <xs:documentation>1=Company 2=Travel Agent 3=Source 4=Individual 5=Vendors 6=Meeting Planner</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="LoginName"/> <xs:enumeration value="ProfileGlobalID"/> <xs:enumeration value="City"/> <xs:enumeration value="ZIP"/> <xs:enumeration value="CentralSyncTime"/> <xs:enumeration value="CorporateID"/> </xs:restriction> </xs:simpleType> </xs:attribute> </xs:restriction> </xs:simpleContent></xs:complexType></pre>																								

complexType queryType

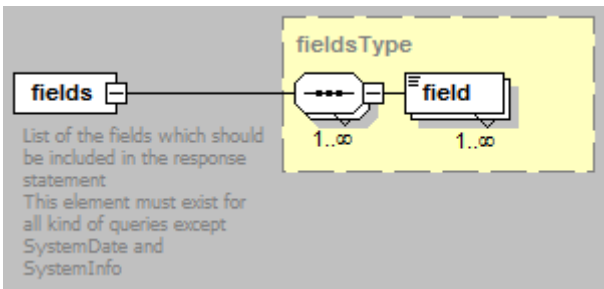
diagram						
namespace	V8XMLInterface					
children	<u>conditions</u> <u>fields</u> <u>froms</u> <u>orders</u> <u>groups</u>					
used by	element <u>requestType/query</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	ReqType	xs:NMTOKEN	required			
	Name	xs:string	optional			
	Language	xs:string	optional			
	TranslationTable	xs:string	optional			documentation If present in the request, short descriptions in request and response will be translated based on the specified translation table
annotation	documentation Types of accepted queriesReqType - type of the rquestName - name of the request. It will be returned as Name attribute for the query element in the response. Used to match response to the request in case more than one query were passed					
source	<pre><xs:complexType name="queryType"> <xs:annotation> <xs:documentation>Types of accepted queriesReqType - type of the rquestName - name of the request. It will be returned as Name attribute for the query element in the response. Used to match response to the request in case more than one query were passed</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="conditions" type="conditionsType" minOccurs="0"> <xs:annotation> <xs:documentation>Search conditions</xs:documentation> </xs:annotation> </xs:element> <xs:element name="fields" type="fieldsType" minOccurs="0"> <xs:annotation> <xs:documentation>List of the fields which should be included in the response statementThis element must exist for all kind of queries except SystemDate and SystemInfo</xs:documentation> </xs:annotation> </xs:element> <xs:element name="froms" minOccurs="0"> <xs:annotation> <xs:documentation>Used in CustomQuery request</xs:documentation> </xs:annotation> </xs:element> <xs:element name="orders" minOccurs="0"> <xs:annotation> <xs:documentation>Used in CustomQuery request. Order By clause</xs:documentation> </xs:annotation> </xs:element> <xs:element name="groups" minOccurs="0"> <xs:annotation> <xs:documentation>Used in CustomQuery request. Group By clause</xs:documentation> </xs:annotation> </xs:element> </xs:sequence></pre>					

	<pre> <xs:element name="from" type="xs:string" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="orders" minOccurs="0"> <xs:annotation> <xs:documentation>Used in CustomQuery request. Order By clause</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="order" type="xs:string" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="groups" minOccurs="0"> <xs:annotation> <xs:documentation>Used in CustomQuery request. Group By clause</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="group" type="xs:string" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </xs:element> </xs:sequence> <xs:attribute name="ReqType" use="required"> </xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="Availability"/> <xs:enumeration value="Profile"/> <xs:enumeration value="Reservation"/> <xs:enumeration value="Department"/> <xs:enumeration value="SystemDate"/> <xs:annotation> <xs:documentation>All conditions and fields list are ignored</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="SystemInfo"/> <xs:annotation> <xs:documentation>All conditions and fields list are ignored</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="Posting"/> <xs:enumeration value="ChildrenCategories"/> <xs:enumeration value="CreditCardTypes"/> <xs:enumeration value="UserLogin"/> <xs:enumeration value="HtmlInfo"/> <xs:enumeration value="RequestGlobalID"/> <xs:enumeration value="SeatingArrangments"/> <xs:enumeration value="ConfiguredStatusList"/> <xs:enumeration value="ConferencePackagesList"/> <xs:enumeration value="GetEventInfoBoardDetails"/> <xs:enumeration value="GetActivitiesDetails"/> <xs:enumeration value="Group"/> <xs:enumeration value="LanguagesLis"/> <xs:enumeration value="FutureReservations"/> <xs:enumeration value="SystemTime"/> <xs:enumeration value="Activity"/> <xs:enumeration value="Task"/> <xs:enumeration value="GetEventInfoBoardDetails"/> <xs:enumeration value="ConferencePackagesList"/> <xs:enumeration value="ConfiguredStatusList"/> <xs:enumeration value="SeatingArrangments"/> <xs:enumeration value="GroupTemplate"/> <xs:enumeration value="BlockHeader"/> <xs:enumeration value="BlockDetail"/> <xs:enumeration value="CurrencyList"/> <xs:enumeration value="Package"/> </xs:restriction> </xs:simpleType> </xs:attribute> <xs:attribute name="Name" type="xs:string" use="optional"/> <xs:attribute name="Language" type="xs:string" use="optional"> <xs:annotation> <xs:documentation source="If data in the response should be translated"/> </xs:annotation> </xs:attribute> <xs:attribute name="TranslationTable" type="xs:string" use="optional"> <xs:annotation> <xs:documentation>If present in the request, short descriptions in request and response will be translated based on the specified translation table</xs:documentation> </xs:annotation> </xs:attribute></xs:complexType> </pre>
--	--


element queryType/conditions

diagram	
namespace	V8XMLInterface
type	<u>conditionsType</u>
children	<u>condition</u> <u>link</u>
annotation	documentation Search conditions
source	<pre> <xs:element name="conditions" type="conditionsType" minOccurs="0"> <xs:annotation> <xs:documentation>Search conditions</xs:documentation> </xs:annotation></xs:element> </pre>

element queryType/fields

diagram	
namespace	V8XMLInterface
type	<u>fieldsType</u>
children	<u>field</u>
annotation	documentation List of the fields which should be included in the response statementThis element must exist for all kind of queries except SystemDate and SystemInfo
source	<pre><xs:element name="fields" type="fieldsType" minOccurs="0"> <xs:annotation> <xs:documentation>List of the fields which should be included in the response statementThis element must exist for all kind of queries except SystemDate and SystemInfo</xs:documentation> </xs:annotation> </xs:element></pre>


element queryType/froms

diagram	
namespace	V8XMLInterface
children	<u>from</u>
annotation	documentation Used in CustomQuery request
source	<pre><xs:element name="froms" minOccurs="0"> <xs:annotation> <xs:documentation>Used in CustomQuery request</xs:documentation> </xs:annotation> <xs:complexType base="xs:sequence"> <xs:sequence> <xs:element name="from" type="xs:string" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </xs:element></pre>

element queryType/froms/from


diagram	
namespace	V8XMLInterface
type	xs:string
source	<pre><xs:element name="from" type="xs:string" maxOccurs="unbounded"/></pre>

element queryType/orders


diagram	
namespace	V8XMLInterface

children	<u>order</u>
annotation	documentation Used in CustomQuery request. Order By clause
source	<pre><xs:element name="orders" minOccurs="0"> <xs:annotation> <xs:documentation>Used in CustomQuery request. Order By clause</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="order" type="xs:string" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType></xs:element></pre>

element queryType/orders/order

diagram	
namespace	V8XMLInterface
type	xs:string
source	<pre><xs:element name="order" type="xs:string" maxOccurs="unbounded"/></pre>

element queryType/groups

diagram	
namespace	V8XMLInterface
children	<u>group</u>
annotation	documentation Used in CustomQuery request. Group By clause
source	<pre><xs:element name="groups" minOccurs="0"> <xs:annotation> <xs:documentation>Used in CustomQuery request. Group By clause</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="group" type="xs:string" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType></xs:element></pre>

element queryType/groups/group

diagram	
namespace	V8XMLInterface
type	xs:string
source	<pre><xs:element name="group" type="xs:string" maxOccurs="unbounded"/></pre>

complexType ReportType

diagram													
namespace	V8XMLInterface												
children	<u>ReportID</u> <u>ReportType</u> <u>Parameter</u> <u>Destination</u> <u>ExportFormat</u> <u>Email</u> <u>ConfirmationArchiveRequest</u>												
used by	element <u>requestType/Report</u>												
attributes	<table><tr><th>Name</th><th>Type</th><th>Use</th><th>Default</th><th>Fixed</th><th>Annotation</th></tr><tr><td>Name</td><td>xs:string</td><td></td><td></td><td></td><td></td></tr></table>	Name	Type	Use	Default	Fixed	Annotation	Name	xs:string				
Name	Type	Use	Default	Fixed	Annotation								
Name	xs:string												
source	<pre><xs:complexType name="ReportType"> <xs:sequence> <xs:element name="ReportID" type="xs:integer" minOccurs="0"/> <xs:element name="ReportType" minOccurs="0"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="Confirmation"/> <xs:enumeration value="CCMConfirmation"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="Parameter" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:attribute name="Name" type="xs:string"/> <xs:attribute name="DataType" type="xs:string"/> <xs:restriction base="xs:string"> <xs:enumeration value="String"/> <xs:enumeration value="Date"/> </xs:restriction> </xs:simpleType> </xs:complexType> </xs:element> <xs:element name="Destination" type="xs:string" base="xs:string"> <xs:enumeration value="Email"/> <xs:enumeration value="Printer"/> <xs:enumeration value="Export"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="ExportFormat" minOccurs="0"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="PDF"/> <xs:enumeration value="RTF"/> <xs:enumeration value="Text"/> <xs:enumeration value="HTML"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="Email" minOccurs="0"> <xs:complexType> <xs:attribute name="Address" type="xs:string" use="required"/> <xs:attribute name="SendAsAttachment" type="xs:boolean" use="required"/> <xs:attribute name="AttachmentFormat" use="optional"> <xs:annotation> <xs:documentation>If Attachment type is "Text" then report will be sent as a body</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="RTF"/> <xs:enumeration value="PDF"/> <xs:enumeration value="HTML"/> <xs:enumeration value="Text"/> </xs:restriction> </xs:simpleType> </xs:attribute> <xs:attribute name="Subject" type="xs:string" use="optional"/> <xs:attribute name="DefaultBody" type="xs:string" use="optional"/> <xs:attribute name="CC" type="xs:string" use="optional"> <xs:annotation> <xs:documentation>List of CC email addresses separated by comma</xs:documentation> </xs:annotation> </xs:attribute> <xs:attribute name="BCC" type="xs:string" use="optional"> <xs:annotation> <xs:documentation>List of BCC email addresses separated by comma</xs:documentation> </xs:annotation> </xs:attribute> </xs:complexType> </xs:element> <xs:element name="ConfirmationArchiveRequest" type="xs:integer" minOccurs="0"> <xs:annotation> <xs:documentation>Should contain archive record ID (for internal use : yrco_id)</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="Name" type="xs:string"/></xs:complexType></pre>												

element ReportType/ReportID

diagram	
---------	--

namespace	V8XMLInterface
type	xs:integer
source	<code><xs:element name="ReportID" type="xs:integer" minOccurs="0"/></code>


element ReportType/ReportType

diagram	
namespace	V8XMLInterface
type	restriction of xs:string
facets	enumeration Confirmation enumeration CCMConfirmation
source	<code><xs:element name="ReportType" minOccurs="0"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="Confirmation"/> <xs:enumeration value="CCMConfirmation"/> </xs:restriction> </xs:simpleType></xs:element></code>

element ReportType/Parameter

diagram	Parameter																		
namespace	V8XMLInterface																		
attributes	<table><tr><td>Name</td><td>Type</td><td>Use</td><td>Default</td><td>Fixed</td><td>Annotation</td></tr><tr><td>Name</td><td>xs:string</td><td></td><td></td><td></td><td></td></tr><tr><td>DataType</td><td>xs:string</td><td></td><td></td><td></td><td></td></tr></table>	Name	Type	Use	Default	Fixed	Annotation	Name	xs:string					DataType	xs:string				
Name	Type	Use	Default	Fixed	Annotation														
Name	xs:string																		
DataType	xs:string																		
source	<pre><xs:element name="Parameter" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:attribute name="Name" type="xs:string"/> <xs:attribute name="DataType"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="String"/> <xs:enumeration value="Date"/> <xs:enumeration value="Int"/> </xs:restriction> </xs:simpleType> </xs:attribute> </xs:complexType></xs:element></pre>																		

element ReportType/Destination

diagram	
namespace	V8XMLInterface
type	restriction of xs:string
facets	enumeration Email enumeration Printer enumeration Export
source	<code><xs:element name="Destination"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="Email"/> <xs:enumeration value="Printer"/> <xs:enumeration value="Export"/> </xs:restriction> </xs:simpleType></xs:element></code>

element ReportType/ExportFormat


diagram	
namespace	V8XMLInterface

type	restriction of xs:string
facets	enumeration PDF enumeration RTF enumeration Text enumeration HTML
source	<pre> <xs:element name="ExportFormat" minOccurs="0"> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="PDF"/> <xs:enumeration value="RTF"/> <xs:enumeration value="Text"/> <xs:enumeration value="HTML"/> </xs:restriction> </xs:simpleType></xs:element> </pre>

element ReportType/Email

diagram	Email																																																					
namespace	V8XMLInterface																																																					
attributes	<table><thead><tr><th>Name</th><th>Type</th><th>Use</th><th>Default</th><th>Fixed</th><th>Annotation</th></tr></thead><tbody><tr><td>Address</td><td>xs:string</td><td>required</td><td></td><td></td><td></td></tr><tr><td>SendAsAttachment</td><td>xs:boolean</td><td>required</td><td></td><td></td><td></td></tr><tr><td>AttachmentFormat</td><td>xs:string</td><td>optional</td><td></td><td></td><td>documentation If Attachment type is "Text" then report will be sent as a body</td></tr><tr><td>Subject</td><td>xs:string</td><td>optional</td><td></td><td></td><td></td></tr><tr><td>DefaultBody</td><td>xs:string</td><td>optional</td><td></td><td></td><td></td></tr><tr><td>CC</td><td>xs:string</td><td>optional</td><td></td><td></td><td>documentation List of CC email addresses separated by comma</td></tr><tr><td>BCC</td><td>xs:string</td><td>optional</td><td></td><td></td><td>documentation List of BCC email addresses separated by comma</td></tr></tbody></table>	Name	Type	Use	Default	Fixed	Annotation	Address	xs:string	required				SendAsAttachment	xs:boolean	required				AttachmentFormat	xs:string	optional			documentation If Attachment type is "Text" then report will be sent as a body	Subject	xs:string	optional				DefaultBody	xs:string	optional				CC	xs:string	optional			documentation List of CC email addresses separated by comma	BCC	xs:string	optional			documentation List of BCC email addresses separated by comma					
Name	Type	Use	Default	Fixed	Annotation																																																	
Address	xs:string	required																																																				
SendAsAttachment	xs:boolean	required																																																				
AttachmentFormat	xs:string	optional			documentation If Attachment type is "Text" then report will be sent as a body																																																	
Subject	xs:string	optional																																																				
DefaultBody	xs:string	optional																																																				
CC	xs:string	optional			documentation List of CC email addresses separated by comma																																																	
BCC	xs:string	optional			documentation List of BCC email addresses separated by comma																																																	
source	<pre><xs:element name="Email" minOccurs="0"> <xs:complexType> <xs:attribute name="Address" type="xs:string" use="required"/> <xs:attribute name="SendAsAttachment" type="xs:boolean" use="required"/> <xs:attribute name="AttachmentFormat" use="optional"> <xs:annotation> <xs:documentation>If Attachment type is "Text" then report will be sent as a body</xs:documentation> </xs:annotation> <xs:simpleType> <xs:restriction base="xs:string"> <xs:enumeration value="RTF"/> <xs:enumeration value="PDF"/> <xs:enumeration value="HTML"/> <xs:enumeration value="Text"/> </xs:restriction> </xs:simpleType> </xs:attribute> <xs:attribute name="Subject" type="xs:string" use="optional"/> <xs:attribute name="DefaultBody" type="xs:string" use="optional"/> <xs:attribute name="CC" type="xs:string" use="optional"> <xs:annotation> <xs:documentation>List of CC email addresses separated by comma</xs:documentation> </xs:annotation> </xs:attribute> <xs:attribute name="BCC" type="xs:string" use="optional"> <xs:annotation> <xs:documentation>List of BCC email addresses separated by comma</xs:documentation> </xs:annotation> </xs:attribute> </xs:complexType></xs:element></pre>																																																					

element ReportType/ConfirmationArchiveRequest

diagram						
namespace	V8XMLInterface					

type	xs:integer
annotation	documentation Should contain archive record ID (for internal use : yrco_id)
source	<pre><xs:element name="ConfirmationArchiveRequest" type="xs:integer" minOccurs="0"> <xs:annotation> <xs:documentation>Should contain archive record ID (for internal use : yrco_id)</xs:documentation> </xs:annotation></xs:element></pre>

complexType requestType

diagram	
namespace	V8XMLInterface
children	<u>query</u> <u>update</u> <u>insert</u> <u>command</u> <u>AvailabilityForWeb</u> <u>ValidateCreditCard</u> <u>import</u> <u>HotelAvailability</u> <u>Report</u>
used by	element <u>fidelio/request</u>
annotation	documentation Defines a request figure
source	<pre><xs:complexType name="requestType"> <xs:annotation> <xs:documentation>Defines a request figure</xs:documentation> </xs:annotation> <xs:choice> <xs:element name="query" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>To Send query request for reservation, profile, availability etc</xs:documentation> </xs:annotation> </xs:element> <xs:complexType> <xs:complexContent> <xs:extension base="queryType"/> </xs:complexContent> </xs:complexType> <xs:element name="update" type="updateType" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>To Send update request for profile,</pre>

	<pre> etc</xs:documentation> </xs:annotation> </xs:element> <xs:element name="insert" type="insertType" maxOccurs="unbounded"> </xs:annotation> </xs:documentation>To Send create request for profile, etc</xs:documentation> </xs:annotation> </xs:element> <xs:element name="command" maxOccurs="unbounded"> </xs:annotation> </xs:complexType> <xs:complexContent> <xs:extension base="commandType"> <xs:attribute name="Name" type="xs:string" use="optional"/> <xs:attribute name="TranslationTable" type="xs:string" use="optional"> </xs:annotation> <xs:documentation>If present in the request, short descriptions in request and response will be translated based on the specified translation table</xs:documentation> </xs:annotation> </xs:attribute> </xs:extension> </xs:complexContent> </xs:complexType> </xs:element> <xs:element name="AvailabilityForWeb" type="AvailabilityForWebType" maxOccurs="unbounded"> </xs:annotation> <xs:documentation>Rate availability including room availability figures</xs:documentation> </xs:annotation> </xs:element> <xs:element name="ValidateCreditCard" type="ValidateCreditCardType" maxOccurs="unbounded"/> <xs:element name="import" type="importType"/> <xs:element name="HotelAvailability" type="HotelAvailabilityType" maxOccurs="unbounded"> </xs:annotation> <xs:documentation>Room Availability </xs:documentation> </xs:annotation> </xs:element> <xs:element name="Report" type="ReportType" maxOccurs="unbounded"/> </xs:choice></xs:complexType> </pre>
--	--

element requestType/query

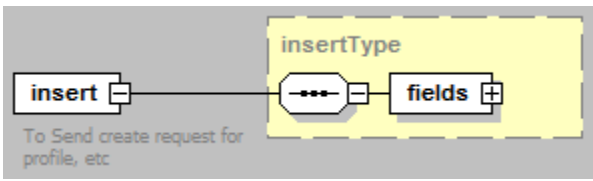
diagram						
namespace	V8XMLInterface					
type	extension of queryType					
children	<u>conditions</u> <u>fields</u> <u>froms</u> <u>orders</u> <u>groups</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	ReqType	xs:NMTOKEN	required			
	Name	xs:string	optional			
	Language	xs:string	optional			
	TranslationTable	xs:string	optional			documentation If present in the request, short descriptions in request and response will be

		translated based on the specified translation table
annotation	documentation To Send query request for reservation, profile, availability etc	
source	<pre> <xs:element name="query" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>To Send query request for reservation, profile, availability etc</xs:documentation> </xs:annotation> <xs:complexType> <xs:complexContent> <xs:extension base="queryType"/> </xs:complexContent> </xs:complexType> </xs:element> </pre>	

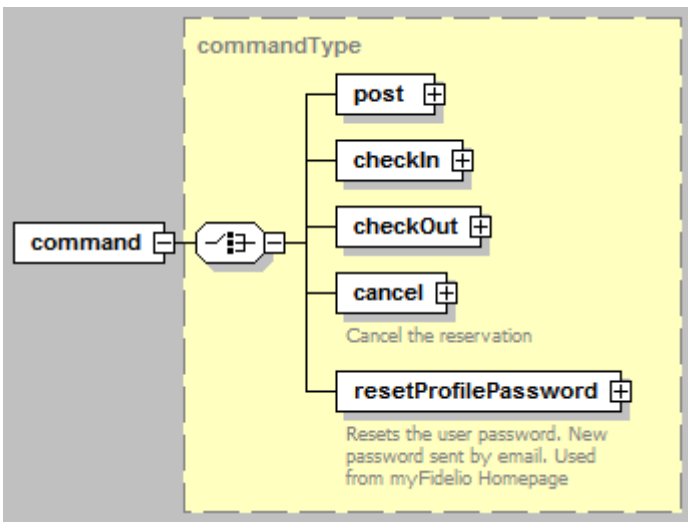
element requestType/update

diagram						
namespace	V8XMLInterface					
type	<u>updateType</u>					
children	<u>conditions</u> <u>fields</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	ReqType	xs:NMTOKEN	required			
	Name	xs:string	optional			
	TranslationTable	xs:string	optional			documentation If present in the request, short descriptions in request and response will be translated based on the specified translation table
annotation	documentation To Send update request for profile, etc					
source	<pre> <xs:element name="update" type="updateType" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>To Send update request for profile, etc</xs:documentation> </xs:annotation> </xs:element> </pre>					

element requestType/insert

diagram						
namespace	V8XMLInterface					
type	<u>insertType</u>					
children	<u>fields</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	ReqType	xs:NMTOKEN	required			
	Name	xs:string	optional			
	TranslationTable	xs:string	optional			documentation If present in the request, short descriptions in request and response will be translated based on the specified translation table
annotation	documentation To Send create request for profile, etc					
source	<pre><xs:element name="insert" type="insertType" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>To Send create request for profile, etc</xs:documentation> </xs:annotation> </xs:element></pre>					

element requestType/command

diagram						
namespace	V8XMLInterface					
type	extension of <u>commandType</u>					
children	<u>post</u> <u>checkIn</u> <u>checkOut</u> <u>cancel</u> <u>resetProfilePassword</u>					

attributes	Name	Type	Use	Default	Fixed	Annotation
	Name	xs:string	optional			
	TranslationTable	xs:string	optional			documentation If present in the request, short descriptions in request and response will be translated based on the specified translation table
source	<pre> <xs:element name="command" maxOccurs="unbounded"> <xs:complexType> <xs:complexContent> <xs:extension base="commandType"> <xs:attribute name="Name" type="xs:string" use="optional"/> <xs:attribute name="TranslationTable" type="xs:string" use="optional"/> <xs:annotation> <xs:documentation>If present in the request, short descriptions in request and response will be translated based on the specified translation table</xs:documentation> </xs:annotation> </xs:extension> </xs:complexContent> </xs:complexType> </xs:element> </pre>					

element requestType/AvailabilityForWeb

diagram						
namespace	V8XMLInterface					
type	<u>AvailabilityForWebType</u>					
children	<u>fields</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	Name	xs:string	optional			
	Language	xs:string	optional			
	TranslationTable	xs:string	optional			documentation If present in the request, short descriptions in request and response will be translated based on the specified translation table
annotation	documentation Rate availability including room availability figures					
source	<pre> <xs:element name="AvailabilityForWeb" type="AvailabilityForWebType" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Rate availability including room availability figures</xs:documentation> </xs:annotation> </xs:element> </pre>					

element requestType/ValidateCreditCard

diagram						
namespace	V8XMLInterface					
type	<u>ValidateCreditCardType</u>					
children	<u>CreditCardNo</u> <u>ExpiryMonth</u> <u>ExpiryYear</u> <u>CardholderName</u> <u>CreditCardCode</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	Name	xs:string	optional			
source	<pre><xs:element name="ValidateCreditCard" type="ValidateCreditCardType" maxOccurs="unbounded"/></pre>					

element requestType/import

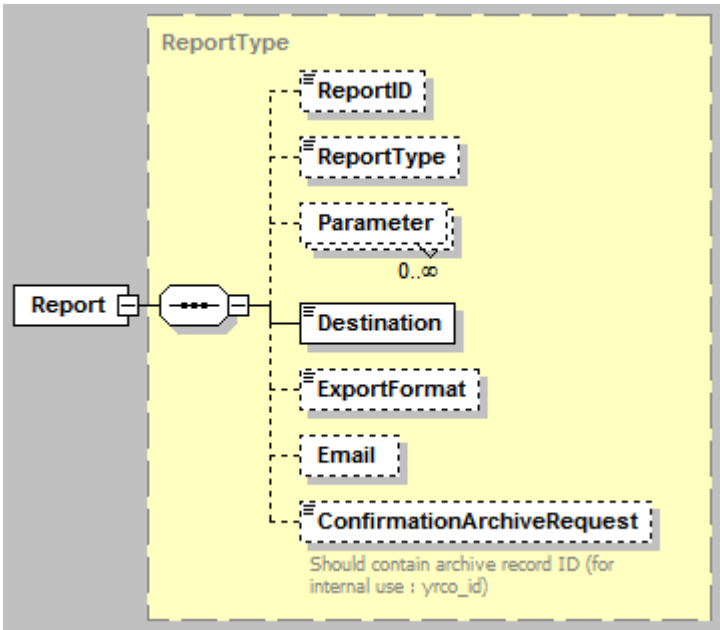
diagram						
namespace	V8XMLInterface					
type	<u>importType</u>					
children	<u>insert</u> <u>update</u> <u>delete</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	TableName	xs:string	required			
	HotelID	xs:string	required			
	Name	xs:string	optional			
source	<pre><xs:element name="import" type="importType"/></pre>					

element requestType/HotelAvailability


diagram						
namespace	V8XMLInterface					

type	<u>HotelAvailabilityType</u>					
children	<u>fields</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	Name	xs:string	optional			
	TranslationTable	xs:string	optional			
annotation	documentation Room Availability					
source	<pre><xs:element name="HotelAvailability" type="HotelAvailabilityType" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Room Availability </xs:documentation> </xs:annotation></xs:element></pre>					

element requestType/Report

diagram						
namespace	V8XMLInterface					
type	<u>ReportType</u>					
children	<u>ReportID</u> <u>ReportType</u> <u>Parameter</u> <u>Destination</u> <u>ExportFormat</u> <u>Email</u> <u>ConfirmationArchiveRequest</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	Name	xs:string				
source	<pre><xs:element name="Report" type="ReportType" maxOccurs="unbounded"/></pre>					

complexType ReservationConditionType

diagram						
namespace	V8XMLInterface					
type	restriction of <u>conditionType</u>					
attributes	Name	Type	Use	Default	Fixed	Annotation
	name	xs:NMTOKEN	required			

	operation binaryOperation required dataType xs:NMTOKEN optional
annotation	documentation Used to define condition for reservation search request
source	<pre> <xs:complexType name="ReservationConditionType"> <xs:annotation> <xs:documentation>Used to define condition for reservation search request</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:restriction base="conditionType"> <xs:attribute name="name" use="required"> <xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="GuestFirstname"/> <xs:enumeration value="GuestName"/> <xs:enumeration value="RoomNum"/> <xs:enumeration value="RoomType"/> <xs:enumeration value="GuestArrival"/> <xs:enumeration value="GuestNum"> <xs:annotation> <xs:documentation>Means Reservation Number</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="ReservationStatus"> <xs:annotation> <xs:documentation>Allowed values are: Show </xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="ProfileID"/> </xs:restriction> </xs:simpleType> </xs:attribute> </xs:restriction> </xs:simpleContent></xs:complexType> </pre>

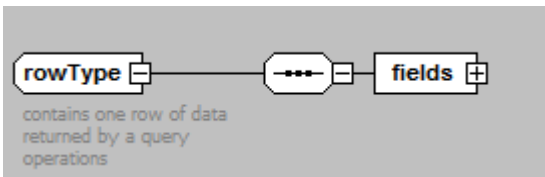
complexType rowsType

diagram	
namespace	V8XMLInterface
children	<u>row</u>
used by	elements <u>fidelio/response/queryResponse/rows</u> <u>fidelio/response/updateResponse/rows</u> <u>importType/insert/rows</u>
annotation	documentation contains a set of rows returned by a query operations
source	<pre> <xs:complexType name="rowsType"> <xs:annotation> <xs:documentation>contains a set of rows returned by a query operations</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="row" type="rowType" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence></xs:complexType> </pre>

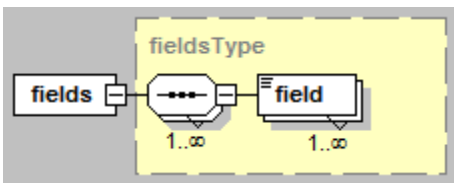
element rowsType/row

diagram	
namespace	V8XMLInterface
type	<u>rowType</u>
children	<u>fields</u>
source	<pre> <xs:element name="row" type="rowType" minOccurs="0" maxOccurs="unbounded"/> </pre>

complexType rowType

diagram	 The diagram shows a box labeled 'rowType' connected to a box labeled 'fields'. Below the 'rowType' box, it says 'contains one row of data returned by a query operations'.
namespace	V8XMLInterface
children	<u>fields</u>
used by	element <u>rowsType/row</u>
annotation	documentation contains one row of data returned by a query operations
source	<pre><xs:complexType name="rowType"> <xs:annotation> <xs:documentation>contains one row of data returned by a query operations</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="fields" type="fieldsType"/> </xs:sequence></xs:complexType></pre>


element rowType/fields

diagram	 The diagram shows a box labeled 'fields' connected to a box labeled 'field'. The 'fields' box is connected to a box labeled 'fieldsType' which contains a box labeled 'field'. The 'fieldsType' box has a cardinality of '1..∞' and the 'field' box has a cardinality of '1..∞'.
namespace	V8XMLInterface
type	<u>fieldsType</u>
children	<u>field</u>
source	<pre><xs:element name="fields" type="fieldsType"/></pre>

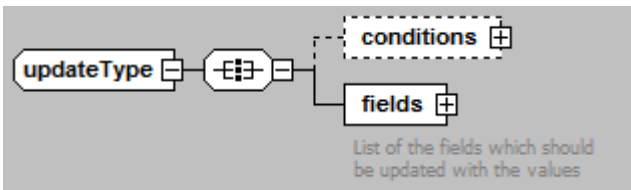
complexType SystemDateConditionType

diagram	SystemDateConditionType Used to request System Date. No condition is accepted																								
namespace	V8XMLInterface																								
type	restriction of <u>conditionType</u>																								
attributes	<table><tr><th>Name</th><th>Type</th><th>Use</th><th>Default</th><th>Fixed</th><th>Annotation</th></tr><tr><td>name</td><td>xs:anySimpleType</td><td>prohibited</td><td></td><td></td><td></td></tr><tr><td>operation</td><td>binaryOperation</td><td>prohibited</td><td></td><td></td><td></td></tr><tr><td>dataType</td><td>xs:NMTOKEN</td><td>optional</td><td></td><td></td><td></td></tr></table>	Name	Type	Use	Default	Fixed	Annotation	name	xs:anySimpleType	prohibited				operation	binaryOperation	prohibited				dataType	xs:NMTOKEN	optional			
Name	Type	Use	Default	Fixed	Annotation																				
name	xs:anySimpleType	prohibited																							
operation	binaryOperation	prohibited																							
dataType	xs:NMTOKEN	optional																							
annotation	documentation Used to request System Date. No condition is accepted																								
source	<pre><xs:complexType name="SystemDateConditionType"> <xs:annotation> <xs:documentation>Used to request System Date. No condition is accepted</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:restriction base="conditionType"> <xs:attribute name="operation" use="prohibited"/> <xs:attribute name="name" use="prohibited"/> </xs:restriction> </xs:simpleContent></xs:complexType></pre>																								

complexType SystemInformationConditionType

diagram						
namespace	V8XMLInterface					
type	restriction of conditionType					
attributes	Name	Type	Use	Default	Fixed	Annotation
	name	xs:anySimpleType	prohibited			
	operation	binaryOperation	prohibited			
	dataType	xs:NMTOKEN	optional			
annotation	documentation Used to request System Information. No condition is accepted					
source	<pre><xs:complexType name="SystemInformationConditionType"> <xs:annotation> <xs:documentation>Used to request System Information. No condition is accepted</xs:documentation> </xs:annotation> <xs:simpleContent> <xs:restriction base="conditionType"> <xs:attribute name="operation" use="prohibited"/> <xs:attribute name="name" use="prohibited"/> </xs:restriction> </xs:simpleContent></xs:complexType></pre>					

complexType updateType

diagram						
namespace	V8XMLInterface					
children	conditions fields					
used by	elements requestType/update importType/update					
attributes	Name	Type	Use	Default	Fixed	Annotation
	ReqType	xs:NMTOKEN	required			
	Name	xs:string	optional			
	TranslationTable	xs:string	optional			documentation If present in the request, short descriptions in request and response will be translated based on the specified translation table
source	<pre><xs:complexType name="updateType"> <xs:all> <xs:element name="conditions" type="conditionsType" minOccurs="0"/> <xs:element name="fields" type="fieldsType"> <xs:annotation> <xs:documentation>List of the fields which should be updated with the values</xs:documentation> </xs:annotation> </xs:element> </xs:all> <xs:attribute name="ReqType" use="required"> <xs:simpleType> <xs:restriction base="xs:NMTOKEN"> <xs:enumeration value="Profile"/> <xs:enumeration value="Reservation"/> <xs:enumeration value="Group"/> <xs:enumeration value="GroupTemplate"/> <xs:enumeration value="Activity"/> <xs:enumeration value="Task"/> <xs:enumeration value="HurdleRate"/> <xs:enumeration value="Overbooking"/> <xs:enumeration</pre>					

	<pre> value="Report"/> </xs:restriction> </xs:simpleType> </xs:attribute> <xs:attribute name="Name" type="xs:string" use="optional"/> <xs:attribute name="TranslationTable" type="xs:string" use="optional"> <xs:annotation> <xs:documentation>If present in the request, short descriptions in request and response will be translated based on the specified translation table</xs:documentation> </xs:annotation> </xs:attribute></xs:complexType> </pre>
--	--

element updateType/conditions

diagram	
namespace	V8XMLInterface
type	<u>conditionsType</u>
children	<u>condition</u> <u>link</u>
source	<pre><xs:element name="conditions" type="conditionsType" minOccurs="0"/></pre>

element updateType/fields

diagram	
namespace	V8XMLInterface
type	<u>fieldsType</u>
children	<u>field</u>
annotation	documentation List of the fields which should be updated with the values
source	<pre><xs:element name="fields" type="fieldsType"> <xs:annotation> <xs:documentation>List of the fields which should be updated with the values</xs:documentation> </xs:annotation></xs:element></pre>

complexType ValidateCreditCardType

diagram	
namespace	V8XMLInterface
children	<u>CreditCardNo</u> <u>ExpiryMonth</u> <u>ExpiryYear</u> <u>CardholderName</u> <u>CreditCardCode</u>
used by	element <u>requestType/ValidateCreditCard</u>

attributes	Name Name	Type xs:string	Use optional	Default	Fixed	Annotation
source	<xs:complexType name="ValidateCreditCardType"> <xs:all> <xs:element name="CreditCardNo" type="xs:string"/> <xs:element name="ExpiryMonth" type="xs:string"/> <xs:element name="ExpiryYear" type="xs:string"/> <xs:element name="CardholderName" type="xs:string"/> <xs:element name="CreditCardCode" type="xs:string"/> </xs:all> <xs:attribute name="Name" type="xs:string" use="optional"/></xs:complexType>					

element ValidateCreditCardType/CreditCardNo

diagram	
namespace	V8XMLInterface
type	xs:string
source	<xs:element name="CreditCardNo" type="xs:string"/>

element ValidateCreditCardType/ExpiryMonth

diagram	
namespace	V8XMLInterface
type	xs:string
source	<xs:element name="ExpiryMonth" type="xs:string"/>


element ValidateCreditCardType/ExpiryYear

diagram	
namespace	V8XMLInterface
type	xs:string
source	<xs:element name="ExpiryYear" type="xs:string"/>

element ValidateCreditCardType/CardholderName

diagram	
namespace	V8XMLInterface
type	xs:string
source	<xs:element name="CardholderName" type="xs:string"/>

element ValidateCreditCardType/CreditCardCode

diagram	
namespace	V8XMLInterface
type	xs:string

source	<code><xs:element name="CreditCardCode" type="xs:string"/></code>
--------	---

simpleType binaryOperation

namespace	V8XMLInterface
type	restriction of xs:string
used by	attribute <u>conditionType/@operation</u>
facets	enumeration lt enumeration le enumeration gt enumeration ge enumeration eq enumeration neq enumeration in enumeration like
annotation	documentation defines a binary operation documentation lt = less documentation le = less or equal documentation gt = greater documentation ge = greater or equal documentation eq = equal documentation neq = not equal documentation like = oracle like condition
source	<pre> <xs:simpleType name="binaryOperation"> <xs:annotation> <xs:documentation>defines a binary operation</xs:documentation> <xs:documentation>lt = less</xs:documentation> <xs:documentation>le = less or equal</xs:documentation> <xs:documentation>gt = greater</xs:documentation> <xs:documentation>ge = greater or equal</xs:documentation> <xs:documentation>eq = equal</xs:documentation> <xs:documentation>neq = not equal</xs:documentation> <xs:documentation>like = oracle like condition</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:enumeration value="lt"/> <xs:enumeration value="le"/> <xs:enumeration value="gt"/> <xs:enumeration value="ge"/> <xs:enumeration value="eq"/> <xs:enumeration value="neq"/> <xs:enumeration value="in"> <xs:annotation> <xs:documentation>Not supported yet</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="like"/> </xs:restriction></xs:simpleType> </pre>

simpleType conditionSimpleType

namespace	V8XMLInterface
type	xs:string
used by	complexType <u>conditionType</u>
source	<code><xs:simpleType name="conditionSimpleType"> <xs:restriction base="xs:string"/></xs:simpleType></code>