Quaternion Pseudoinverse Methods Benchmark

Runtime Comparison: $m = n + 50$

- NS ($\gamma = 1$)
- HON (3rd order)
- RSP-Q (column)
- Hybrid RSP+NS
- CGNE-Q

Runtime [seconds] vs Matrix dimension n
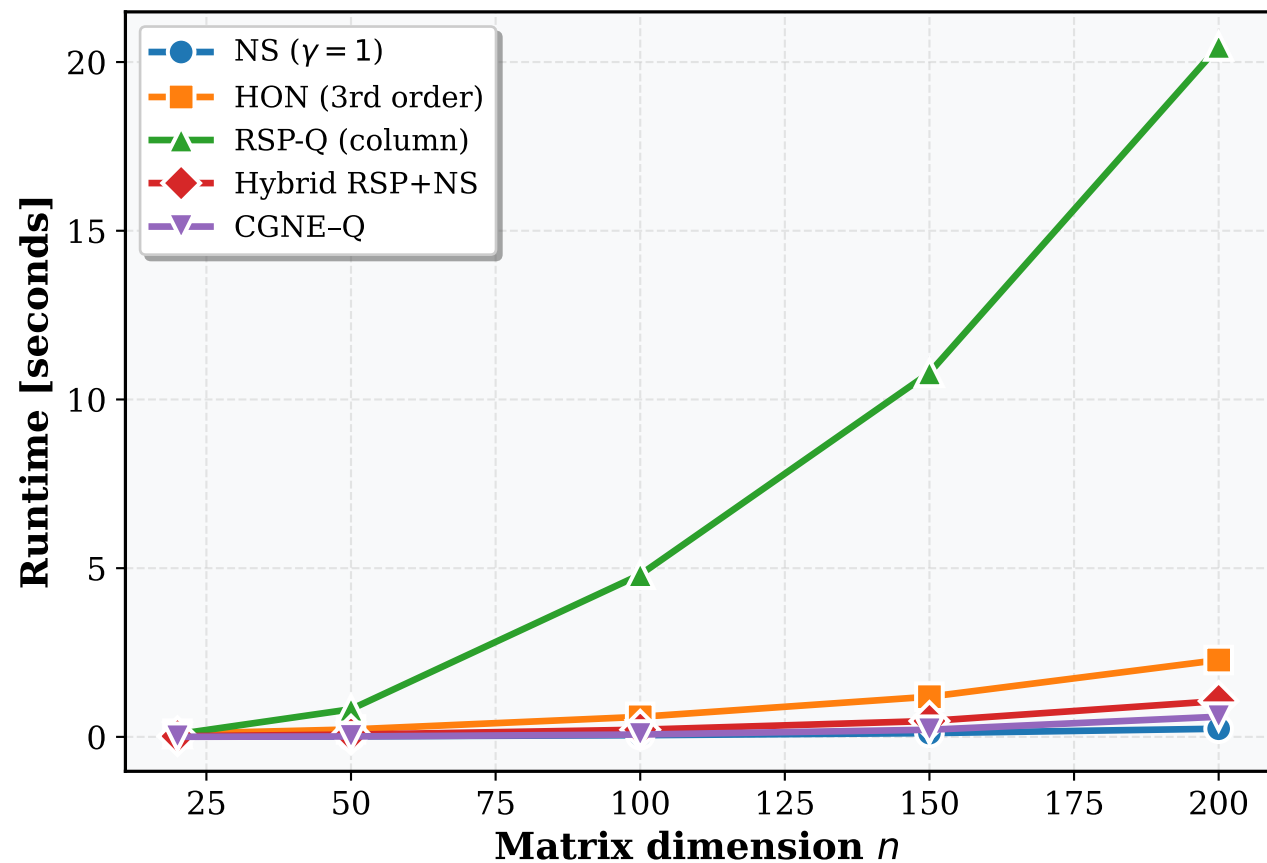
Relative Residual Error: $m = n + 50$

$\dfrac{\|XA - I_n\|_F}{\|I_n\|_F}$ vs Matrix dimension n

- NS ($\gamma = 1$)
- HON (3rd order)
- RSP-Q (column)
- Hybrid RSP+NS
- CGNE-Q