



Sign in to Medium with Google



Venkateswar Reddy Melachervu

vmelachervu@gmail.com

Continue as Venkateswar Reddy

Understanding of Convolutional Neural Network (CNN) — Deep Learning



Prabhu Raghav · Follow

5 min read · Mar 4, 2018



Listen



Share

In neural networks, Convolutional neural network (ConvNets or CNNs) is one of the main categories to do images recognition, images classifications. Objects detections, recognition faces etc., are some of the areas where CNNs are widely used.

CNN image classifications takes an input image, process it and classify it under certain categories (Eg., Dog, Cat, Tiger, Lion). Computers sees an input image as array of pixels and it depends on the image resolution. Based on the image resolution, it will see $h \times w \times d$ (h = Height, w = Width, d = Dimension). Eg., An image of $6 \times 6 \times 3$ array of matrix of RGB (3 refers to RGB values) and an image of $4 \times 4 \times 1$ array of matrix of grayscale image.

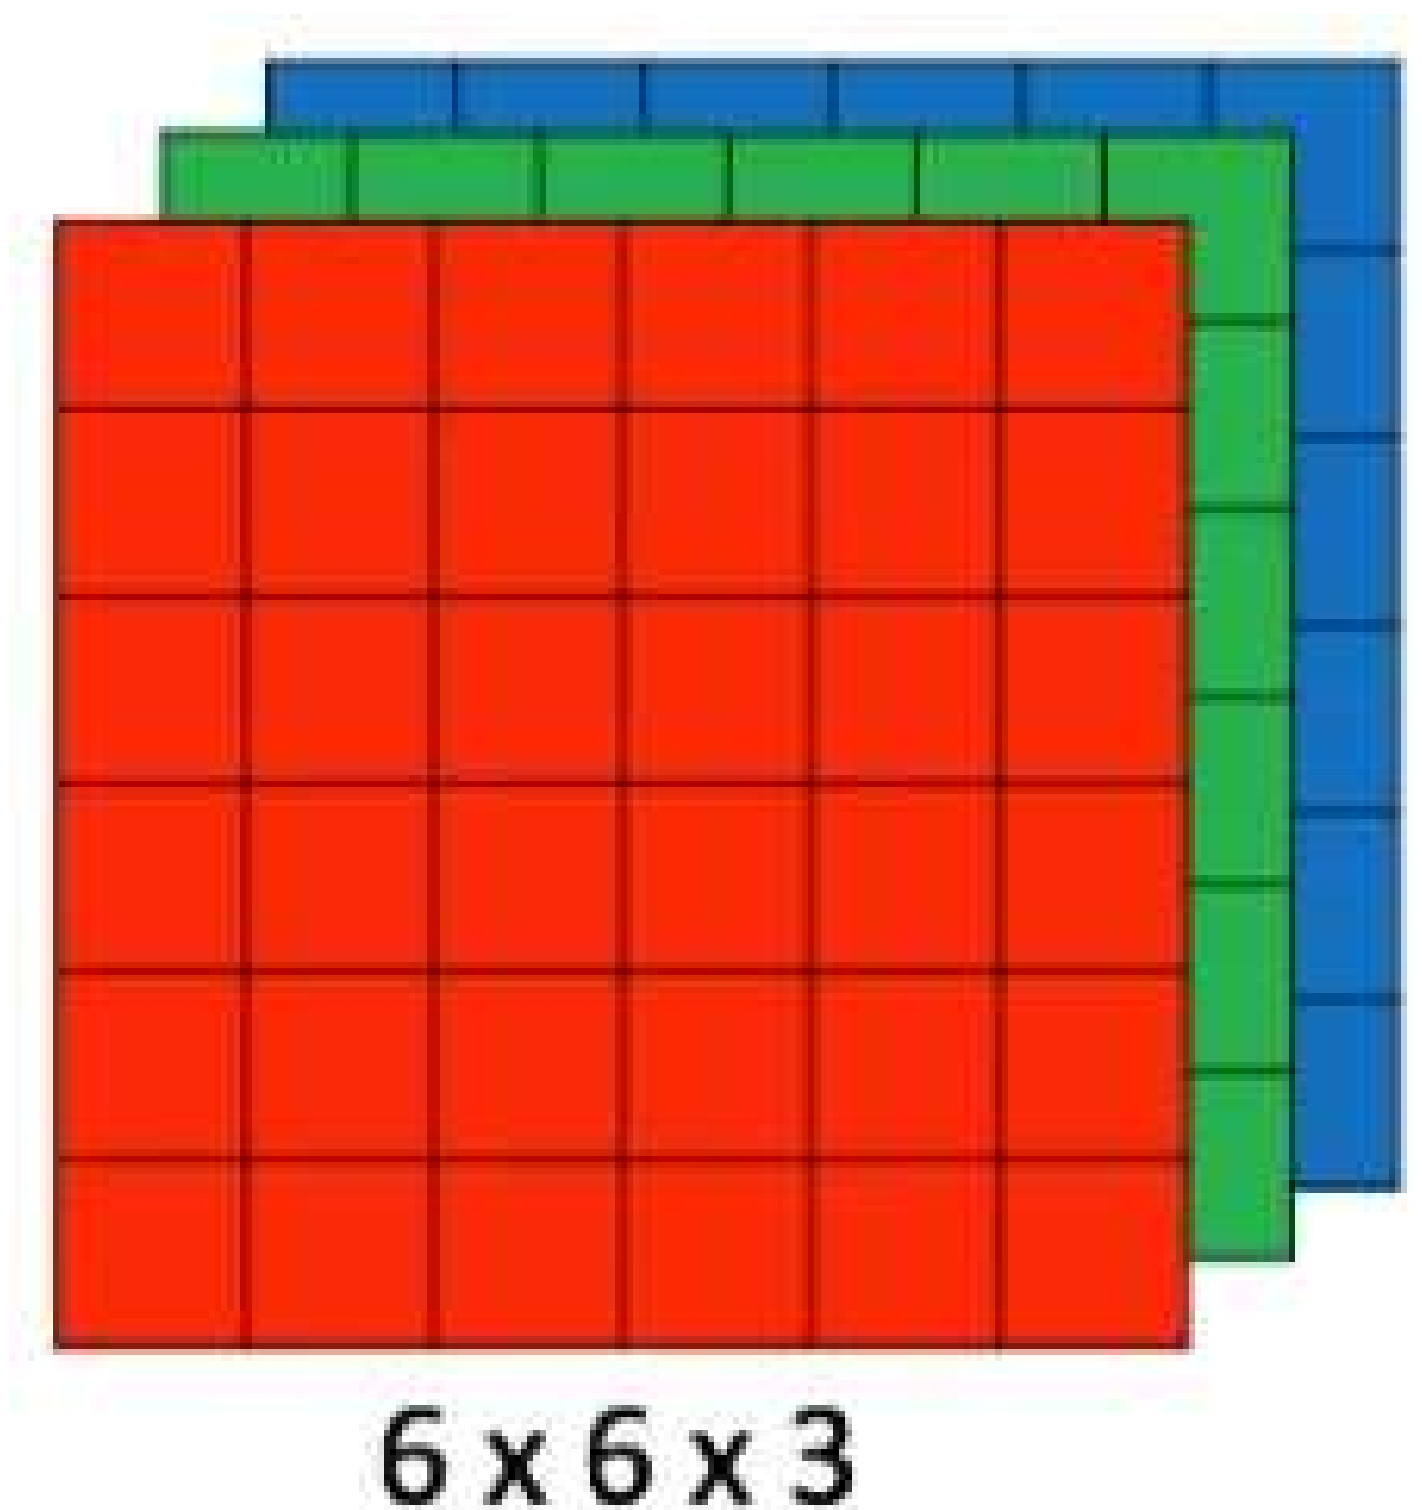


Figure 1 : Array of RGB Matrix

Technically, deep learning CNN models to train and test, each input image will pass it through a series of convolution layers with filters (Kernels), Pooling, fully connected layers (FC) and apply Softmax function to classify an object with probabilistic values between 0 and 1. The below figure is a complete flow of CNN to process an input image and classifies the objects based on values.

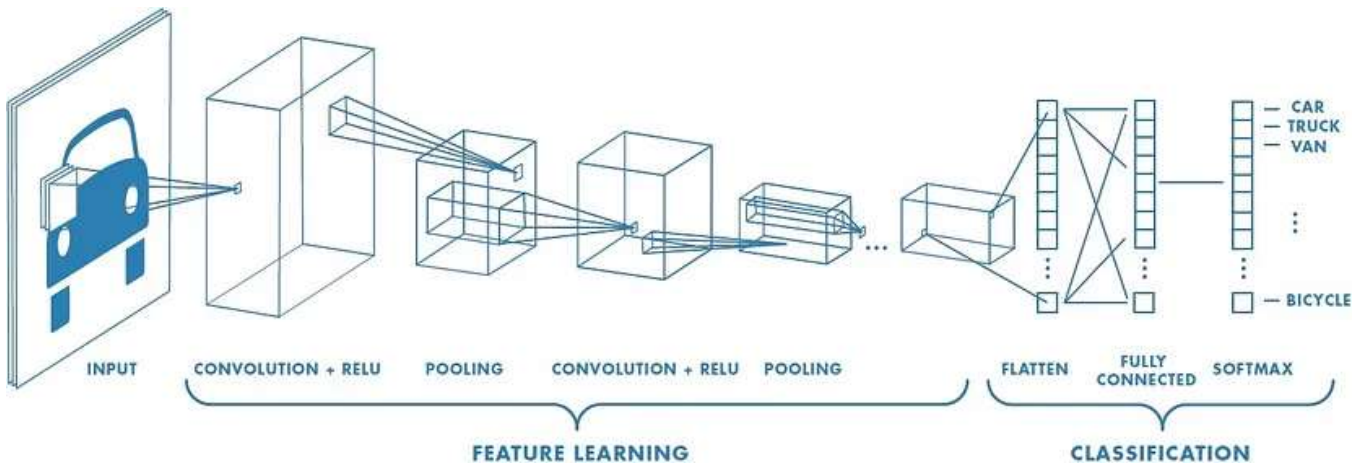


Figure 2 : Neural network with many convolutional layers

Convolution Layer

Convolution is the first layer to extract features from an input image. Convolution preserves the relationship between pixels by learning image features using small squares of input data. It is a mathematical operation that takes two inputs such as image matrix and a filter or kernel.

- An image matrix (volume) of dimension **(h x w x d)**
- A filter **(f_h x f_w x d)**
- Outputs a volume dimension **(h - f_h + 1) x (w - f_w + 1) x 1**

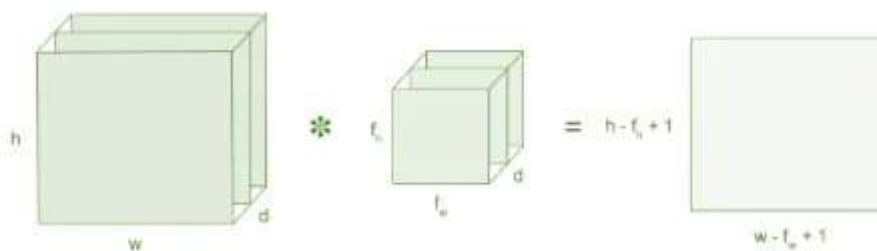


Figure 3: Image matrix multiplies kernel or filter matrix

Consider a 5 x 5 whose image pixel values are 0, 1 and filter matrix 3 x 3 as shown in below

1	1	1	0	0
0	1	1	1	0
0	0	1	1	1
0	0	1	1	0
0	1	1	0	0

5 x 5 – Image Matrix

*

1	0	1
0	1	0
1	0	1

3 x 3 – Filter Matrix

Figure 4: Image matrix multiplies kernel or filter matrix

Then the convolution of 5 x 5 image matrix multiplies with 3 x 3 filter matrix which is called “**Feature Map**” as output shown in below

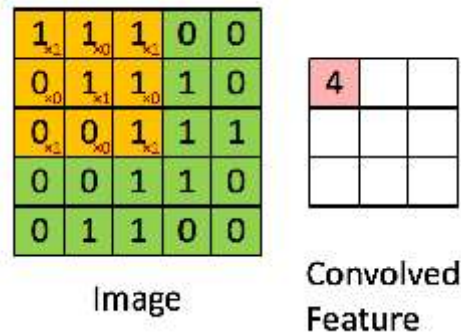


Figure 5: 3 × 3 Output matrix

Convolution of an image with different filters can perform operations such as edge detection, blur and sharpen by applying filters. The below example shows various convolution image after applying different types of filters (Kernels).








Operation	Filter	Convolved Image
Identity	$\begin{bmatrix} 0 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 0 \end{bmatrix}$	
Edge detection	$\begin{bmatrix} 1 & 0 & -1 \\ 0 & 0 & 0 \\ -1 & 0 & 1 \end{bmatrix}$	
	$\begin{bmatrix} 0 & 1 & 0 \\ 1 & -4 & 1 \\ 0 & 1 & 0 \end{bmatrix}$	
	$\begin{bmatrix} -1 & -1 & -1 \\ -1 & 8 & -1 \\ -1 & -1 & -1 \end{bmatrix}$	
Sharpen	$\begin{bmatrix} 0 & -1 & 0 \\ -1 & 5 & -1 \\ 0 & -1 & 0 \end{bmatrix}$	
Box blur (normalized)	$\frac{1}{9} \begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \end{bmatrix}$	
Gaussian blur (approximation)	$\frac{1}{16} \begin{bmatrix} 1 & 2 & 1 \\ 2 & 4 & 2 \\ 1 & 2 & 1 \end{bmatrix}$	

Figure 7 : Some common filters

Strides

Stride is the number of pixels shifts over the input matrix. When the stride is 1 then we move the filters to 1 pixel at a time. When the stride is 2 then we move the filters to 2 pixels at a time and so on. The below figure shows convolution would work with a stride of 2.

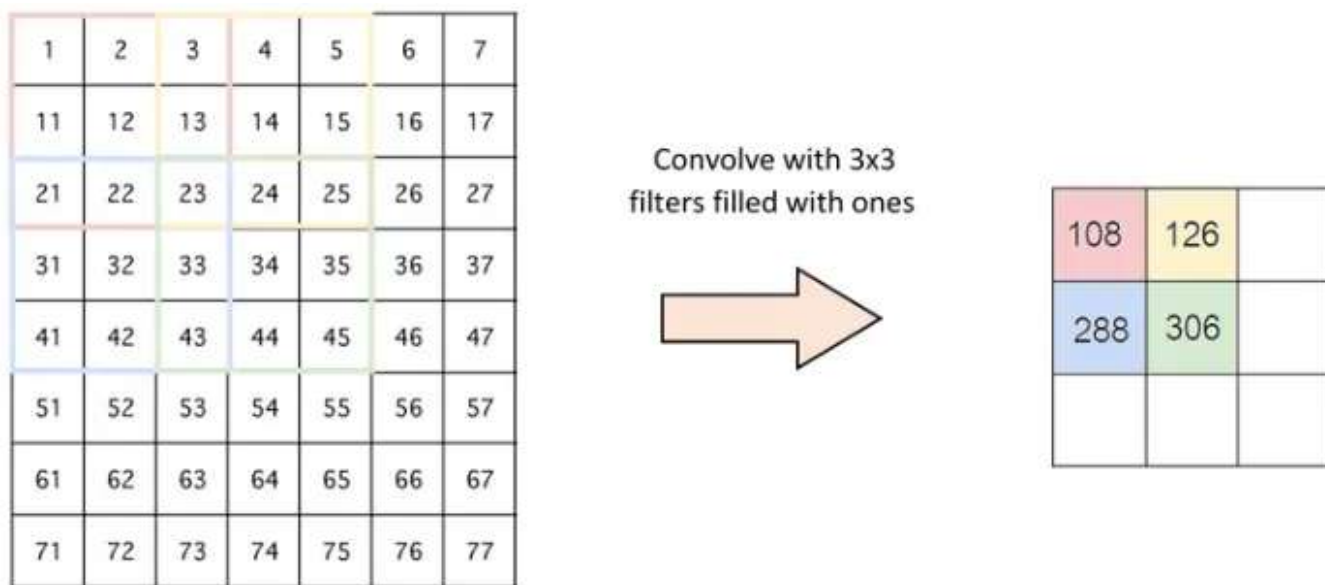


Figure 6 : Stride of 2 pixels

Padding

Sometimes filter does not fit perfectly fit the input image. We have two options:

- Pad the picture with zeros (zero-padding) so that it fits
- Drop the part of the image where the filter did not fit. This is called valid padding which keeps only valid part of the image.

Non Linearity (ReLU)

ReLU stands for Rectified Linear Unit for a non-linear operation. The output is $f(x) = \max(0, x)$.

Why ReLU is important : ReLU's purpose is to introduce non-linearity in our ConvNet. Since, the real world data would want our ConvNet to learn would be non-negative linear values.

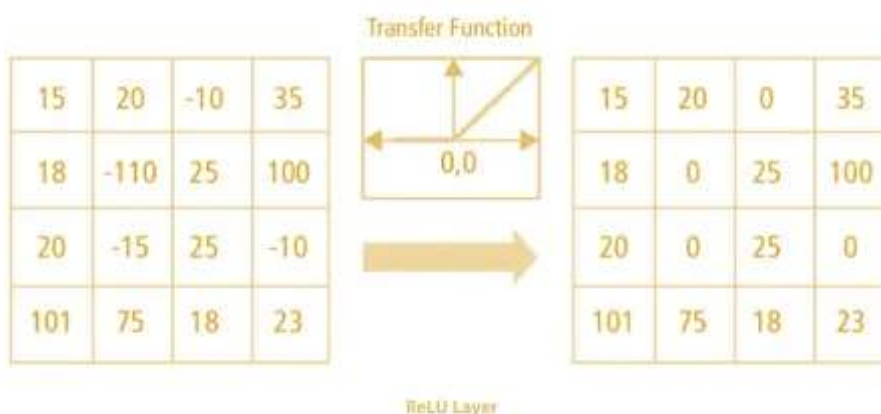


Figure 7 : ReLU operation

There are other non linear functions such as tanh or sigmoid that can also be used instead of ReLU. Most of the data scientists use ReLU since performance wise ReLU is better than the other two.

Pooling Layer

Pooling layers section would reduce the number of parameters when the images are too large. Spatial pooling also called subsampling or downsampling which reduces the dimensionality of each map but retains important information. Spatial pooling can be of different types:

- Max Pooling
- Average Pooling
- Sum Pooling

Max pooling takes the largest element from the rectified feature map. Taking the largest element could also take the average pooling. Sum of all elements in the feature map call as sum pooling.


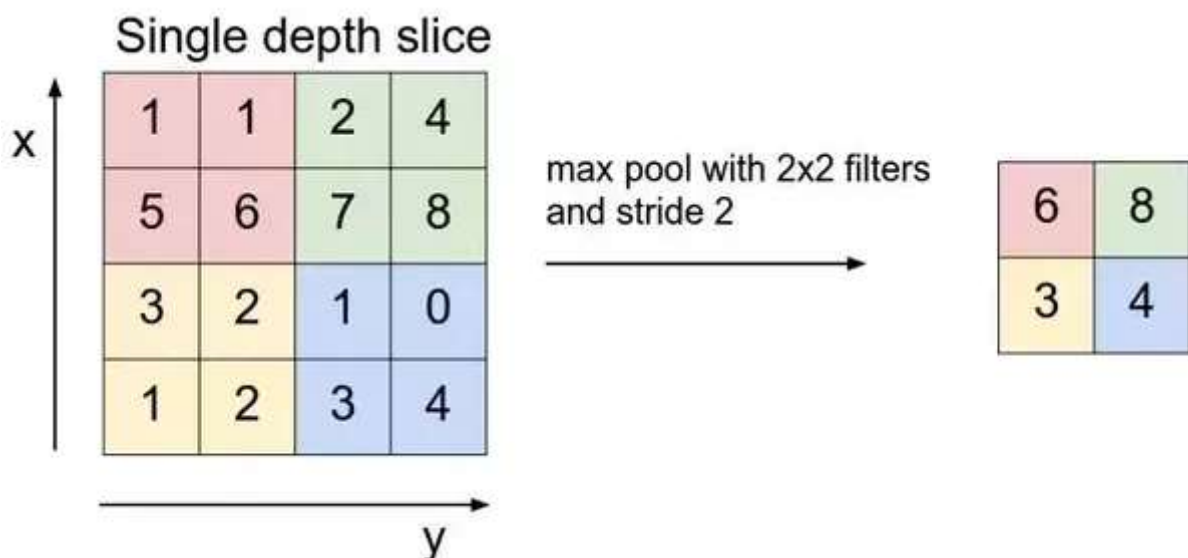


Figure 8 : Max Pooling

Fully Connected Layer

The layer we call as FC layer, we flattened our matrix into vector and feed it into a fully connected layer like a neural network.

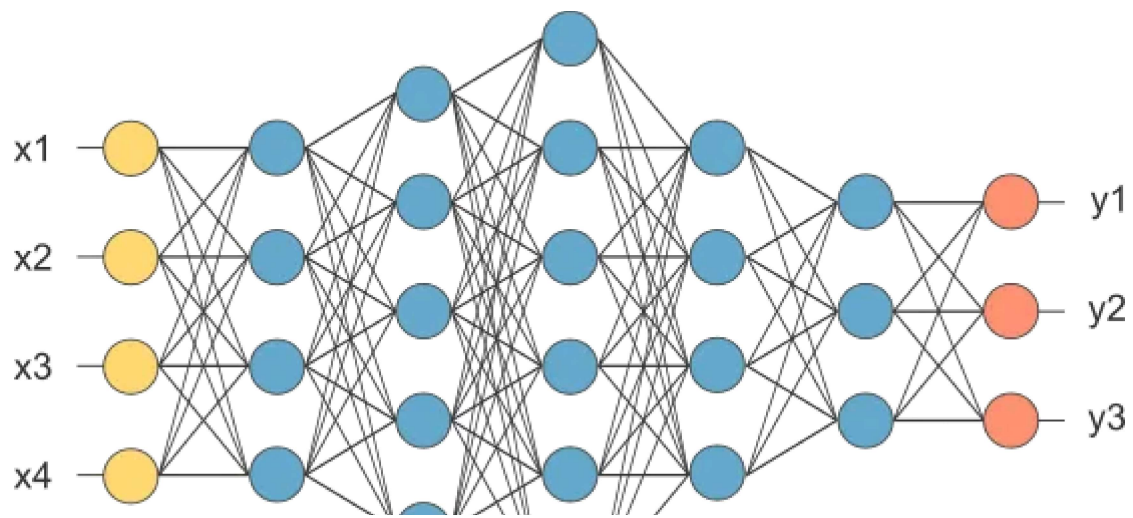

Open in app ↗

Sign up

Sign in

Medium

Search



In the above diagram, the feature map matrix will be converted as vector (x1, x2, x3, ...). With the fully connected layers, we combined these features together to create a model. Finally, we have an activation function such as softmax or sigmoid to classify the outputs as cat, dog, car, truck etc.,

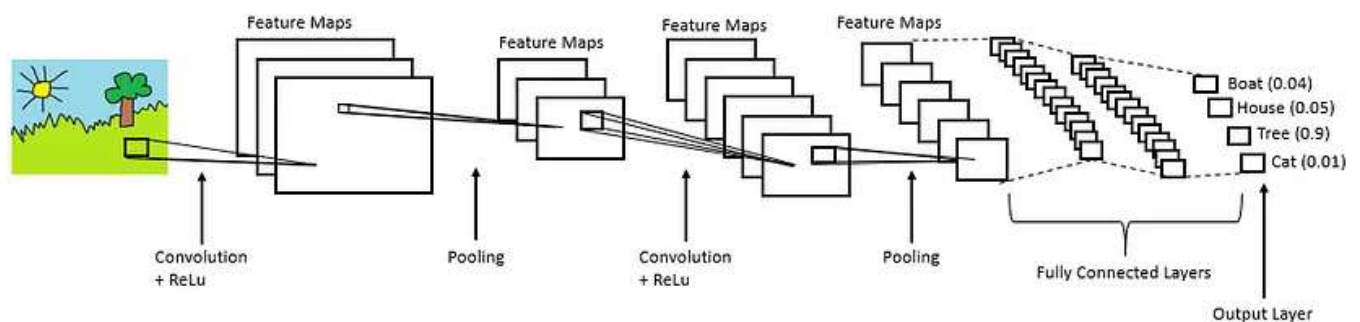


Figure 10 : Complete CNN architecture

Summary

- Provide input image into convolution layer
- Choose parameters, apply filters with strides, padding if requires. Perform convolution on the image and apply ReLU activation to the matrix.
- Perform pooling to reduce dimensionality size
- Add as many convolutional layers until satisfied
- Flatten the output and feed into a fully connected layer (FC Layer)

- Output the class using an activation function (Logistic Regression with cost functions) and classifies images.

In the next post, I would like to talk about some popular CNN architectures such as AlexNet, VGGNet, GoogLeNet, and ResNet.

References :

- <https://www.mathworks.com/discovery/convolutional-neural-network.html>
- <https://adeshpande3.github.io/adeshpande3.github.io/A-Beginner's-Guide-To-Understanding-Convolutional-Neural-Networks/>
- <https://ujjwalkarn.me/2016/08/11/intuitive-explanation-convnets/>
- <https://blog.datawow.io/interns-explain-cnn-8a669d053f8b>.

Machine Learning

Cnn

Convolution Neural Net

Image Recognition

Neural Networks




Follow

Written by Prabhu Raghav

1.8K Followers

Co-Founder & CTO — [Decisionfacts.ai](#) - Data Scientist, Architect, Full Stack Developer — Tech Enthusiast, Learner

More from Prabhu Raghav

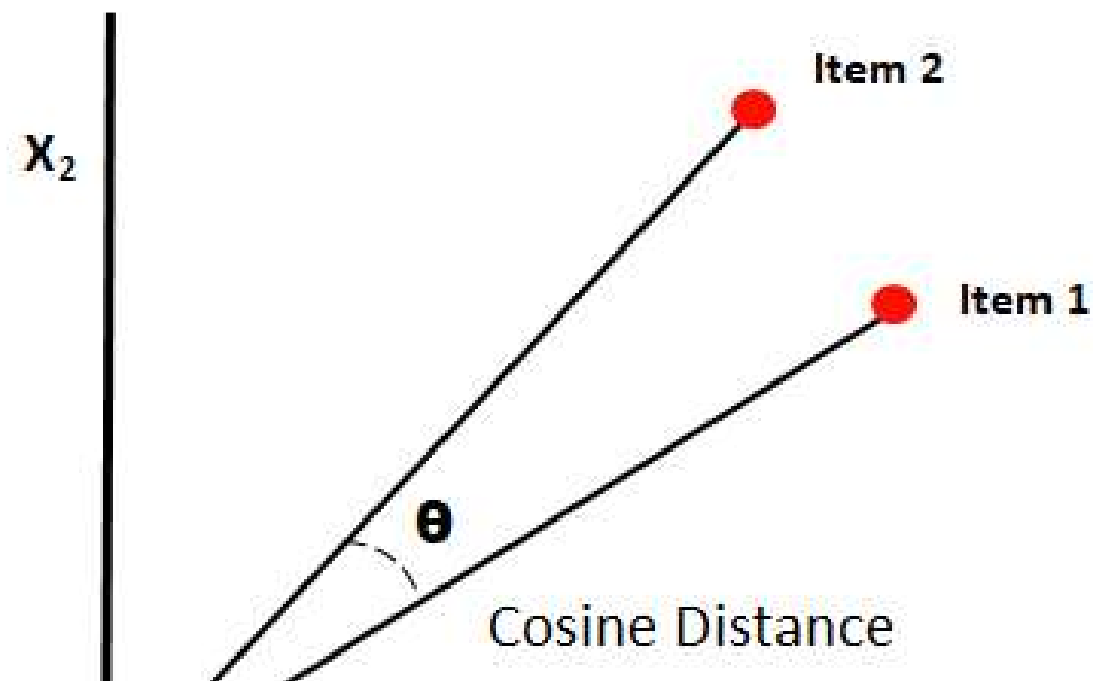

 Prabhu Raghav in Towards Data Science

Understanding NLP Word Embeddings—Text Vectorization

Processing natural language text and extract useful information from the given word, a sentence using machine learning and deep learning...

5 min read · Nov 11, 2019

 428

 3




 Prabhu Raghav in Towards Data Science

Linear Regression Simplified - Ordinary Least Square vs Gradient Descent

What is Linear Regression? Linear regression is a statistical method of finding the relationship between independent and dependent...

6 min read · May 15, 2018

 2.2K  12

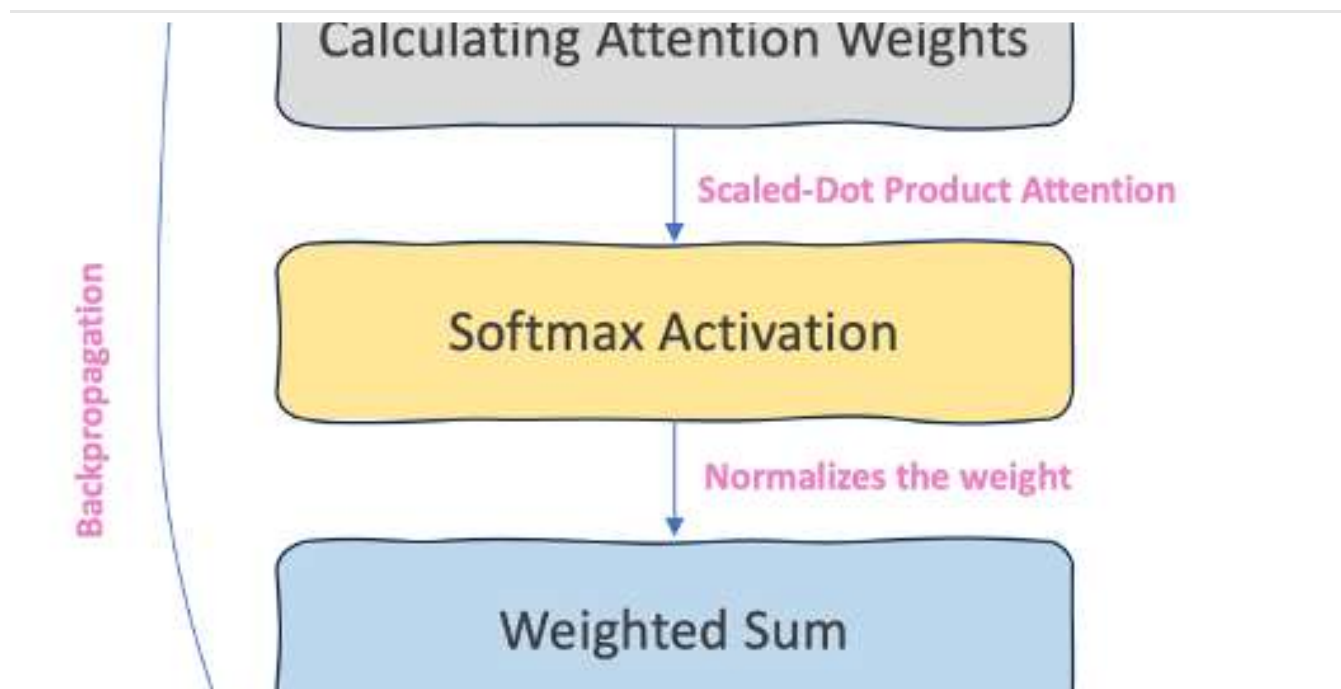

Prabhu Raghav in DecisionFacts


Simplified Explanation of Attention—Approach to Handle Efficient Memory Management for LLM Model...

Sequence Model

8 min read · Dec 13, 2023

 108 



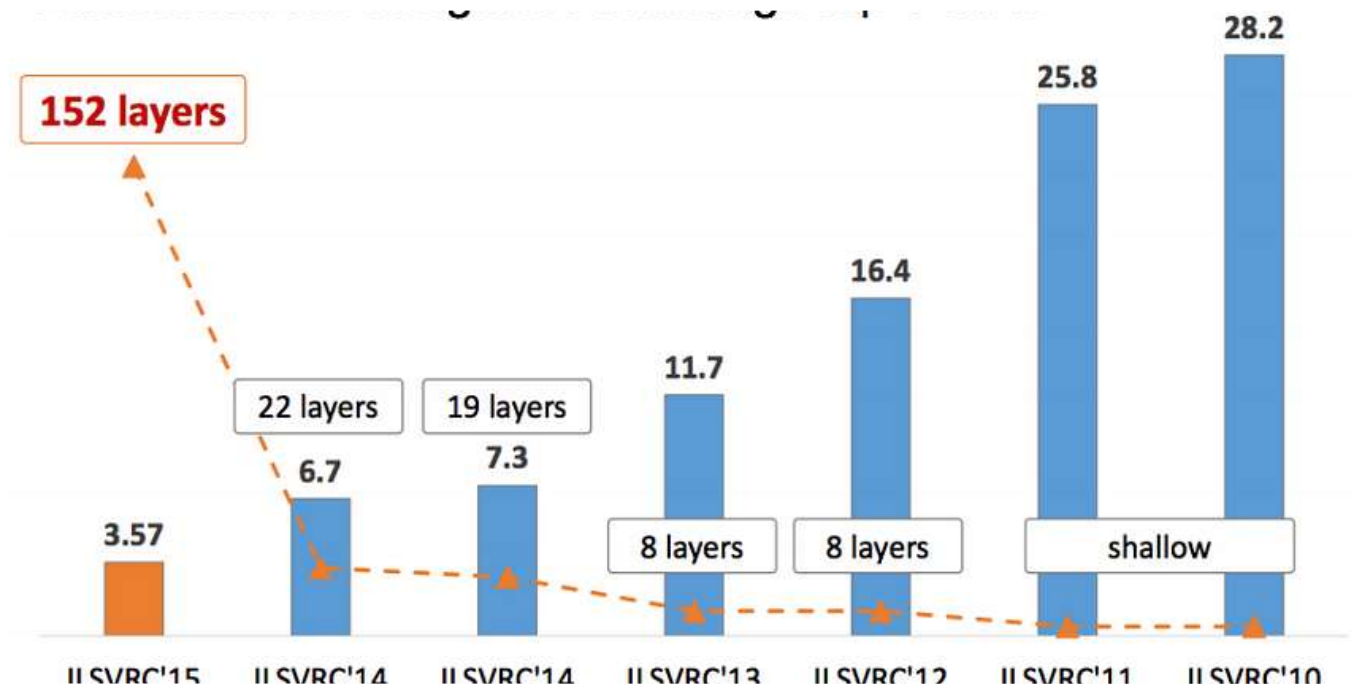

Prabhu Raghav

CNN Architectures — LeNet, AlexNet, VGG, GoogLeNet and ResNet

In my previous blog post, explained about my understanding of Convolution Neural Network (CNN). In this post, I am going to detailing about...

5 min read · Mar 15, 2018



346




3



See all from Prabhu Raghav

Recommended from Medium

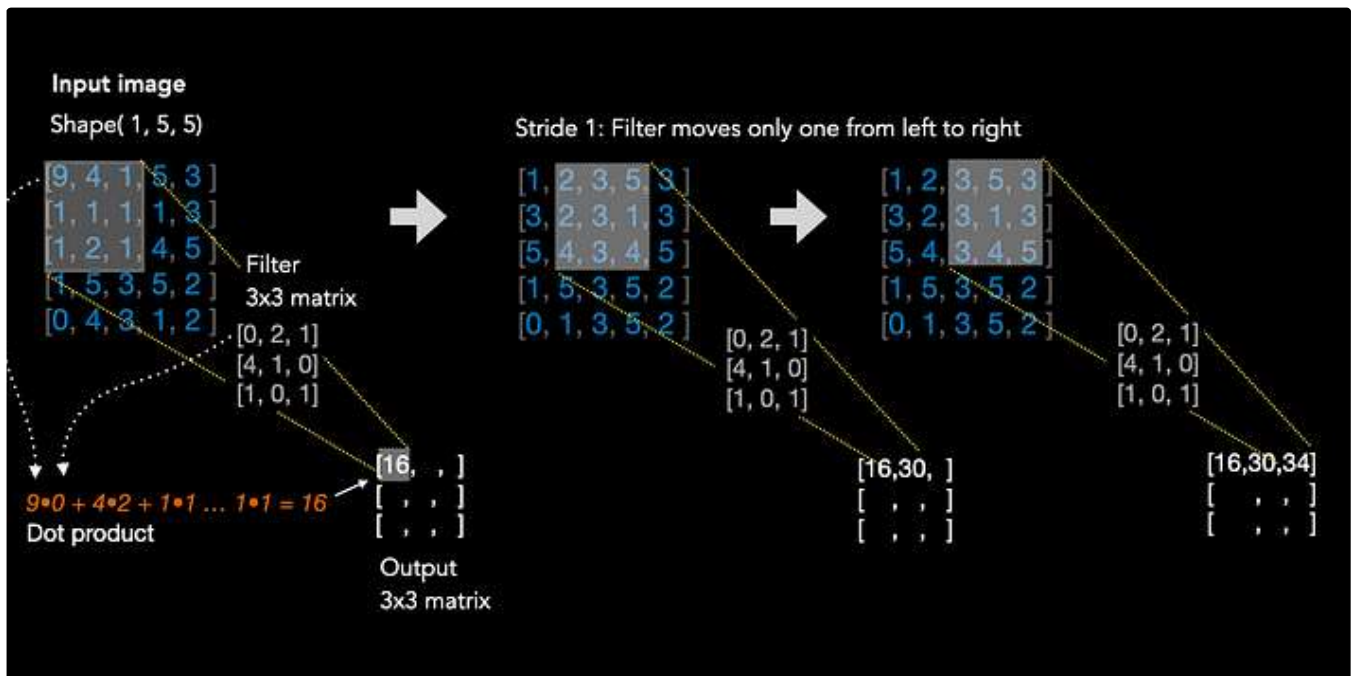


Frederik vI in Advanced Deep Learning

Understanding the Convolutional Filter Operation in CNN's.

5 min read · Aug 18, 2023

134 4

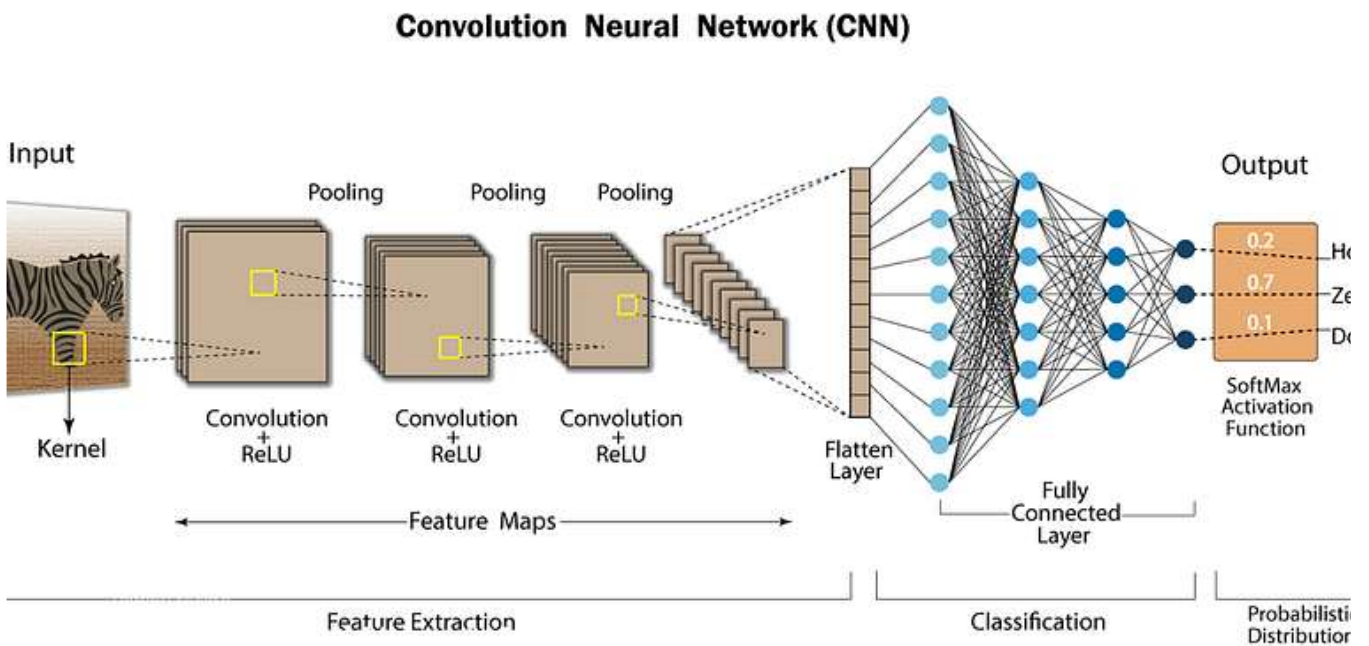


Prathammodi

Convolutional Neural Networks for Dummies

So you want to learn about Convolutional Neural Networks, CNNs, huh? Well, you've come to the right place.

Lists



Predictive Modeling w/ Python

20 stories · 846 saves



Practical Guides to Machine Learning

10 stories · 989 saves



Natural Language Processing

1133 stories · 608 saves



The New Chatbots: ChatGPT, Bard, and Beyond

12 stories · 286 saves


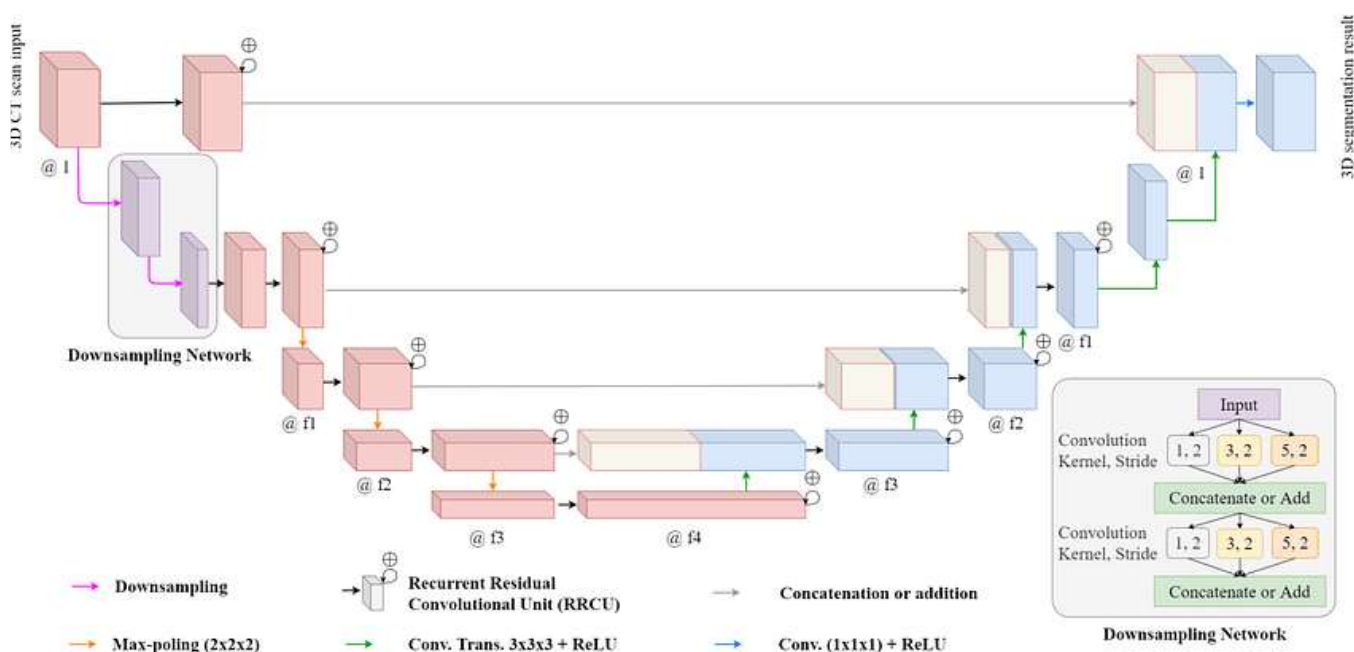


FIGURE 1 The overview of the proposed U-Net based P2U2D architecture for lung segmentation

Alexquesada

U-Net: A Versatile Deep Learning Architecture for Image Segmentation

This article is one of the assignments of Data Glacier Intership 2023.

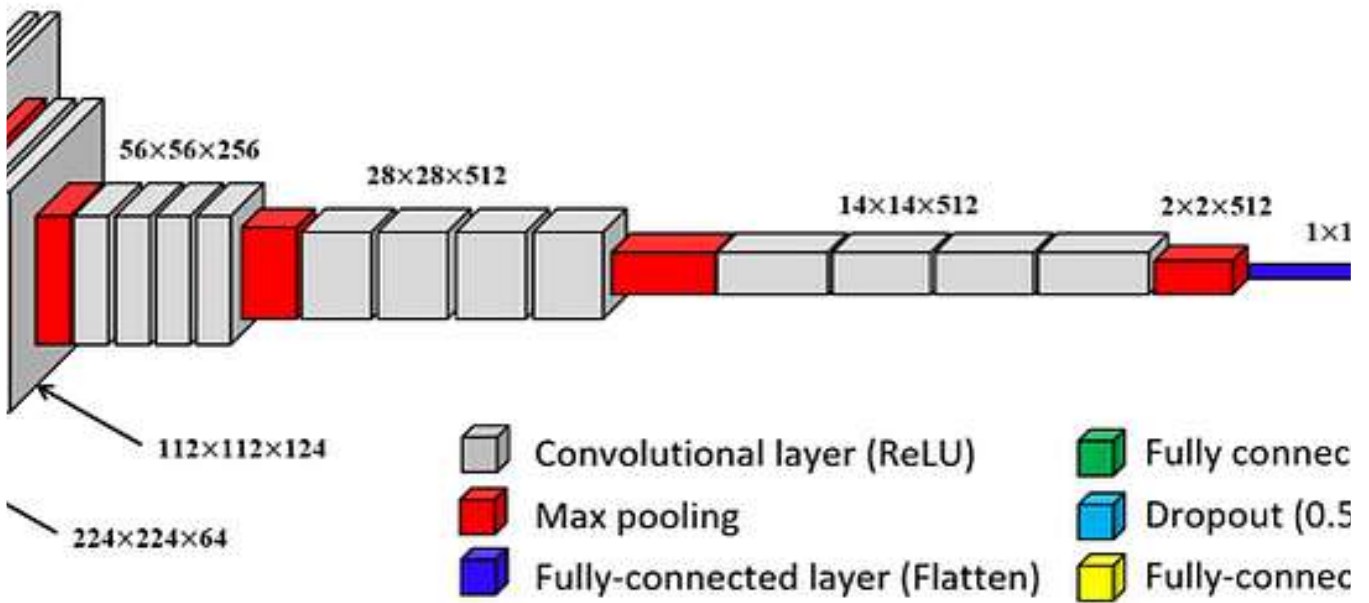


D Daniyal Masood

Pre-trained CNN architectures designs, performance analysis and comparison

Pre-trained CNN (Convolutional Neural Network) models are neural networks that have been trained on a large dataset, typically for a...

12 min read · Oct 17, 2023

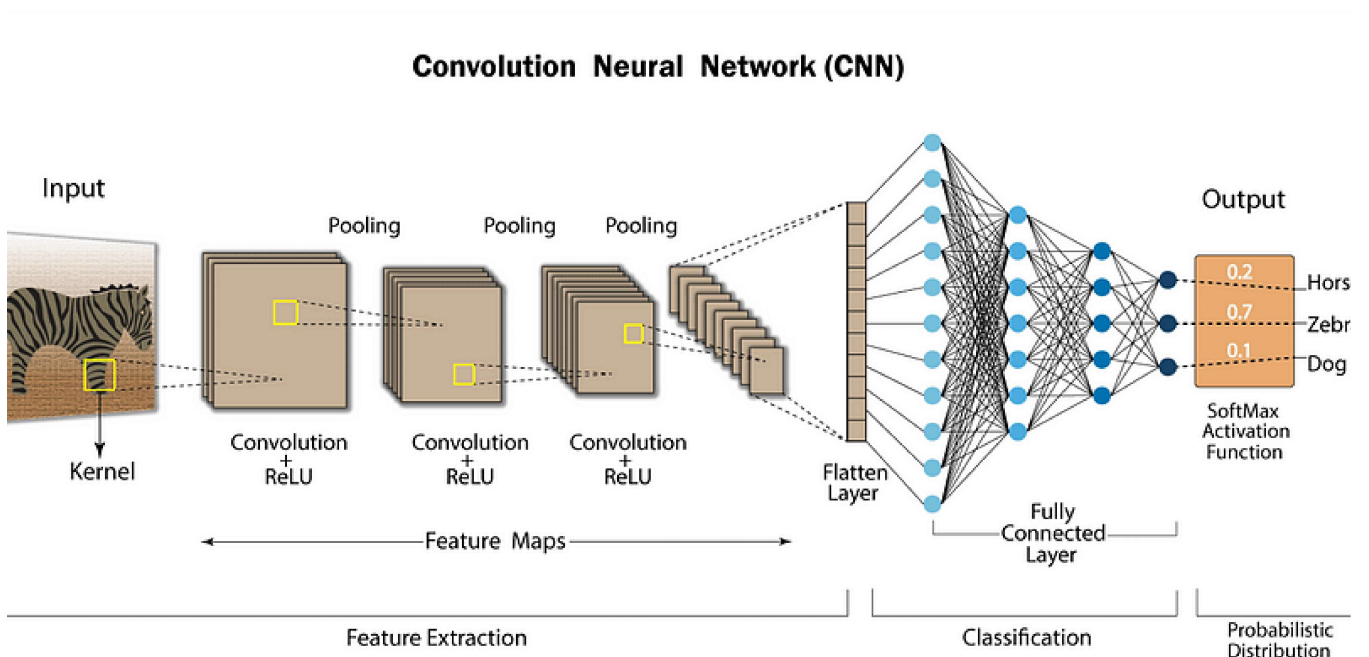


Understanding Convolutional Neural Networks (CNNs) in Depth

Convolutional Neural Networks skillfully capturing and extracting patterns from data, revealing the hidden artistry within pixels.

12 min read · Nov 28, 2023

 456  5

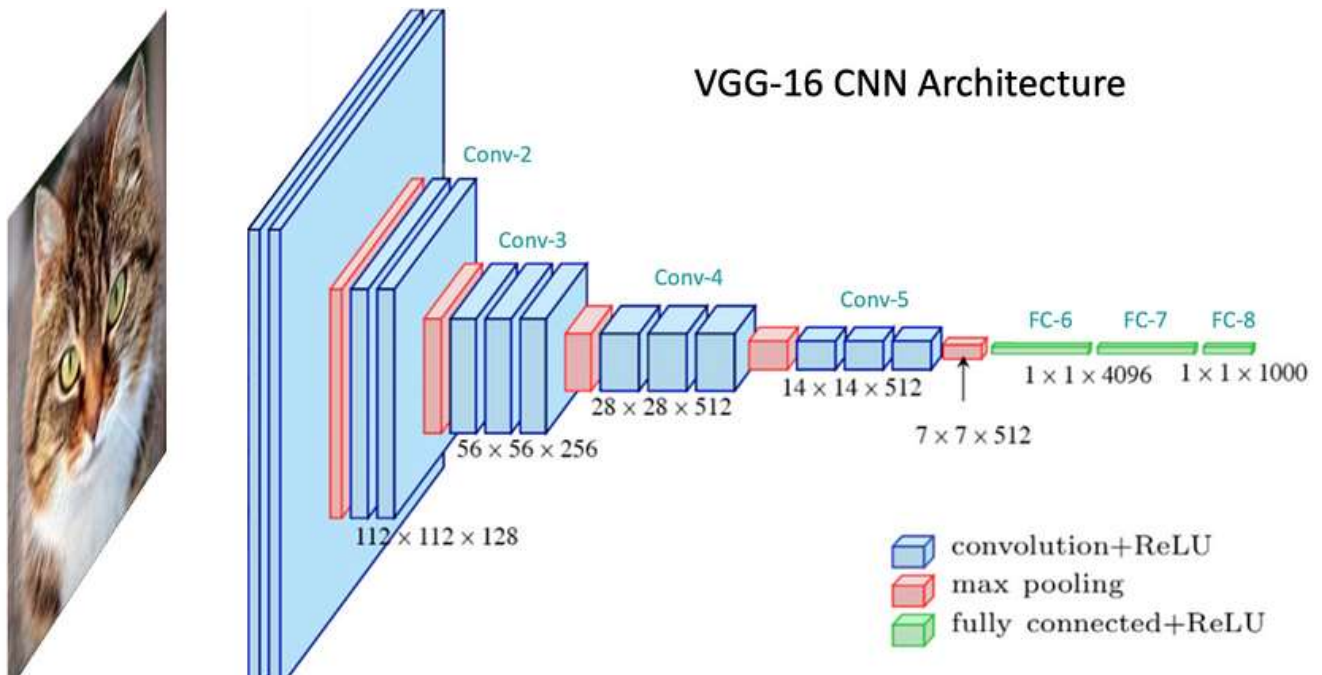

 Luís Fernando Torres in LatinXinAI

Convolutional Neural Network From Scratch

The most effective way of working with image data

21 min read · Oct 16, 2023

 715  6



See more recommendations