

Exploratory graphs

Part 1

Jeffrey Leek, Assistant Professor of Biostatistics
Johns Hopkins Bloomberg School of Public Health

Why do we use graphs in data analysis?

- To understand data properties
- To find patterns in data
- To suggest modeling strategies
- To "debug" analyses
- To communicate results

Exploratory graphs

- To understand data properties
- To find patterns in data
- To suggest modeling strategies
- To "debug" analyses
- To communicate results

Characteristics of exploratory graphs

- They are made quickly
- A large number are made
- The goal is for personal understanding
- Axes/legends are generally cleaned up
- Color/size are primarily used for information

Background - perceptual tasks


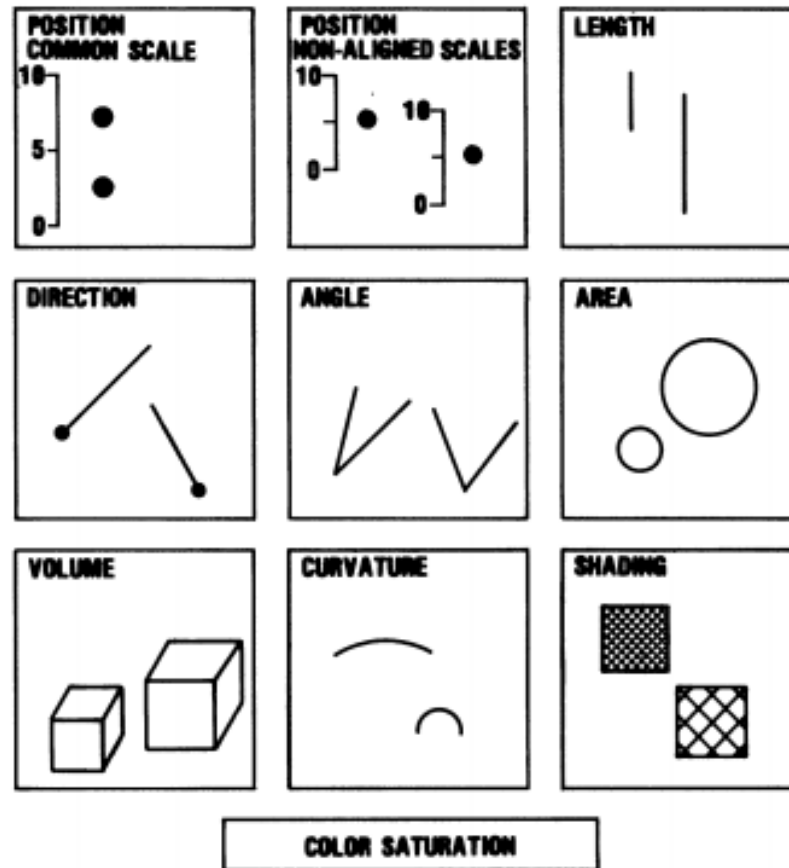


Figure 1. Elementary perceptual tasks.

[Graphical perception: Theory, Experimentation, and Applications to the Development of Graphical Models](#)


5/20

Position versus length

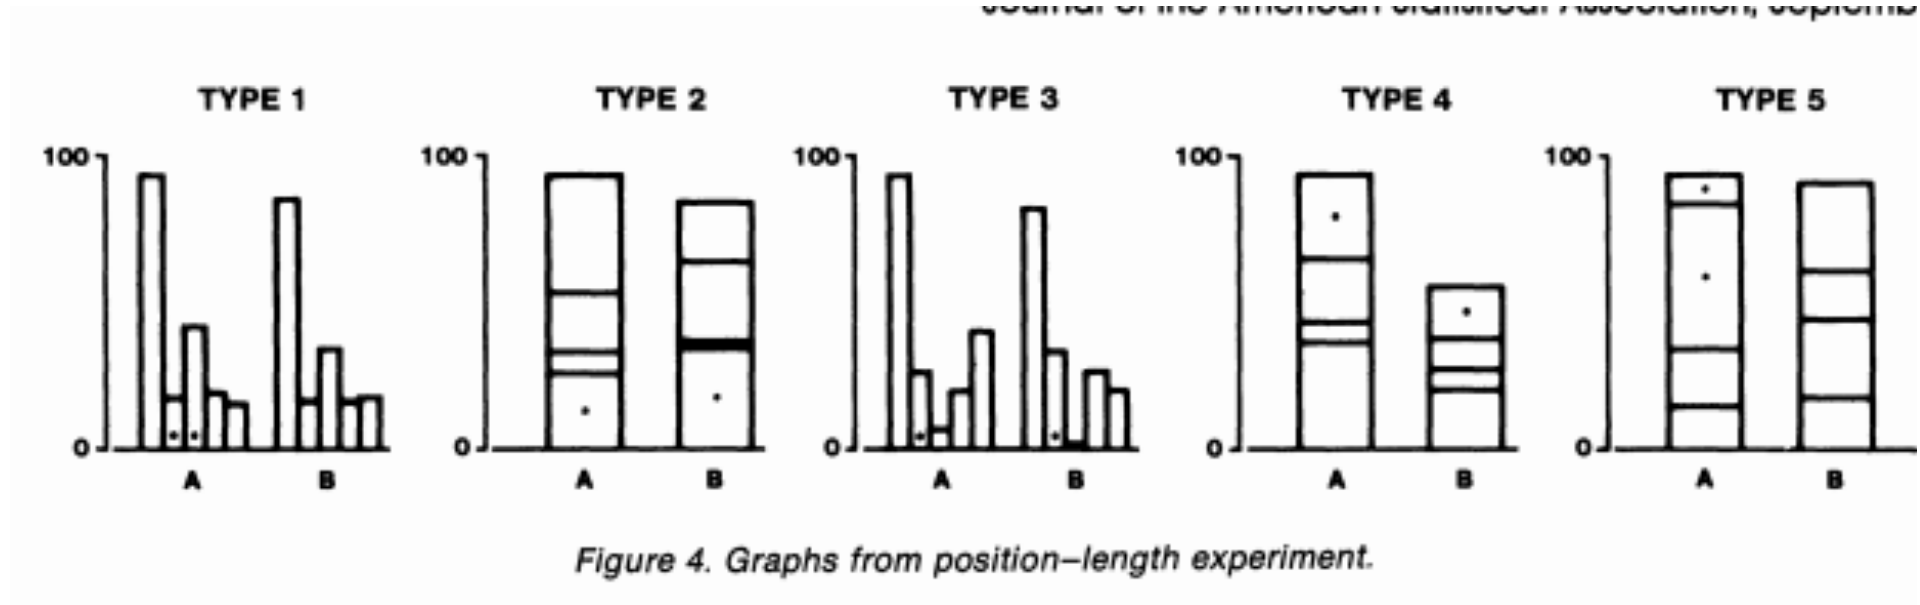


[Graphical perception: Theory, Experimentation, and Applications to the Development of Graphical Models](#)

Position versus length - results

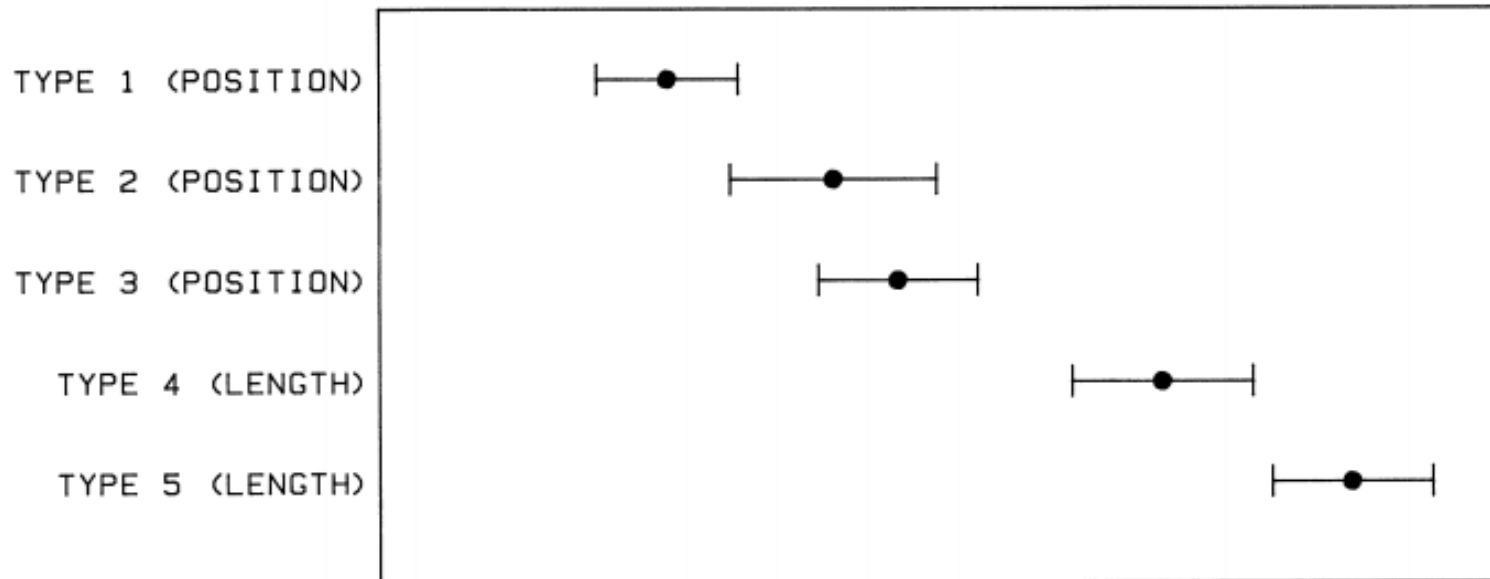


[Graphical perception: Theory, Experimentation, and Applications to the Development of Graphical Models](#)

Position versus angle

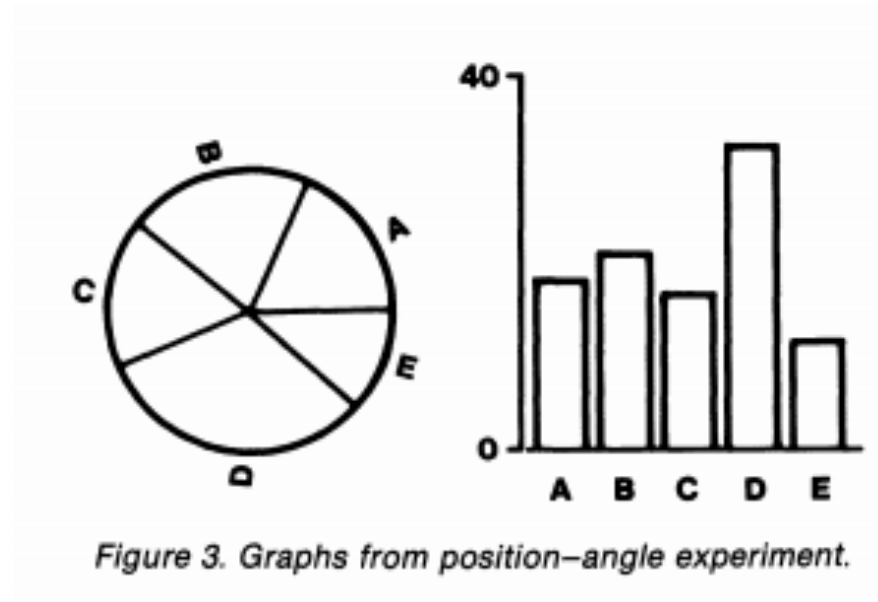


[Graphical perception: Theory, Experimentation, and Applications to the Development of Graphical Models](#)

Position versus angle - results

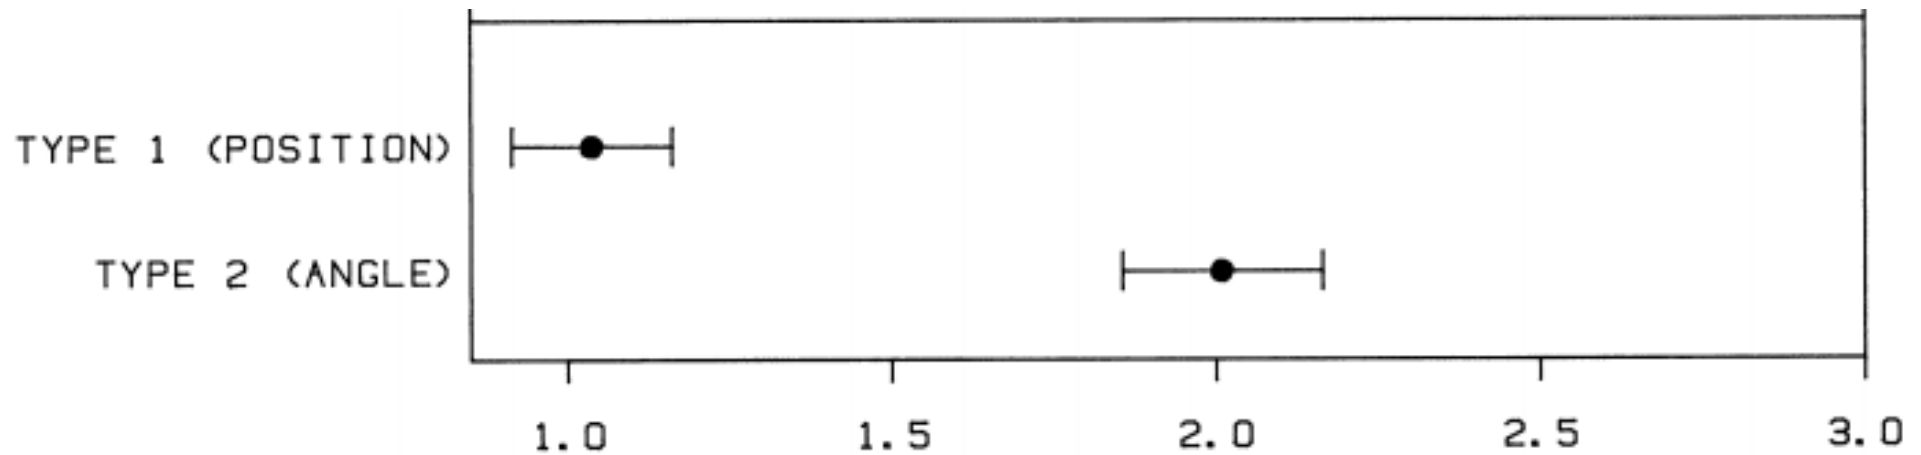

[Graphical perception: Theory, Experimentation, and Applications to the Development of Graphical Models](#)

More experimental results

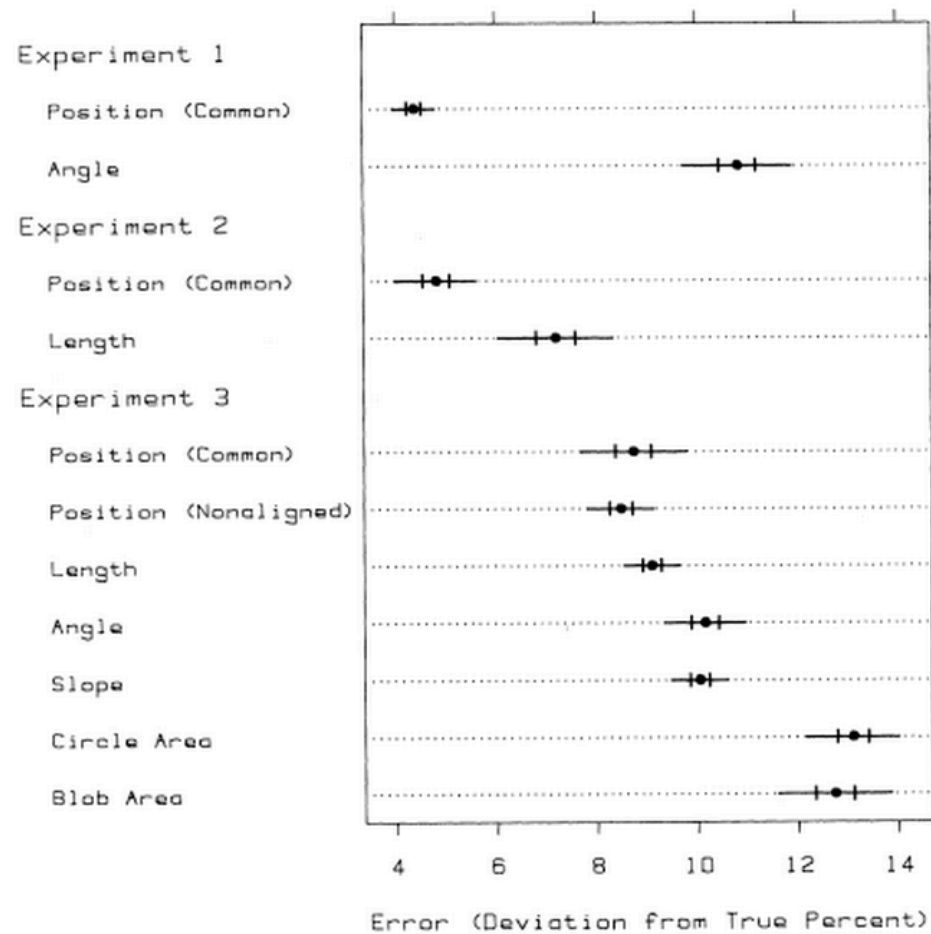

Graphical Perception and Graphical Methods for Analyzing Scientific Data

Summary

- Use common scales when possible
- When possible use position comparisons
- Angle comparisons are frequently hard to interpret (no piecharts!)
- No 3-D barcharts

Housing data

The screenshot shows the U.S. Census Bureau website. The main navigation bar includes links for People, Business, Geography, Data, Research, and Newsroom. The page title is "American Community Survey" and the subtitle is "Public Use Microdata Sample (PUMS)". The left sidebar contains a list of links: Data Releases, Data Product Descriptions, Documentation, Geography, Downloadable data via FTP, Summary File, Public Use Microdata Sample (PUMS) (selected), About PUMS, PUMS Data, PUMS Documentation, PUMS on DataFerrett, PUMS FAQs, and Custom Tabulations. The main content area is titled "Public Use Microdata Sample (PUMS)" and includes a description of the ACS PUMS files, a section on why to use PUMS, and a section on what's available and how to access PUMS.

Public Use Microdata Sample (PUMS)

The American Community Survey (ACS) Public Use Microdata Sample (PUMS) files are a set of untabulated records about individual people or housing units. The Census Bureau produces the PUMS files so that data users can create custom tables that are not available through pretabulated (or summary) ACS data products.

Summary products, such as the tables and profiles accessible via American FactFinder (AFF), show data that have already been tabulated for specific geographic areas.

PUMS files, in contrast, include population and housing unit records with individual response information such as relationship, sex, educational attainment, and employment status.

Why Use PUMS?

PUMS files are perfect for people, such as students, who are looking for greater accessibility to inexpensive data for research projects. Social scientists often use the PUMS for regression analysis and modeling applications.

What's Available and How Can I Access PUMS?

The Census Bureau produces 1-year, 3-year, and 5-year ACS PUMS files. The 3-year and 5-year PUMS files are multiyear combinations of the 1-year PUMS file with appropriate adjustments to the weights and inflation adjustment factors. The PUMS files are accessible via [American FactFinder](#), the Census Bureau's [FTP site](#), and [DataFerrett](#). Statistical software is needed to use the PUMS files from American FactFinder and the FTP site.

Need Help with PUMS?

Learn more about PUMS in the Compass Products [What PUMS Data Users Need to Know](#) handbook and [Introduction to the PUMS](#) training presentation.

Geographic Areas Available


```
pData <- read.csv("./data/ss06pid.csv")
```

12/20

Boxplots


- Important parameters: *col, varwidth, names, horizontal*

```
boxplot(pData$AGEP,col="blue")
```

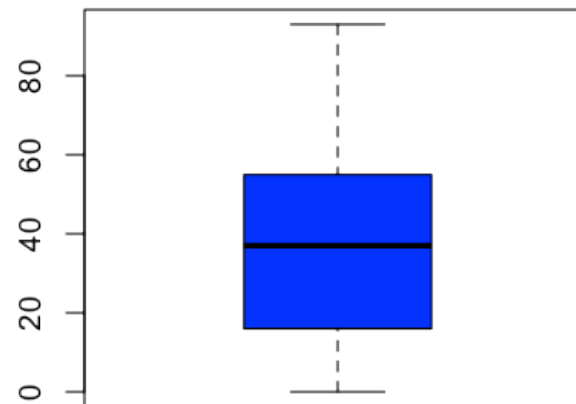


Boxplots

```
boxplot(pData$AGEP ~ as.factor(pData$DDRS), col="blue")
```

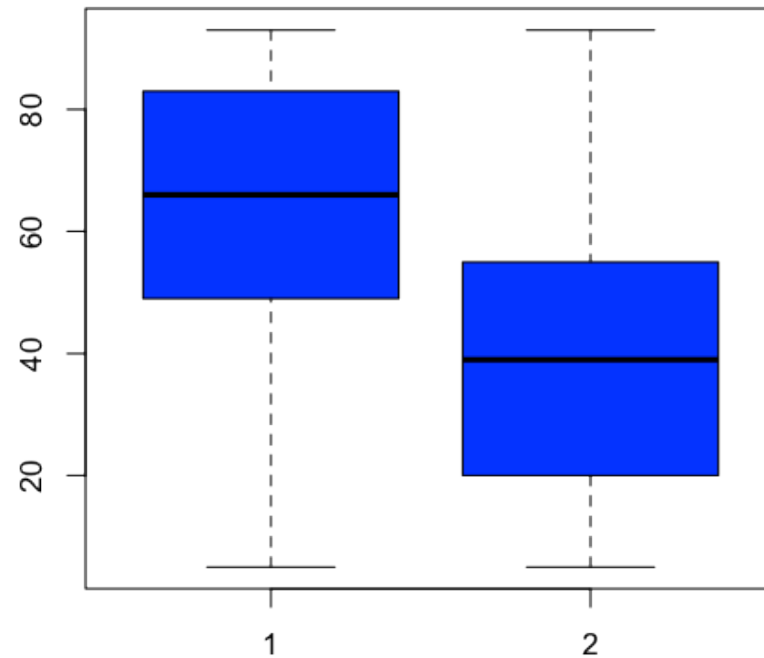


Boxplots

```
boxplot(pData$AGEP ~ as.factor(pData$DDRS), col=c("blue", "orange"), names=c("yes", "no"), varwidth=TRUE
```

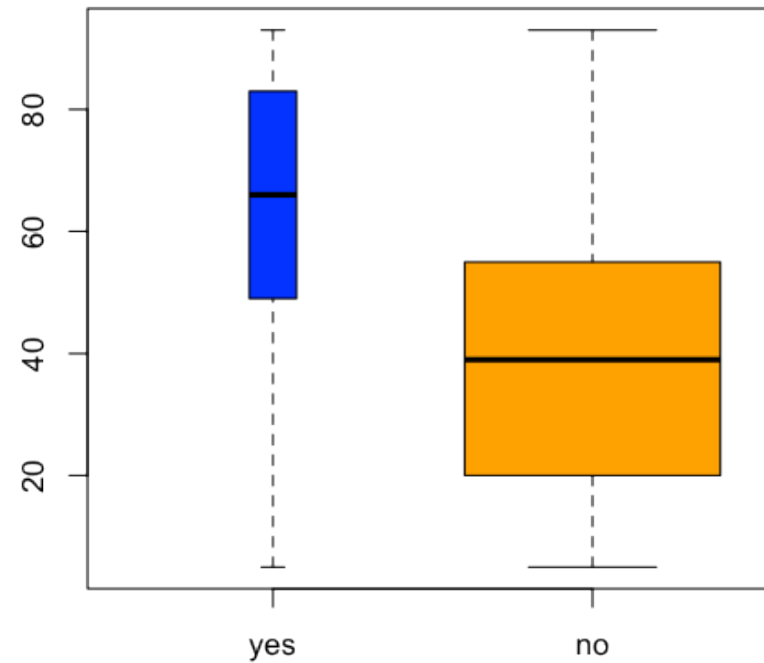

Barplots


```
barplot(table(pData$CIT),col="blue")
```

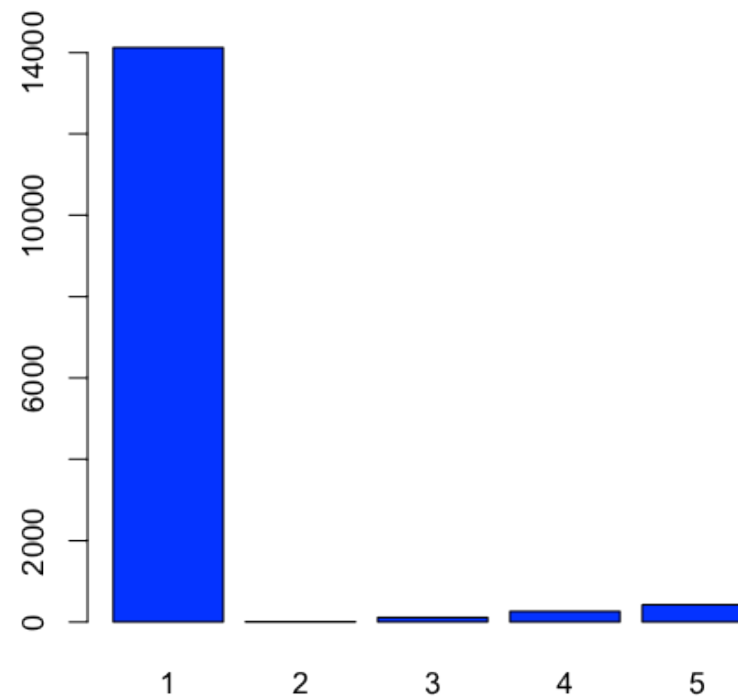

Histograms


- Important parameters: *breaks, freq, col, xlab, ylab, xlim, _ylim, main*

```
hist(pData$AGEP,col="blue")
```

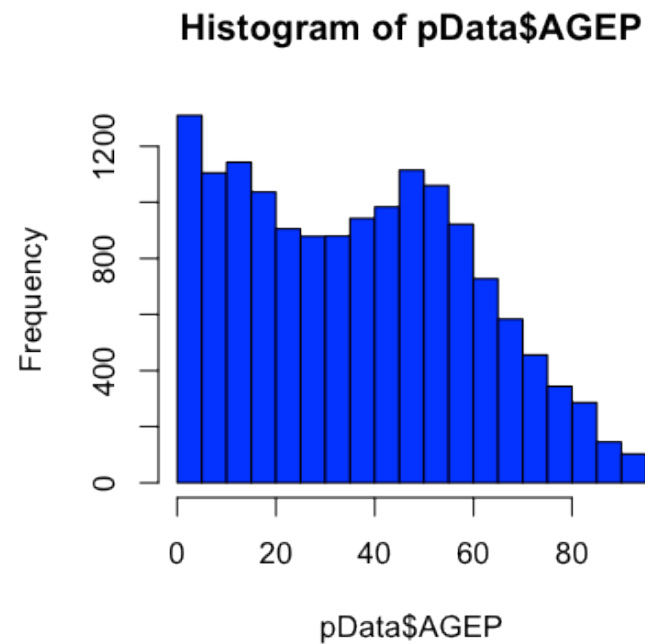

Histograms


```
hist(pData$AGEP,col="blue",breaks=100,main="Age")
```

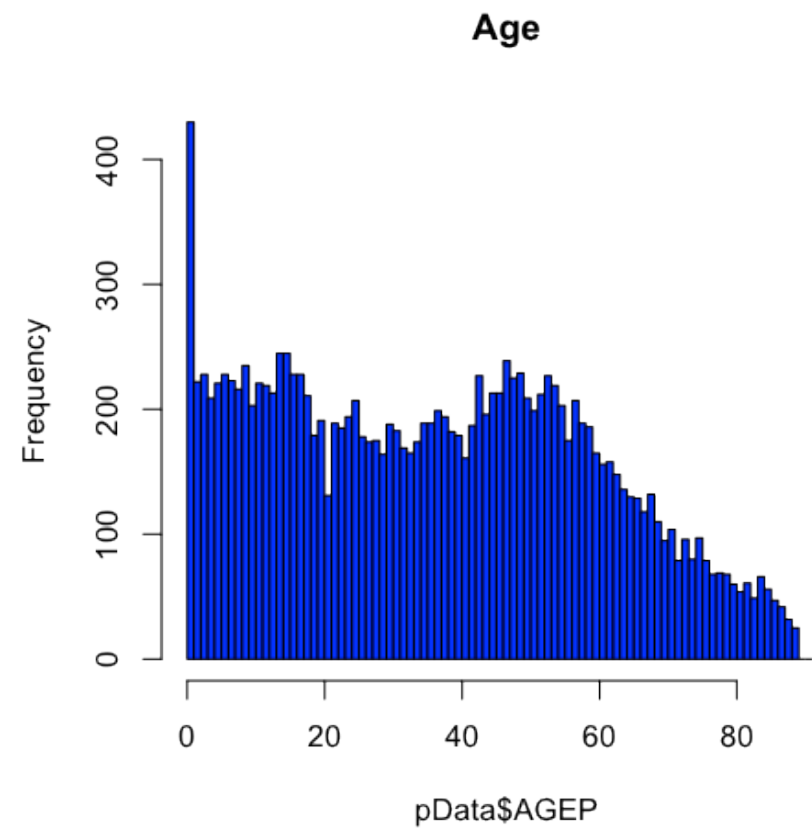

Density plots

Important parameters (to plot): *col, lwd, xlab, ylab, xlim, ylim*

```
dens <- density(pData$AGEP)  
plot(dens, lwd=3, col="blue")
```

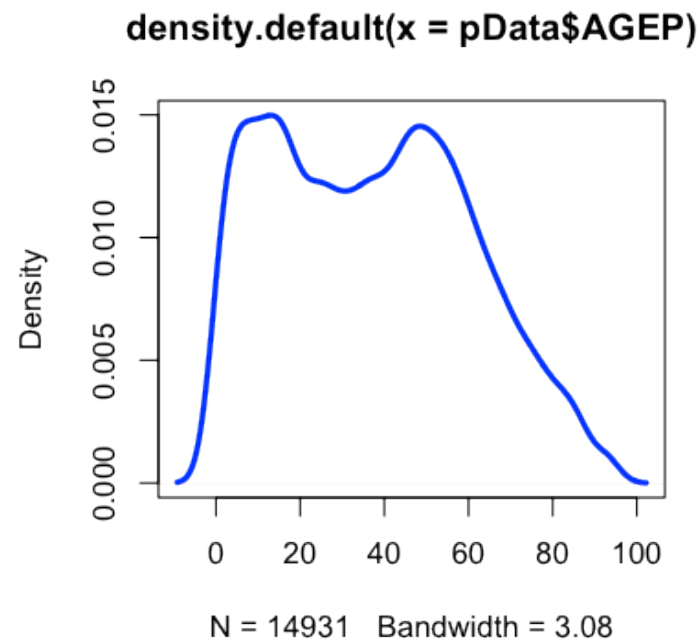

Density plots - multiple distributions

```
dens <- density(pData$AGEP)
densMales <- density(pData$AGEP[which(pData$SEX==1)])
plot(dens,lwd=3,col="blue")
lines(densMales,lwd=3,col="orange")
```

