

## tengine Scan Report

Project Name	tengine
Scan Start	Friday, June 21, 2024 12:30:08 AM
Preset	Checkmarx Default
Scan Time	00h:20m:43s
Lines Of Code Scanned	98477
Files Scanned	44
Report Creation Time	Friday, June 21, 2024 10:39:58 AM
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012</a>
Team	CxServer
Checkmarx Version	8.7.0
Scan Type	Full
Source Origin	LocalPath
Density	2/1000 (Vulnerabilities/LOC)
Visibility	Public

## Filter Settings

### **Severity**

Included: High, Medium, Low, Information

Excluded: None

### **Result State**

Included: Confirmed, Not Exploitable, To Verify, Urgent, Proposed Not Exploitable

Excluded: None

### **Assigned to**

Included: All

### **Categories**

Included:

Uncategorized	All
Custom	All
PCI DSS v3.2	All
OWASP Top 10 2013	All
FISMA 2014	All
NIST SP 800-53	All
OWASP Top 10 2017	All
OWASP Mobile Top 10 2016	All

Excluded:

Uncategorized	None
Custom	None
PCI DSS v3.2	None
OWASP Top 10 2013	None
FISMA 2014	None

NIST SP 800-53	None
OWASP Top 10 2017	None
OWASP Mobile Top 10 2016	None

**Results Limit**


Results limit per query was set to 50

**Selected Queries**


Selected queries are listed in [Result Summary](#)

---


## Result Summary

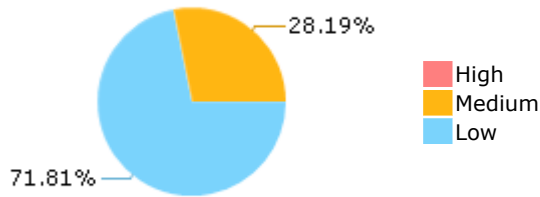

## Most Vulnerable Files

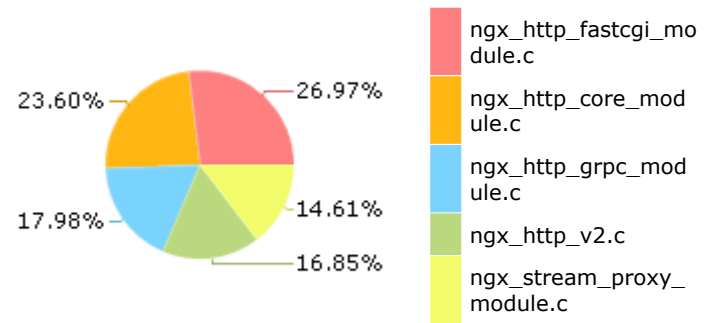

## Top 5 Vulnerabilities

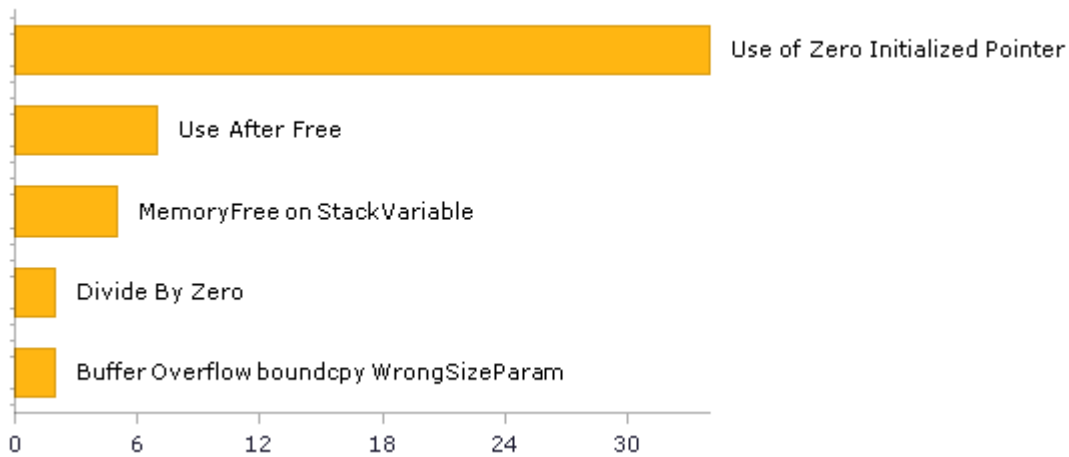

## Scan Summary - OWASP Top 10 2017

Further details and elaboration about vulnerabilities and risks can be found at: [OWASP Top 10 2017](#)

Category	Threat Agent	Exploitability	Weakness Prevalence	Weakness Detectability	Technical Impact	Business Impact	Issues Found	Best Fix Locations
A1-Injection	App. Specific	EASY	COMMON	EASY	SEVERE	App. Specific	81	28
A2-Broken Authentication	App. Specific	EASY	COMMON	AVERAGE	SEVERE	App. Specific	0	0
A3-Sensitive Data Exposure	App. Specific	AVERAGE	WIDESPREAD	AVERAGE	SEVERE	App. Specific	4	4
A4-XML External Entities (XXE)	App. Specific	AVERAGE	COMMON	EASY	SEVERE	App. Specific	0	0
A5-Broken Access Control*	App. Specific	AVERAGE	COMMON	AVERAGE	SEVERE	App. Specific	0	0
A6-Security Misconfiguration	App. Specific	EASY	WIDESPREAD	EASY	MODERATE	App. Specific	0	0
A7-Cross-Site Scripting (XSS)	App. Specific	EASY	WIDESPREAD	EASY	MODERATE	App. Specific	0	0
A8-Insecure Deserialization	App. Specific	DIFFICULT	COMMON	AVERAGE	SEVERE	App. Specific	0	0
A9-Using Components with Known Vulnerabilities*	App. Specific	AVERAGE	WIDESPREAD	AVERAGE	MODERATE	App. Specific	1	1
A10-Insufficient Logging & Monitoring	App. Specific	AVERAGE	WIDESPREAD	DIFFICULT	MODERATE	App. Specific	0	0

\* Project scan results do not include all relevant queries. Presets and/or Filters should be changed to include all relevant standard queries.

## Scan Summary - OWASP Top 10 2013

Further details and elaboration about vulnerabilities and risks can be found at: [OWASP Top 10 2013](#)

Category	Threat Agent	Attack Vectors	Weakness Prevalence	Weakness Detectability	Technical Impact	Business Impact	Issues Found	Best Fix Locations
A1-Injection	EXTERNAL, INTERNAL, ADMIN USERS	EASY	COMMON	AVERAGE	SEVERE	ALL DATA	0	0
A2-Broken Authentication and Session Management	EXTERNAL, INTERNAL USERS	AVERAGE	WIDESPREAD	AVERAGE	SEVERE	AFFECTED DATA AND FUNCTIONS	0	0
A3-Cross-Site Scripting (XSS)	EXTERNAL, INTERNAL, ADMIN USERS	AVERAGE	VERY WIDESPREAD	EASY	MODERATE	AFFECTED DATA AND SYSTEM	0	0
A4-Insecure Direct Object References	SYSTEM USERS	EASY	COMMON	EASY	MODERATE	EXPOSED DATA	0	0
A5-Security Misconfiguration	EXTERNAL, INTERNAL, ADMIN USERS	EASY	COMMON	EASY	MODERATE	ALL DATA AND SYSTEM	0	0
A6-Sensitive Data Exposure	EXTERNAL, INTERNAL, ADMIN USERS, USERS BROWSERS	DIFFICULT	UNCOMMON	AVERAGE	SEVERE	EXPOSED DATA	0	0
A7-Missing Function Level Access Control*	EXTERNAL, INTERNAL USERS	EASY	COMMON	AVERAGE	MODERATE	EXPOSED DATA AND FUNCTIONS	0	0
A8-Cross-Site Request Forgery (CSRF)	USERS BROWSERS	AVERAGE	COMMON	EASY	MODERATE	AFFECTED DATA AND FUNCTIONS	0	0
A9-Using Components with Known Vulnerabilities*	EXTERNAL USERS, AUTOMATED TOOLS	AVERAGE	WIDESPREAD	DIFFICULT	MODERATE	AFFECTED DATA AND FUNCTIONS	1	1
A10-Unvalidated Redirects and Forwards	USERS BROWSERS	AVERAGE	WIDESPREAD	DIFFICULT	MODERATE	AFFECTED DATA AND FUNCTIONS	0	0

\* Project scan results do not include all relevant queries. Presets and/or Filters should be changed to include all relevant standard queries.

## Scan Summary - PCI DSS v3.2

Category	Issues Found	Best Fix Locations
PCI DSS (3.2) - 6.5.1 - Injection flaws - particularly SQL injection	1	1
PCI DSS (3.2) - 6.5.2 - Buffer overflows	2	2
PCI DSS (3.2) - 6.5.3 - Insecure cryptographic storage	0	0
PCI DSS (3.2) - 6.5.4 - Insecure communications	0	0
PCI DSS (3.2) - 6.5.5 - Improper error handling*	0	0
PCI DSS (3.2) - 6.5.7 - Cross-site scripting (XSS)	0	0
PCI DSS (3.2) - 6.5.8 - Improper access control	0	0
PCI DSS (3.2) - 6.5.9 - Cross-site request forgery	0	0
PCI DSS (3.2) - 6.5.10 - Broken authentication and session management	0	0

\* Project scan results do not include all relevant queries. Presets and/or Filters should be changed to include all relevant standard queries.

## Scan Summary - FISMA 2014

Category	Description	Issues Found	Best Fix Locations
Access Control	Organizations must limit information system access to authorized users, processes acting on behalf of authorized users, or devices (including other information systems) and to the types of transactions and functions that authorized users are permitted to exercise.	0	0
Audit And Accountability*	Organizations must: (i) create, protect, and retain information system audit records to the extent needed to enable the monitoring, analysis, investigation, and reporting of unlawful, unauthorized, or inappropriate information system activity; and (ii) ensure that the actions of individual information system users can be uniquely traced to those users so they can be held accountable for their actions.	0	0
Configuration Management	Organizations must: (i) establish and maintain baseline configurations and inventories of organizational information systems (including hardware, software, firmware, and documentation) throughout the respective system development life cycles; and (ii) establish and enforce security configuration settings for information technology products employed in organizational information systems.	0	0
Identification And Authentication*	Organizations must identify information system users, processes acting on behalf of users, or devices and authenticate (or verify) the identities of those users, processes, or devices, as a prerequisite to allowing access to organizational information systems.	0	0
Media Protection	Organizations must: (i) protect information system media, both paper and digital; (ii) limit access to information on information system media to authorized users; and (iii) sanitize or destroy information system media before disposal or release for reuse.	4	4
System And Communications Protection	Organizations must: (i) monitor, control, and protect organizational communications (i.e., information transmitted or received by organizational information systems) at the external boundaries and key internal boundaries of the information systems; and (ii) employ architectural designs, software development techniques, and systems engineering principles that promote effective information security within organizational information systems.	0	0
System And Information Integrity	Organizations must: (i) identify, report, and correct information and information system flaws in a timely manner; (ii) provide protection from malicious code at appropriate locations within organizational information systems; and (iii) monitor information system security alerts and advisories and take appropriate actions in response.	0	0

\* Project scan results do not include all relevant queries. Presets and/or Filters should be changed to include all relevant standard queries.

## Scan Summary - NIST SP 800-53

Category	Issues Found	Best Fix Locations
AC-12 Session Termination (P2)	0	0
AC-3 Access Enforcement (P1)	0	0
AC-4 Information Flow Enforcement (P1)	0	0
AC-6 Least Privilege (P1)	0	0
AU-9 Protection of Audit Information (P1)	0	0
CM-6 Configuration Settings (P2)	0	0
IA-5 Authenticator Management (P1)	0	0
IA-6 Authenticator Feedback (P2)	0	0
IA-8 Identification and Authentication (Non-Organizational Users) (P1)	0	0
SC-12 Cryptographic Key Establishment and Management (P1)	0	0
SC-13 Cryptographic Protection (P1)	0	0
SC-17 Public Key Infrastructure Certificates (P1)	0	0
SC-18 Mobile Code (P2)	0	0
SC-23 Session Authenticity (P1)*	0	0
SC-28 Protection of Information at Rest (P1)	4	4
SC-4 Information in Shared Resources (P1)	0	0
SC-5 Denial of Service Protection (P1)*	114	44
SC-8 Transmission Confidentiality and Integrity (P1)	0	0
SI-10 Information Input Validation (P1)*	21	21
SI-11 Error Handling (P2)*	0	0
SI-15 Information Output Filtering (P0)	0	0
SI-16 Memory Protection (P1)	1	1

\* Project scan results do not include all relevant queries. Presets and/or Filters should be changed to include all relevant standard queries.



## Scan Summary - OWASP Mobile Top 10 2016

Category	Description	Issues Found	Best Fix Locations
M1-Improper Platform Usage	This category covers misuse of a platform feature or failure to use platform security controls. It might include Android intents, platform permissions, misuse of TouchID, the Keychain, or some other security control that is part of the mobile operating system. There are several ways that mobile apps can experience this risk.	0	0
M2-Insecure Data Storage	This category covers insecure data storage and unintended data leakage.	0	0
M3-Insecure Communication	This category covers poor handshaking, incorrect SSL versions, weak negotiation, cleartext communication of sensitive assets, etc.	0	0
M4-Insecure Authentication	This category captures notions of authenticating the end user or bad session management. This can include: -Failing to identify the user at all when that should be required -Failure to maintain the user's identity when it is required -Weaknesses in session management	0	0
M5-Insufficient Cryptography	The code applies cryptography to a sensitive information asset. However, the cryptography is insufficient in some way. Note that anything and everything related to TLS or SSL goes in M3. Also, if the app fails to use cryptography at all when it should, that probably belongs in M2. This category is for issues where cryptography was attempted, but it wasn't done correctly.	0	0
M6-Insecure Authorization	This is a category to capture any failures in authorization (e.g., authorization decisions in the client side, forced browsing, etc.). It is distinct from authentication issues (e.g., device enrolment, user identification, etc.). If the app does not authenticate users at all in a situation where it should (e.g., granting anonymous access to some resource or service when authenticated and authorized access is required), then that is an authentication failure not an authorization failure.	0	0
M7-Client Code Quality	This category is the catch-all for code-level implementation problems in the mobile client. That's distinct from server-side coding mistakes. This would capture things like buffer overflows, format string vulnerabilities, and various other code-level mistakes where the solution is to rewrite some code that's running on the mobile device.	0	0
M8-Code Tampering	This category covers binary patching, local resource modification, method hooking, method swizzling, and dynamic memory modification. Once the application is delivered to the mobile device, the code and data resources are resident there. An attacker can either directly modify the code, change the contents of memory dynamically, change or replace the system APIs that the application uses, or	0	0

	modify the application's data and resources. This can provide the attacker a direct method of subverting the intended use of the software for personal or monetary gain.		
M9-Reverse Engineering	This category includes analysis of the final core binary to determine its source code, libraries, algorithms, and other assets. Software such as IDA Pro, Hopper, otool, and other binary inspection tools give the attacker insight into the inner workings of the application. This may be used to exploit other nascent vulnerabilities in the application, as well as revealing information about back end servers, cryptographic constants and ciphers, and intellectual property.	0	0
M10-Extraneous Functionality	Often, developers include hidden backdoor functionality or other internal development security controls that are not intended to be released into a production environment. For example, a developer may accidentally include a password as a comment in a hybrid app. Another example includes disabling of 2-factor authentication during testing.	0	0

## Scan Summary - Custom


Category	Issues Found	Best Fix Locations
Must audit	0	0
Check	0	0
Optional	0	0

## Results Distribution By Status

First scan of the project

	High	Medium	Low	Information	Total
New Issues	0	53	135	0	188
Recurrent Issues	0	0	0	0	0
Total	0	53	135	0	188

Fixed Issues	0	0	0	0	0
--------------	---	---	---	---	---

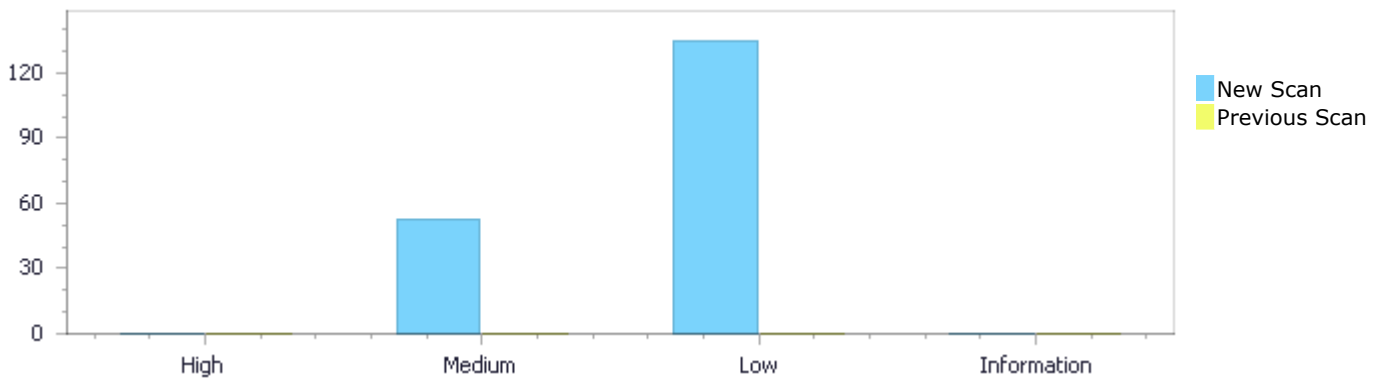

## Results Distribution By State

	High	Medium	Low	Information	Total
Confirmed	0	0	0	0	0
Not Exploitable	0	0	0	0	0
To Verify	0	53	135	0	188
Urgent	0	0	0	0	0
Proposed Not Exploitable	0	0	0	0	0
Total	0	53	135	0	188

## Result Summary

Vulnerability Type	Occurrences	Severity
<a href="#">Use of Zero Initialized Pointer</a>	34	Medium
<a href="#">Use After Free</a>	7	Medium
<a href="#">MemoryFree on StackVariable</a>	5	Medium
<a href="#">Buffer Overflow boundcpy WrongSizeParam</a>	2	Medium
<a href="#">Divide By Zero</a>	2	Medium

<a href="#">Memory Leak</a>	2	Medium
<a href="#">Dangerous Functions</a>	1	Medium
<a href="#">NULL Pointer Dereference</a>	71	Low
<a href="#">Use of Sizeof On a Pointer Type</a>	38	Low
<a href="#">Unchecked Array Index</a>	21	Low
<a href="#">Use of Insufficiently Random Values</a>	4	Low
<a href="#">Potential Off by One Error in Loops</a>	1	Low

## 10 Most Vulnerable Files

### High and Medium Vulnerabilities

File Name	Issues Found
tengine/nginx_http_v2.c	11
tengine/nginx_tfs_common.c	7
tengine/nginx_stream_proxy_module.c	7
tengine/nginx_http_lua_util.c	6
tengine/nginx_http_core_module.c	5
tengine/nginx_http_fastcgi_module.c	3
tengine/nginx_http_grpc_module.c	3
tengine/nginx_string.c	2
tengine/nginx_http_request.c	2
tengine/nginx_http_upstream_check_module.c	2

# Scan Results Details

## Use of Zero Initialized Pointer

Query Path:

CPP\Cx\CPP Medium Threat\Use of Zero Initialized Pointer Version:1

### Categories

NIST SP 800-53: SC-5 Denial of Service Protection (P1)

### Description

#### Use of Zero Initialized Pointer\Path 1:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=155">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=155</a>
Status	New

The variable declared in out at engine/nginx\_http\_core\_module.c in line 2494 is not initialized when it is used by next at engine/nginx\_http\_core\_module.c in line 2494.

	Source	Destination
File	engine/nginx_http_core_module.c	engine/nginx_http_core_module.c
Line	2639	2644
Object	out	next

### Code Snippet

File Name engine/nginx\_http\_core\_module.c  
Method ngx\_http\_subrequest(ngx\_http\_request\_t \*r,

```
....  
2639.         pr->out = NULL;  
....  
2644.         p->next = pr;
```

#### Use of Zero Initialized Pointer\Path 2:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=156">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=156</a>
Status	New

The variable declared in next at engine/nginx\_http\_core\_module.c in line 2494 is not initialized when it is used by next at engine/nginx\_http\_core\_module.c in line 2494.

	Source	Destination
File	engine/nginx_http_core_module.c	engine/nginx_http_core_module.c
Line	2640	2644

Object	next	next
--------	------	------

#### Code Snippet

File Name      engine/nginx\_http\_core\_module.c  
Method          ngx\_http\_subrequest(ngx\_http\_request\_t \*r,

```
....
2640.             pr->next = NULL;
....
2644.             p->next = pr;
```

#### Use of Zero Initialized Pointer\Path 3:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=157">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=157</a>
Status	New

The variable declared in content\_handler at engine/nginx\_http\_core\_module.c in line 2775 is not initialized when it is used by content\_handler at engine/nginx\_http\_core\_module.c in line 1448.

	Source	Destination
File	engine/nginx_http_core_module.c	engine/nginx_http_core_module.c
Line	2821	1525
Object	content_handler	content_handler

#### Code Snippet

File Name      engine/nginx\_http\_core\_module.c  
Method          ngx\_http\_named\_location(ngx\_http\_request\_t \*r, ngx\_str\_t \*name)

```
....
2821.             r->content_handler = NULL;
```



File Name      engine/nginx\_http\_core\_module.c  
Method          ngx\_http\_update\_location\_config(ngx\_http\_request\_t \*r)

```
....
1525.             r->content_handler = clcf->handler;
```

#### Use of Zero Initialized Pointer\Path 4:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=158">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=158</a>
Status	New

The variable declared in data at `tengine/nginx_http_core_module.c` in line 2851 is not initialized when it is used by cleanup at `tengine/nginx_http_core_module.c` in line 2851.

	Source	Destination
File	<code>tengine/nginx_http_core_module.c</code>	<code>tengine/nginx_http_core_module.c</code>
Line	2869	2875
Object	data	cleanup

#### Code Snippet

File Name `tengine/nginx_http_core_module.c`  
Method `ngx_http_cleanup_add(ngx_http_request_t *r, size_t size)`

```
....  
2869.         cln->data = NULL;  
....  
2875.         r->cleanup = cln;
```

#### Use of Zero Initialized Pointer\Path 5:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=159">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=159</a>
Status	New

The variable declared in handler at `tengine/nginx_http_core_module.c` in line 2851 is not initialized when it is used by cleanup at `tengine/nginx_http_core_module.c` in line 2851.

	Source	Destination
File	<code>tengine/nginx_http_core_module.c</code>	<code>tengine/nginx_http_core_module.c</code>
Line	2872	2875
Object	handler	cleanup

#### Code Snippet

File Name `tengine/nginx_http_core_module.c`  
Method `ngx_http_cleanup_add(ngx_http_request_t *r, size_t size)`

```
....  
2872.         cln->handler = NULL;  
....  
2875.         r->cleanup = cln;
```

#### Use of Zero Initialized Pointer\Path 6:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=160">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=160</a>
Status	New



The variable declared in pos at tengine/nginx\_http\_fastcgi\_module.c in line 844 is not initialized when it is used by start at tengine/nginx\_http\_fastcgi\_module.c in line 844.

	Source	Destination
File	tengine/nginx_http_fastcgi_module.c	tengine/nginx_http_fastcgi_module.c
Line	1207	1248
Object	pos	start

#### Code Snippet

File Name tengine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_create\_request(ngx\_http\_request\_t \*r)

```
....  
1207.          pos = NULL;  
....  
1248.          b->start = pos;
```

#### Use of Zero Initialized Pointer\Path 7:

Severity Medium  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=161>  
Status New

The variable declared in pos at tengine/nginx\_http\_fastcgi\_module.c in line 844 is not initialized when it is used by pos at tengine/nginx\_http\_fastcgi\_module.c in line 844.

	Source	Destination
File	tengine/nginx_http_fastcgi_module.c	tengine/nginx_http_fastcgi_module.c
Line	1207	1247
Object	pos	pos

#### Code Snippet

File Name tengine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_create\_request(ngx\_http\_request\_t \*r)

```
....  
1207.          pos = NULL;  
....  
1247.          b->pos = pos;
```

#### Use of Zero Initialized Pointer\Path 8:

Severity Medium  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=162>  
Status New

The variable declared in pos at tengine/nginx\_http\_fastcgi\_module.c in line 1358 is not initialized when it is used by pos at tengine/nginx\_http\_fastcgi\_module.c in line 1358.

	Source	Destination
File	tengine/nginx_http_fastcgi_module.c	tengine/nginx_http_fastcgi_module.c
Line	1442	1506
Object	pos	pos

#### Code Snippet

File Name tengine/nginx\_http\_fastcgi\_module.c

Method ngx\_http\_fastcgi\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```
....  
1442.         pos = NULL;  
....  
1506.         b->pos = pos;
```

#### Use of Zero Initialized Pointer\Path 9:

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=163>

Status New

The variable declared in pos at tengine/nginx\_http\_grpc\_module.c in line 1259 is not initialized when it is used by shadow at tengine/nginx\_http\_grpc\_module.c in line 1259.

	Source	Destination
File	tengine/nginx_http_grpc_module.c	tengine/nginx_http_grpc_module.c
Line	1361	1450
Object	pos	shadow

#### Code Snippet

File Name tengine/nginx\_http\_grpc\_module.c

Method ngx\_http\_grpc\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```
....  
1361.         pos = NULL;  
....  
1450.         b->shadow = in->buf;
```

#### Use of Zero Initialized Pointer\Path 10:

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=164>

Status New

The variable declared in pos at tengine/nginx\_http\_grpc\_module.c in line 1259 is not initialized when it is used by connection at tengine/nginx\_http\_grpc\_module.c in line 1259.

	Source	Destination
File	tengine/nginx_http_grpc_module.c	tengine/nginx_http_grpc_module.c
Line	1361	1471
Object	pos	connection

#### Code Snippet

File Name tengine/nginx\_http\_grpc\_module.c  
Method ngx\_http\_grpc\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```
....  
1361.         pos = NULL;  
....  
1471.         ctx->connection->send_window -= len;
```

#### Use of Zero Initialized Pointer\Path 11:

Severity Medium  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=165>  
Status New

The variable declared in pos at tengine/nginx\_http\_grpc\_module.c in line 1259 is not initialized when it is used by pos at tengine/nginx\_http\_grpc\_module.c in line 1259.

	Source	Destination
File	tengine/nginx_http_grpc_module.c	tengine/nginx_http_grpc_module.c
Line	1361	1437
Object	pos	pos

#### Code Snippet

File Name tengine/nginx\_http\_grpc\_module.c  
Method ngx\_http\_grpc\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```
....  
1361.         pos = NULL;  
....  
1437.         b->pos = pos;
```

#### Use of Zero Initialized Pointer\Path 12:

Severity Medium  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=166>  
Status New

The variable declared in `cur_co_ctx` at `tengine/nginx_http_lua_util.c` in line 1020 is not initialized when it is used by `cur_co_ctx` at `tengine/nginx_http_lua_util.c` in line 1020.

	Source	Destination
File	tengine/nginx_http_lua_util.c	tengine/nginx_http_lua_util.c
Line	1139	1137
Object	cur_co_ctx	cur_co_ctx

#### Code Snippet

File Name tengine/nginx\_http\_lua\_util.c

Method ngx\_http\_lua\_run\_thread(lua\_State \*L, ngx\_http\_request\_t \*r,

```
....  
1139.                ctx->cur_co_ctx = NULL;  
....  
1137.                ngx_http_lua_assert(lua_gettop(ctx-  
>cur_co_ctx->co) == 0);
```

#### Use of Zero Initialized Pointer\Path 13:

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=167>

Status New

The variable declared in `cur_co_ctx` at `tengine/nginx_http_lua_util.c` in line 1020 is not initialized when it is used by `cur_co_ctx` at `tengine/nginx_http_lua_util.c` in line 1020.

	Source	Destination
File	tengine/nginx_http_lua_util.c	tengine/nginx_http_lua_util.c
Line	1311	1308
Object	cur_co_ctx	cur_co_ctx

#### Code Snippet

File Name tengine/nginx\_http\_lua\_util.c

Method ngx\_http\_lua\_run\_thread(lua\_State \*L, ngx\_http\_request\_t \*r,

```
....  
1311.                ctx->cur_co_ctx = NULL;  
....  
1308.                lua_insert(ctx->cur_co_ctx->co, 1);
```

#### Use of Zero Initialized Pointer\Path 14:

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=168>

Status New

The variable declared in `cur_co_ctx` at `tengine/nginx_http_lua_util.c` in line 1020 is not initialized when it is used by `cur_co_ctx` at `tengine/nginx_http_lua_util.c` in line 1020.

	Source	Destination
File	tengine/nginx_http_lua_util.c	tengine/nginx_http_lua_util.c
Line	1311	1307
Object	cur_co_ctx	cur_co_ctx

#### Code Snippet

File Name tengine/nginx\_http\_lua\_util.c

Method ngx\_http\_lua\_run\_thread(lua\_State \*L, ngx\_http\_request\_t \*r,

```
....  
1311.                               ctx->cur_co_ctx = NULL;  
....  
1307.                               lua_pushboolean(ctx->cur_co_ctx->co, 1);
```

#### Use of Zero Initialized Pointer\Path 15:

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=169>

Status New

The variable declared in `cur_co_ctx` at `tengine/nginx_http_lua_util.c` in line 1020 is not initialized when it is used by `cur_co_ctx` at `tengine/nginx_http_lua_util.c` in line 1020.

	Source	Destination
File	tengine/nginx_http_lua_util.c	tengine/nginx_http_lua_util.c
Line	1449	1446
Object	cur_co_ctx	cur_co_ctx

#### Code Snippet

File Name tengine/nginx\_http\_lua\_util.c

Method ngx\_http\_lua\_run\_thread(lua\_State \*L, ngx\_http\_request\_t \*r,

```
....  
1449.                               ctx->cur_co_ctx = NULL;  
....  
1446.                               lua_insert(ctx->cur_co_ctx->co, 1);
```

#### Use of Zero Initialized Pointer\Path 16:

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=170>

Status New

The variable declared in `cur_co_ctx` at `tengine/nginx_http_lua_util.c` in line 1020 is not initialized when it is used by `cur_co_ctx` at `tengine/nginx_http_lua_util.c` in line 1020.

	Source	Destination
File	tengine/nginx_http_lua_util.c	tengine/nginx_http_lua_util.c
Line	1449	1445
Object	cur_co_ctx	cur_co_ctx

#### Code Snippet

File Name tengine/nginx\_http\_lua\_util.c

Method ngx\_http\_lua\_run\_thread(lua\_State \*L, ngx\_http\_request\_t \*r,

```
....
1449.                ctx->cur_co_ctx = NULL;
....
1445.                lua_pushboolean(ctx->cur_co_ctx->co, 0);
```

#### Use of Zero Initialized Pointer\Path 17:

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=171>

Status New

The variable declared in `handler` at `tengine/nginx_http_lua_util.c` in line 4153 is not initialized when it is used by `cleanup` at `tengine/nginx_http_lua_util.c` in line 4153.

	Source	Destination
File	tengine/nginx_http_lua_util.c	tengine/nginx_http_lua_util.c
Line	4172	4175
Object	handler	cleanup

#### Code Snippet

File Name tengine/nginx\_http\_lua\_util.c

Method ngx\_http\_lua\_cleanup\_add(ngx\_http\_request\_t \*r, size\_t size)

```
....
4172.                cln->handler = NULL;
....
4175.                r->cleanup = cln;
```

#### Use of Zero Initialized Pointer\Path 18:

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=172>

Status New

The variable declared in out at engine/nginx\_http\_proxy\_module.c in line 1678 is not initialized when it is used by next at engine/nginx\_http\_proxy\_module.c in line 1678.

	Source	Destination
File	engine/nginx_http_proxy_module.c	engine/nginx_http_proxy_module.c
Line	1699	1786
Object	out	next

#### Code Snippet

File Name engine/nginx\_http\_proxy\_module.c

Method ngx\_http\_proxy\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```
....
1699.         out = NULL;
....
1786.         tl->next = *fl;
```

#### Use of Zero Initialized Pointer\Path 19:

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=173>

Status New

The variable declared in next at engine/nginx\_http\_request.c in line 3261 is not initialized when it is used by busy at engine/nginx\_http\_request.c in line 3261.

	Source	Destination
File	engine/nginx_http_request.c	engine/nginx_http_request.c
Line	3321	3323
Object	next	busy

#### Code Snippet

File Name engine/nginx\_http\_request.c

Method ngx\_http\_set\_keepalive(ngx\_http\_request\_t \*r)

```
....
3321.         cl->next = NULL;
....
3323.         hc->busy = cl;
```

#### Use of Zero Initialized Pointer\Path 20:

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=174>

Status New

The variable declared in connection at `tengine/nginx_http_upstream_check_module.c` in line 1573 is not initialized when it is used by handler at `tengine/nginx_http_upstream_check_module.c` in line 1573.

	Source	Destination
File	<code>tengine/nginx_http_upstream_check_module.c</code>	<code>tengine/nginx_http_upstream_check_module.c</code>
Line	1607	1636
Object	connection	handler

#### Code Snippet

File Name `tengine/nginx_http_upstream_check_module.c`

Method `ngx_http_upstream_check_connect_handler(ngx_event_t *event)`

```
....  
1607.         peer->pc.connection = NULL;  
....  
1636.         c->write->handler(c->write);
```

#### Use of Zero Initialized Pointer\Path 21:

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=175>

Status New

The variable declared in connection at `tengine/nginx_http_upstream_check_module.c` in line 1573 is not initialized when it is used by handler at `tengine/nginx_http_upstream_check_module.c` in line 1573.

	Source	Destination
File	<code>tengine/nginx_http_upstream_check_module.c</code>	<code>tengine/nginx_http_upstream_check_module.c</code>
Line	1593	1636
Object	connection	handler

#### Code Snippet

File Name `tengine/nginx_http_upstream_check_module.c`

Method `ngx_http_upstream_check_connect_handler(ngx_event_t *event)`

```
....  
1593.         peer->pc.connection = NULL;  
....  
1636.         c->write->handler(c->write);
```

#### Use of Zero Initialized Pointer\Path 22:

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=175>



[12&pathid=176](#)

Status New

The variable declared in frame at `tengine/nginx_http_v2.c` in line 520 is not initialized when it is used by `last_out` at `tengine/nginx_http_v2.c` in line 520.

	Source	Destination
File	<code>tengine/nginx_http_v2.c</code>	<code>tengine/nginx_http_v2.c</code>
Line	601	609
Object	frame	last_out

## Code Snippet

File Name `tengine/nginx_http_v2.c`Method `ngx_http_v2_send_output_queue(ngx_http_v2_connection_t *h2c)`

```
....  
601.      frame = NULL;  
....  
609.      h2c->last_out = frame;
```

**Use of Zero Initialized Pointer\Path 23:**

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=177>

Status New

The variable declared in stream at `tengine/nginx_http_v2.c` in line 4609 is not initialized when it is used by stream at `tengine/nginx_http_v2.c` in line 4609.

	Source	Destination
File	<code>tengine/nginx_http_v2.c</code>	<code>tengine/nginx_http_v2.c</code>
Line	4656	4609
Object	stream	stream

## Code Snippet

File Name `tengine/nginx_http_v2.c`Method `ngx_http_v2_close_stream(ngx_http_v2_stream_t *stream, ngx_int_t rc)`

```
....  
4656.      h2c->state.stream = NULL;  
....  
4609.      ngx_http_v2_close_stream(ngx_http_v2_stream_t *stream, ngx_int_t  
rc)
```

**Use of Zero Initialized Pointer\Path 24:**

Severity Medium

Result State To Verify

Online Results <http://WIN->

[BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=178](http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=178)

Status New

The variable declared in stream at tengine/nginx\_http\_v2.c in line 4609 is not initialized when it is used by stream at tengine/nginx\_http\_v2.c in line 4609.

	Source	Destination
File	tengine/nginx_http_v2.c	tengine/nginx_http_v2.c
Line	4656	4677
Object	stream	stream

#### Code Snippet

File Name tengine/nginx\_http\_v2.c  
Method ngx\_http\_v2\_close\_stream(ngx\_http\_v2\_stream\_t \*stream, ngx\_int\_t rc)

```
....
4656.          h2c->state.stream = NULL;
....
4677.          ngx_http_free_request(stream->request, rc);
```

### Use of Zero Initialized Pointer\Path 25:

Severity Medium  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=179>  
Status New

The variable declared in stream at tengine/nginx\_http\_v2.c in line 4609 is not initialized when it is used by stream at tengine/nginx\_http\_v2.c in line 4609.

	Source	Destination
File	tengine/nginx_http_v2.c	tengine/nginx_http_v2.c
Line	4656	4626
Object	stream	stream

#### Code Snippet

File Name tengine/nginx\_http\_v2.c  
Method ngx\_http\_v2\_close\_stream(ngx\_http\_v2\_stream\_t \*stream, ngx\_int\_t rc)

```
....
4656.          h2c->state.stream = NULL;
....
4626.          fc = stream->request->connection;
```

### Use of Zero Initialized Pointer\Path 26:

Severity Medium  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=179>

[BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=180](http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=180)

Status New

The variable declared in stream at tengine/nginx\_http\_v2.c in line 4609 is not initialized when it is used by stream at tengine/nginx\_http\_v2.c in line 4609.

	Source	Destination
File	tengine/nginx_http_v2.c	tengine/nginx_http_v2.c
Line	4656	4673
Object	stream	stream

#### Code Snippet

File Name tengine/nginx\_http\_v2.c  
Method ngx\_http\_v2\_close\_stream(ngx\_http\_v2\_stream\_t \*stream, ngx\_int\_t rc)

```
....
4656.          h2c->state.stream = NULL;
....
4673.          pool = stream->pool;
```

#### Use of Zero Initialized Pointer\Path 27:

Severity Medium  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=181>  
Status New

The variable declared in stream at tengine/nginx\_http\_v2.c in line 4609 is not initialized when it is used by stream at tengine/nginx\_http\_v2.c in line 4609.

	Source	Destination
File	tengine/nginx_http_v2.c	tengine/nginx_http_v2.c
Line	4656	4659
Object	stream	stream

#### Code Snippet

File Name tengine/nginx\_http\_v2.c  
Method ngx\_http\_v2\_close\_stream(ngx\_http\_v2\_stream\_t \*stream, ngx\_int\_t rc)

```
....
4656.          h2c->state.stream = NULL;
....
4659.          push = stream->node->id % 2 == 0;
```

#### Use of Zero Initialized Pointer\Path 28:

Severity Medium  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=181>

	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=182">BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=182</a>
Status	New

The variable declared in stream at tengine/nginx\_http\_v2.c in line 4609 is not initialized when it is used by stream at tengine/nginx\_http\_v2.c in line 4609.

	Source	Destination
File	tengine/nginx_http_v2.c	tengine/nginx_http_v2.c
Line	4656	4619
Object	stream	stream

#### Code Snippet

File Name tengine/nginx\_http\_v2.c  
Method ngx\_http\_v2\_close\_stream(ngx\_http\_v2\_stream\_t \*stream, ngx\_int\_t rc)

```
....
4656.          h2c->state.stream = NULL;
....
4619.          node = stream->node;
```

#### Use of Zero Initialized Pointer\Path 29:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=183">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=183</a>
Status	New

The variable declared in stream at tengine/nginx\_http\_v2.c in line 4609 is not initialized when it is used by stream at tengine/nginx\_http\_v2.c in line 4609.

	Source	Destination
File	tengine/nginx_http_v2.c	tengine/nginx_http_v2.c
Line	4656	4618
Object	stream	stream

#### Code Snippet

File Name tengine/nginx\_http\_v2.c  
Method ngx\_http\_v2\_close\_stream(ngx\_http\_v2\_stream\_t \*stream, ngx\_int\_t rc)

```
....
4656.          h2c->state.stream = NULL;
....
4618.          h2c = stream->connection;
```

#### Use of Zero Initialized Pointer\Path 30:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=183">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=183</a>

	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=184">BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=184</a>
Status	New

The variable declared in stream at tengine/nginx\_http\_v2.c in line 4609 is not initialized when it is used by stream at tengine/nginx\_http\_v2.c in line 4609.

	Source	Destination
File	tengine/nginx_http_v2.c	tengine/nginx_http_v2.c
Line	4656	4624
Object	stream	stream

#### Code Snippet

File Name tengine/nginx\_http\_v2.c  
Method ngx\_http\_v2\_close\_stream(ngx\_http\_v2\_stream\_t \*stream, ngx\_int\_t rc)

```
....
4656.          h2c->state.stream = NULL;
....
4624.          node->id, stream->queued, h2c->processing,
h2c->pushing);
```

### Use of Zero Initialized Pointer\Path 31:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=185">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=185</a>
Status	New

The variable declared in stream at tengine/nginx\_http\_v2.c in line 4609 is not initialized when it is used by stream at tengine/nginx\_http\_v2.c in line 4609.

	Source	Destination
File	tengine/nginx_http_v2.c	tengine/nginx_http_v2.c
Line	4656	4675
Object	stream	stream

#### Code Snippet

File Name tengine/nginx\_http\_v2.c  
Method ngx\_http\_v2\_close\_stream(ngx\_http\_v2\_stream\_t \*stream, ngx\_int\_t rc)

```
....
4656.          h2c->state.stream = NULL;
....
4675.          h2c->frames -= stream->frames;
```

### Use of Zero Initialized Pointer\Path 32:

Severity	Medium
Result State	To Verify

Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=186">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=186</a>
Status	New

The variable declared in request at `tengine/nginx_http_v3_stream.c` in line 52 is not initialized when it is used by request at `tengine/nginx_http_v3_stream.c` in line 52.

	Source	Destination
File	<code>tengine/nginx_http_v3_stream.c</code>	<code>tengine/nginx_http_v3_stream.c</code>
Line	104	207
Object	request	request

#### Code Snippet

File Name `tengine/nginx_http_v3_stream.c`  
 Method `ngx_http_v3_create_stream(ngx_http_xquic_connection_t *h3c, uint64_t stream_id)`

```
....
104.         ctx->request = NULL;
....
207.         stream->request = r;
```

### Use of Zero Initialized Pointer\Path 33:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=187">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=187</a>
Status	New

The variable declared in `current_request` at `tengine/nginx_http_v3_stream.c` in line 52 is not initialized when it is used by request at `tengine/nginx_http_v3_stream.c` in line 52.

	Source	Destination
File	<code>tengine/nginx_http_v3_stream.c</code>	<code>tengine/nginx_http_v3_stream.c</code>
Line	105	207
Object	<code>current_request</code>	request

#### Code Snippet

File Name `tengine/nginx_http_v3_stream.c`  
 Method `ngx_http_v3_create_stream(ngx_http_xquic_connection_t *h3c, uint64_t stream_id)`

```
....
105.         ctx->current_request = NULL;
....
207.         stream->request = r;
```

### Use of Zero Initialized Pointer\Path 34:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=188">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=188</a>
Status	New

The variable declared in handler at engine/nginx\_stream\_proxy\_module.c in line 827 is not initialized when it is used by last at engine/nginx\_stream\_proxy\_module.c in line 827.

	Source	Destination
File	engine/nginx_stream_proxy_module.c	engine/nginx_stream_proxy_module.c
Line	883	959
Object	handler	last

#### Code Snippet

File Name engine/nginx\_stream\_proxy\_module.c  
Method ngx\_stream\_proxy\_init\_upstream(ngx\_stream\_session\_t \*s)

```
....
883.             c->log->handler = NULL;
....
959.             cl->buf->last = p;
```

## Use After Free

Query Path:

CPP\Cx\CPP Medium Threat\Use After Free Version:1

### Categories

NIST SP 800-53: SC-5 Denial of Service Protection (P1)

OWASP Top 10 2017: A1-Injection

### Description

#### Use After Free\Path 1:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=13">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=13</a>
Status	New

The pointer tries at engine/nginx\_stream\_proxy\_module.c in line 1956 is being used after it has been freed.

	Source	Destination
File	engine/nginx_stream_proxy_module.c	engine/nginx_stream_proxy_module.c
Line	1981	1989
Object	Address	tries

#### Code Snippet

File Name engine/nginx\_stream\_proxy\_module.c

Method ngx\_stream\_proxy\_next\_upstream(ngx\_stream\_session\_t \*s)

```
....  
1981.          u->peer.free(&u->peer, u->peer.data, NGX_PEER_FAILED);  
....  
1989.          if (u->peer.tries == 0
```

### Use After Free\Path 2:

Severity Medium  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=14>  
Status New

The pointer peer at engine/nginx\_stream\_proxy\_module.c in line 1956 is being used after it has been freed.

	Source	Destination
File	engine/nginx_stream_proxy_module.c	engine/nginx_stream_proxy_module.c
Line	1981	1989
Object	Address	peer

### Code Snippet

File Name engine/nginx\_stream\_proxy\_module.c  
Method ngx\_stream\_proxy\_next\_upstream(ngx\_stream\_session\_t \*s)

```
....  
1981.          u->peer.free(&u->peer, u->peer.data, NGX_PEER_FAILED);  
....  
1989.          if (u->peer.tries == 0
```

### Use After Free\Path 3:

Severity Medium  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=15>  
Status New

The pointer peer at engine/nginx\_stream\_proxy\_module.c in line 1956 is being used after it has been freed.

	Source	Destination
File	engine/nginx_stream_proxy_module.c	engine/nginx_stream_proxy_module.c
Line	1981	1989
Object	data	peer

### Code Snippet

File Name engine/nginx\_stream\_proxy\_module.c  
Method ngx\_stream\_proxy\_next\_upstream(ngx\_stream\_session\_t \*s)



```
.....
1981.          u->peer.free(&u->peer, u->peer.data, NGX_PEER_FAILED);
.....
1989.          if (u->peer.tries == 0
```

#### Use After Free\Path 4:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=16">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=16</a>
Status	New

The pointer start\_time at engine/nginx\_stream\_proxy\_module.c in line 1956 is being used after it has been freed.

	Source	Destination
File	engine/nginx_stream_proxy_module.c	engine/nginx_stream_proxy_module.c
Line	1981	1991
Object	Address	start_time

#### Code Snippet

File Name engine/nginx\_stream\_proxy\_module.c  
Method ngx\_stream\_proxy\_next\_upstream(ngx\_stream\_session\_t \*s)

```
.....
1981.          u->peer.free(&u->peer, u->peer.data, NGX_PEER_FAILED);
.....
1991.          || (timeout && ngx_current_msec - u->peer.start_time >=
timeout))
```

#### Use After Free\Path 5:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=17">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=17</a>
Status	New

The pointer peer at engine/nginx\_stream\_proxy\_module.c in line 1956 is being used after it has been freed.

	Source	Destination
File	engine/nginx_stream_proxy_module.c	engine/nginx_stream_proxy_module.c
Line	1981	1991
Object	Address	peer

#### Code Snippet

File Name engine/nginx\_stream\_proxy\_module.c  
Method ngx\_stream\_proxy\_next\_upstream(ngx\_stream\_session\_t \*s)

```
.....
1981.          u->peer.free(&u->peer, u->peer.data, NGX_PEER_FAILED);
.....
1991.          || (timeout && ngx_current_msec - u->peer.start_time >=
timeout))
```

#### Use After Free\Path 6:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=18">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=18</a>
Status	New

The pointer peer at tengine/nginx\_stream\_proxy\_module.c in line 1956 is being used after it has been freed.

	Source	Destination
File	tengine/nginx_stream_proxy_module.c	tengine/nginx_stream_proxy_module.c
Line	1981	1991
Object	data	peer

#### Code Snippet

File Name tengine/nginx\_stream\_proxy\_module.c  
Method ngx\_stream\_proxy\_next\_upstream(ngx\_stream\_session\_t \*s)

```
.....
1981.          u->peer.free(&u->peer, u->peer.data, NGX_PEER_FAILED);
.....
1991.          || (timeout && ngx_current_msec - u->peer.start_time >=
timeout))
```

#### Use After Free\Path 7:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=19">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=19</a>
Status	New

The pointer buf at tengine/nginx\_tfs\_common.c in line 432 is being used after it has been freed.

	Source	Destination
File	tengine/nginx_tfs_common.c	tengine/nginx_tfs_common.c
Line	470	469
Object	buf	buf

#### Code Snippet

File Name tengine/nginx\_tfs\_common.c  
Method ngx\_http\_tfs\_sum\_md5(ngx\_chain\_t \*data, u\_char \*md5\_final,

```

.....
470.                free(buf);
.....
469.                ngx_md5_update(&md5, buf, n);

```

## MemoryFree on StackVariable

Query Path:

CPP\Cx\CPP Medium Threat\MemoryFree on StackVariable Version:0

[Description](#)

### MemoryFree on StackVariable\Path 1:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=5">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=5</a>
Status	New

Calling free() (line 194) on a variable that was not dynamically allocated (line 194) in file tengine/nginx\_tfs\_common.c may result with a crash.

	Source	Destination
File	tengine/nginx_tfs_common.c	tengine/nginx_tfs_common.c
Line	230	230
Object	dst	dst

### Code Snippet

File Name tengine/nginx\_tfs\_common.c  
 Method ngx\_http\_tfs\_compute\_buf\_crc(ngx\_http\_tfs\_crc\_t \*t\_crc, ngx\_buf\_t \*b,

```

.....
230.                free(dst);

```

### MemoryFree on StackVariable\Path 2:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=6">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=6</a>
Status	New

Calling free() (line 194) on a variable that was not dynamically allocated (line 194) in file tengine/nginx\_tfs\_common.c may result with a crash.

	Source	Destination
File	tengine/nginx_tfs_common.c	tengine/nginx_tfs_common.c
Line	236	236
Object	dst	dst

## Code Snippet

File Name engine/nginx\_tfs\_common.c

Method ngx\_http\_tfs\_compute\_buf\_crc(ngx\_http\_tfs\_crc\_t \*t\_crc, ngx\_buf\_t \*b,

```
....  
236.         free(dst);
```

**MemoryFree on StackVariable\Path 3:**

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=7>

Status New

Calling free() (line 432) on a variable that was not dynamically allocated (line 432) in file engine/nginx\_tfs\_common.c may result with a crash.

	Source	Destination
File	engine/nginx_tfs_common.c	engine/nginx_tfs_common.c
Line	457	457
Object	buf	buf

## Code Snippet

File Name engine/nginx\_tfs\_common.c

Method ngx\_http\_tfs\_sum\_md5(ngx\_chain\_t \*data, u\_char \*md5\_final,

```
....  
457.         free(buf);
```

**MemoryFree on StackVariable\Path 4:**

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=8>

Status New

Calling free() (line 432) on a variable that was not dynamically allocated (line 432) in file engine/nginx\_tfs\_common.c may result with a crash.

	Source	Destination
File	engine/nginx_tfs_common.c	engine/nginx_tfs_common.c
Line	465	465
Object	buf	buf

## Code Snippet

File Name engine/nginx\_tfs\_common.c

Method ngx\_http\_tfs\_sum\_md5(ngx\_chain\_t \*data, u\_char \*md5\_final,

```
.....
465.                free(buf);
```

### MemoryFree on StackVariable\Path 5:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=9">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=9</a>
Status	New

Calling free() (line 432) on a variable that was not dynamically allocated (line 432) in file engine/nginx\_tfs\_common.c may result with a crash.

	Source	Destination
File	engine/nginx_tfs_common.c	engine/nginx_tfs_common.c
Line	470	470
Object	buf	buf

### Code Snippet

File Name engine/nginx\_tfs\_common.c  
Method ngx\_http\_tfs\_sum\_md5(ngx\_chain\_t \*data, u\_char \*md5\_final,

```
.....
470.                free(buf);
```

## Divide By Zero

Query Path:

CPP\Cx\CPP Medium Threat\Divide By Zero Version:1

[Description](#)

### Divide By Zero\Path 1:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=1">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=1</a>
Status	New

The application performs an illegal operation in ngx\_resolver\_report\_srv, in engine/nginx\_resolver.c. In line 4424, the program attempts to divide by nw, which might be evaluate to 0 (zero) at time of division. This value could be a hard-coded zero value, or received from external, untrusted input nw in ngx\_resolver\_report\_srv of engine/nginx\_resolver.c, at line 4424.

	Source	Destination
File	engine/nginx_resolver.c	engine/nginx_resolver.c
Line	4490	4490
Object	nw	nw

**Code Snippet**

File Name      tengine/nginx\_resolver.c

Method          ngx\_resolver\_report\_srv(ngx\_resolver\_t \*r, ngx\_resolver\_ctx\_t \*ctx)

```
....  
4490.                   w = ngx_random() % nw;
```

**Divide By Zero\Path 2:**

Severity        Medium

Result State    To Verify

Online Results   <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=2>

Status          New

The application performs an illegal operation in ngx\_http\_v2\_get\_closed\_node, in tengine/nginx\_http\_v2.c. In line 3359, the program attempts to divide by weight, which might be evaluate to 0 (zero) at time of division. This value could be a hard-coded zero value, or received from external, untrusted input weight in ngx\_http\_v2\_get\_closed\_node of tengine/nginx\_http\_v2.c, at line 3359.

	Source	Destination
File	tengine/nginx_http_v2.c	tengine/nginx_http_v2.c
Line	3410	3410
Object	weight	weight

**Code Snippet**

File Name      tengine/nginx\_http\_v2.c

Method          ngx\_http\_v2\_get\_closed\_node(ngx\_http\_v2\_connection\_t \*h2c)

```
....  
3410.                   child->weight = node->weight * child->weight / weight;
```

## Buffer Overflow boundcpy WrongSizeParam

Query Path:

CPP\Cx\CPP Buffer Overflow\Buffer Overflow boundcpy WrongSizeParam Version:1

### Categories

PCI DSS v3.2: PCI DSS (3.2) - 6.5.2 - Buffer overflows

OWASP Top 10 2017: A1-Injection

Description**Buffer Overflow boundcpy WrongSizeParam\Path 1:**

Severity        Medium

Result State    To Verify

Online Results   <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=3>

Status          New

The size of the buffer used by ngx\_pipe\_rollback\_parse\_args in ->, at line 776 of tengine/nginx\_pipe.c, is not properly verified before writing data to the buffer. This can enable a buffer overflow attack, using the source

buffer that ngx\_pipe\_rollback\_parse\_args passes to ->, at line 776 of engine/ngx\_pipe.c, to overwrite the target buffer.

	Source	Destination
File	engine/ngx_pipe.c	engine/ngx_pipe.c
Line	810	810
Object	->	->

#### Code Snippet

File Name engine/ngx\_pipe.c

Method ngx\_pipe\_rollback\_parse\_args(ngx\_cycle\_t \*cycle, ngx\_open\_pipe\_t \*op,

```
....
810.      memset(rbcf->backup, 0, sizeof(rbcf->backup));
```

### Buffer Overflow boundcpy WrongSizeParam\Path 2:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=4">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=4</a>
Status	New

The size of the buffer used by ngx\_memcpy in n, at line 2117 of engine/ngx\_string.c, is not properly verified before writing data to the buffer. This can enable a buffer overflow attack, using the source buffer that ngx\_memcpy passes to n, at line 2117 of engine/ngx\_string.c, to overwrite the target buffer.

	Source	Destination
File	engine/ngx_string.c	engine/ngx_string.c
Line	2124	2124
Object	n	n

#### Code Snippet

File Name engine/ngx\_string.c

Method ngx\_memcpy(void \*dst, const void \*src, size\_t n)

```
....
2124.      return memcpy(dst, src, n);
```

## Memory Leak

Query Path:

CPP\Cx\CPP Medium Threat\Memory Leak Version:1

### Categories

NIST SP 800-53: SC-5 Denial of Service Protection (P1)

#### Description

### Memory Leak\Path 1:

Severity	Medium
Result State	To Verify
Online Results	<a href="http://WIN-">http://WIN-</a>

	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=11">BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=11</a>
Status	New

	Source	Destination
File	tengine/nginx_http_request.c	tengine/nginx_http_request.c
Line	1760	1760
Object	neW	neW

#### Code Snippet

File Name tengine/nginx\_http\_request.c

Method ngx\_http\_alloc\_large\_header\_buffer(ngx\_http\_request\_t \*r,

```
....
1760.         u_char                *old, *new;
```

#### Memory Leak\Path 2:

Severity Medium

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=12>

Status New

	Source	Destination
File	tengine/nginx_tfs_common.c	tengine/nginx_tfs_common.c
Line	691	691
Object	neW	neW

#### Code Snippet

File Name tengine/nginx\_tfs\_common.c

Method ngx\_http\_tfs\_prealloc(ngx\_pool\_t \*pool, void \*p,

```
....
691.         void *new;
```

## Dangerous Functions

Query Path:

CPP\Cx\CPP Medium Threat\Dangerous Functions Version:1

### Categories

OWASP Top 10 2013: A9-Using Components with Known Vulnerabilities

OWASP Top 10 2017: A9-Using Components with Known Vulnerabilities

### Description

#### Dangerous Functions\Path 1:

Severity Medium

Result State To Verify

Online Results <http://WIN->



	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=10">BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=10</a>
Status	New

The dangerous function, memcpy, was found in use at line 2117 in engine/nginx\_string.c file. Such functions may expose information and allow an attacker to get full control over the host machine.

	Source	Destination
File	engine/nginx_string.c	engine/nginx_string.c
Line	2124	2124
Object	memcpy	memcpy

#### Code Snippet

File Name engine/nginx\_string.c

Method ngx\_memcpy(void \*dst, const void \*src, size\_t n)

```
....
2124.      return memcpy(dst, src, n);
```

## NULL Pointer Dereference

Query Path:

CPP\Cx\CPP Low Visibility\NULL Pointer Dereference Version:1

### Categories

NIST SP 800-53: SC-5 Denial of Service Protection (P1)

OWASP Top 10 2017: A1-Injection

#### Description

##### NULL Pointer Dereference\Path 1:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=63">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=63</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 1358 is not initialized when it is used by buf at engine/nginx\_http\_fastcgi\_module.c in line 1358.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	1382	1617
Object	null	buf

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c

Method ngx\_http\_fastcgi\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```

.....
1382.         out = NULL;
.....
1617.         cl->buf->file_last - cl->buf->file_pos);

```

### NULL Pointer Dereference\Path 2:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=64">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=64</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 1358 is not initialized when it is used by buf at engine/nginx\_http\_fastcgi\_module.c in line 1358.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	1382	1617
Object	null	buf

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```

.....
1382.         out = NULL;
.....
1617.         cl->buf->file_last - cl->buf->file_pos);

```

### NULL Pointer Dereference\Path 3:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=65">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=65</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 1358 is not initialized when it is used by buf at engine/nginx\_http\_fastcgi\_module.c in line 1358.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	1382	1616
Object	null	buf

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```

.....
1382.         out = NULL;
.....
1616.                                cl->buf->file_pos,

```

#### NULL Pointer Dereference\Path 4:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=66">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=66</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 1358 is not initialized when it is used by buf at engine/nginx\_http\_fastcgi\_module.c in line 1358.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	1382	1615
Object	null	buf

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```

.....
1382.         out = NULL;
.....
1615.                                cl->buf->last - cl->buf->pos,

```

#### NULL Pointer Dereference\Path 5:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=67">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=67</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 1358 is not initialized when it is used by buf at engine/nginx\_http\_fastcgi\_module.c in line 1358.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	1382	1615
Object	null	buf

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```
.....
1382.         out = NULL;
.....
1615.                                cl->buf->last - cl->buf->pos,
```

### NULL Pointer Dereference\Path 6:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=68">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=68</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 1358 is not initialized when it is used by buf at engine/nginx\_http\_fastcgi\_module.c in line 1358.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	1382	1614
Object	null	buf

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```
.....
1382.         out = NULL;
.....
1614.                                cl->buf->start, cl->buf->pos,
```

### NULL Pointer Dereference\Path 7:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=69">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=69</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 1358 is not initialized when it is used by buf at engine/nginx\_http\_fastcgi\_module.c in line 1358.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	1382	1614
Object	null	buf

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```
.....
1382.         out = NULL;
.....
1614.                                cl->buf->start, cl->buf->pos,
```

### NULL Pointer Dereference\Path 8:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=70">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=70</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 1358 is not initialized when it is used by buf at engine/nginx\_http\_fastcgi\_module.c in line 1358.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	1382	1613
Object	null	buf

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```
.....
1382.         out = NULL;
.....
1613.                                cl->buf->in_file,
```

### NULL Pointer Dereference\Path 9:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=71">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=71</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 1358 is not initialized when it is used by buf at engine/nginx\_http\_fastcgi\_module.c in line 1358.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	1382	1612
Object	null	buf

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```

.....
1382.         out = NULL;
.....
1612.                                cl->buf->last_buf,

```

### NULL Pointer Dereference\Path 10:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=72">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=72</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 3273 is not initialized when it is used by key at engine/nginx\_http\_fastcgi\_module.c in line 3273.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	3318	3425
Object	null	key

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_fastcgi\_loc\_conf\_t \*conf,

```

.....
3318.         src = NULL;
.....
3425.         ngx_memcpy(p, src[i].key.data, src[i].key.len);

```

### NULL Pointer Dereference\Path 11:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=73">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=73</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 3273 is not initialized when it is used by key at engine/nginx\_http\_fastcgi\_module.c in line 3273.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	3318	3425
Object	null	key

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_fastcgi\_loc\_conf\_t \*conf,

```

.....
3318.          src = NULL;
.....
3425.          ngx_memcpy(p, src[i].key.data, src[i].key.len);

```

### NULL Pointer Dereference\Path 12:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=74">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=74</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 3273 is not initialized when it is used by key at engine/nginx\_http\_fastcgi\_module.c in line 3273.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	3318	3422
Object	null	key

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_fastcgi\_loc\_conf\_t \*conf,

```

.....
3318.          src = NULL;
.....
3422.          copy->len = src[i].key.len;

```

### NULL Pointer Dereference\Path 13:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=75">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=75</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 3273 is not initialized when it is used by key at engine/nginx\_http\_fastcgi\_module.c in line 3273.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	3318	3399
Object	null	key

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_fastcgi\_loc\_conf\_t \*conf,

```

....
3318.          src = NULL;
....
3399.          copy->len = src[i].key.len;

```

#### NULL Pointer Dereference\Path 14:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=76">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=76</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 3273 is not initialized when it is used by value at engine/nginx\_http\_fastcgi\_module.c in line 3273.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	3318	3386
Object	null	value

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_fastcgi\_loc\_conf\_t \*conf,

```

....
3318.          src = NULL;
....
3386.          if (src[i].value.len == 0) {

```

#### NULL Pointer Dereference\Path 15:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=77">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=77</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 3273 is not initialized when it is used by key at engine/nginx\_http\_fastcgi\_module.c in line 3273.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	3318	3373
Object	null	key

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_fastcgi\_loc\_conf\_t \*conf,



```

.....
3318.          src = NULL;
.....
3373.          if (src[i].key.len > sizeof("HTTP_") - 1

```

### NULL Pointer Dereference\Path 16:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=78">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=78</a>
Status	New

The variable declared in null at engine/nginx\_http\_fastcgi\_module.c in line 3273 is not initialized when it is used by key at engine/nginx\_http\_fastcgi\_module.c in line 3273.

	Source	Destination
File	engine/nginx_http_fastcgi_module.c	engine/nginx_http_fastcgi_module.c
Line	3318	3374
Object	null	key

#### Code Snippet

File Name engine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_fastcgi\_loc\_conf\_t \*conf,

```

.....
3318.          src = NULL;
.....
3374.          && ngx_strncmp(src[i].key.data, "HTTP_",
sizeof("HTTP_") - 1) == 0)

```

### NULL Pointer Dereference\Path 17:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=79">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=79</a>
Status	New

The variable declared in null at engine/nginx\_http\_file\_cache.c in line 1684 is not initialized when it is used by file at engine/nginx\_http\_file\_cache.c in line 1619.

	Source	Destination
File	engine/nginx_http_file_cache.c	engine/nginx_http_file_cache.c
Line	1700	1669
Object	null	file

#### Code Snippet

File Name engine/nginx\_http\_file\_cache.c

Method ngx\_http\_file\_cache\_cleanup(void \*data)

```
....
1700.      ngx_http_file_cache_free(c, NULL);
```

File Name engine/nginx\_http\_file\_cache.c

Method ngx\_http\_file\_cache\_free(ngx\_http\_cache\_t \*c, ngx\_temp\_file\_t \*tf)

```
....
1669.      if (ngx_delete_file(tf->file.name.data) ==
NGX_FILE_ERROR) {
```

### NULL Pointer Dereference\Path 18:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=80>

Status New

The variable declared in null at engine/nginx\_http\_file\_cache.c in line 1684 is not initialized when it is used by file at engine/nginx\_http\_file\_cache.c in line 1619.

	Source	Destination
File	engine/nginx_http_file_cache.c	engine/nginx_http_file_cache.c
Line	1700	1667
Object	null	file

### Code Snippet

File Name engine/nginx\_http\_file\_cache.c

Method ngx\_http\_file\_cache\_cleanup(void \*data)

```
....
1700.      ngx_http_file_cache_free(c, NULL);
```

File Name engine/nginx\_http\_file\_cache.c

Method ngx\_http\_file\_cache\_free(ngx\_http\_cache\_t \*c, ngx\_temp\_file\_t \*tf)

```
....
1667.      tf->file.name.data);
```

### NULL Pointer Dereference\Path 19:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=81>

Status New

The variable declared in null at engine/nginx\_http\_file\_cache.c in line 1684 is not initialized when it is used by file at engine/nginx\_http\_file\_cache.c in line 1619.

	Source	Destination
File	engine/nginx_http_file_cache.c	engine/nginx_http_file_cache.c
Line	1700	1664
Object	null	file

#### Code Snippet

File Name engine/nginx\_http\_file\_cache.c  
Method ngx\_http\_file\_cache\_cleanup(void \*data)

```
....  
1700.         ngx_http_file_cache_free(c, NULL);
```



File Name engine/nginx\_http\_file\_cache.c  
Method ngx\_http\_file\_cache\_free(ngx\_http\_cache\_t \*c, ngx\_temp\_file\_t \*tf)

```
....  
1664.         if (tf && tf->file.fd != NGX_INVALID_FILE) {
```

#### NULL Pointer Dereference\Path 20:

Severity Low  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=82>  
Status New

The variable declared in null at engine/nginx\_http\_grpc\_module.c in line 1259 is not initialized when it is used by buf at engine/nginx\_http\_grpc\_module.c in line 1259.

	Source	Destination
File	engine/nginx_http_grpc_module.c	engine/nginx_http_grpc_module.c
Line	1289	1553
Object	null	buf

#### Code Snippet

File Name engine/nginx\_http\_grpc\_module.c  
Method ngx\_http\_grpc\_body\_output\_filter(void \*data, ngx\_chain\_t \*in)

```
....  
1289.         out = NULL;  
....  
1553.         cl->buf->file_last = cl->buf->file_pos);
```

**NULL Pointer Dereference\Path 21:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=83">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=83</a>
Status	New

The variable declared in null at `tengine/nginx_http_grpc_module.c` in line 1259 is not initialized when it is used by `buf` at `tengine/nginx_http_grpc_module.c` in line 1259.

	Source	Destination
File	<code>tengine/nginx_http_grpc_module.c</code>	<code>tengine/nginx_http_grpc_module.c</code>
Line	1289	1553
Object	null	buf

**Code Snippet**

File Name `tengine/nginx_http_grpc_module.c`  
Method `ngx_http_grpc_body_output_filter(void *data, ngx_chain_t *in)`

```
....  
1289.         out = NULL;  
....  
1553.         cl->buf->file_last - cl->buf->file_pos);
```

**NULL Pointer Dereference\Path 22:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=84">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=84</a>
Status	New

The variable declared in null at `tengine/nginx_http_grpc_module.c` in line 1259 is not initialized when it is used by `buf` at `tengine/nginx_http_grpc_module.c` in line 1259.

	Source	Destination
File	<code>tengine/nginx_http_grpc_module.c</code>	<code>tengine/nginx_http_grpc_module.c</code>
Line	1289	1552
Object	null	buf

**Code Snippet**

File Name `tengine/nginx_http_grpc_module.c`  
Method `ngx_http_grpc_body_output_filter(void *data, ngx_chain_t *in)`

```
....  
1289.         out = NULL;  
....  
1552.         cl->buf->file_pos,
```

**NULL Pointer Dereference\Path 23:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=85">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=85</a>
Status	New

The variable declared in null at `tengine/nginx_http_grpc_module.c` in line 1259 is not initialized when it is used by `buf` at `tengine/nginx_http_grpc_module.c` in line 1259.

	Source	Destination
File	<code>tengine/nginx_http_grpc_module.c</code>	<code>tengine/nginx_http_grpc_module.c</code>
Line	1289	1551
Object	null	buf

**Code Snippet**

File Name `tengine/nginx_http_grpc_module.c`  
Method `ngx_http_grpc_body_output_filter(void *data, ngx_chain_t *in)`

```
....  
1289.         out = NULL;  
....  
1551.                                cl->buf->last - cl->buf->pos,
```

**NULL Pointer Dereference\Path 24:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=86">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=86</a>
Status	New

The variable declared in null at `tengine/nginx_http_grpc_module.c` in line 1259 is not initialized when it is used by `buf` at `tengine/nginx_http_grpc_module.c` in line 1259.

	Source	Destination
File	<code>tengine/nginx_http_grpc_module.c</code>	<code>tengine/nginx_http_grpc_module.c</code>
Line	1289	1551
Object	null	buf

**Code Snippet**

File Name `tengine/nginx_http_grpc_module.c`  
Method `ngx_http_grpc_body_output_filter(void *data, ngx_chain_t *in)`

```
....  
1289.         out = NULL;  
....  
1551.                                cl->buf->last - cl->buf->pos,
```

**NULL Pointer Dereference\Path 25:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=87">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=87</a>
Status	New

The variable declared in null at `tengine/nginx_http_grpc_module.c` in line 1259 is not initialized when it is used by `buf` at `tengine/nginx_http_grpc_module.c` in line 1259.

	Source	Destination
File	<code>tengine/nginx_http_grpc_module.c</code>	<code>tengine/nginx_http_grpc_module.c</code>
Line	1289	1550
Object	null	buf

**Code Snippet**

File Name `tengine/nginx_http_grpc_module.c`  
Method `ngx_http_grpc_body_output_filter(void *data, ngx_chain_t *in)`

```
....  
1289.         out = NULL;  
....  
1550.                                cl->buf->start, cl->buf->pos,
```

**NULL Pointer Dereference\Path 26:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=88">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=88</a>
Status	New

The variable declared in null at `tengine/nginx_http_grpc_module.c` in line 1259 is not initialized when it is used by `buf` at `tengine/nginx_http_grpc_module.c` in line 1259.

	Source	Destination
File	<code>tengine/nginx_http_grpc_module.c</code>	<code>tengine/nginx_http_grpc_module.c</code>
Line	1289	1550
Object	null	buf

**Code Snippet**

File Name `tengine/nginx_http_grpc_module.c`  
Method `ngx_http_grpc_body_output_filter(void *data, ngx_chain_t *in)`

```
....  
1289.         out = NULL;  
....  
1550.                                cl->buf->start, cl->buf->pos,
```

**NULL Pointer Dereference\Path 27:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=89">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=89</a>
Status	New

The variable declared in null at `tengine/nginx_http_grpc_module.c` in line 1259 is not initialized when it is used by `buf` at `tengine/nginx_http_grpc_module.c` in line 1259.

	Source	Destination
File	<code>tengine/nginx_http_grpc_module.c</code>	<code>tengine/nginx_http_grpc_module.c</code>
Line	1289	1549
Object	null	buf

**Code Snippet**

File Name `tengine/nginx_http_grpc_module.c`  
Method `ngx_http_grpc_body_output_filter(void *data, ngx_chain_t *in)`

```
....  
1289.         out = NULL;  
....  
1549.                                cl->buf->in_file,
```

**NULL Pointer Dereference\Path 28:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=90">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=90</a>
Status	New

The variable declared in null at `tengine/nginx_http_grpc_module.c` in line 1259 is not initialized when it is used by `buf` at `tengine/nginx_http_grpc_module.c` in line 1259.

	Source	Destination
File	<code>tengine/nginx_http_grpc_module.c</code>	<code>tengine/nginx_http_grpc_module.c</code>
Line	1289	1548
Object	null	buf

**Code Snippet**

File Name `tengine/nginx_http_grpc_module.c`  
Method `ngx_http_grpc_body_output_filter(void *data, ngx_chain_t *in)`

```
....  
1289.         out = NULL;  
....  
1548.                                cl->buf->last_buf,
```

**NULL Pointer Dereference\Path 29:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=91">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=91</a>
Status	New

The variable declared in null at engine/nginx\_http\_lua\_util.c in line 969 is not initialized when it is used by Pointer at engine/nginx\_http\_lua\_util.c in line 969.

	Source	Destination
File	engine/nginx_http_lua_util.c	engine/nginx_http_lua_util.c
Line	987	987
Object	null	Pointer

**Code Snippet**

File Name engine/nginx\_http\_lua\_util.c  
Method ngx\_http\_lua\_request\_cleanup(ngx\_http\_lua\_ctx\_t \*ctx, int forcible)

```
....  
987.          *ctx->cleanup = NULL;
```

**NULL Pointer Dereference\Path 30:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=92">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=92</a>
Status	New

The variable declared in null at engine/nginx\_http\_request.c in line 2406 is not initialized when it is used by ctx at engine/nginx\_http\_request.c in line 2406.

	Source	Destination
File	engine/nginx_http_request.c	engine/nginx_http_request.c
Line	2414	2478
Object	null	ctx

**Code Snippet**

File Name engine/nginx\_http\_request.c  
Method ngx\_http\_set\_virtual\_server(ngx\_http\_request\_t \*r, ngx\_str\_t \*host)

```
....  
2414.          cscf = NULL;  
....  
2478.          r->loc_conf = cscf->ctx->loc_conf;
```



**NULL Pointer Dereference\Path 31:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=93">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=93</a>
Status	New

The variable declared in null at engine/nginx\_http\_request.c in line 2406 is not initialized when it is used by ctx at engine/nginx\_http\_request.c in line 2406.

	Source	Destination
File	engine/nginx_http_request.c	engine/nginx_http_request.c
Line	2414	2477
Object	null	ctx

**Code Snippet**

File Name engine/nginx\_http\_request.c  
Method ngx\_http\_set\_virtual\_server(ngx\_http\_request\_t \*r, ngx\_str\_t \*host)

```
....  
2414.      cscf = NULL;  
....  
2477.      r->srv_conf = cscf->ctx->srv_conf;
```

**NULL Pointer Dereference\Path 32:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=94">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=94</a>
Status	New

The variable declared in null at engine/nginx\_http\_upstream\_check\_module.c in line 1094 is not initialized when it is used by shm at engine/nginx\_http\_upstream\_check\_module.c in line 1094.

	Source	Destination
File	engine/nginx_http_upstream_check_module.c	engine/nginx_http_upstream_check_module.c
Line	1101	1158
Object	null	shm

**Code Snippet**

File Name engine/nginx\_http\_upstream\_check\_module.c  
Method ngx\_http\_upstream\_check\_delete\_dynamic\_peer(ngx\_str\_t \*name,

```
....  
1101.      chosen = NULL;  
....  
1158.      ngx_shmtx_unlock(&chosen->shm->mutex);
```

**NULL Pointer Dereference\Path 33:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=95">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=95</a>
Status	New

The variable declared in null at `tengine/nginx_http_upstream_check_module.c` in line 1094 is not initialized when it is used by shm at `tengine/nginx_http_upstream_check_module.c` in line 1094.

	Source	Destination
File	<code>tengine/nginx_http_upstream_check_module.c</code>	<code>tengine/nginx_http_upstream_check_module.c</code>
Line	1101	1154
Object	null	shm

**Code Snippet**

File Name `tengine/nginx_http_upstream_check_module.c`  
Method `ngx_http_upstream_check_delete_dynamic_peer(ngx_str_t *name,`

```
....  
1101.         chosen = NULL;  
....  
1154.         if (chosen->shm->ref <= 0 && chosen->shm->delete !=  
PEER_DELETED) {
```

**NULL Pointer Dereference\Path 34:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=96">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=96</a>
Status	New

The variable declared in null at `tengine/nginx_http_upstream_check_module.c` in line 1094 is not initialized when it is used by shm at `tengine/nginx_http_upstream_check_module.c` in line 1094.

	Source	Destination
File	<code>tengine/nginx_http_upstream_check_module.c</code>	<code>tengine/nginx_http_upstream_check_module.c</code>
Line	1101	1154
Object	null	shm

**Code Snippet**

File Name `tengine/nginx_http_upstream_check_module.c`  
Method `ngx_http_upstream_check_delete_dynamic_peer(ngx_str_t *name,`

```

.....
1101.         chosen = NULL;
.....
1154.         if (chosen->shm->ref <= 0 && chosen->shm->delete !=
PEER_DELETED) {

```

### NULL Pointer Dereference\Path 35:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=97">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=97</a>
Status	New

The variable declared in null at engine/nginx\_http\_upstream\_check\_module.c in line 1094 is not initialized when it is used by shm at engine/nginx\_http\_upstream\_check\_module.c in line 1094.

	Source	Destination
File	engine/nginx_http_upstream_check_module.c	engine/nginx_http_upstream_check_module.c
Line	1101	1149
Object	null	shm

#### Code Snippet

File Name engine/nginx\_http\_upstream\_check\_module.c  
Method ngx\_http\_upstream\_check\_delete\_dynamic\_peer(ngx\_str\_t \*name,

```

.....
1101.         chosen = NULL;
.....
1149.         if (chosen->shm->owner == ngx_pid) {

```

### NULL Pointer Dereference\Path 36:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=98">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=98</a>
Status	New

The variable declared in null at engine/nginx\_http\_upstream\_check\_module.c in line 1094 is not initialized when it is used by shm at engine/nginx\_http\_upstream\_check\_module.c in line 1094.

	Source	Destination
File	engine/nginx_http_upstream_check_module.c	engine/nginx_http_upstream_check_module.c
Line	1101	1147
Object	null	shm

**Code Snippet****File Name** engine/nginx\_http\_upstream\_check\_module.c**Method** ngx\_http\_upstream\_check\_delete\_dynamic\_peer(ngx\_str\_t \*name,

```
....  
1101.         chosen = NULL;  
....  
1147.         ngx_shmtx_lock(&chosen->shm->mutex);
```

**NULL Pointer Dereference\Path 37:****Severity** Low**Result State** To Verify**Online Results** <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=99>**Status** New

The variable declared in null at engine/nginx\_http\_upstream\_check\_module.c in line 1094 is not initialized when it is used by shm at engine/nginx\_http\_upstream\_check\_module.c in line 1094.

	Source	Destination
File	engine/nginx_http_upstream_check_module.c	engine/nginx_http_upstream_check_module.c
Line	1101	1145
Object	null	shm

**Code Snippet****File Name** engine/nginx\_http\_upstream\_check\_module.c**Method** ngx\_http\_upstream\_check\_delete\_dynamic\_peer(ngx\_str\_t \*name,

```
....  
1101.         chosen = NULL;  
....  
1145.         chosen, chosen->index, chosen->shm->ref);
```

**NULL Pointer Dereference\Path 38:****Severity** Low**Result State** To Verify**Online Results** <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=100>**Status** New

The variable declared in null at engine/nginx\_http\_upstream\_check\_module.c in line 1094 is not initialized when it is used by index at engine/nginx\_http\_upstream\_check\_module.c in line 1094.

	Source	Destination
File	engine/nginx_http_upstream_check_module.c	engine/nginx_http_upstream_check_module.c
Line	1101	1145

Object	null	index
--------	------	-------

#### Code Snippet

File Name      engine/nginx\_http\_upstream\_check\_module.c  
Method          ngx\_http\_upstream\_check\_delete\_dynamic\_peer(ngx\_str\_t \*name,

```
.....
1101.          chosen = NULL;
.....
1145.          chosen, chosen->index, chosen->shm->ref);
```

### NULL Pointer Dereference\Path 39:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=101">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=101</a>
Status	New

The variable declared in null at engine/nginx\_http\_uwsgi\_module.c in line 2002 is not initialized when it is used by key at engine/nginx\_http\_uwsgi\_module.c in line 2002.

	Source	Destination
File	engine/nginx_http_uwsgi_module.c	engine/nginx_http_uwsgi_module.c
Line	2047	2154
Object	null	key

#### Code Snippet

File Name      engine/nginx\_http\_uwsgi\_module.c  
Method          ngx\_http\_uwsgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_uwsgi\_loc\_conf\_t \*conf,

```
.....
2047.          src = NULL;
.....
2154.          ngx_memcpy(p, src[i].key.data, src[i].key.len);
```

### NULL Pointer Dereference\Path 40:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=102">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=102</a>
Status	New

The variable declared in null at engine/nginx\_http\_uwsgi\_module.c in line 2002 is not initialized when it is used by key at engine/nginx\_http\_uwsgi\_module.c in line 2002.

	Source	Destination
File	engine/nginx_http_uwsgi_module.c	engine/nginx_http_uwsgi_module.c

Line	2047	2154
Object	null	key

#### Code Snippet

File Name engine/nginx\_http\_uwsgi\_module.c

Method ngx\_http\_uwsgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_uwsgi\_loc\_conf\_t \*conf,

```
....
2047.         src = NULL;
....
2154.         ngx_memcpy(p, src[i].key.data, src[i].key.len);
```

#### NULL Pointer Dereference\Path 41:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=103>

Status New

The variable declared in null at engine/nginx\_http\_uwsgi\_module.c in line 2002 is not initialized when it is used by key at engine/nginx\_http\_uwsgi\_module.c in line 2002.

	Source	Destination
File	engine/nginx_http_uwsgi_module.c	engine/nginx_http_uwsgi_module.c
Line	2047	2151
Object	null	key

#### Code Snippet

File Name engine/nginx\_http\_uwsgi\_module.c

Method ngx\_http\_uwsgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_uwsgi\_loc\_conf\_t \*conf,

```
....
2047.         src = NULL;
....
2151.         copy->len = src[i].key.len;
```

#### NULL Pointer Dereference\Path 42:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=104>

Status New

The variable declared in null at engine/nginx\_http\_uwsgi\_module.c in line 2002 is not initialized when it is used by key at engine/nginx\_http\_uwsgi\_module.c in line 2002.

Source	Destination
--------	-------------

File	tengine/nginx_http_uwsgi_module.c	tengine/nginx_http_uwsgi_module.c
Line	2047	2128
Object	null	key

#### Code Snippet

File Name tengine/nginx\_http\_uwsgi\_module.c

Method ngx\_http\_uwsgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_uwsgi\_loc\_conf\_t \*conf,

```

.....
2047.          src = NULL;
.....
2128.          copy->len = src[i].key.len;

```

### NULL Pointer Dereference\Path 43:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=105>

Status New

The variable declared in null at tengine/nginx\_http\_uwsgi\_module.c in line 2002 is not initialized when it is used by value at tengine/nginx\_http\_uwsgi\_module.c in line 2002.

	Source	Destination
File	tengine/nginx_http_uwsgi_module.c	tengine/nginx_http_uwsgi_module.c
Line	2047	2115
Object	null	value

#### Code Snippet

File Name tengine/nginx\_http\_uwsgi\_module.c

Method ngx\_http\_uwsgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_uwsgi\_loc\_conf\_t \*conf,

```

.....
2047.          src = NULL;
.....
2115.          if (src[i].value.len == 0) {

```

### NULL Pointer Dereference\Path 44:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=106>

Status New

The variable declared in null at tengine/nginx\_http\_uwsgi\_module.c in line 2002 is not initialized when it is used by key at tengine/nginx\_http\_uwsgi\_module.c in line 2002.

	Source	Destination
File	tengine/nginx_http_uwsgi_module.c	tengine/nginx_http_uwsgi_module.c
Line	2047	2102
Object	null	key

#### Code Snippet

File Name tengine/nginx\_http\_uwsgi\_module.c

Method ngx\_http\_uwsgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_uwsgi\_loc\_conf\_t \*conf,

```

....
2047.         src = NULL;
....
2102.         if (src[i].key.len > sizeof("HTTP_") - 1

```

### NULL Pointer Dereference\Path 45:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=107>

Status New

The variable declared in null at tengine/nginx\_http\_uwsgi\_module.c in line 2002 is not initialized when it is used by key at tengine/nginx\_http\_uwsgi\_module.c in line 2002.

	Source	Destination
File	tengine/nginx_http_uwsgi_module.c	tengine/nginx_http_uwsgi_module.c
Line	2047	2103
Object	null	key

#### Code Snippet

File Name tengine/nginx\_http\_uwsgi\_module.c

Method ngx\_http\_uwsgi\_init\_params(ngx\_conf\_t \*cf, ngx\_http\_uwsgi\_loc\_conf\_t \*conf,

```

....
2047.         src = NULL;
....
2103.         && ngx_strncmp(src[i].key.data, "HTTP_",
sizeof("HTTP_") - 1) == 0)

```

### NULL Pointer Dereference\Path 46:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=108>

Status New

The variable declared in null at tengine/nginx\_http\_v2.c in line 520 is not initialized when it is used by stream at tengine/nginx\_http\_v2.c in line 520.



	Source	Destination
File	tengine/nginx_http_v2.c	tengine/nginx_http_v2.c
Line	541	597
Object	null	stream

#### Code Snippet

File Name tengine/nginx\_http\_v2.c  
Method ngx\_http\_v2\_send\_output\_queue(ngx\_http\_v2\_connection\_t \*h2c)

```
....  
541.         out = NULL;  
....  
597.         out, out->stream ? out->stream->node->id :  
0,
```

#### NULL Pointer Dereference\Path 47:

Severity Low  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=109>  
Status New

The variable declared in null at tengine/nginx\_resolver.c in line 2058 is not initialized when it is used by addr6 at tengine/nginx\_resolver.c in line 2058.

	Source	Destination
File	tengine/nginx_resolver.c	tengine/nginx_resolver.c
Line	2451	2502
Object	null	addr6

#### Code Snippet

File Name tengine/nginx\_resolver.c  
Method ngx\_resolver\_process\_a(ngx\_resolver\_t \*r, u\_char \*buf, size\_t n,

```
....  
2451.         addr6 = NULL;  
....  
2502.         ngx_memcpy(addr6[j].s6_addr, &buf[i], 16);
```

#### NULL Pointer Dereference\Path 48:

Severity Low  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=110>  
Status New

The variable declared in null at tengine/nginx\_stream\_proxy\_module.c in line 1650 is not initialized when it is used by read at tengine/nginx\_stream\_proxy\_module.c in line 1650.

	Source	Destination
File	tengine/nginx_stream_proxy_module.c	tengine/nginx_stream_proxy_module.c
Line	1670	1740
Object	null	read

#### Code Snippet

File Name tengine/nginx\_stream\_proxy\_module.c

Method ngx\_stream\_proxy\_process(ngx\_stream\_session\_t \*s, ngx\_uint\_t from\_upstream,

```
....  
1670.         pc = u->connected ? u->peer.connection : NULL;  
....  
1740.         if (size && src->read->ready && !src->read->delayed
```

#### NULL Pointer Dereference\Path 49:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=111>

Status New

The variable declared in null at tengine/nginx\_stream\_proxy\_module.c in line 1650 is not initialized when it is used by read at tengine/nginx\_stream\_proxy\_module.c in line 1650.

	Source	Destination
File	tengine/nginx_stream_proxy_module.c	tengine/nginx_stream_proxy_module.c
Line	1670	1740
Object	null	read

#### Code Snippet

File Name tengine/nginx\_stream\_proxy\_module.c

Method ngx\_stream\_proxy\_process(ngx\_stream\_session\_t \*s, ngx\_uint\_t from\_upstream,

```
....  
1670.         pc = u->connected ? u->peer.connection : NULL;  
....  
1740.         if (size && src->read->ready && !src->read->delayed
```

#### NULL Pointer Dereference\Path 50:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=112>

Status New

The variable declared in null at engine/nginx\_stream\_proxy\_module.c in line 1650 is not initialized when it is used by read at engine/nginx\_stream\_proxy\_module.c in line 1650.

	Source	Destination
File	engine/nginx_stream_proxy_module.c	engine/nginx_stream_proxy_module.c
Line	1670	1741
Object	null	read

#### Code Snippet

File Name engine/nginx\_stream\_proxy\_module.c  
Method ngx\_stream\_proxy\_process(ngx\_stream\_session\_t \*s, ngx\_uint\_t from\_upstream,

```
....
1670.         pc = u->connected ? u->peer.connection : NULL;
....
1741.         && !src->read->error)
```

## Use of Sizeof On a Pointer Type

Query Path:

CPP\Cx\CPP Low Visibility\Use of Sizeof On a Pointer Type Version:1

[Description](#)

### Use of Sizeof On a Pointer Type\Path 1:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=24">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=24</a>
Status	New

	Source	Destination
File	engine/nginx_http_core_module.c	engine/nginx_http_core_module.c
Line	2545	2545
Object	sizeof	sizeof

#### Code Snippet

File Name engine/nginx\_http\_core\_module.c  
Method ngx\_http\_subrequest(ngx\_http\_request\_t \*r,

```
....
2545.         sr->ctx = ngx_palloc(r->pool, sizeof(void *) *
ngx_http_max_module);
```

### Use of Sizeof On a Pointer Type\Path 2:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=25">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=25</a>

Status	New
--------	-----

	Source	Destination
File	tengine/nginx_http_core_module.c	tengine/nginx_http_core_module.c
Line	2752	2752
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_http\_core\_module.c  
Method ngx\_http\_internal\_redirect(ngx\_http\_request\_t \*r,

```
....  
2752.         ngx_memzero(r->ctx, sizeof(void *) * ngx_http_max_module);
```

#### Use of Sizeof On a Pointer Type\Path 3:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=26">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=26</a>
Status	New

	Source	Destination
File	tengine/nginx_http_core_module.c	tengine/nginx_http_core_module.c
Line	2826	2826
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_http\_core\_module.c  
Method ngx\_http\_named\_location(ngx\_http\_request\_t \*r, ngx\_str\_t \*name)

```
....  
2826.         ngx_memzero(r->ctx, sizeof(void *) *  
ngx_http_max_module);
```

#### Use of Sizeof On a Pointer Type\Path 4:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=27">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=27</a>
Status	New

	Source	Destination
File	tengine/nginx_http_core_module.c	tengine/nginx_http_core_module.c
Line	3052	3052
Object	sizeof	sizeof

## Code Snippet

File Name engine/nginx\_http\_core\_module.c

Method ngx\_http\_core\_server(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*dummy)

```
....
3052.         ctx->srv_conf = ngx_pcalloc(cf->pool, sizeof(void *) *
ngx_http_max_module);
```

**Use of Sizeof On a Pointer Type\Path 5:**

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=28>

Status New

	Source	Destination
File	engine/nginx_http_core_module.c	engine/nginx_http_core_module.c
Line	3059	3059
Object	sizeof	sizeof

## Code Snippet

File Name engine/nginx\_http\_core\_module.c

Method ngx\_http\_core\_server(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*dummy)

```
....
3059.         ctx->loc_conf = ngx_pcalloc(cf->pool, sizeof(void *) *
ngx_http_max_module);
```

**Use of Sizeof On a Pointer Type\Path 6:**

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=29>

Status New

	Source	Destination
File	engine/nginx_http_core_module.c	engine/nginx_http_core_module.c
Line	3192	3192
Object	sizeof	sizeof

## Code Snippet

File Name engine/nginx\_http\_core\_module.c

Method ngx\_http\_core\_location(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*dummy)

```
....
3192.         ctx->loc_conf = ngx_pcalloc(cf->pool, sizeof(void *) *
ngx_http_max_module);
```

#### Use of Sizeof On a Pointer Type\Path 7:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=30">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=30</a>
Status	New

	Source	Destination
File	tengine/nginx_http_core_module.c	tengine/nginx_http_core_module.c
Line	3524	3524
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_http\_core\_module.c  
Method ngx\_http\_core\_create\_main\_conf(ngx\_conf\_t \*cf)

```
....
3524.         sizeof(ngx_http_core_srv_conf_t *))
```

#### Use of Sizeof On a Pointer Type\Path 8:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=31">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=31</a>
Status	New

	Source	Destination
File	tengine/nginx_http_core_module.c	tengine/nginx_http_core_module.c
Line	3617	3617
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_http\_core\_module.c  
Method ngx\_http\_core\_merge\_srv\_conf(ngx\_conf\_t \*cf, void \*parent, void \*child)

```
....
3617.         prev->connection_pool_size, 64 *
sizeof(void *));
```

#### Use of Sizeof On a Pointer Type\Path 9:

Severity	Low
----------	-----

Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=32">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=32</a>
Status	New

	Source	Destination
File	tengine/nginx_http_core_module.c	tengine/nginx_http_core_module.c
Line	4833	4833
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_http\_core\_module.c  
Method ngx\_http\_core\_limit\_except(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*conf)

```
....
4833.         ctx->loc_conf = ngx_pcalloc(cf->pool, sizeof(void *) *
ngx_http_max_module);
```

#### Use of Sizeof On a Pointer Type\Path 10:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=33">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=33</a>
Status	New

	Source	Destination
File	tengine/nginx_http_fastcgi_module.c	tengine/nginx_http_fastcgi_module.c
Line	921	921
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_create\_request(ngx\_http\_request\_t \*r)

```
....
921.         ignored = ngx_palloc(r->pool, n * sizeof(void *));
```

#### Use of Sizeof On a Pointer Type\Path 11:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=34">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=34</a>
Status	New

Source	Destination
--------	-------------

File	tengine/nginx_http_fastcgi_module.c	tengine/nginx_http_fastcgi_module.c
Line	2803	2803
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_http\_fastcgi\_module.c  
Method ngx\_http\_fastcgi\_create\_main\_conf(ngx\_conf\_t \*cf)

```
....
2803.                                sizeof(ngx_http_file_cache_t *))
```

#### Use of Sizeof On a Pointer Type\Path 12:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=35">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=35</a>
Status	New

	Source	Destination
File	tengine/nginx_http_lua_subrequest.c	tengine/nginx_http_lua_subrequest.c
Line	200	200
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_http\_lua\_subrequest.c  
Method ngx\_http\_lua ngx\_location\_capture\_multi(lua\_State \*L)

```
....
200.        sr_headers_len = nsubreqs * sizeof(ngx_http_headers_out_t );
```

#### Use of Sizeof On a Pointer Type\Path 13:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=36">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=36</a>
Status	New

	Source	Destination
File	tengine/nginx_http_lua_subrequest.c	tengine/nginx_http_lua_subrequest.c
Line	543	543
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_http\_lua\_subrequest.c  
Method ngx\_http\_lua ngx\_location\_capture\_multi(lua\_State \*L)



```
....
543.          ofs1 = ngx_align(sizeof(ngx_http_post_subrequest_t),
sizeof(void *));
```

#### Use of Sizeof On a Pointer Type\Path 14:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=37">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=37</a>
Status	New

	Source	Destination
File	tengine/ngx_http_lua_subrequest.c	tengine/ngx_http_lua_subrequest.c
Line	544	544
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/ngx\_http\_lua\_subrequest.c  
Method ngx\_http\_lua\_ngx\_location\_capture\_multi(lua\_State \*L)

```
....
544.          ofs2 = ngx_align(sizeof(ngx_http_lua_ctx_t), sizeof(void
*));
```

#### Use of Sizeof On a Pointer Type\Path 15:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=38">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=38</a>
Status	New

	Source	Destination
File	tengine/ngx_http_lua_subrequest.c	tengine/ngx_http_lua_subrequest.c
Line	559	559
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/ngx\_http\_lua\_subrequest.c  
Method ngx\_http\_lua\_ngx\_location\_capture\_multi(lua\_State \*L)

```
....
559.          sizeof(void *));
```

#### Use of Sizeof On a Pointer Type\Path 16:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=39">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=39</a>
Status	New

	Source	Destination
File	tengine/nginx_http_lua_subrequest.c	tengine/nginx_http_lua_subrequest.c
Line	566	566
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_http\_lua\_subrequest.c  
Method ngx\_http\_lua ngx\_location\_capture\_multi(lua\_State \*L)

```
....  
566.  
sizeof(void *));
```

#### Use of Sizeof On a Pointer Type\Path 17:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=40">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=40</a>
Status	New

	Source	Destination
File	tengine/nginx_http_lua_subrequest.c	tengine/nginx_http_lua_subrequest.c
Line	1505	1505
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_http\_lua\_subrequest.c  
Method ngx\_http\_lua\_subrequest(ngx\_http\_request\_t \*r,

```
....  
1505.      sr->ctx = ngx_pcalloc(r->pool, sizeof(void *) *  
ngx_http_max_module);
```

#### Use of Sizeof On a Pointer Type\Path 18:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=41">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=41</a>
Status	New

	Source	Destination
File	tengine/nginx_http_lua_util.c	tengine/nginx_http_lua_util.c
Line	2243	2243
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_http\_lua\_util.c

Method ngx\_http\_lua\_handle\_exec(lua\_State \*L, ngx\_http\_request\_t \*r,

```
....
2243.          ngx_memzero(r->ctx, sizeof(void *) *
ngx_http_max_module);
```

### Use of Sizeof On a Pointer Type\Path 19:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=42>

Status New

	Source	Destination
File	tengine/nginx_http_lua_util.c	tengine/nginx_http_lua_util.c
Line	4007	4007
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_http\_lua\_util.c

Method ngx\_http\_lua\_create\_fake\_request(ngx\_connection\_t \*c)

```
....
4007.          + sizeof(void *) * ngx_http_max_module +
sizeof(ngx_http_cleanup_t));
```

### Use of Sizeof On a Pointer Type\Path 20:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=43>

Status New

	Source	Destination
File	tengine/nginx_http_lua_util.c	tengine/nginx_http_lua_util.c
Line	4033	4033
Object	sizeof	sizeof

## Code Snippet

File Name engine/nginx\_http\_lua\_util.c

Method ngx\_http\_lua\_create\_fake\_request(ngx\_connection\_t \*c)

```
....  
4033.         r->ctx = ngx_palloc(r->pool, sizeof(void *) *  
ngx_http_max_module);
```

**Use of Sizeof On a Pointer Type\Path 21:**

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=44>

Status New

	Source	Destination
File	tengine/nginx_http_proxy_module.c	tengine/nginx_http_proxy_module.c
Line	3341	3341
Object	sizeof	sizeof

## Code Snippet

File Name tengine/nginx\_http\_proxy\_module.c

Method ngx\_http\_proxy\_create\_main\_conf(ngx\_conf\_t \*cf)

```
....  
3341.         sizeof(ngx_http_file_cache_t *))
```

**Use of Sizeof On a Pointer Type\Path 22:**

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=45>

Status New

	Source	Destination
File	tengine/nginx_http_request.c	tengine/nginx_http_request.c
Line	635	635
Object	sizeof	sizeof

## Code Snippet

File Name tengine/nginx\_http\_request.c

Method ngx\_http\_alloc\_request(ngx\_connection\_t \*c)

```
....  
635.         r->ctx = ngx_palloc(r->pool, sizeof(void *) *  
ngx_http_max_module);
```

**Use of Sizeof On a Pointer Type\Path 23:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=46">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=46</a>
Status	New

	Source	Destination
File	tengine/nginx_http_request.c	tengine/nginx_http_request.c
Line	2111	2111
Object	sizeof	sizeof

**Code Snippet**

File Name tengine/nginx\_http\_request.c  
Method ngx\_http\_process\_multi\_header\_lines(ngx\_http\_request\_t \*r, ngx\_table\_elt\_t \*h,

```
....  
2111.         if (ngx_array_init(headers, r->pool, 1,  
sizeof(ngx_table_elt_t *)))
```

**Use of Sizeof On a Pointer Type\Path 24:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=47">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=47</a>
Status	New

	Source	Destination
File	tengine/nginx_http_ssi_filter_module.c	tengine/nginx_http_ssi_filter_module.c
Line	741	741
Object	sizeof	sizeof

**Code Snippet**

File Name tengine/nginx\_http\_ssi\_filter\_module.c  
Method ngx\_http\_ssi\_body\_filter(ngx\_http\_request\_t \*r, ngx\_chain\_t \*in)

```
....  
741.                                     (NGX_HTTP_SSI_MAX_PARAMS + 1) *  
sizeof(ngx_str_t *));
```

**Use of Sizeof On a Pointer Type\Path 25:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=48">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=48</a>

[12&pathid=48](#)

Status New

	Source	Destination
File	tengine/nginx_http_ssi_filter_module.c	tengine/nginx_http_ssi_filter_module.c
Line	1693	1693
Object	sizeof	sizeof

## Code Snippet

File Name tengine/nginx\_http\_ssi\_filter\_module.c

Method ngx\_http\_ssi\_evaluate\_string(ngx\_http\_request\_t \*r, ngx\_http\_ssi\_ctx\_t \*ctx,

```
.....  
1693.         if (ngx_array_init(&lengths, r->pool, 8, sizeof(size_t *)) !=  
NGX_OK) {
```

**Use of Sizeof On a Pointer Type\Path 26:**

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=49>

Status New

	Source	Destination
File	tengine/nginx_http_ssi_filter_module.c	tengine/nginx_http_ssi_filter_module.c
Line	1697	1697
Object	sizeof	sizeof

## Code Snippet

File Name tengine/nginx\_http\_ssi\_filter\_module.c

Method ngx\_http\_ssi\_evaluate\_string(ngx\_http\_request\_t \*r, ngx\_http\_ssi\_ctx\_t \*ctx,

```
.....  
1697.         if (ngx_array_init(&values, r->pool, 8, sizeof(u_char *)) !=  
NGX_OK) {
```

**Use of Sizeof On a Pointer Type\Path 27:**

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=50>

Status New

	Source	Destination
File	tengine/nginx_http_uwsgi_module.c	tengine/nginx_http_uwsgi_module.c

Line	962	962
Object	sizeof	sizeof

#### Code Snippet

File Name      engine/nginx\_http\_uwsgi\_module.c

Method          ngx\_http\_uwsgi\_create\_request(ngx\_http\_request\_t \*r)

```
....  
962.                              ignored = ngx_palloc(r->pool, n * sizeof(void *));
```

#### Use of Sizeof On a Pointer Type\Path 28:

Severity          Low

Result State      To Verify

Online Results   <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=51>

Status            New

	Source	Destination
File	engine/nginx_http_uwsgi_module.c	engine/nginx_http_uwsgi_module.c
Line	1484	1484
Object	sizeof	sizeof

#### Code Snippet

File Name      engine/nginx\_http\_uwsgi\_module.c

Method          ngx\_http\_uwsgi\_create\_main\_conf(ngx\_conf\_t \*cf)

```
....  
1484.                              sizeof(ngx_http_file_cache_t *))
```

#### Use of Sizeof On a Pointer Type\Path 29:

Severity          Low

Result State      To Verify

Online Results   <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=52>

Status            New

	Source	Destination
File	engine/nginx_http_v2.c	engine/nginx_http_v2.c
Line	298	298
Object	sizeof	sizeof

#### Code Snippet

File Name      engine/nginx\_http\_v2.c

Method          ngx\_http\_v2\_init(ngx\_event\_t \*rev)

```
....
298.                                     *
sizeof(ngx_http_v2_node_t *));
```

### Use of Sizeof On a Pointer Type\Path 30:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=53">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=53</a>
Status	New

	Source	Destination
File	tengine/ngx_mail_core_module.c	tengine/ngx_mail_core_module.c
Line	137	137
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/ngx\_mail\_core\_module.c  
Method ngx\_mail\_core\_create\_main\_conf(ngx\_conf\_t \*cf)

```
....
137.                                     sizeof(ngx_mail_core_srv_conf_t *))
```

### Use of Sizeof On a Pointer Type\Path 31:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=54">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=54</a>
Status	New

	Source	Destination
File	tengine/ngx_mail_core_module.c	tengine/ngx_mail_core_module.c
Line	245	245
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/ngx\_mail\_core\_module.c  
Method ngx\_mail\_core\_server(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*conf)

```
....
245.         ctx->srv_conf = ngx_pcalloc(cf->pool, sizeof(void *) *
ngx_mail_max_module);
```

### Use of Sizeof On a Pointer Type\Path 32:

Severity	Low
----------	-----



Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=55">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=55</a>
Status	New

	Source	Destination
File	tengine/nginx_mail_handler.c	tengine/nginx_mail_handler.c
Line	468	468
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_mail\_handler.c  
Method ngx\_mail\_init\_session(ngx\_connection\_t \*c)

```
....
468.      s->ctx = ngx_pcalloc(c->pool, sizeof(void *) *
ngx_mail_max_module);
```

### Use of Sizeof On a Pointer Type\Path 33:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=56">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=56</a>
Status	New

	Source	Destination
File	tengine/nginx_pipe.c	tengine/nginx_pipe.c
Line	97	97
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_pipe.c  
Method ngx\_conf\_open\_pipe(ngx\_cycle\_t \*cycle, ngx\_str\_t \*cmd, const char \*type)

```
....
97.      argv_out = ngx_array_create(cycle->pool, numargs, sizeof(u_char
*)) ;
```

### Use of Sizeof On a Pointer Type\Path 34:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=57">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=57</a>
Status	New

Source	Destination
--------	-------------

File	tengine/nginx_stream_core_module.c	tengine/nginx_stream_core_module.c
Line	386	386
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_stream\_core\_module.c  
Method ngx\_stream\_core\_create\_main\_conf(ngx\_conf\_t \*cf)

```
....  
386.                                sizeof(ngx_stream_core_srv_conf_t *))
```

#### Use of Sizeof On a Pointer Type\Path 35:

Severity Low  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=58>  
Status New

	Source	Destination
File	tengine/nginx_stream_core_module.c	tengine/nginx_stream_core_module.c
Line	590	590
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_stream\_core\_module.c  
Method ngx\_stream\_core\_server(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*conf)

```
....  
590.                                sizeof(void *) *  
ngx_stream_max_module);
```

#### Use of Sizeof On a Pointer Type\Path 36:

Severity Low  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=59>  
Status New

	Source	Destination
File	tengine/nginx_stream_upstream.c	tengine/nginx_stream_upstream.c
Line	344	344
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_stream\_upstream.c

Method ngx\_stream\_upstream(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*dummy)

```
....
344.                                     sizeof(void *) *
ngx_stream_max_module);
```

### Use of Sizeof On a Pointer Type\Path 37:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=60">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=60</a>
Status	New

	Source	Destination
File	tengine/nginx_stream_upstream.c	tengine/nginx_stream_upstream.c
Line	682	682
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_stream\_upstream.c  
Method ngx\_stream\_upstream\_create\_main\_conf(ngx\_conf\_t \*cf)

```
....
682.                                     sizeof(ngx_stream_upstream_srv_conf_t *))
```

### Use of Sizeof On a Pointer Type\Path 38:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=61">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=61</a>
Status	New

	Source	Destination
File	tengine/nginx_string.c	tengine/nginx_string.c
Line	420	420
Object	sizeof	sizeof

#### Code Snippet

File Name tengine/nginx\_string.c  
Method ngx\_vslprintf(u\_char \*buf, u\_char \*last, const char \*fmt, va\_list args)

```
....
420.                                     width = 2 * sizeof(void *);
```

## Unchecked Array Index

Query Path:

## Categories

NIST SP 800-53: SI-10 Information Input Validation (P1)

### Description

#### Unchecked Array Index\Path 1:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=134">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=134</a>
Status	New

	Source	Destination
File	tengine/nginx_http_core_module.c	tengine/nginx_http_core_module.c
Line	3077	3077
Object	ctx_index	ctx_index

#### Code Snippet

File Name tengine/nginx\_http\_core\_module.c  
Method ngx\_http\_core\_server(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*dummy)

```
....  
3077.             ctx->srv_conf[cf->cycle->modules[i]->ctx_index] =  
mconf;
```

#### Unchecked Array Index\Path 2:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=135">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=135</a>
Status	New

	Source	Destination
File	tengine/nginx_http_core_module.c	tengine/nginx_http_core_module.c
Line	3086	3086
Object	ctx_index	ctx_index

#### Code Snippet

File Name tengine/nginx\_http\_core\_module.c  
Method ngx\_http\_core\_server(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*dummy)

```
....  
3086.             ctx->loc_conf[cf->cycle->modules[i]->ctx_index] =  
mconf;
```

#### Unchecked Array Index\Path 3:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=136">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=136</a>
Status	New

	Source	Destination
File	tengine/nginx_http_core_module.c	tengine/nginx_http_core_module.c
Line	3205	3205
Object	ctx_index	ctx_index

#### Code Snippet

File Name tengine/nginx\_http\_core\_module.c  
Method ngx\_http\_core\_location(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*dummy)

```
....  
3205.          ctx->loc_conf[cf->cycle->modules[i]->ctx_index] =
```

#### Unchecked Array Index\Path 4:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=137">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=137</a>
Status	New

	Source	Destination
File	tengine/nginx_http_core_module.c	tengine/nginx_http_core_module.c
Line	4852	4852
Object	ctx_index	ctx_index

#### Code Snippet

File Name tengine/nginx\_http\_core\_module.c  
Method ngx\_http\_core\_limit\_except(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*conf)

```
....  
4852.          ctx->loc_conf[cf->cycle->modules[i]->ctx_index] =  
mconf;
```

#### Unchecked Array Index\Path 5:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=138">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=138</a>
Status	New

	Source	Destination
File	tengine/nginx_http_fastcgi_module.c	tengine/nginx_http_fastcgi_module.c
Line	1933	1933
Object	len	len

#### Code Snippet

File Name tengine/nginx\_http\_fastcgi\_module.c

Method ngx\_http\_fastcgi\_process\_header(ngx\_http\_request\_t \*r)

```
....  
1933.                                h->value.data[h->value.len] = '\0';
```

#### Unchecked Array Index\Path 6:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=139>

Status New

	Source	Destination
File	tengine/nginx_http_fastcgi_module.c	tengine/nginx_http_fastcgi_module.c
Line	1960	1960
Object	len	len

#### Code Snippet

File Name tengine/nginx\_http\_fastcgi\_module.c

Method ngx\_http\_fastcgi\_process\_header(ngx\_http\_request\_t \*r)

```
....  
1960.                                h->value.data[h->value.len] = '\0';
```

#### Unchecked Array Index\Path 7:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=140>

Status New

	Source	Destination
File	tengine/nginx_http_grpc_module.c	tengine/nginx_http_grpc_module.c
Line	3232	3232
Object	len	len

#### Code Snippet

File Name engine/nginx\_http\_grpc\_module.c  
Method ngx\_http\_grpc\_parse\_fragment(ngx\_http\_request\_t \*r, ngx\_http\_grpc\_ctx\_t \*ctx,  
  
.....  
3232. ctx->name.data[ctx->name.len] = '\0';

#### Unchecked Array Index\Path 8:

Severity Low  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=141>  
Status New

	Source	Destination
File	engine/nginx_http_grpc_module.c	engine/nginx_http_grpc_module.c
Line	3236	3236
Object	len	len

#### Code Snippet

File Name engine/nginx\_http\_grpc\_module.c  
Method ngx\_http\_grpc\_parse\_fragment(ngx\_http\_request\_t \*r, ngx\_http\_grpc\_ctx\_t \*ctx,  
  
.....  
3236. ctx->name.data[ctx->name.len] = '\0';

#### Unchecked Array Index\Path 9:

Severity Low  
Result State To Verify  
Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=142>  
Status New

	Source	Destination
File	engine/nginx_http_grpc_module.c	engine/nginx_http_grpc_module.c
Line	3341	3341
Object	len	len

#### Code Snippet

File Name engine/nginx\_http\_grpc\_module.c  
Method ngx\_http\_grpc\_parse\_fragment(ngx\_http\_request\_t \*r, ngx\_http\_grpc\_ctx\_t \*ctx,  
  
.....  
3341. ctx->value.data[ctx->value.len] = '\0';

**Unchecked Array Index\Path 10:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=143">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=143</a>
Status	New

	Source	Destination
File	tengine/nginx_http_grpc_module.c	tengine/nginx_http_grpc_module.c
Line	3345	3345
Object	len	len

**Code Snippet**

File Name tengine/nginx\_http\_grpc\_module.c  
Method ngx\_http\_grpc\_parse\_fragment(ngx\_http\_request\_t \*r, ngx\_http\_grpc\_ctx\_t \*ctx,

```
....  
3345.                ctx->value.data[ctx->value.len] = '\0';
```

**Unchecked Array Index\Path 11:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=144">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=144</a>
Status	New

	Source	Destination
File	tengine/nginx_http_proxy_module.c	tengine/nginx_http_proxy_module.c
Line	1966	1966
Object	len	len

**Code Snippet**

File Name tengine/nginx\_http\_proxy\_module.c  
Method ngx\_http\_proxy\_process\_header(ngx\_http\_request\_t \*r)

```
....  
1966.                h->value.data[h->value.len] = '\0';
```

**Unchecked Array Index\Path 12:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=145">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=145</a>
Status	New



	Source	Destination
File	tengine/nginx_http_request.c	tengine/nginx_http_request.c
Line	1614	1614
Object	len	len

#### Code Snippet

File Name tengine/nginx\_http\_request.c

Method ngx\_http\_process\_request\_headers(ngx\_event\_t \*rev)

```
....  
1614.                h->value.data[h->value.len] = '\0';
```

#### Unchecked Array Index\Path 13:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=146>

Status New

	Source	Destination
File	tengine/nginx_http_uwsgi_module.c	tengine/nginx_http_uwsgi_module.c
Line	1331	1331
Object	len	len

#### Code Snippet

File Name tengine/nginx\_http\_uwsgi\_module.c

Method ngx\_http\_uwsgi\_process\_header(ngx\_http\_request\_t \*r)

```
....  
1331.                h->value.data[h->value.len] = '\0';
```

#### Unchecked Array Index\Path 14:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=147>

Status New

	Source	Destination
File	tengine/nginx_http_v2.c	tengine/nginx_http_v2.c
Line	2773	2773
Object	index	index

**Code Snippet**

File Name engine/nginx\_http\_v2.c

Method ngx\_http\_v2\_push\_stream(ngx\_http\_v2\_stream\_t \*parent, ngx\_str\_t \*path)

```
....  
2773.             h2c->streams_index[index] = node->index;
```

**Unchecked Array Index\Path 15:**

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=148>

Status New

	Source	Destination
File	engine/nginx_http_v2.c	engine/nginx_http_v2.c
Line	3352	3352
Object	index	index

**Code Snippet**

File Name engine/nginx\_http\_v2.c

Method ngx\_http\_v2\_get\_node\_by\_id(ngx\_http\_v2\_connection\_t \*h2c, ngx\_uint\_t sid,

```
....  
3352.             h2c->streams_index[index] = node;
```

**Unchecked Array Index\Path 16:**

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=149>

Status New

	Source	Destination
File	engine/nginx_http_v3_stream.c	engine/nginx_http_v3_stream.c
Line	202	202
Object	index	index

**Code Snippet**

File Name engine/nginx\_http\_v3\_stream.c

Method ngx\_http\_v3\_create\_stream(ngx\_http\_xquic\_connection\_t \*h3c, uint64\_t stream\_id)

```
....  
202.             h3c->streams_index[index] = stream->list_node;
```

**Unchecked Array Index\Path 17:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=150">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=150</a>
Status	New

	Source	Destination
File	tengine/nginx_http_v3_stream.c	tengine/nginx_http_v3_stream.c
Line	714	714
Object	len	len

**Code Snippet**

File Name tengine/nginx\_http\_v3\_stream.c  
Method ngx\_http\_v3\_request\_process\_header(ngx\_http\_request\_t \*r,

```
....  
714.         header->value.data[header->value.len] = '\0';
```

**Unchecked Array Index\Path 18:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=151">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=151</a>
Status	New

	Source	Destination
File	tengine/nginx_mail_core_module.c	tengine/nginx_mail_core_module.c
Line	263	263
Object	ctx_index	ctx_index

**Code Snippet**

File Name tengine/nginx\_mail\_core\_module.c  
Method ngx\_mail\_core\_server(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*conf)

```
....  
263.         ctx->srv_conf[cf->cycle->modules[m]->ctx_index] =  
mconf;
```

**Unchecked Array Index\Path 19:**

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=152">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=152</a>
Status	New

	Source	Destination
File	tengine/nginx_stream_core_module.c	tengine/nginx_stream_core_module.c
Line	608	608
Object	ctx_index	ctx_index

#### Code Snippet

File Name tengine/nginx\_stream\_core\_module.c

Method ngx\_stream\_core\_server(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*conf)

```
....  
608.             ctx->srv_conf[cf->cycle->modules[m]->ctx_index] =  
mconf;
```

#### Unchecked Array Index\Path 20:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=153>

Status New

	Source	Destination
File	tengine/nginx_stream_upstream.c	tengine/nginx_stream_upstream.c
Line	349	349
Object	ctx_index	ctx_index

#### Code Snippet

File Name tengine/nginx\_stream\_upstream.c

Method ngx\_stream\_upstream(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*dummy)

```
....  
349.             ctx->srv_conf[ngx_stream_upstream_module.ctx_index] = uscf;
```

#### Unchecked Array Index\Path 21:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=154>

Status New

	Source	Destination
File	tengine/nginx_stream_upstream.c	tengine/nginx_stream_upstream.c
Line	366	366
Object	ctx_index	ctx_index

#### Code Snippet

File Name engine/nginx\_stream\_upstream.c  
Method ngx\_stream\_upstream(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*dummy)

```
....
366.             ctx->srv_conf[cf->cycle->modules[m]->ctx_index] =
mconf;
```

## Use of Insufficiently Random Values

Query Path:

CPP\Cx\CPP Low Visibility\Use of Insufficiently Random Values Version:0

### Categories

FISMA 2014: Media Protection

NIST SP 800-53: SC-28 Protection of Information at Rest (P1)

OWASP Top 10 2017: A3-Sensitive Data Exposure

### Description

#### Use of Insufficiently Random Values\Path 1:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=20">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=20</a>
Status	New

Method ngx\_pipe\_rollback\_parse\_args at line 776 of engine/nginx\_pipe.c uses a weak method rand to produce random values. These values might be used for secret values, personal identifiers or cryptographic input, allowing an attacker to guess the value.

	Source	Destination
File	engine/nginx_pipe.c	engine/nginx_pipe.c
Line	891	891
Object	rand	rand

#### Code Snippet

File Name engine/nginx\_pipe.c  
Method ngx\_pipe\_rollback\_parse\_args(ngx\_cycle\_t \*cycle, ngx\_open\_pipe\_t \*op,

```
....
891.             rbcf->adjust_time = rand() % rbcf->adjust_time_raw;
```

#### Use of Insufficiently Random Values\Path 2:

Severity	Low
Result State	To Verify
Online Results	<a href="http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=21">http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&amp;projectid=10012&amp;pathid=21</a>
Status	New

Method ngx\_pipe\_rollback\_parse\_args at line 776 of engine/ngx\_pipe.c uses a weak method srand to produce random values. These values might be used for secret values, personal identifiers or cryptographic input, allowing an attacker to guess the value.

	Source	Destination
File	engine/ngx_pipe.c	engine/ngx_pipe.c
Line	890	890
Object	srand	srand

#### Code Snippet

File Name engine/ngx\_pipe.c

Method ngx\_pipe\_rollback\_parse\_args(ngx\_cycle\_t \*cycle, ngx\_open\_pipe\_t \*op,

```
....  
890.      srand(hash);
```

### Use of Insufficiently Random Values\Path 3:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=22>

Status New

Method ngx\_http\_upstream\_check\_add\_timers at line 1401 of engine/ngx\_http\_upstream\_check\_module.c uses a weak method srand to produce random values. These values might be used for secret values, personal identifiers or cryptographic input, allowing an attacker to guess the value.

	Source	Destination
File	engine/ngx_http_upstream_check_module.c	engine/ngx_http_upstream_check_module.c
Line	1427	1427
Object	srandom	srandom

#### Code Snippet

File Name engine/ngx\_http\_upstream\_check\_module.c

Method ngx\_http\_upstream\_check\_add\_timers(ngx\_cycle\_t \*cycle)

```
....  
1427.      srandom(ngx_pid);
```

### Use of Insufficiently Random Values\Path 4:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=23>

Status New

Method ngx\_worker\_process\_init at line 822 of engine/ngx\_process\_cycle.c uses a weak method srandom to produce random values. These values might be used for secret values, personal identifiers or cryptographic input, allowing an attacker to guess the value.

	Source	Destination
File	engine/ngx_process_cycle.c	engine/ngx_process_cycle.c
Line	966	966
Object	srandom	srandom

#### Code Snippet

File Name engine/ngx\_process\_cycle.c

Method ngx\_worker\_process\_init(ngx\_cycle\_t \*cycle, ngx\_int\_t worker)

```
....
966.      srandom(((unsigned) ngx_pid << 16) ^ tp->sec ^ tp->msec);
```

## Potential Off by One Error in Loops

Query Path:

CPP\Cx\CPP Heuristic\Potential Off by One Error in Loops Version:1

### Categories

PCI DSS v3.2: PCI DSS (3.2) - 6.5.1 - Injection flaws - particularly SQL injection

NIST SP 800-53: SI-16 Memory Protection (P1)

OWASP Top 10 2017: A1-Injection

### Description

#### Potential Off by One Error in Loops\Path 1:

Severity Low

Result State To Verify

Online Results <http://WIN-BA8RD5TJ8IG/CxWebClient/ViewerMain.aspx?scanid=1010011&projectid=10012&pathid=62>

Status New

The buffer allocated by <= in engine/ngx\_http\_xquic\_module.c at line 476 does not correctly account for the actual size of the value, resulting in an incorrect allocation that is off by one.

	Source	Destination
File	engine/ngx_http_xquic_module.c	engine/ngx_http_xquic_module.c
Line	488	488
Object	<=	<=

#### Code Snippet

File Name engine/ngx\_http\_xquic\_module.c

Method ngx\_http\_xquic\_set\_log\_level(ngx\_conf\_t \*cf, ngx\_command\_t \*cmd, void \*conf)

```
....
488.      for (i = 0; i <= NGX_XQUIC_LOG_DEBUG; i++) {
```

# Divide By Zero

## Risk

### What might happen

When a program divides a number by zero, an exception will be raised. If this exception is not handled by the application, unexpected results may occur, including crashing the application. This can be considered a DoS (Denial of Service) attack, if an external user has control of the value of the denominator or can cause this error to occur.

---

## Cause

### How does it happen

The program receives an unexpected value, and uses it for division without filtering, validation, or verifying that the value is not zero. The application does not explicitly handle this error or prevent division by zero from occurring.

---

## General Recommendations

### How to avoid it

- Before dividing by an unknown value, validate the number and explicitly ensure it does not evaluate to zero.
  - Validate all untrusted input from all sources, in particular verifying that it is not zero before dividing with it.
  - Verify output of methods, calculations, dictionary lookups, and so on, and ensure it is not zero before dividing with the result.
  - Ensure divide-by-zero errors are caught and handled appropriately.
- 

## Source Code Examples

### Java

#### Divide by Zero

```
public float getAverage(HttpServletRequest req) {  
    int total = Integer.parseInt(req.getParameter("total"));  
    int count = Integer.parseInt(req.getParameter("count"));  
  
    return total / count;  
}
```

#### Checked Division

```
public float getAverage(HttpServletRequest req) {  
    int total = Integer.parseInt(req.getParameter("total"));  
    int count = Integer.parseInt(req.getParameter("count"));
```



```
if (count > 0)
    return total / count;
else
    return 0;
}
```

# Buffer Overflow boundcpy WrongSizeParam

## Risk

### What might happen

Buffer overflow attacks, in their various forms, could allow an attacker to control certain areas of memory. Typically, this is used to overwrite data on the stack necessary for the program to function properly, such as code and memory addresses, though other forms of this attack exist. Exploiting this vulnerability can generally lead to system crashes, infinite loops, or even execution of arbitrary code.

---

## Cause

### How does it happen

Buffer Overflows can manifest in numerous different variations. In its most basic form, the attack controls a buffer, which is then copied to a smaller buffer without size verification. Because the attacker's source buffer is larger than the program's target buffer, the attacker's data overwrites whatever is next on the stack, allowing the attacker to control program structures.

Alternatively, the vulnerability could be the result of improper bounds checking; exposing internal memory addresses outside of their valid scope; allowing the attacker to control the size of the target buffer; or various other forms.

---

## General Recommendations

### How to avoid it

- Always perform proper bounds checking before copying buffers or strings.
  - Prefer to use safer functions and structures, e.g. safe string classes over `char*`, `strncpy` over `strcpy`, and so on.
  - Consistently apply tests for the size of buffers.
  - Do not return variable addresses outside the scope of their variables.
- 

## Source Code Examples

### CPP

#### Overflowing Buffers

```
const int BUFFER_SIZE = 10;
char buffer[BUFFER_SIZE];

void copyStringToBuffer(char* inputString)
{
    strcpy(buffer, inputString);
}
```

#### Checked Buffers

```
const int BUFFER_SIZE = 10;
const int MAX_INPUT_SIZE = 256;
```

```
char buffer[BUFFER_SIZE];

void copyStringToBuffer(char* inputString)
{
    if (strlen(inputString, MAX_INPUT_SIZE) < sizeof(buffer))
    {
        strncpy(buffer, inputString, sizeof(buffer));
    }
}
```

# MemoryFree on StackVariable

## Risk

### What might happen

Undefined Behavior may result with a crash. Crashes may give an attacker valuable information about the system and the program internals. Furthermore, it may leave unprotected files (e.g. memory) that may be exploited.

---

## Cause

### How does it happen

Calling `free()` on a variable that was not dynamically allocated (e.g. `malloc`) will result with an Undefined Behavior.

---

## General Recommendations

### How to avoid it

Use `free()` only on dynamically allocated variables in order to prevent unexpected behavior from the compiler.

---

## Source Code Examples

### CPP

#### Bad - Calling `free()` on a static variable

```
void clean_up() {  
    char temp[256];  
    do_something();  
    free(tmp);  
    return;  
}
```

#### Good - Calling `free()` only on variables that were dynamically allocated

```
void clean_up() {  
    char *buff;  
    buff = (char*) malloc(1024);  
    free(buff);  
    return;  
}
```

# Dangerous Functions

## Risk

### What might happen

Use of dangerous functions may expose varying risks associated with each particular function, with potential impact of improper usage of these functions varying significantly. The presence of such functions indicates a flaw in code maintenance policies and adherence to secure coding practices, in a way that has allowed introducing known dangerous code into the application.

---

## Cause

### How does it happen

A dangerous function has been identified within the code. Functions are often deemed dangerous to use for numerous reasons, as there are different sets of vulnerabilities associated with usage of such functions. For example, some string copy and concatenation functions are vulnerable to Buffer Overflow, Memory Disclosure, Denial of Service and more. Use of these functions is not recommended.

---

## General Recommendations

### How to avoid it

- Deploy a secure and recommended alternative to any functions that were identified as dangerous.
    - If no secure alternative is found, conduct further researching and testing to identify whether current usage successfully sanitizes and verifies values, and thus successfully avoids the use-cases for whom the function is indeed dangerous
  - Conduct a periodical review of methods that are in use, to ensure that all external libraries and built-in functions are up-to-date and whose use has not been excluded from best secure coding practices.
- 

## Source Code Examples

### CPP

#### Buffer Overflow in gets()

```
int main()
{
    char buf[10];

    printf("Please enter your name: ");
    gets(buf); // veryveryverylongname
    if (buf == ACCEPTED_NAME)
    {
        // Do something
    }
    return 0;
}
```

## Safe reading from user

```
int main()
{
    char buf[10];

    printf("Please enter your name: ");
    fgets(buf, sizeof(buf), stdin); //setting the amount of bytes to read
    if (buf == ACCEPTED_NAME)
    {
        //Do something
    }
    return 0;
}
```

## Unsafe function for string copy

```
int main(int argc, char* argv[])
{
    char buf[10];
    strcpy(buf, argv[1]); // overflow occurs when len(argv[1]) > 10 bytes

    return 0;
}
```

## Safe string copy

```
int main(int argc, char* argv[])
{
    char buf[10];
    strncpy(buf, argv[1], sizeof(buf));
    buf[9] = '\0'; //strncpy doesn't NULL terminates

    return 0;
}
```

## Unsafe format string

```
int main(int argc, char* argv[])
{
    printf(argv[1]); // If argv[1] contains a format token, such as %s,%x or %d, will cause an access violation
    return 0;
}
```

## Safe format string

```
int main(int argc, char* argv[])
{
    printf("%s", argv[1]); // Second parameter is not a formattable string
    return 0;
}
```

**Failure to Release Memory Before Removing Last Reference ('Memory Leak')****Weakness ID:** 401 (*Weakness Base*)**Status:** Draft**Description****Description Summary**

The software does not sufficiently track and release allocated memory after it has been used, which slowly consumes remaining memory.

**Extended Description**

This is often triggered by improper handling of malformed data or unexpectedly interrupted sessions.

**Terminology Notes**

"memory leak" has sometimes been used to describe other kinds of issues, e.g. for information leaks in which the contents of memory are inadvertently leaked (CVE-2003-0400 is one such example of this terminology conflict).

**Time of Introduction**

- Architecture and Design
- Implementation

**Applicable Platforms****Languages**

C

C++

**Modes of Introduction**

Memory leaks have two common and sometimes overlapping causes:

- Error conditions and other exceptional circumstances
- Confusion over which part of the program is responsible for freeing the memory

**Common Consequences**

Scope	Effect
Availability	Most memory leaks result in general software reliability problems, but if an attacker can intentionally trigger a memory leak, the attacker might be able to launch a denial of service attack (by crashing or hanging the program) or take advantage of other unexpected program behavior resulting from a low memory condition.

**Likelihood of Exploit**

Medium

**Demonstrative Examples****Example 1**

The following C function leaks a block of allocated memory if the call to read() fails to return the expected number of bytes:

*(Bad Code)**Example Language: C*

```
char* getBlock(int fd) {  
    char* buf = (char*) malloc(BLOCK_SIZE);  
    if (!buf) {  
        return NULL;  
    }  
    if (read(fd, buf, BLOCK_SIZE) != BLOCK_SIZE) {  
  
        return NULL;  
    }  
}
```



```
return buf;
}
```

## Example 2

Here the problem is that every time a connection is made, more memory is allocated. So if one just opened up more and more connections, eventually the machine would run out of memory.

(Bad Code)

Example Language: C

```
bar connection(){
foo = malloc(1024);
return foo;
}

endConnection(bar foo) {

free(foo);
}

int main() {

while(1) //thread 1
//On a connection
foo=connection(); //thread 2
//When the connection ends
endConnection(foo)
}
```

## Observed Examples

Reference	Description
<a href="#">CVE-2005-3119</a>	Memory leak because function does not free() an element of a data structure.
<a href="#">CVE-2004-0427</a>	Memory leak when counter variable is not decremented.
<a href="#">CVE-2002-0574</a>	Memory leak when counter variable is not decremented.
<a href="#">CVE-2005-3181</a>	Kernel uses wrong function to release a data structure, preventing data from being properly tracked by other code.
<a href="#">CVE-2004-0222</a>	Memory leak via unknown manipulations as part of protocol test suite.
<a href="#">CVE-2001-0136</a>	Memory leak via a series of the same command.

## Potential Mitigations

Pre-design: Use a language or compiler that performs automatic bounds checking.

### Phase: Architecture and Design

Use an abstraction library to abstract away risky APIs. Not a complete solution.

Pre-design through Build: The Boehm-Demers-Weiser Garbage Collector or valgrind can be used to detect leaks in code. This is not a complete solution as it is not 100% effective.

## Relationships

Nature	Type	ID	Name	View(s) this relationship pertains to
ChildOf	Weakness Class	398	<a href="#">Indicator of Poor Code Quality</a>	<b>Seven Pernicious Kingdoms (primary)700</b>
ChildOf	Category	399	<a href="#">Resource Management Errors</a>	<b>Development Concepts (primary)699</b>
ChildOf	Category	633	<a href="#">Weaknesses that Affect Memory</a>	<b>Resource-specific Weaknesses (primary)631</b>
ChildOf	Category	730	<a href="#">OWASP Top Ten 2004 Category A9 - Denial of Service</a>	<b>Weaknesses in OWASP Top Ten (2004) (primary)711</b>
ChildOf	Weakness Base	772	<a href="#">Missing Release of Resource after Effective</a>	<b>Research Concepts (primary)1000</b>

MemberOf	View	630	<a href="#">Lifetime Weaknesses Examined by SAMATE</a>	<b>Weaknesses Examined by SAMATE (primary) 630</b> Research Concepts1000
CanFollow	Weakness Class	390	<a href="#">Detection of Error Condition Without Action</a>	

## Relationship Notes

This is often a resultant weakness due to improper handling of malformed data or early termination of sessions.

## Affected Resources

- Memory

## Functional Areas

- Memory management

## Taxonomy Mappings

Mapped Taxonomy Name	Node ID	Fit	Mapped Node Name
PLOVER			Memory leak
7 Pernicious Kingdoms			Memory Leak
CLASP			Failure to deallocate data
OWASP Top Ten 2004	A9	CWE More Specific	Denial of Service

## White Box Definitions

A weakness where the code path has:

1. start statement that allocates dynamically allocated memory resource
2. end statement that loses identity of the dynamically allocated memory resource creating situation where dynamically allocated memory resource is never relinquished

Where "loses" is defined through the following scenarios:

1. identity of the dynamic allocated memory resource never obtained
2. the statement assigns another value to the data element that stored the identity of the dynamically allocated memory resource and there are no aliases of that data element
3. identity of the dynamic allocated memory resource obtained but never passed on to function for memory resource release
4. the data element that stored the identity of the dynamically allocated resource has reached the end of its scope at the statement and there are no aliases of that data element

## References

J. Whittaker and H. Thompson. "How to Break Software Security". Addison Wesley. 2003.

## Content History

Submissions			
Submission Date	Submitter	Organization	Source
	PLOVER		Externally Mined
Modifications			
Modification Date	Modifier	Organization	Source
2008-07-01	Eric Dalci	Cigital	External
	updated Time of Introduction		
2008-08-01		KDM Analytics	External
	added/updated white box definitions		
2008-08-15		Veracode	External
	Suggested OWASP Top Ten 2004 mapping		
2008-09-08	CWE Content Team	MITRE	Internal
	updated Applicable Platforms, Common Consequences, Relationships, Other Notes, References, Relationship Notes, Taxonomy Mappings, Terminology Notes		
2008-10-14	CWE Content Team	MITRE	Internal
	updated Description		
2009-03-10	CWE Content Team	MITRE	Internal
	updated Other Notes		
2009-05-27	CWE Content Team	MITRE	Internal
	updated Name		
2009-07-17	KDM Analytics		External
	Improved the White Box Definition		

2009-07-27	CWE Content Team updated White Box Definitions	MITRE	Internal
2009-10-29	CWE Content Team updated Modes of Introduction, Other Notes	MITRE	Internal
2010-02-16	CWE Content Team updated Relationships	MITRE	Internal
<b>Previous Entry Names</b>			
<b>Change Date</b>	<b>Previous Entry Name</b>		
2008-04-11	Memory Leak		
2009-05-27	Failure to Release Memory Before Removing Last Reference (aka 'Memory Leak')		

[BACK TO TOP](#)

# Use After Free

## Risk

### What might happen

A use after free error will cause code to use an area of memory previously assigned with a specific value, which has since been freed and may have been overwritten by another value. This error will likely cause unexpected behavior, memory corruption and crash errors. In some cases where the freed and used section of memory is used to determine execution flow, and the error can be induced by an attacker, this may result in execution of malicious code.

---

## Cause

### How does it happen

Pointers to variables allow code to have an address with a set size to a dynamically allocated variable. Eventually, the pointer's destination may become free - either explicitly in code, such as when programmatically freeing this variable, or implicitly, such as when a local variable is returned - once it is returned, the variable's scope is released. Once freed, this memory will be re-used by the application, overwritten with new data. At this point, dereferencing this pointer will potentially resolve newly written and unexpected data.

---

## General Recommendations

### How to avoid it

- Do not return local variables or pointers
  - Review code to ensure no flow allows use of a pointer after it has been explicitly freed
- 

## Source Code Examples

### CPP

#### Use of Variable after It was Freed

```
free(input);  
printf("%s", input);
```

#### Use of Pointer to Local Variable That Was Freed On Return

```
int* func1()  
{  
    int i;  
    i = 1;  
    return &i;  
}  
  
void func2()  
{  
    int j;  
    j = 5;
```

```
}

//..
    int * i = func1();
    printf("%d\r\n", *i); // Output could be 1 or Segmentation Fault
    func2();
    printf("%d\r\n", *i); // Output is 5, which is j's value, as func2() overwrote data in
the stack
//..
```

# Use of Zero Initialized Pointer

## Risk

### What might happen

A null pointer dereference is likely to cause a run-time exception, a crash, or other unexpected behavior.

---

## Cause

### How does it happen

Variables which are declared without being assigned will implicitly retain a null value until they are assigned. The null value can also be explicitly set to a variable, to ensure clear out its contents. Since null is not really a value, it may not have object variables and methods, and any attempt to access contents of a null object, instead of verifying it is set beforehand, will result in a null pointer dereference exception.

---

## General Recommendations

### How to avoid it

- For any variable that is created, ensure all logic flows between declaration and use assign a non-null value to the variable first.
  - Enforce null checks on any received variable or object before it is dereferenced, to ensure it does not contain a null assigned to it elsewhere.
  - Consider the need to assign null values in order to overwrite initialized variables. Consider reassigning or releasing these variables instead.
- 

## Source Code Examples

### CPP

#### Explicit NULL Dereference

```
char * input = NULL;
printf("%s", input);
```

#### Implicit NULL Dereference

```
char * input;
printf("%s", input);
```

### Java

#### Explicit Null Dereference

```
Object o = null;
out.println(o.getClass());
```



# Use of Insufficiently Random Values

## Risk

### What might happen

Random values are often used as a mechanism to prevent malicious users from guessing a value, such as a password, encryption key, or session identifier. Depending on what this random value is used for, an attacker would be able to predict the next numbers generated, or previously generated values. This could enable the attacker to hijack another user's session, impersonate another user, or crack an encryption key (depending on what the pseudo-random value was used for).

---

## Cause

### How does it happen

The application uses a weak method of generating pseudo-random values, such that other numbers could be determined from a relatively small sample size. Since the pseudo-random number generator used is designed for statistically uniform distribution of values, it is approximately deterministic. Thus, after collecting a few generated values (e.g. by creating a few individual sessions, and collecting the sessionids), it would be possible for an attacker to calculate another sessionid.

Specifically, if this pseudo-random value is used in any security context, such as passwords, keys, or secret identifiers, an attacker would be able to predict the next numbers generated, or previously generated values.

---

## General Recommendations

### How to avoid it

#### Generic Guidance:

- Whenever unpredictable numbers are required in a security context, use a cryptographically strong random number generator, instead of a statistical pseudo-random generator.
- Use the cryptorandom generator that is built-in to your language or platform, and ensure it is securely seeded. Do not seed the generator with a weak, non-random seed. (In most cases, the default is securely random).
- Ensure you use a long enough random value, to make brute-force attacks unfeasible.

#### Specific Recommendations:

- Do not use the statistical pseudo-random number generator, use the cryptorandom generator instead. In Java, this is the SecureRandom class.
- 

## Source Code Examples

### Java

#### Use of a weak pseudo-random number generator

```
Random random = new Random();  
  
long sessNum = random.nextLong();  
  
String sessionId = sessNum.toString();
```



### Cryptographically secure random number generator

```
SecureRandom random = new SecureRandom();

byte sessBytes[] = new byte[32];

random.nextBytes(sessBytes);

String sessionId = new String(sessBytes);
```

## Objc

### Use of a weak pseudo-random number generator

```
long sessNum = rand();
NSString* sessionId = [NSString stringWithFormat:@"%ld", sessNum];
```

### Cryptographically secure random number generator

```
UInt32 sessBytes;
SecRandomCopyBytes(kSecRandomDefault, sizeof(sessBytes), (uint8_t*)&sessBytes);

NSString* sessionId = [NSString stringWithFormat:@"%llu", sessBytes];
```

## Swift

### Use of a weak pseudo-random number generator

```
let sessNum = rand();
let sessionId = String(format:@"%ld", sessNum)
```

### Cryptographically secure random number generator

```
var sessBytes: UInt32 = 0
withUnsafeMutablePointer(&sessBytes, { (sessBytesPointer) -> Void in
    let castedPointer = unsafeBitCast(sessBytesPointer, UnsafeMutablePointer<UInt8>.self)
    SecRandomCopyBytes(kSecRandomDefault, sizeof(UInt32), castedPointer)
})

let sessionId = String(format:@"%llu", sessBytes)
```

## Use of sizeof() on a Pointer Type

**Weakness ID:** 467 (*Weakness Variant*)

**Status:** Draft

### Description

### Description Summary

The code calls sizeof() on a malloced pointer type, which always returns the wordsize/8. This can produce an unexpected result if the programmer intended to determine how much memory has been allocated.

### Time of Introduction

### Implementation

### Applicable Platforms

### Languages

C

C++

### Common Consequences

Scope	Effect
Integrity	This error can often cause one to allocate a buffer that is much smaller than what is needed, leading to resultant weaknesses such as buffer overflows.

### Likelihood of Exploit

High

### Demonstrative Examples

#### Example 1

Care should be taken to ensure sizeof returns the size of the data structure itself, and not the size of the pointer to the data structure.

In this example, sizeof(foo) returns the size of the pointer.

*(Bad Code)*

*Example Languages: C and C++*

```
double *foo;
...
foo = (double *)malloc(sizeof(foo));
```

In this example, sizeof(\*foo) returns the size of the data structure and not the size of the pointer.

*(Good Code)*

*Example Languages: C and C++*

```
double *foo;
...
foo = (double *)malloc(sizeof(*foo));
```

#### Example 2

This example defines a fixed username and password. The AuthenticateUser() function is intended to accept a username and a password from an untrusted user, and check to ensure that it matches the username and password. If the username and password match, AuthenticateUser() is intended to indicate that authentication succeeded.

*(Bad Code)*

*/\* Ignore CWE-259 (hard-coded password) and CWE-309 (use of password system for authentication) for this example. \*/*

```
char *username = "admin";
char *pass = "password";

int AuthenticateUser(char *inUser, char *inPass) {
```

```
printf("Sizeof username = %d\n", sizeof(username));
printf("Sizeof pass = %d\n", sizeof(pass));

if (strcmp(username, inUser, sizeof(username))) {
printf("Auth failure of username using sizeof\n");
return(AUTH_FAIL);
}
/* Because of CWE-467, the sizeof returns 4 on many platforms and architectures. */
if (! strcmp(pass, inPass, sizeof(pass))) {
printf("Auth success of password using sizeof\n");
return(AUTH_SUCCESS);
}
else {
printf("Auth fail of password using sizeof\n");
return(AUTH_FAIL);
}
}

int main (int argc, char **argv)
{
int authResult;

if (argc < 3) {
ExitError("Usage: Provide a username and password");
}
authResult = AuthenticateUser(argv[1], argv[2]);
if (authResult != AUTH_SUCCESS) {
ExitError("Authentication failed");
}
else {
DoAuthenticatedTask(argv[1]);
}
}
```

In `AuthenticateUser()`, because `sizeof()` is applied to a parameter with an array type, the `sizeof()` call might return 4 on many modern architectures. As a result, the `strcmp()` call only checks the first four characters of the input password, resulting in a partial comparison (CWE-187), leading to improper authentication (CWE-287).

Because of the partial comparison, any of these passwords would still cause authentication to succeed for the "admin" user:

*(Attack)*

```
pass5
passABCDEFGH
passWORD
```

Because only 4 characters are checked, this significantly reduces the search space for an attacker, making brute force attacks more feasible.

The same problem also applies to the username, so values such as "adminXYZ" and "administrator" will succeed for the username.

## Potential Mitigations

### Phase: Implementation

Use expressions such as "`sizeof(*pointer)`" instead of "`sizeof(pointer)`", unless you intend to run `sizeof()` on a pointer type to gain some platform independence or if you are allocating a variable on the stack.

## Other Notes

The use of `sizeof()` on a pointer can sometimes generate useful information. An obvious case is to find out the wordsize on a platform. More often than not, the appearance of `sizeof(pointer)` indicates a bug.

## Weakness Ordinalities

Ordinality	Description
Primary	(where the weakness exists independent of other weaknesses)

## Relationships

Nature	Type	ID	Name	View(s) this relationship pertains to
ChildOf	Category	465	<a href="#">Pointer Issues</a>	<b>Development Concepts (primary)699</b>
ChildOf	Weakness Class	682	<a href="#">Incorrect Calculation</a>	<b>Research Concepts (primary)1000</b>
ChildOf	Category	737	<a href="#">CERT C Secure Coding Section 03 - Expressions (EXP)</a>	<b>Weaknesses Addressed by the CERT C Secure Coding Standard (primary)734</b>
ChildOf	Category	740	<a href="#">CERT C Secure Coding Section 06 - Arrays (ARR)</a>	Weaknesses Addressed by the CERT C Secure Coding Standard734
CanPrecede	Weakness Base	131	<a href="#">Incorrect Calculation of Buffer Size</a>	Research Concepts1000

## Taxonomy Mappings

Mapped Taxonomy Name	Node ID	Fit	Mapped Node Name
CLASP			Use of sizeof() on a pointer type
CERT C Secure Coding	ARR01-C		Do not apply the sizeof operator to a pointer when taking the size of an array
CERT C Secure Coding	EXP01-C		Do not take the size of a pointer to determine the size of the pointed-to type

## White Box Definitions

A weakness where code path has:

1. end statement that passes an identity of a dynamically allocated memory resource to a sizeof operator
2. start statement that allocates the dynamically allocated memory resource

## References

Robert Seacord. "EXP01-A. Do not take the sizeof a pointer to determine the size of a type".  
<https://www.securecoding.cert.org/confluence/display/seccode/EXP01-A.+Do+not+take+the+sizeof+a+pointer+to+determine+the+size+of+a+type>.

## Content History

Submissions			
Submission Date	Submitter	Organization	Source
	CLASP		Externally Mined
Modifications			
Modification Date	Modifier	Organization	Source
2008-07-01	Eric Dalci	Cigital	External
	updated Time of Introduction		
2008-08-01		KDM Analytics	External
	added/updated white box definitions		
2008-09-08	CWE Content Team	MITRE	Internal
	updated Applicable Platforms, Common Consequences, Relationships, Other Notes, Taxonomy Mappings, Weakness Ordinalities		
2008-11-24	CWE Content Team	MITRE	Internal
	updated Relationships, Taxonomy Mappings		
2009-03-10	CWE Content Team	MITRE	Internal
	updated Demonstrative Examples		
2009-12-28	CWE Content Team	MITRE	Internal
	updated Demonstrative Examples		
2010-02-16	CWE Content Team	MITRE	Internal
	updated Relationships		

[BACK TO TOP](#)

# Potential Off by One Error in Loops

## Risk

### What might happen

An off by one error may result in overwriting or over-reading of unintended memory; in most cases, this can result in unexpected behavior and even application crashes. In other cases, where allocation can be controlled by an attacker, a combination of variable assignment and an off by one error can result in execution of malicious code.

---

## Cause

### How does it happen

Often when designating variables to memory, a calculation error may occur when determining size or length that is off by one.

For example in loops, when allocating an array of size 2, its cells are counted as 0,1 - therefore, if a For loop iterator on the array is incorrectly set with the start condition `i=0` and the continuation condition `i<=2`, three cells will be accessed instead of 2, and an attempt will be made to write or read cell [2], which was not originally allocated, resulting in potential corruption of memory outside the bounds of the originally assigned array.

Another example occurs when a null-byte terminated string, in the form of a character array, is copied without its terminating null-byte. Without the null-byte, the string representation is unterminated, resulting in certain functions to over-read memory as they expect the missing null terminator.

---

## General Recommendations

### How to avoid it

- Always ensure that a given iteration boundary is correct:
    - With array iterations, consider that arrays begin with cell 0 and end with cell `n-1`, for a size `n` array.
    - With character arrays and null-byte terminated string representations, consider that the null byte is required and should not be overwritten or ignored; ensure functions in use are not vulnerable to off-by-one, specifically for instances where null-bytes are automatically appended after the buffer, instead of in place of its last character.
  - Where possible, use safe functions that manage memory and are not prone to off-by-one errors.
- 

## Source Code Examples

### CPP

#### Off-By-One in For Loop

```
int *ptr;
ptr = (int*)malloc(5 * sizeof(int));
for (int i = 0; i <= 5; i++)
{
    ptr[i] = i * 2 + 1; // ptr[5] will be set, but is out of bounds
}
```

```
}
```

### Proper Iteration in For Loop

```
int *ptr;
ptr = (int*)malloc(5 * sizeof(int));
for (int i = 0; i < 5; i++)
{
    ptr[i] = i * 2 + 1; // ptr[0-4] are well defined
}
```

### Off-By-One in strncat

```
strncat(buf, input, sizeof(buf) - strlen(buf)); // actual value should be sizeof(buf) -  
strlen(buf)-1 - this form will overwrite the terminating nullbyte
```

# NULL Pointer Dereference

## Risk

### What might happen

A null pointer dereference is likely to cause a run-time exception, a crash, or other unexpected behavior.

---

## Cause

### How does it happen

Variables which are declared without being assigned will implicitly retain a null value until they are assigned. The null value can also be explicitly set to a variable, to ensure clear out its contents. Since null is not really a value, it may not have object variables and methods, and any attempt to access contents of a null object, instead of verifying it is set beforehand, will result in a null pointer dereference exception.

---

## General Recommendations

### How to avoid it

- For any variable that is created, ensure all logic flows between declaration and use assign a non-null value to the variable first.
  - Enforce null checks on any received variable or object before it is dereferenced, to ensure it does not contain a null assigned to it elsewhere.
  - Consider the need to assign null values in order to overwrite initialized variables. Consider reassigning or releasing these variables instead.
- 

## Source Code Examples

## Improper Validation of Array Index

**Weakness ID:** 129 (*Weakness Base*)

**Status:** Draft

### Description

### Description Summary

The product uses untrusted input when calculating or using an array index, but the product does not validate or incorrectly validates the index to ensure the index references a valid position within the array.

### Alternate Terms

out-of-bounds array index

index-out-of-range

array index underflow

### Time of Introduction

### Implementation

### Applicable Platforms

### Languages

C: (*Often*)

C++: (*Often*)

### Language-independent

### Common Consequences

Scope	Effect
Integrity Availability	Unchecked array indexing will very likely result in the corruption of relevant memory and perhaps instructions, leading to a crash, if the values are outside of the valid memory area.
Integrity	If the memory corrupted is data, rather than instructions, the system will continue to function with improper values.
Confidentiality Integrity	Unchecked array indexing can also trigger out-of-bounds read or write operations, or operations on the wrong objects; i.e., "buffer overflows" are not always the result. This may result in the exposure or modification of sensitive data.
Integrity	If the memory accessible by the attacker can be effectively controlled, it may be possible to execute arbitrary code, as with a standard buffer overflow and possibly without the use of large inputs if a precise index can be controlled.
Integrity Availability Confidentiality	A single fault could allow either an overflow (CWE-788) or underflow (CWE-786) of the array index. What happens next will depend on the type of operation being performed out of bounds, but can expose sensitive information, cause a system crash, or possibly lead to arbitrary code execution.

### Likelihood of Exploit

High

### Detection Methods

#### Automated Static Analysis

This weakness can often be detected using automated static analysis tools. Many modern tools use data flow analysis or constraint-based techniques to minimize the number of false positives.

Automated static analysis generally does not account for environmental considerations when reporting out-of-bounds memory operations. This can make it difficult for users to determine which warnings should be investigated first. For example, an analysis tool might report array index errors that originate from command line arguments in a program that is not expected to run with setuid or other special privileges.

**Effectiveness: High**



This is not a perfect solution, since 100% accuracy and coverage are not feasible.

---

### Automated Dynamic Analysis

This weakness can be detected using dynamic tools and techniques that interact with the software using large test suites with many diverse inputs, such as fuzz testing (fuzzing), robustness testing, and fault injection. The software's operation may slow down, but it should not become unstable, crash, or generate incorrect results.

---

### Black Box

Black box methods might not get the needed code coverage within limited time constraints, and a dynamic test might not produce any noticeable side effects even if it is successful.

---

## Demonstrative Examples

### Example 1

The following C/C++ example retrieves the sizes of messages for a pop3 mail server. The message sizes are retrieved from a socket that returns in a buffer the message number and the message size, the message number (num) and size (size) are extracted from the buffer and the message size is placed into an array using the message number for the array index.

*(Bad Code)*

*Example Language: C*

```
/* capture the sizes of all messages */
int getsizes(int sock, int count, int *sizes) {
    ...
    char buf[BUFFER_SIZE];
    int ok;
    int num, size;

    // read values from socket and added to sizes array
    while ((ok = gen_recv(sock, buf, sizeof(buf))) == 0)
    {

        // continue read from socket until buf only contains '.'
        if (DOTLINE(buf))
            break;
        else if (sscanf(buf, "%d %d", &num, &size) == 2)
            sizes[num - 1] = size;
        }
    ...
}
```

In this example the message number retrieved from the buffer could be a value that is outside the allowable range of indices for the array and could possibly be a negative number. Without proper validation of the value to be used for the array index an array overflow could occur and could potentially lead to unauthorized access to memory addresses and system crashes. The value of the array index should be validated to ensure that it is within the allowable range of indices for the array as in the following code.

*(Good Code)*

*Example Language: C*

```
/* capture the sizes of all messages */
int getsizes(int sock, int count, int *sizes) {
    ...
    char buf[BUFFER_SIZE];
    int ok;
    int num, size;

    // read values from socket and added to sizes array
    while ((ok = gen_recv(sock, buf, sizeof(buf))) == 0)
    {

        // continue read from socket until buf only contains '.'
        if (DOTLINE(buf))
```

```
break;
else if (sscanf(buf, "%d %d", &num, &size) == 2) {
if (num > 0 && num <= (unsigned)count)
sizes[num - 1] = size;
else
/* warn about possible attempt to induce buffer overflow */
report(stderr, "Warning: ignoring bogus data for message sizes returned by server.\n");
}
}
...
}
```

## Example 2

In the code snippet below, an unchecked integer value is used to reference an object in an array.

*(Bad Code)*

*Example Language: Java*

```
public String getValue(int index) {
return array[index];
}
```

If index is outside of the range of the array, this may result in an `ArrayIndexOutOfBoundsException` Exception being raised.

## Example 3

In the following Java example the method `displayProductSummary` is called from a Web service servlet to retrieve product summary information for display to the user. The servlet obtains the integer value of the product number from the user and passes it to the `displayProductSummary` method. The `displayProductSummary` method passes the integer value of the product number to the `getProductSummary` method which obtains the product summary from the array object containing the project summaries using the integer value of the product number as the array index.

*(Bad Code)*

*Example Language: Java*

*// Method called from servlet to obtain product information*

```
public String displayProductSummary(int index) {

String productSummary = new String("");

try {
String productSummary = getProductSummary(index);

} catch (Exception ex) {...}

return productSummary;
}

public String getProductSummary(int index) {
return products[index];
}
```

In this example the integer value used as the array index that is provided by the user may be outside the allowable range of indices for the array which may provide unexpected results or may cause the application to fail. The integer value used for the array index should be validated to ensure that it is within the allowable range of indices for the array as in the following code.

*(Good Code)*

*Example Language: Java*

*// Method called from servlet to obtain product information*

```
public String displayProductSummary(int index) {

String productSummary = new String("");
```

```
try {
String productSummary = getProductSummary(index);

} catch (Exception ex) {...}

return productSummary;
}

public String getProductSummary(int index) {
String productSummary = "";

if ((index >= 0) && (index < MAX_PRODUCTS)) {
productSummary = products[index];
}
else {
System.err.println("index is out of bounds");
throw new IndexOutOfBoundsException();
}

return productSummary;
}
```

An alternative in Java would be to use one of the collection objects such as `ArrayList` that will automatically generate an exception if an attempt is made to access an array index that is out of bounds.

*(Good Code)*

#### Example Language: Java

```
ArrayList productArray = new ArrayList(MAX_PRODUCTS);
...
try {
productSummary = (String) productArray.get(index);
} catch (IndexOutOfBoundsException ex) {...}
```

### Observed Examples

Reference	Description
<a href="#">CVE-2005-0369</a>	large ID in packet used as array index
<a href="#">CVE-2001-1009</a>	negative array index as argument to POP LIST command
<a href="#">CVE-2003-0721</a>	Integer signedness error leads to negative array index
<a href="#">CVE-2004-1189</a>	product does not properly track a count and a maximum number, which can lead to resultant array index overflow.
<a href="#">CVE-2007-5756</a>	chain: device driver for packet-capturing software allows access to an unintended IOCTL with resultant array index error.

### Potential Mitigations

#### Phase: Architecture and Design

### Strategies: Input Validation; Libraries or Frameworks

Use an input validation framework such as Struts or the OWASP ESAPI Validation API. If you use Struts, be mindful of weaknesses covered by the CWE-101 category.

---

#### Phase: Architecture and Design

For any security checks that are performed on the client side, ensure that these checks are duplicated on the server side, in order to avoid CWE-602. Attackers can bypass the client-side checks by modifying values after the checks have been performed, or by changing the client to remove the client-side checks entirely. Then, these modified values would be submitted to the server.

Even though client-side checks provide minimal benefits with respect to server-side security, they are still useful. First, they can support intrusion detection. If the server receives input that should have been rejected by the client, then it may be an indication of an attack. Second, client-side error-checking can provide helpful feedback to the user about the expectations for valid input. Third, there may be a reduction in server-side processing time for accidental input errors, although this is typically a small savings.

---

#### Phase: Requirements

### Strategy: Language Selection

Use a language with features that can automatically mitigate or eliminate out-of-bounds indexing errors.

---

For example, Ada allows the programmer to constrain the values of a variable and languages such as Java and Ruby will allow the programmer to handle exceptions when an out-of-bounds index is accessed.

#### Phase: Implementation

### Strategy: Input Validation

Assume all input is malicious. Use an "accept known good" input validation strategy (i.e., use a whitelist). Reject any input that does not strictly conform to specifications, or transform it into something that does. Use a blacklist to reject any unexpected inputs and detect potential attacks.

When accessing a user-controlled array index, use a stringent range of values that are within the target array. Make sure that you do not allow negative values to be used. That is, verify the minimum as well as the maximum of the range of acceptable values.

#### Phase: Implementation

Be especially careful to validate your input when you invoke code that crosses language boundaries, such as from an interpreted language to native code. This could create an unexpected interaction between the language boundaries. Ensure that you are not violating any of the expectations of the language with which you are interfacing. For example, even though Java may not be susceptible to buffer overflows, providing a large argument in a call to native code might trigger an overflow.

### Weakness Ordinalities

Ordinality	Description
Resultant	The most common condition situation leading to unchecked array indexing is the use of loop index variables as buffer indexes. If the end condition for the loop is subject to a flaw, the index can grow or shrink unbounded, therefore causing a buffer overflow or underflow. Another common situation leading to this condition is the use of a function's return value, or the resulting value of a calculation directly as an index in to a buffer.

### Relationships

Nature	Type	ID	Name	View(s) this relationship pertains to
ChildOf	Weakness Class	20	<a href="#">Improper Input Validation</a>	<b>Development Concepts (primary)699</b> <b>Research Concepts (primary)1000</b>
ChildOf	Category	189	<a href="#">Numeric Errors</a>	Development Concepts699
ChildOf	Category	633	<a href="#">Weaknesses that Affect Memory</a>	<b>Resource-specific Weaknesses (primary)631</b>
ChildOf	Category	738	<a href="#">CERT C Secure Coding Section 04 - Integers (INT)</a>	<b>Weaknesses Addressed by the CERT C Secure Coding Standard (primary)734</b>
ChildOf	Category	740	<a href="#">CERT C Secure Coding Section 06 - Arrays (ARR)</a>	Weaknesses Addressed by the CERT C Secure Coding Standard734
ChildOf	Category	802	<a href="#">2010 Top 25 - Risky Resource Management</a>	<b>Weaknesses in the 2010 CWE/SANS Top 25 Most Dangerous Programming Errors (primary)800</b>
CanPrecede	Weakness Class	119	<a href="#">Failure to Constrain Operations within the Bounds of a Memory Buffer</a>	Research Concepts1000
CanPrecede	Weakness Variant	789	<a href="#">Uncontrolled Memory Allocation</a>	Research Concepts1000
PeerOf	Weakness Base	124	<a href="#">Buffer Underwrite ('Buffer Underflow')</a>	Research Concepts1000

### Theoretical Notes

An improperly validated array index might lead directly to the always-incorrect behavior of "access of array using out-of-bounds index."

### Affected Resources

## Memory

### f Causal Nature

### Explicit

### Taxonomy Mappings

Mapped Taxonomy Name	Node ID	Fit	Mapped Node Name
CLASP			Unchecked array indexing
PLOVER			INDEX - Array index overflow
CERT C Secure Coding	ARR00-C		Understand how arrays work
CERT C Secure Coding	ARR30-C		Guarantee that array indices are within the valid range
CERT C Secure Coding	ARR38-C		Do not add or subtract an integer to a pointer if the resulting value does not refer to a valid array element
CERT C Secure Coding	INT32-C		Ensure that operations on signed integers do not result in overflow

### Related Attack Patterns

CAPEC-ID	Attack Pattern Name	(CAPEC Version: 1.5)
<a href="#">100</a>	Overflow Buffers	

### References

[REF-11] M. Howard and D. LeBlanc. "Writing Secure Code". Chapter 5, "Array Indexing Errors" Page 144. 2nd Edition. Microsoft. 2002.

### Content History

Submissions			
Submission Date	Submitter	Organization	Source
	CLASP		Externally Mined
Modifications			
Modification Date	Modifier	Organization	Source
2008-07-01	Sean Eidemiller	Cigital	External
	added/updated demonstrative examples		
2008-09-08	CWE Content Team	MITRE	Internal
	updated Alternate Terms, Applicable Platforms, Common Consequences, Relationships, Other Notes, Taxonomy Mappings, Weakness Ordinalities		
2008-11-24	CWE Content Team	MITRE	Internal
	updated Relationships, Taxonomy Mappings		
2009-01-12	CWE Content Team	MITRE	Internal
	updated Common Consequences		
2009-10-29	CWE Content Team	MITRE	Internal
	updated Description, Name, Relationships		
2009-12-28	CWE Content Team	MITRE	Internal
	updated Applicable Platforms, Common Consequences, Observed Examples, Other Notes, Potential Mitigations, Theoretical Notes, Weakness Ordinalities		
2010-02-16	CWE Content Team	MITRE	Internal
	updated Applicable Platforms, Demonstrative Examples, Detection Factors, Likelihood of Exploit, Potential Mitigations, References, Related Attack Patterns, Relationships		
2010-04-05	CWE Content Team	MITRE	Internal
	updated Related Attack Patterns		
Previous Entry Names			
Change Date	Previous Entry Name		
2009-10-29	Unchecked Array Indexing		

[BACK TO TOP](#)

## Scanned Languages

Language	Hash Number	Change Date
CPP	4541647240435660	6/19/2024
Common	0105849645654507	6/19/2024