



JORDAN PDF

DMW

Things I do for LOVE

Team : Jordan,
TatyaVinchu, Sergio

ALL RIGHTS RESERVED BY JORDAN TEAM



Join our Telegram Group

UNIT ONE	SUB : 410244 (D) DMW					
Sr. No.	Questions	a	b	c	d	Ans
1	Which of the following applied on warehouse?	write only	read only	both a & b	none	B
2	Data can be store , retriive and updated in ...	SMTOP	OLTP	FTP	OLAP	B
3	Data mining is Extraction of interesting (non-trivial, implicit, previously unknown and potentially useful) information or patterns from data in large databases	TRUE	FALSE			A
4	Data in the real world is	incomplete	inconsitent	noisy	all	D
5	What are Measure of Data Quality	Accuracy	Completeness	Consistency	all	D
6	Data cleaning is fill in missing values, smooth noisy data, identify or remove outliers, and resolve inconsistencies	TRUE	FALSE			A
7	Data integration is Integration of multiple databases, data cubes, or files	TRUE	FALSE			A
8	Data transformation is Normalization and aggregation	TRUE	FALSE			A
9	Data reduction Obtains reduced representation in volume but produces the same or similar analytical results	TRUE	FALSE			A
10	Data discretization is Part of data reduction but with particular importance, especially for numerical data	TRUE	FALSE			A

11	Missing data may be due to	equipment malfunction	inconsistent with other recorded data and thus deleted data not entered due to misunderstanding	certain data may not be considered important at the time of entry	all	D
12	Incorrect attribute values may due to	faulty data collection instruments	data entry problems	data transmission problems	all	D
13	data cleaning is not required for duplicate records	TRUE	FALSE			B
14	Binning method first sort data and partition into (equi-depth) bins	TRUE	FALSE			A
15	Data can be smoothed by fitting the data to a function, such as with regression.	TRUE	FALSE			A
16	Linear regression - involves finding the _____ line to fit two attributes (or variables)	best	average	worst		A
17	Data cleaning is fill in _____ values	existing	missing			B
18	Data integration is Integration of multiple databases, data cubes, or files	TRUE	FALSE			A

19	Data transformation is _____ and aggregation	Normalizati on	Denormali zation			A
20	Data reduction Obtains reduced representation in volume but produces the _____ or similar analytical results	same	different			A
21	Data discretization is Part of data reduction but with particular importance, especially for _____ data	Character	numerical			B
22	Redundant data occur often when integration of multiple databases	TRUE	FALSE			A
23	The same attribute may have different names in different databases	TRUE	FALSE			A
24	Careful integration of the data from multiple sources may help reduce/avoid redundancies and inconsistencies	TRUE	FALSE			A
25	Correlation coefficient is also called Pearson's product moment coefficient	TRUE	FALSE			A
26	Min-max normalization performs a linear transformation on the original data.	TRUE	FALSE			A
27	The values for an attribute, A, are normalized based on the mean and standard deviation of A	Min-max normalizati on	z-score normalizat ion			B
28	The values for an attribute, A, are normalized based on the mean and standard deviation of A in z-score normalization	TRUE	FALSE			A

29	z-score normalization is useful when the actual minimum and maximum of attribute A are unknown	TRUE	FALSE			A
30	Normalization by decimal scaling normalizes by moving the decimal point of values of attribute A.	TRUE	FALSE			A
31	Data reduction obtains a reduced representation of the data set that is much smaller in volume but yet produces the same (or almost the same) analytical results	TRUE	FALSE			A
32	Run Length Encoding is lossless	TRUE	FALSE			A
33	Jpeg compression is	lossy	lossless			A
34	Wavelet Transform Decomposes a signal into different frequency subbands	TRUE	FALSE			A
35	Principal Component Analysis (PCA) is used for dimensionality reduction	TRUE	FALSE			A
36	Normalization by_____ scaling normalizes by moving the decimal point of values of attribute A.	binary	octal	decimal		C
37	Data cube aggregation is normalization	TRUE	FALSE			B
38	ordinal attribute have values from an _____set	ordered	unordered			A
39	Run Length Encoding is	lossy	lossless			B

40	Nominal attribute have values from an _____ set	ordered	unordered			B
----	---	---------	-----------	--	--	----------

Things I do for LUC

UNIT TWO	SUB : 410244 (D) DMW					
Sr. No.	Questions	a	b	c	d	Ans
1	What is the type of relationship in star schema?	many-to-many.	one-to-one	many-to-one	one-to-many	d
2	Fact tables are _____.	completely demoralized.	partially demoralized.	completely normalized.	partially normalized.	c
3	Data warehouse is volatile, because obsolete data are discarded	TRUE	FALSE			b
4	Which is NOT a basic conceptual schema in Data Modeling of Data Warehouses?	Star schema	Tree schema	Snowflake schema	Fact constellations	b
5	Which is NOT a valid OLAP Rule by E.F.Codd?	Accessibility	Transparency	Flexible reporting	Reliability	d
6	Which is NOT a valid layer in Three-layer Data Warehouse Architecture in Conceptual View?	Processed data layer	Real-time data layer	Derived data layer	Reconciled data layer	a
7	Among the types of fact tables which is not a correct type ?	Fact-less fact table	Transaction fact tables	Integration fact tables	Aggregate fact tables	c
8	Among the followings which is not a characteristic of Data Warehouse?	Integrated	Volatile	Time-variant	Subject oriented	b
9	what is not considered as issues in data warehousing?	optimization	data transformation	extraction	inter mediation	d

10	which one is NOT considering as a standard query technique?	Drill-up	Drill-across	DSS	Pivoting	c
11	Among the following which is not a type of business data ?	Real time data	Application data	Reconciled data	Derived data	b
12	A data warehouse is which of the following?	Can be updated by end users.	Contains numerous naming conventions and formats.	Organized around important subject areas.	Contains only current data.	c
13	A snowflake schema is which of the following types of tables?	Fact	Dimension	Helper	All of the above	d
14	The extract process is which of the following?	Capturing all of the data contained in various operational systems	Capturing a subset of the data contained in various operational systems	Capturing all of the data contained in various decision support systems	Capturing a subset of the data contained in various decision support systems	b
15	The generic two-level data warehouse architecture includes which of the following?	At least one data mart	Data that can be extracted from numerous internal and external sources	Near real-time updates	All of the above.	b
16	Which one is correct regarding MOLAP ? A.Data is stored and fetched from the main data warehouse. B.Use complex SQL queries to fetch data from the main warehouse C.Large volume of data is used.	All are incorrect	A and B is correct.	Only C	Only A	a

17	In terms of data warehouse, metadata can be define as, A.Metadata is a road-map to data warehouse B.Metadata in data warehouse defines the warehouse objects. C.Metadata acts as a directory.	A and B is correct	A and C is correct	B is correct	All are incorrect	d
18	In terms of RLOP model, choose the most suitable answer A.The warehouse stores atomic data. B.The application layer generates SQL for the two dimensional view. C.The presentation layer provides the multidimensional view.	A and B is correct	A and C is correct	B & C is correct	All are incorrect	d
19	In the OLAP model, the _____ provides the multidimensional view.	C. Data layer	D. Data link layer	B. Presentation layer	A. Application layer	c
20	Which of the following is not true regarding characteristics of warehoused data?	Changed data will be added as new data	Data warehouse can contains historical data	Obsolete data are discarded	Users can change data once entered into the data warehouse	d
21	ETL is an abbreviation for Elevation, Transformation and Loading	TRUE	FALSE			b
22	which is the core of the multidimensional model that consists of a large set of facts and a number of dimensions?	Multidimensional cube	Data model	Data cube	None of the above	c

23	Which of the following statements is incorrect	ROLAPs have large data volumes	Data form of ROLAP is large multidimensional array made of cubes	MOLAP uses sparse matrix technology to manage data sparsity	Access for MOLAP is faster than ROLAP	b
24	Which of the following standard query techniques increase the granularity	roll-up	drill-down	slicing	dicing	b
25	The full form of OLAP is	Online Analytical Processing	Online Advanced Processing	Online Analytical Performance	Online Advanced Preparation	a
26	Which of the following statements is/are incorrect about ROLAP A) ROLAP fetched data from datawarehouse. B) ROLAP data store as data cubes. C) ROLAP use sparse matrix to manage data sparsity.	A and B	B and C	A and C	A	b
27	_____ is a standard query technique that can be used within OLAP to zoom in to more detailed data by changing dimensions.	Drill-up	Drill-down	Pivoting	Drill-across	b
28	Which of the following statements is/are correct about Fact constellation schema A) Fact constellation schema can be seen as a combination of many star schemas. B) It is possible to create fact constellation schema, for each star schema or snowflake schema. C) Can be identified as a flexible schema for implementation.	A	B	A and C	All of the above	d

29	How to describe the data contained in the data warehouse?	Relational data	Operational data	Meta data	Informational data	c
30	The output of an OLAP query is displayed as a A.Pivot B.Matrix C.Excel	A	A,B	B,C	All of the above	c
31	One can perform Query operations in the data present in Data Warahouse	TRUE	FALSE			a
32	A _____ combines facts from multiple processes into a single fact table and eases the analytic burden on BI applications.	Aggregate fact table	Consolidated fact table	Transaction fact table	Accumulating snapshot fact table	b
33	In OLAP operations, Slicing is the technique of _____	Selecting one particular dimension from a given cube and providing a new sub-cube	Selecting two or more dimensions from a given cube and providing a new sub-cube	Rotating the data axes in order to provide an alternative presentation of data	Performing aggregation on a data cube	a
34	Standalone data marts built by drawing data directly from operational or external sources of data or both are known as independent data marts	TRUE	FALSE			a
35	Focusing on the modeling and analysis of data for decision makers, not on daily operations or transaction processing is known as	Integrated	Time-variant	Subject oriented	Non-volatile	c

36	Most of the time data ware house is A Read B Write	A	B	A and B	None of the above	a
37	Data granularity is ----- of details of data ? A.summarization B.transformation C.level	A & B	B & C	A , B & C	C	d
38	Which one is not a type of fact?	Fully Addictive	Cumulative addictive	Semi Addictive	Non Addictive	c
39	When the level of details of data is reducing the data granularity goes higher	TRUE	FALSE			b
40	Data Warehouses are having summarized and reconciled data which can be used by decision makers	TRUE	FALSE			a
41	_____ refers to the currency and lineage of data in a data warehouse	Operational metadata	Business metadata	Technical metadata	End-User meatdata	a

UNIT THREE	SUB : 410244 (D) DMW					
Sr. No.	Questions	a	b	c	d	Ans
1	Euclidean distance measure is	A stage of the KDD process in which new data is added to the existing selection.	The process of finding a solution for a problem simply by enumerating all possible solutions according to some pre-defined order and then testing them	The distance between two points as calculated using the Pythagoras theorem	None of these	c
2	Hidden knowledge referred to	A set of databases from different vendors, possibly using different database paradigms	An approach to a problem that is not guaranteed to work but performs well in most cases	Information that is hidden in a database and that cannot be recovered by a simple SQL query.	None of these	c

3	Enrichment is	A stage of the KDD process in which new data is added to the existing selection	The process of finding a solution for a problem simply by enumerating all possible solutions according to some pre-defined order and then testing them	The distance between two points as calculated using the Pythagoras theorem	None of these	a
4	A dissimilarity coefficient is metric if it meets the four metric properties, including the triangular inequality for all possible triplets of points in the D matrix	TRUE	FALSE	Both a & b	None of these	a
5	A dissimilarity coefficient is semimetric if it violates the triangular inequality for all possible triplets of point in D matrix	TRUE	FALSE	Both a & b	None of these	b
6	A D coefficient is Euclidean if it always produces D matrices that can be fully represented in Euclidean space without distortion	TRUE	FALSE	Both a & b	None of these	a
7	A non- Euclidean dissimilarity matrix is identified by the criterion that principal coordinate analysis (PCoA) of that matrix produces some negative eigenvalues	TRUE	FALSE	Both a & b	None of these	a
8	Ecologists prefer to remove double zeros from the calculation of (dis)similarity coefficients because double zeros have no clear, unambiguous ecological interpretation	TRUE	FALSE	Both a & b	None of these	a

9	In double-zerosymmetrical coefficients, like the simple matching coefficient, double zeros affect the S or D value	TRUE	FALSE	Both a & b	None of these	a
10	Plane which have set of points satisfying certain relationships, expressible in terms of distance and angle is known as	Euclidean Plane	Dihedral plane	one dimensional plane	zero plane	a
11	Which of the following distance metric can not be used in k-NN?	Manhattan	Minkowski	Tanimoto	All of these	d
12	Which of the following is true about Manhattan distance?	It can be used for continuous variables	It can be used for categorical variables	It can be used for categorical as well as continuous	None of these	a
13	Which of the following will be Euclidean Distance between the two data point A(1,3) and B(2,3)?	1	2	4	8	a
14	Suppose, you want to predict the class of new data point $x=1$ and $y=1$ using euclidian distance in 3-NN. In which class this data point belong to?	+ Class	– Class	cant say	None of these	a
15	Which of the following would be the leave out cross validation accuracy for $k=5$?	(2/14)	(4/14)	(6/14)	None of these	d

16	What is Manhattan distance?	The distance between two points in a vector data layer calculated as the length of the line between them.	The distance between two points in a raster data layer calculated as the number of cells crossed by a straight line between them.	The distance between two points in a raster data layer calculated as the sum of the cell sides intersected by a straight line between them.	None of these	c
17	Which of the following combination is incorrect ?	Continuous – euclidean distance	Continuous – correlation similarity	Binary – manhattan distance	None of the Mentioned	d
18	The two-dimensional Euclidean plane is known as	Euclidean Plane	Dihedral plane	one dimensional plane	zero plane	a
19	The standardised form of Euclidean distance is called as	Manhattan distance	Mahalanobis distance	Dendogram	none of these	b
20	The distance between two points calculated using Pythagoras theorem is	Manhattan	Minkowski	Tanimoto	Euclidean	d
21	Identify the example of Nominal attribute	Temperature	salary	mass	gender	d
22	Nominal and ordinal attributes can be collectively referred to as _____ attributes	Perfect	Qualitative	Consistent	Optimized	b
23	A similarity S and a dissimilarity D matrix have zeros on the main diagonal	TRUE	FALSE	Both a & b	None of these	b

24	The distance between species profiles and the Hellinger, chord, and chi-square distances are Euclidean indices	TRUE	FALSE	Both a & b	None of these	a
25	In most cases, \sqrt{D} or $\sqrt{1-S}$ turns a non-Euclidean matrix to Euclidean	TRUE	FALSE	Both a & b	None of these	a
26	For descriptors with different physical units, the Euclidean distance computed on standardized descriptors makes sense; the distances then have no physical units	TRUE	FALSE	Both a & b	None of these	a
27	A non-Euclidean dissimilarity matrix is identified by the criterion that principal coordinate analysis (PCoA) of that matrix produces some negative eigenvalues	TRUE	FALSE	Both a & b	None of these	a
28	A D coefficient is Euclidean if it always produces D matrices that can be fully represented in Euclidean space without distortion	TRUE	FALSE	Both a & b	None of these	a
29	A similarity S and a dissimilarity D matrix have zeros on the main diagonal	TRUE	FALSE	Both a & b	None of these	b
30are the different types of attributes	nominal	ordinal	interval	All of these	d
31	... are the types of data sets	graph	record	ordered	All of these	d

32	...are the types of ordered data	spatial data	temporal data	sequential data	All of these	d
33	... are the example of data quality problems	missing value	wrong data	duplicate data	All of these	d
34	Numerical measure of how different two data objects are...	similarity measure	dissimilarity measure	Both a & b	none of these	b
35	Numerical measure of how same two data objects are...	similarity measure	dissimilarity measure	Both a & b	none of these	a
36	Combining two or more attributes (or objects) into a single attribute (or object)	Aggregation	Sampling	Transformation	none of these	a
37	Which of the following is true about Manhattan distance?	It can be used for continuous variables	It can be used for categorical variables	It can be used for categorical as well as continuous	None of these	a
38	Sampling is the main technique employed for data reduction	Aggregation	Sampling	Transformation	none of these	b
39	...is the process of converting a continuous attribute into an ordinal attribute	Discretization	Sampling	Transformation	none of these	a

UNIT FOUR	SUB : 410244 (D) DMW					
Sr. No.	Questions	a	b	c	d	Ans
1	What does Apriori algorithm do?	It mines all frequent patterns through pruning rules with lesser	It mines all frequent patterns through pruning rules with higher support	Both a and b	None of these	a
2	What does FP growth algorithm do?	It mines all frequent patterns through pruning rules with lesser support	It mines all frequent patterns through pruning rules with higher support	It mines all frequent patterns by constructing a FP tree	All of these	c
3	What techniques can be used to improve the efficiency of apriori algorithm?	hash based techniques	transaction reduction	Partitioning	All of these	d
4	What do you mean by support(A)?	Total number of transactions containing A	Total Number of transactions not containing A	Number of transactions containing A / Total number of transactions	Number of transactions not containing A / Total number of transactions	c
5	Which of the following is direct application of frequent itemset mining?	Social Network Analysis	Market Basket Analysis	outlier detection	intrusion detection	b

6	What is not true about FP growth algorithms?	It mines frequent itemsets without candidate generation	There are chances that FP trees may not fit in the memory	FP trees are very expensive to build	It expands the original database to build FP trees	d
7	When do you consider an association rule interesting?	If it only satisfies min_support	If it only satisfies min_confidence	If it satisfies both min_support and min_confidence	There are other measures to check so	c
8	What is the difference between absolute and relative support?	Absolute-Minimum support count threshold and Relative-Minimum support	Absolute-Minimum support threshold and Relative-Minimum support count threshold	Both a and b	None of these	a
9	What is the relation between candidate and frequent itemsets?	A candidate itemset is always a frequent itemset	A frequent itemset must be a candidate itemset	No relation between the two	None of these	b
10	Which technique finds the frequent itemsets in just two database scans?	Partitioning	sampling	hashing	None of these	a
11	Which of the following is true?	Both apriori and FP-Growth uses horizontal data format	Both apriori and FP-Growth uses vertical data format	Both a and b	None of these	a
12	What is the principle on which Apriori algorithm work?	If a rule is infrequent, its specialized rules are also infrequent	If a rule is infrequent, its generalized rules are also infrequent	Both a and b	None of these	a

13	Which of these is not a frequent pattern mining algorithm	Apriori	FP growth	Decision trees	Eclat	c
14	Which algorithm requires fewer scans of data?	Apriori	FP growth	Both a and b	None of these	b
15	What are Max_confidence, Cosine similarity, All_confidence?	Frequent pattern mining algorithms	Measures to improve efficiency of apriori	Pattern evaluation measure	None of these	c
16	What are closed itemsets?	An itemset for which at least one proper supert itemset has same support	An item setwhose no proper super-itemset has same support	Both a and b	None of these	b
17	What are closed frequent itemsets?	A closed itemset	A frequent itemset	An itemset which is both closed and frequent	None of these	c
18	What are maximal frequent itemsets?	A frequent itemsetwhose no super-itemset is frequent	A frequent itemset whose super-itemset is also frequent	Both a and b	None of these	a
19	Why is correlation analysis important?	To make apriori memory efficient	To weed out uninteresting frequent itemsets	To find large number of interesting itemsets	To restrict the number of database iterations	b

20	What will happen if support is reduced?	Number of frequent itemsets remains same	Some itemsets will add to the current set of frequent itemsets	Some itemsets will become infrequent while others will become frequent	Can not say	b
21	Can FP growth algorithm be used if FP tree cannot be fit in memory?	Yes	No	Both a and b	None of these	b
22	What is association rule mining?	Same as frequent itemset mining	Finding of strong association rules using frequent itemsets	Both a and b	None of these	b
23	What is frequent pattern growth?	Same as frequent itemset mining	Use of hashing to make discovery of frequent itemsets more efficient	Mining of frequent itemsets without candidate generation	None of these	c
24	When is sub-itemset pruning done?	A frequent itemset 'P' is a proper subset of another frequent itemset 'Q'	Support (P) = Support(Q)	When both a and b is true	When a is true and b is not	c
25	Which of the following is not null invariant measure(that does not considers null transactions)?	all_confidence	max_confidence	cosine measure	lift	d
26	The apriori algorithm works in a ..and ..fashion?	top-down and depth-first	top-down and breath-first	bottom-up and depth-first	bottom-up and breath-first	d

27	Our use of association analysis will yield the same frequent itemsets and strong association rules whether a specific item occurs once or three times in an individual transaction	TRUE	FALSE	Both a and b	None of these	a
28	In association rule mining the generation of the frequent itemsets is the computational intensive step.	TRUE	FALSE	Both a and b	None of these	a
29	The number of iterations in apriori _____	increases with the size of the data	decreases with the increase in size of the data	increases with the size of the maximum frequent set	decreases with increase in size of the maximum frequent set	c
30	Which of the following are interestingness measures for association rules?	recall	lift	accuracy	compactness	b
31	Frequent item sets is	Superset of only closed frequent item sets	Superset of only maximal frequent item sets	Subset of maximal frequent item sets	Superset of both closed frequent item sets and maximal frequent item sets	d

32	Assume that we have a dataset containing information about 200 individuals. A supervised data mining session has discovered the following rule: IF age < 30 & credit card insurance = yes THEN life insurance = yes Rule Accuracy: 70% and Rule Coverage: 63% How many individuals in the class life insurance= no have credit card insurance and are less than 30 years old?	63	30	38	70	c
33	In Apriori algorithm, if 1 item-sets are 100, then the number of candidate 2 item-sets are	100	4950	200	5000	b
34	Significant Bottleneck in the Apriori algorithm is	Finding frequent itemsets	pruning	Candidate generation	Number of iterations	c
35	Which Association Rule would you prefer	High support and medium confidence	High support and low confidence	Low support and high confidence	Low support and low confidence	c
36	The apriori property means	If a set cannot pass a test, its supersets will also fail the same test	To decrease the efficiency, do level-wise generation of frequent item sets	To improve the efficiency, do level-wise generation of frequent item	If a set can pass a test, its supersets will fail the same test	a
37	If an item set 'XYZ' is a frequent item set, then all subsets of that frequent item set are	undefined	not frequent	frequent	cant say	c

38	To determine association rules from frequent item sets	Only minimum confidence needed	Neither support not confidence needed	Both minimum support and confidence are needed	Minimum support is needed	c
39	If {A,B,C,D} is a frequent itemset, candidate rules which is not possible is	$C \rightarrow A$	$D \rightarrow ABCD$	$A \rightarrow BC$	$B \rightarrow ADC$	b
40	What is frequent pattern growth?	Same as frequent itemset mining	Use of hashing to make discovery of frequent itemsets more efficient	Mining of frequent itemsets without candidate generation	None of these	c

**UNIT SUB: 410244 (D) DMW
FIVE**

Sr. No.	Questions	a	b	c	d	Ans
1	Data set {brown, black, blue, green , red} is example of Select one:	a. Continuous attribute	b. Ordinal attribute	c. Numeric attribute		B
2	Which of the following activities is NOT a data mining task? Select one:	a. Predicting the future stock price of a company using historical records	b. Monitoring and predicting failures in a hydropower plant	c. Extracting the frequencies of a sound wave	d. Monitoring the heart rate of a patient for abnormalities	C
3	The difference between supervised learning and unsupervised learning is given by	a. unlike unsupervised learning, supervised learning needs labeled data	b. unlike unsupervised learning, supervised learning can be used to detect outliers	c. there is no difference	d. unlike supervised learning, unsupervised learning can form new classes	A
4	Regression analysis is a form of predictive modelling technique	TRUE	FALSE			A
5	Regression analysis is a form of predictive modelling technique which investigates the relationship between a dependent (target) and independent variable (s) (predictor).	TRUE	FALSE			A

6	Logistic regression should be used when the dependent variable is binary (0/ 1, True/ False, Yes/ No) in nature.	TRUE	FALSE			A
7	Decision Tree is used to build classification and regression models.	TRUE	FALSE			A
8	Sequential Covering Algorithm can be used to extract_____rules form the training data	Do_WHILE	IF-THEN			B
9	Bayesian Belief Network or Bayesian Network or Belief Network is a Probabilistic Graphical Model (PGM) that represents conditional dependencies between random variables through a Directed Acyclic Graph (DAG).	TRUE	FALSE			A
10	In <i>k-NN classification</i> , the output is a class membership.	TRUE	FALSE			A
11	Associative classification integrates_____ and association rule discovery to build classification models (classifiers).	Regression	classification			B
12	BAYESIAN BELIEF NETWORKS To represent the probabilistic relationships between different classes.	TRUE	FALSE			A
13	Regression analysis is a form of _____ modelling technique	definate	predictive			B
14	Regression analysis is used for forecasting, time series modelling and finding the causal effect relationship between the variables.	TRUE	FALSE			A
15	Logistic regression should be used when the _____ variable is binary (0/ 1, True/ False, Yes/ No) in nature.	independent	dependent			B
16	In <i>k-NN regression</i> , the output is the property value for the object.	TRUE	FALSE			A
17	Decision Tree Mining belongs to supervised class learning.	TRUE	FALSE			A

18	A regression equation is a polynomial regression equation if the power of independent variable is more than 1.	TRUE	FALSE			A
19	Decision Tree is used to create data models that will predict class labels or values for the decision-making process.	TRUE	FALSE			A
20	Regression indicates the significant relationships between dependent variable and independent variable.	TRUE	FALSE			A
21	Decision Tree Mining belongs to _____ class learning.	supervised	unsupervised			A
22	A decision tree works for both discrete and continuous variables.	TRUE	FALSE			A
23	Decision tree induction is the method of learning the decision trees from the training set.	TRUE	FALSE			A
24	Case-Based Reasoning (CBR) is used to solve problems by finding similar, past cases and adapting their solutions.	TRUE	FALSE			A
25	The Case-based reasoning CBR process can be described as a cyclic procedure	TRUE	FALSE			A
26	Linear Regression establishes a relationship between dependent variable (Y) and one or more independent variables (X) using a best fit straight line (also known as regression line).	TRUE	FALSE			A
27	Case-based reasoning (CBR) is the process of solving new problems based on the solutions of similar past problems.[TRUE	FALSE			A
28	Sequential Covering Algorithm can be used to extract IF-THEN rules from the training data	TRUE	FALSE			A
29	The Case-based reasoning CBR process can be described as a _____ procedure	cyclic	Random	acyclic	none	A

30	Frequent patterns are itemsets, subsequences, or substructures that appear in a data set with frequency no less than a user-specified threshold.	TRUE	FALSE			A
31	An associative classifier (AC) is a kind of supervised learning model that uses association rules to assign a target value.	TRUE	FALSE			A
32	Regression indicates the significant relationships between dependent variable and independent variable.	TRUE	FALSE			A
33	Decision Tree Mining belongs to _____ class learning.	supervised	unsupervised			A
34	Regression analysis is used for forecasting, time series modelling and finding the causal effect relationship between the variables.	TRUE	FALSE			A
35	Logistic regression should be used when the _____ variable is binary (0/ 1, True/ False, Yes/ No) in nature.	independent	dependent			B
36	Case-based reasoning (CBR) is an experience-based approach to solving new problems by adapting previously successful solutions to similar problems.	TRUE	FALSE			A
37	Regression and classification are categorized under the same umbrella of supervised machine learning.	TRUE	FALSE			A
38	Regression and classification are categorized under _____ machine learning.	supervised	unsupervised			A
39	K-NN is a lazy learner because it doesn't learn a discriminative function from the training data but “memorizes” the training dataset instead	TRUE	FALSE			A
40	In machine learning, lazy learning is a learning method in which generalization of the training data is, in theory, delayed until a query is made to the system	TRUE	FALSE			A

**UNIT SUB : 410244 (D) DMW
SIX**

Sr. No.	Questions	a	b	c	d	Ans
1	The problem of finding hidden structure in unlabeled data is called	Supervised learning	Unsupervised learning	Reinforcement learning	none of the above	b
2	Which of the following is true for Classification?	A subdivision of a set	A measure of the accuracy	The task of assigning a classification	All of these	a
3	Classification and regression are the properties of...	data manipulation	data mining	both A & B	none of the above	b
4	We define a _____ as a subdivision of a set of examples into a number of classes	kingdom	tree	classification	array	c
5	What is inductive learning?	learning by hypothesis	learning by analyzing	learning by generalizing	none of these	c
6	In a multiclass classification problem, Bayes classifier assigns an instance to the class corresponding to:	Highest aposteriori probability	Highest apriori probability	Lowest aposteriori probability	none of these	c
7	Multiclass classifiers are also known as:	Multilabel classifiers	Multinomial classifiers	Multioutput classifiers	none of these	b
8	Task of inferring a model from labeled training data is called	Unsupervised learning	Supervised learning	Reinforcement learning	none of these	b
9	The problem of finding hidden structure in unlabeled data is called unsupervised learning	TRUE	FALSE			a
10	The problem of finding hidden structure in unlabeled data is called supervised learning	TRUE	FALSE			b
11	Multiclass classifiers are also known as Multinomial classifiers	TRUE	FALSE			a

12	Task of inferring a model from labeled training data is called Supervised learning	TRUE	FALSE			a
13	Classification is	A subdivision of a set of examples into a number of classes	A measure of the accuracy, of the classification of a concept that is given by a certain theory	The task of assigning a classification to a set of examples	None of these	a
14	Classification is A subdivision of a set of examples into a number of classes	TRUE	FALSE			a
15	Task of inferring a model from labeled training data is called Unsupervised learning	TRUE	FALSE			b
16	Classification accuracy is	A subdivision of a set of examples into a number of classes	Measure of the accuracy, of the classification of a concept that is given by a certain theory	The task of assigning a classification to a set of examples	None of these	b
17	Classification task referred to	A subdivision of a set of examples into a number of classes	A measure of the accuracy, of the classification of a concept that is given by a certain theory	The task of assigning a classification to a set of examples	None of these	c
18	Hybrid learning is	Machine-learning involving different techniques	The learning algorithmic analyzes the examples on a systematic basis and makes incremental adjustments to the theory that is learned	Learning by generalizing from examples	None of these	a

19	Incremental learning referred to	Machine-learning involving different techniques	The learning algorithmic analyzes the examples on a systematic basis and makes incremental adjustments to the theory that is learned	Learning by generalizing from examples	None of these	b
20	Learning is	The process of finding the right formal representation of a certain body of knowledge in order to represent it in a knowledge-based system	It automatically maps an external signal space into a system's internal representational space. They are useful in the performance of classification tasks.	A process where an individual learns how to carry out a certain task when making a transition from a situation in which the task cannot be carried out to a situation in which the same task under the same circumstances can be carried out.	None of these	c
21	Classification accuracy is Measure of the accuracy, of the classification of a concept that is given by a certain theory	TRUE	FALSE			a

22	Learning algorithm refers to	An algorithm that can learn	A sub-discipline of computer science that deals with the design and implementation of learning algorithms	A machine-learning approach that abstracts from the actual strategy of an individual algorithm and can therefore be applied to any other form of machine learning.	None of these	a
23	Inductive learning is	Machine-learning involving different techniques	The learning algorithm analyzes the examples on a systematic basis and makes incremental adjustments to the theory that is learned	Learning by generalizing from examples	None of these	c

24	Bayesian classifiers is	A class of learning algorithm that tries to find an optimum classification of a set of examples using the probabilistic theory.	Any mechanism employed by a learning system to constrain the search space of a hypothesis	An approach to the design of learning algorithms that is inspired by the fact that when people encounter new situations, they often explain them by reference to familiar experiences, adapting the explanations to fit the new situation.	None of these	a
25	Reinforcement learning is based on goal-directed learning from interaction	TRUE	FALSE			a
26	Classification and regression are the properties Of data mining	TRUE	FALSE			a
27	Multi-perspective learning is needed for multi-perspective decision making.	TRUE	FALSE			a
28	Types of Learning	Supervised learning	Unsupervised learning	both A & B	none of these	c
29	In reinforcement learning,a reward function that is used to define goal in a reinforcement learning problem.	TRUE	FALSE			a
30	In reinforcement learning,a value function that is used to define goal in a reinforcement learning problem.	TRUE	FALSE			b
31	In Supervised learning the decision is made on the initial input or the input given at the start	TRUE	FALSE			a

32	Chess game is example of reinforcement learning	TRUE	FALSE			a
33	Chess game is example of supervised learning	TRUE	FALSE			b
34	In Reinforcement learning decision is dependent	TRUE	FALSE			a
35	Supervised learning the decisions are independent of each other	TRUE	FALSE			a
36	Supervised learning the decisions are independent of each other so labels are given to each decision	TRUE	FALSE			a
37	Supervised learning the decisions are -----of each other so labels are given to each decision.	independent	dependent	both A & B	none of these	a
38	Reward and value function is sub elements of reinforcement learning	TRUE	FALSE			a
39	Reward and value function is not sub elements of reinforcement learning	TRUE	FALSE			b
40	Object recognition is example of supervised learning	TRUE	FALSE			a

Data Mining and Warehouse MCQS with Answer

Multiple Choice Questions.

1. _____ is a subject-oriented, integrated, time-variant, nonvolatile collection of data in support of management decisions.

- A. Data Mining.
- B. Data Warehousing.
- C. Web Mining.
- D. Text Mining.

ANSWER: B

2. The data Warehouse is _____.

- A. read only.
- B. write only.
- C. read write only.
- D. none.

ANSWER: A

3. Expansion for DSS in DW is _____.

- A. Decision Support system.
- B. Decision Single System.
- C. Data Storable System.
- D. Data Support System.

ANSWER: A

4. The important aspect of the data warehouse environment is that data found within the data warehouse is _____.

- A. subject-oriented.
- B. time-variant.
- C. integrated.
- D. All of the above.

ANSWER: D

5. The time horizon in Data warehouse is usually _____.

- A. 1-2 years.
- B. 3-4years.
- C. 5-6 years.
- D. 5-10 years.

ANSWER: D

6. The data is stored, retrieved & updated in _____.

- A. OLAP.
- B. OLTP.
- C. SMTP.
- D. FTP.

ANSWER: B

7. _____ describes the data contained in the data warehouse.

- A. Relational data.
- B. Operational data.
- C. Metadata.
- D. Informational data.

ANSWER: C

8. _____ predicts future trends & behaviors, allowing business managers to make proactive, knowledge-driven decisions.

- A. Data warehouse.

SUB : 410244(D) DMW

- B. Data mining.
- C. Datamarts.
- D. Metadata.

ANSWER: B

9. _____ is the heart of the warehouse.

- A. Data mining database servers.
- B. Data warehouse database servers.
- C. Data mart database servers.
- D. Relational data base servers.

ANSWER: B

10. _____ is the specialized data warehouse database.

- A. Oracle.
- B. DBZ.
- C. Informix.
- D. Redbrick.

ANSWER: D

11. _____ defines the structure of the data held in operational databases and used by operational applications.

- A. User-level metadata.
- B. Data warehouse metadata.
- C. Operational metadata.
- D. Data mining metadata.

ANSWER: C

12. _____ is held in the catalog of the warehouse database system.

- A. Application level metadata.
- B. Algorithmic level metadata.
- C. Departmental level metadata.
- D. Core warehouse metadata.

ANSWER: B

13. _____ maps the core warehouse metadata to business concepts, familiar and useful to end users.

- A. Application level metadata.
- B. User level metadata.
- C. Enduser level metadata.
- D. Core level metadata.

ANSWER: A

14. _____ consists of formal definitions, such as a COBOL layout or a database schema.

- A. Classical metadata.
- B. Transformation metadata.
- C. Historical metadata.
- D. Structural metadata.

ANSWER: A

15. _____ consists of information in the enterprise that is not in classical form.

- A. Mushy metadata.
- B. Differential metadata.
- C. Data warehouse.
- D. Data mining.

ANSWER: A

16. _____ databases are owned by particular departments or business groups.

- A. Informational.
- B. Operational.
- C. Both informational and operational.
- D. Flat.

SUB : 410244(D) DMW

ANSWER: B

17. The star schema is composed of _____ fact table.

- A. one.
- B. two.
- C. three.
- D. four.

ANSWER: A

18. The time horizon in operational environment is _____.

- A. 30-60 days.
- B. 60-90 days.
- C. 90-120 days.
- D. 120-150 days.

ANSWER: B

19. The key used in operational environment may not have an element of _____.

- A. time.
- B. cost.
- C. frequency.
- D. quality.

ANSWER: A

20. Data can be updated in _____ environment.

- A. data warehouse.
- B. data mining.
- C. operational.
- D. informational.

ANSWER: C

21. Record cannot be updated in _____.

- A. OLTP
- B. files
- C. RDBMS
- D. data warehouse

ANSWER: D

22. The source of all data warehouse data is the _____.

- A. operational environment.
- B. informal environment.
- C. formal environment.
- D. technology environment.

ANSWER: A

23. Data warehouse contains _____ data that is never found in the operational environment.

- A. normalized.
- B. informational.
- C. summary.
- D. denormalized.

ANSWER: C

24. The modern CASE tools belong to _____ category.

- A. a. analysis.
- B. b. Development
- C. c. Coding
- D. d. Delivery

ANSWER: A

25. Bill Inmon has estimated _____ of the time required to build a data warehouse, is consumed in the conversion process.

SUB : 410244(D) DMW

- A. 10 percent.
- B. 20 percent.
- C. 40 percent
- D. 80 percent.

ANSWER: D

26. Detail data in single fact table is otherwise known as_____.

- A. monoatomic data.
- B. diatomic data.
- C. atomic data.
- D. multiatomic data.

ANSWER: C

27. _____test is used in an online transactional processing environment.

- A. MEGA.
- B. MICRO.
- C. MACRO.
- D. ACID.

ANSWER: D

28. _____ is a good alternative to the star schema.

- A. Star schema.
- B. Snowflake schema.
- C. Fact constellation.
- D. Star-snowflake schema.

ANSWER: C

29. The biggest drawback of the level indicator in the classic star-schema is that it limits_____.

- A. quantify.
- B. qualify.
- C. flexibility.
- D. ability.

ANSWER: C

30. A data warehouse is _____.

- A. updated by end users.
- B. contains numerous naming conventions and formats
- C. organized around important subject areas.
- D. contains only current data.

ANSWER: C

31. An operational system is _____.

- A. used to run the business in real time and is based on historical data.
- B. used to run the business in real time and is based on current data.
- C. used to support decision making and is based on current data.
- D. used to support decision making and is based on historical data.

ANSWER: B

32. The generic two-level data warehouse architecture includes _____.

- A. at least one data mart.
- B. data that can extracted from numerous internal and external sources.
- C. near real-time updates.
- D. far real-time updates.

ANSWER: C

33. The active data warehouse architecture includes _____

- A. at least one data mart.
- B. data that can extracted from numerous internal and external sources.
- C. near real-time updates.
- D. all of the above.

ANSWER: D

SUB : 410244(D) DMW

34. Reconciled data is _____.

- A. data stored in the various operational systems throughout the organization.
- B. current data intended to be the single source for all decision support systems.
- C. data stored in one operational system in the organization.
- D. data that has been selected and formatted for end-user support applications.

ANSWER: B

35. Transient data is _____.

- A. data in which changes to existing records cause the previous version of the records to be eliminated.
- B. data in which changes to existing records do not cause the previous version of the records to be eliminated.
- C. data that are never altered or deleted once they have been added.
- D. data that are never deleted once they have been added.

ANSWER: A

36. The extract process is _____.

- A. capturing all of the data contained in various operational systems.
- B. capturing a subset of the data contained in various operational systems.
- C. capturing all of the data contained in various decision support systems.
- D. capturing a subset of the data contained in various decision support systems.

ANSWER: B

37. Data scrubbing is _____.

- A. a process to reject data from the data warehouse and to create the necessary indexes.
- B. a process to load the data in the data warehouse and to create the necessary indexes.
- C. a process to upgrade the quality of data after it is moved into a data warehouse.
- D. a process to upgrade the quality of data before it is moved into a data warehouse.

ANSWER: D

38. The load and index is _____.

- A. a process to reject data from the data warehouse and to create the necessary indexes.
- B. a process to load the data in the data warehouse and to create the necessary indexes.
- C. a process to upgrade the quality of data after it is moved into a data warehouse.
- D. a process to upgrade the quality of data before it is moved into a data warehouse.

ANSWER: B

39. Data transformation includes _____.

- A. a process to change data from a detailed level to a summary level.
- B. a process to change data from a summary level to a detailed level.
- C. joining data from one source into various sources of data.
- D. separating data from one source into various sources of data.

ANSWER: A

40. _____ is called a multifield transformation.

- A. Converting data from one field into multiple fields.
- B. Converting data from fields into field.
- C. Converting data from double fields into multiple fields.
- D. Converting data from one field to one field.

ANSWER: A

41. The type of relationship in star schema is _____.

- A. many-to-many.
- B. one-to-one.
- C. one-to-many.
- D. many-to-one.

ANSWER: C

42. Fact tables are _____.

- A. completely demoralized.
- B. partially demoralized.

SUB : 410244(D) DMW

C. completely normalized.

D. partially normalized.

ANSWER: C

43. _____ is the goal of data mining.

A. To explain some observed event or condition.

B. To confirm that data exists.

C. To analyze data for expected relationships.

D. To create a new data warehouse.

ANSWER: A

44. Business Intelligence and data warehousing is used for _____.

A. Forecasting.

B. Data Mining.

C. Analysis of large volumes of product sales data.

D. All of the above.

ANSWER: D

45. The data administration subsystem helps you perform all of the following, except _____.

A. backups and recovery.

B. query optimization.

C. security management.

D. create, change, and delete information.

ANSWER: D

46. The most common source of change data in refreshing a data warehouse is _____.

A. queryable change data.

B. cooperative change data.

C. logged change data.

D. snapshot change data.

ANSWER: A

47. _____ are responsible for running queries and reports against data warehouse tables.

A. Hardware.

B. Software.

C. End users.

D. Middle ware.

ANSWER: C

48. Query tool is meant for _____.

A. data acquisition.

B. information delivery.

C. information exchange.

D. communication.

ANSWER: A

49. Classification rules are extracted from _____.

A. root node.

B. decision tree.

C. siblings.

D. branches.

ANSWER: B

50. Dimensionality reduction reduces the data set size by removing _____.

A. relevant attributes.

B. irrelevant attributes.

C. derived attributes.

D. composite attributes.

ANSWER: B

51. _____ is a method of incremental conceptual clustering.

A. CORBA.

SUB : 410244(D) DMW

- B. OLAP.
- C. COBWEB.
- D. STING.

ANSWER: C

52. Effect of one attribute value on a given class is independent of values of other attribute is called _____.

- A. value independence.
- B. class conditional independence.
- C. conditional independence.
- D. unconditional independence.

ANSWER: A

53. The main organizational justification for implementing a data warehouse is to provide _____.

- A. cheaper ways of handling transportation.
- B. decision support.
- C. storing large volume of data.
- D. access to data.

ANSWER: C

54. Multidimensional database is otherwise known as _____.

- A. RDBMS
- B. DBMS
- C. EXTENDED RDBMS
- D. EXTENDED DBMS

ANSWER: B

55. Data warehouse architecture is based on _____.

- A. DBMS.
- B. RDBMS.
- C. Sybase.
- D. SQL Server.

ANSWER: B

56. Source data from the warehouse comes from _____.

- A. ODS.
- B. TDS.
- C. MDDb.
- D. ORDBMS.

ANSWER: A

57. _____ is a data transformation process.

- A. Comparison.
- B. Projection.
- C. Selection.
- D. Filtering.

ANSWER: D

58. The technology area associated with CRM is _____.

- A. specialization.
- B. generalization.
- C. personalization.
- D. summarization.

ANSWER: C

59. SMP stands for _____.

- A. Symmetric Multiprocessor.
- B. Symmetric Multiprogramming.
- C. Symmetric Metaprogramming.
- D. Symmetric Microprogramming.

ANSWER: A

SUB : 410244(D) DMW

60. _____ are designed to overcome any limitations placed on the warehouse by the nature of the relational data model.

- A. Operational database.
- B. Relational database.
- C. Multidimensional database.
- D. Data repository.

ANSWER: C

61. _____ are designed to overcome any limitations placed on the warehouse by the nature of the relational data model.

- A. Operational database.
- B. Relational database.
- C. Multidimensional database.
- D. Data repository.

ANSWER: C

62. MDDDB stands for _____.

- A. multiple data doubling.
- B. multidimensional databases.
- C. multiple double dimension.
- D. multi-dimension doubling.

ANSWER: B

63. _____ is data about data.

- A. Metadata.
- B. Microdata.
- C. Minidata.
- D. Multidata.

ANSWER: A

64. _____ is an important functional component of the metadata.

- A. Digital directory.
- B. Repository.
- C. Information directory.
- D. Data dictionary.

ANSWER: C

65. EIS stands for _____.

- A. Extended interface system.
- B. Executive interface system.
- C. Executive information system.
- D. Extendable information system.

ANSWER: C

66. _____ is data collected from natural systems.

- A. MRI scan.
- B. ODS data.
- C. Statistical data.
- D. Historical data.

ANSWER: A

67. _____ is an example of application development environments.

- A. Visual Basic.
- B. Oracle.
- C. Sybase.
- D. SQL Server.

ANSWER: A

68. The term that is not associated with data cleaning process is _____.

SUB : 410244(D) DMW

- A. domain consistency.
- B. deduplication.
- C. disambiguation.
- D. segmentation.

ANSWER: D

69. _____ are some popular OLAP tools.

- A. Metacube, Informix.
- B. Oracle Express, Essbase.
- C. HOLAP.
- D. MOLAP.

ANSWER: A

70. Capability of data mining is to build _____ models.

- A. retrospective.
- B. interrogative.
- C. predictive.
- D. imperative.

ANSWER: C

71. _____ is a process of determining the preference of customer's majority.

- A. Association.
- B. Preferencing.
- C. Segmentation.
- D. Classification.

ANSWER: B

72. Strategic value of data mining is _____.

- A. cost-sensitive.
- B. work-sensitive.
- C. time-sensitive.
- D. technical-sensitive.

ANSWER: C

73. _____ proposed the approach for data integration issues.

- A. Ralph Campbell.
- B. Ralph Kimball.
- C. John Raphlin.
- D. James Gosling.

ANSWER: B

74. The terms equality and roll up are associated with _____.

- A. OLAP.
- B. visualization.
- C. data mart.
- D. decision tree.

ANSWER: C

75. Exceptional reporting in data warehousing is otherwise called as _____.

- A. exception.
- B. alerts.
- C. errors.
- D. bugs.

ANSWER: B

76. _____ is a metadata repository.

- A. Prism solution directory manager.
- B. CORBA.
- C. STUNT.
- D. COBWEB.

ANSWER: A

SUB : 410244(D) DMW

77. _____ is an expensive process in building an expert system.

- A. Analysis.
- B. Study.
- C. Design.
- D. Information collection.

ANSWER: D

78. The full form of KDD is _____.

- A. Knowledge database.
- B. Knowledge discovery in database.
- C. Knowledge data house.
- D. Knowledge data definition.

ANSWER: B

79. The first International conference on KDD was held in the year _____.

- A. 1996.
- B. 1997.
- C. 1995.
- D. 1994.

ANSWER: C

80. Removing duplicate records is a process called _____.

- A. recovery.
- B. data cleaning.
- C. data cleansing.
- D. data pruning.

ANSWER: B

81. _____ contains information that gives users an easy-to-understand perspective of the information stored in the data warehouse.

- A. Business metadata.
- B. Technical metadata.
- C. Operational metadata.
- D. Financial metadata.

ANSWER: A

82. _____ helps to integrate, maintain and view the contents of the data warehousing system.

- A. Business directory.
- B. Information directory.
- C. Data dictionary.
- D. Database.

ANSWER: B

83. Discovery of cross-sales opportunities is called _____.

- A. segmentation.
- B. visualization.
- C. correction.
- D. association.

ANSWER: D

84. Data marts that incorporate data mining tools to extract sets of data are called _____.

- A. independent data mart.
- B. dependent data marts.
- C. intra-entry data mart.
- D. inter-entry data mart.

ANSWER: B

85. _____ can generate programs itself, enabling it to carry out new tasks.

- A. Automated system.
- B. Decision making system.

SUB : 410244(D) DMW

- C. Self-learning system.
- D. Productivity system.

ANSWER: D

86. The power of self-learning system lies in _____.

- A. cost.
- B. speed.
- C. accuracy.
- D. simplicity.

ANSWER: C

87. Building the informational database is done with the help of _____.

- A. transformation or propagation tools.
- B. transformation tools only.
- C. propagation tools only.
- D. extraction tools.

ANSWER: A

88. How many components are there in a data warehouse?

- A. two.
- B. three.
- C. four.
- D. five.

ANSWER: D

89. Which of the following is not a component of a data warehouse?

- A. Metadata.
- B. Current detail data.
- C. Lightly summarized data.
- D. Component Key.

ANSWER: D

90. _____ is data that is distilled from the low level of detail found at the current detailed level.

- A. Highly summarized data.
- B. Lightly summarized data.
- C. Metadata.
- D. Older detail data.

ANSWER: B

91. Highly summarized data is _____.

- A. compact and easily accessible.
- B. compact and expensive.
- C. compact and hardly accessible.
- D. compact.

ANSWER: A

92. A directory to help the DSS analyst locate the contents of the data warehouse is seen in _____.

- A. Current detail data.
- B. Lightly summarized data.
- C. Metadata.
- D. Older detail data.

ANSWER: C

93. Metadata contains at least _____.

- A. the structure of the data.
- B. the algorithms used for summarization.
- C. the mapping from the operational environment to the data warehouse.
- D. all of the above.

ANSWER: D

94. Which of the following is not a old detail storage medium?

- A. Phot Optical Storage.

SUB : 410244(D) DMW

- B. RAID.
- C. Microfinche.
- D. Pen drive.

ANSWER: D

95. The data from the operational environment enter _____ of data warehouse.

- A. Current detail data.
- B. Older detail data.
- C. Lightly summarized data.
- D. Highly summarized data.

ANSWER: A

96. The data in current detail level resides till _____ event occurs.

- A. purge.
- B. summarization.
- C. archived.
- D. all of the above.

ANSWER: D

97. The dimension tables describe the _____.

- A. entities.
- B. facts.
- C. keys.
- D. units of measures.

ANSWER: B

98. The granularity of the fact is the _____ of detail at which it is recorded.

- A. transformation.
- B. summarization.
- C. level.
- D. transformation and summarization.

ANSWER: C

99. Which of the following is not a primary grain in analytical modeling?

- A. Transaction.
- B. Periodic snapshot.
- C. Accumulating snapshot.
- D. All of the above.

ANSWER: B

100. Granularity is determined by _____.

- A. number of parts to a key.
- B. granularity of those parts.
- C. both A and B.
- D. none of the above.

ANSWER: C

101. _____ of data means that the attributes within a given entity are fully dependent on the entire primary key of the entity.

- A. Additivity.
- B. Granularity.
- C. Functional dependency.
- D. Dimensionality.

ANSWER: C

102. A fact is said to be fully additive if _____.

- A. it is additive over every dimension of its dimensionality.
- B. additive over atleast one but not all of the dimensions.
- C. not additive over any dimension.
- D. None of the above.

SUB : 410244(D) DMW

ANSWER: A

103. A fact is said to be partially additive if _____.

- A. it is additive over every dimension of its dimensionality.
- B. additive over atleast one but not all of the dimensions.
- C. not additive over any dimension.
- D. None of the above.

ANSWER: B

104. A fact is said to be non-additive if _____.

- A. it is additive over every dimension of its dimensionality.
- B. additive over atleast one but not all of the dimensions.
- C. not additive over any dimension.
- D. None of the above.

ANSWER: C

105. Non-additive measures can often combined with additive measures to create new _____.

- A. additive measures.
- B. non-additive measures.
- C. partially additive.
- D. All of the above.

ANSWER: A

106. A fact representing cumulative sales units over a day at a store for a product is a _____.

- A. additive fact.
- B. fully additive fact.
- C. partially additive fact.
- D. non-additive fact.

ANSWER: B

107. _____ of data means that the attributes within a given entity are fully dependent on the entire primary key of the entity.

- A. Additivity.
- B. Granularity.
- C. Functional Dependency.
- D. Dependency.

ANSWER: C

108. Which of the following is the other name of Data mining?

- A. Exploratory data analysis.
- B. Data driven discovery.
- C. Deductive learning.
- D. All of the above.

ANSWER: D

109. Which of the following is a predictive model?

- A. Clustering.
- B. Regression.
- C. Summarization.
- D. Association rules.

ANSWER: B

110. Which of the following is a descriptive model?

- A. Classification.
- B. Regression.
- C. Sequence discovery.
- D. Association rules.

ANSWER: C

111. A _____ model identifies patterns or relationships.

- A. Descriptive.

SUB : 410244(D) DMW

- B. Predictive.
- C. Regression.
- D. Time series analysis.

ANSWER: A

112. A predictive model makes use of _____.

- A. current data.
- B. historical data.
- C. both current and historical data.
- D. assumptions.

ANSWER: B

113. _____ maps data into predefined groups.

- A. Regression.
- B. Time series analysis
- C. Prediction.
- D. Classification.

ANSWER: D

114. _____ is used to map a data item to a real valued prediction variable.

- A. Regression.
- B. Time series analysis.
- C. Prediction.
- D. Classification.

ANSWER: B

115. In _____, the value of an attribute is examined as it varies over time.

- A. Regression.
- B. Time series analysis.
- C. Sequence discovery.
- D. Prediction.

ANSWER: B

116. In _____ the groups are not predefined.

- A. Association rules.
- B. Summarization.
- C. Clustering.
- D. Prediction.

ANSWER: C

117. Link Analysis is otherwise called as _____.

- A. affinity analysis.
- B. association rules.
- C. both A & B.
- D. Prediction.

ANSWER: C

118. _____ is a the input to KDD.

- A. Data.
- B. Information.
- C. Query.
- D. Process.

ANSWER: A

119. The output of KDD is _____.

- A. Data.
- B. Information.
- C. Query.
- D. Useful information.

ANSWER: D

120. The KDD process consists of _____ steps.

SUB : 410244(D) DMW

- A. three.
- B. four.
- C. five.
- D. six.

ANSWER: C

121. Treating incorrect or missing data is called as _____.

- A. selection.
- B. preprocessing.
- C. transformation.
- D. interpretation.

ANSWER: B

122. Converting data from different sources into a common format for processing is called as _____.

- A. selection.
- B. preprocessing.
- C. transformation.
- D. interpretation.

ANSWER: C

123. Various visualization techniques are used in _____ step of KDD.

- A. selection.
- B. transformaiion.
- C. data mining.
- D. interpretation.

ANSWER: D

124. Extreme values that occur infrequently are called as _____.

- A. outliers.
- B. rare values.
- C. dimensionality reduction.
- D. All of the above.

ANSWER: A

125. Box plot and scatter diagram techniques are _____.

- A. Graphical.
- B. Geometric.
- C. Icon-based.
- D. Pixel-based.

ANSWER: B

126. _____ is used to proceed from very specific knowledge to more general information.

- A. Induction.
- B. Compression.
- C. Approximation.
- D. Substitution.

ANSWER: A

127. Describing some characteristics of a set of data by a general model is viewed as _____.

- A. Induction.
- B. Compression.
- C. Approximation.
- D. Summarization.

ANSWER: B

128. _____ helps to uncover hidden information about the data.

- A. Induction.
- B. Compression.
- C. Approximation.

SUB : 410244(D) DMW

D. Summarization.

ANSWER: C

129. _____ are needed to identify training data and desired results.

A. Programmers.

B. Designers.

C. Users.

D. Administrators.

ANSWER: C

130. Overfitting occurs when a model _____.

A. does fit in future states.

B. does not fit in future states.

C. does fit in current state.

D. does not fit in current state.

ANSWER: B

131. The problem of dimensionality curse involves _____.

A. the use of some attributes may interfere with the correct completion of a data mining task.

B. the use of some attributes may simply increase the overall complexity.

C. some may decrease the efficiency of the algorithm.

D. All of the above.

ANSWER: D

132. Incorrect or invalid data is known as _____.

A. changing data.

B. noisy data.

C. outliers.

D. missing data.

ANSWER: B

133. ROI is an acronym of _____.

A. Return on Investment.

B. Return on Information.

C. Repetition of Information.

D. Runtime of Instruction

ANSWER: A

134. The _____ of data could result in the disclosure of information that is deemed to be confidential.

A. authorized use.

B. unauthorized use.

C. authenticated use.

D. unauthenticated use.

ANSWER: B

135. _____ data are noisy and have many missing attribute values.

A. Preprocessed.

B. Cleaned.

C. Real-world.

D. Transformed.

ANSWER: C

136. The rise of DBMS occurred in early _____.

A. 1950's.

B. 1960's

C. 1970's

D. 1980's.

ANSWER: C

137. SQL stand for _____.

A. Standard Query Language.

SUB : 410244(D) DMW

- B. Structured Query Language.
- C. Standard Quick List.
- D. Structured Query list.

ANSWER: B

138. Which of the following is not a data mining metric?

- A. Space complexity.
- B. Time complexity.
- C. ROI.
- D. All of the above.

ANSWER: D

139. Reducing the number of attributes to solve the high dimensionality problem is called as _____.

- A. dimensionality curse.
- B. dimensionality reduction.
- C. cleaning.
- D. Overfitting.

ANSWER: B

140. Data that are not of interest to the data mining task is called as _____.

- A. missing data.
- B. changing data.
- C. irrelevant data.
- D. noisy data.

ANSWER: C

141. _____ are effective tools to attack the scalability problem.

- A. Sampling.
- B. Parallelization
- C. Both A & B.
- D. None of the above.

ANSWER: C

142. Market-basket problem was formulated by _____.

- A. Agrawal et al.
- B. Steve et al.
- C. Toda et al.
- D. Simon et al.

ANSWER: A

143. Data mining helps in _____.

- A. inventory management.
- B. sales promotion strategies.
- C. marketing strategies.
- D. All of the above.

ANSWER: D

144. The proportion of transaction supporting X in T is called _____.

- A. confidence.
- B. support.
- C. support count.
- D. All of the above.

ANSWER: B

145. The absolute number of transactions supporting X in T is called _____.

- A. confidence.
- B. support.
- C. support count.
- D. None of the above.

ANSWER: C

SUB : 410244(D) DMW

146. The value that says that transactions in D that support X also support Y is called _____.

- A. confidence.
- B. support.
- C. support count.
- D. None of the above.

ANSWER: A

147. If T consist of 500000 transactions, 20000 transaction contain bread, 30000 transaction contain jam,

10000 transaction contain both bread and jam. Then the support of bread and jam is _____.

- A. 2%
- B. 20%
- C. 3%
- D. 30%

ANSWER: A

148. 7 If T consist of 500000 transactions, 20000 transaction contain bread, 30000 transaction contain jam,

10000 transaction contain both bread and jam. Then the confidence of buying bread with jam is _____.

- A. 33.33%
- B. 66.66%
- C. 45%
- D. 50%

ANSWER: D

149. The left hand side of an association rule is called _____.

- A. consequent.
- B. onset.
- C. antecedent.
- D. precedent.

ANSWER: C

150. The right hand side of an association rule is called _____.

- A. consequent.
- B. onset.
- C. antecedent.
- D. precedent.

ANSWER: A

151. Which of the following is not a desirable feature of any efficient algorithm?

- A. to reduce number of input operations.
- B. to reduce number of output operations.
- C. to be efficient in computing.
- D. to have maximal code length.

ANSWER: D

152. All set of items whose support is greater than the user-specified minimum support are called as _____.

- A. border set.
- B. frequent set.
- C. maximal frequent set.
- D. lattice.

ANSWER: B

153. If a set is a frequent set and no superset of this set is a frequent set, then it is called _____.

- A. maximal frequent set.
- B. border set.
- C. lattice.

SUB : 410244(D) DMW

D. infrequent sets.

ANSWER: A

154. Any subset of a frequent set is a frequent set. This is _____.

- A. Upward closure property.
- B. Downward closure property.
- C. Maximal frequent set.
- D. Border set.

ANSWER: B

155. Any superset of an infrequent set is an infrequent set. This is _____.

- A. Maximal frequent set.
- B. Border set.
- C. Upward closure property.
- D. Downward closure property.

ANSWER: C

156. If an itemset is not a frequent set and no superset of this is a frequent set, then it is _____.

- A. Maximal frequent set
- B. Border set.
- C. Upward closure property.
- D. Downward closure property.

ANSWER: B

157. A priori algorithm is otherwise called as _____.

- A. width-wise algorithm.
- B. level-wise algorithm.
- C. pincer-search algorithm.
- D. FP growth algorithm.

ANSWER: B

158. The A Priori algorithm is a _____.

- A. top-down search.
- B. breadth first search.
- C. depth first search.
- D. bottom-up search.

ANSWER: D

159. The first phase of A Priori algorithm is _____.

- A. Candidate generation.
- B. Itemset generation.
- C. Pruning.
- D. Partitioning.

ANSWER: A

160. The second phase of A Priori algorithm is _____.

- A. Candidate generation.
- B. Itemset generation.
- C. Pruning.
- D. Partitioning.

ANSWER: C

161. The _____ step eliminates the extensions of (k-1)-itemsets which are not found to be frequent, from being considered for counting support.

- A. Candidate generation.
- B. Pruning.
- C. Partitioning.
- D. Itemset eliminations.

ANSWER: B

162. The a priori frequent itemset discovery algorithm moves _____ in the lattice.

SUB : 410244(D) DMW

- A. upward.
- B. downward.
- C. breadthwise.
- D. both upward and downward.

ANSWER: A

163. After the pruning of a priori algorithm, _____ will remain.

- A. Only candidate set.
- B. No candidate set.
- C. Only border set.
- D. No border set.

ANSWER: B

164. The number of iterations in a priori _____.

- A. increases with the size of the maximum frequent set.
- B. decreases with increase in size of the maximum frequent set.
- C. increases with the size of the data.
- D. decreases with the increase in size of the data.

ANSWER: A

165. MFCS is the acronym of _____.

- A. Maximum Frequency Control Set.
- B. Minimal Frequency Control Set.
- C. Maximal Frequent Candidate Set.
- D. Minimal Frequent Candidate Set.

ANSWER: C

166. Dynamuc Itemset Counting Algorithm was proposed by _____.

- A. Bin et al.
- B. Argawal et at.
- C. Toda et al.
- D. Simon et at.

ANSWER: A

167. Itemsets in the _____ category of structures have a counter and the stop number with them.

- A. Dashed.
- B. Circle.
- C. Box.
- D. Solid.

ANSWER: A

168. The itemsets in the _____ category structures are not subjected to any counting.

- A. Dashes.
- B. Box.
- C. Solid.
- D. Circle.

ANSWER: C

169. Certain itemsets in the dashed circle whose support count reach support value during an iteration

move into the _____.

- A. Dashed box.
- B. Solid circle.
- C. Solid box.
- D. None of the above.

ANSWER: A

170. Certain itemsets enter afresh into the system and get into the _____, which are essentially the

supersets of the itemsets that move from the dashed circle to the dashed box.

- A. Dashed box.

SUB : 410244(D) DMW

- B. Solid circle.
- C. Solid box.
- D. Dashed circle.

ANSWER: D

171. The itemsets that have completed on full pass move from dashed circle to _____.

- A. Dashed box.
- B. Solid circle.
- C. Solid box.
- D. None of the above.

ANSWER: B

172. The FP-growth algorithm has _____ phases.

- A. one.
- B. two.
- C. three.
- D. four.

ANSWER: B

173. A frequent pattern tree is a tree structure consisting of _____.

- A. an item-prefix-tree.
- B. a frequent-item-header table.
- C. a frequent-item-node.
- D. both A & B.

ANSWER: D

174. The non-root node of item-prefix-tree consists of _____ fields.

- A. two.
- B. three.
- C. four.
- D. five.

ANSWER: B

175. The frequent-item-header-table consists of _____ fields.

- A. only one.
- B. two.
- C. three.
- D. four.

ANSWER: B

176. The paths from root node to the nodes labelled 'a' are called _____.

- A. transformed prefix path.
- B. suffix subpath.
- C. transformed suffix path.
- D. prefix subpath.

ANSWER: D

177. The transformed prefix paths of a node 'a' form a truncated database of pattern which co-occur with a _____ is called _____.

- A. suffix path.
- B. FP-tree.
- C. conditional pattern base.
- D. prefix path.

ANSWER: C

178. The goal of _____ is to discover both the dense and sparse regions of a data set.

- A. Association rule.
- B. Classification.
- C. Clustering.
- D. Genetic Algorithm.

SUB : 410244(D) DMW

ANSWER: C

179. Which of the following is a clustering algorithm?

- A. A priori.
- B. CLARA.
- C. Pincer-Search.
- D. FP-growth.

ANSWER: B

180. _____ clustering technique start with as many clusters as there are records, with each cluster having only one record.

- A. Agglomerative.
- B. divisive.
- C. Partition.
- D. Numeric.

ANSWER: A

181. _____ clustering techniques starts with all records in one cluster and then try to split that cluster into small pieces.

- A. Agglomerative.
- B. Divisive.
- C. Partition.
- D. Numeric.

ANSWER: B

182. Which of the following is a data set in the popular UCI machine-learning repository?

- A. CLARA.
- B. CACTUS.
- C. STIRR.
- D. MUSHROOM.

ANSWER: D

183. In _____ algorithm each cluster is represented by the center of gravity of the cluster.

- A. k-medoid.
- B. k-means.
- C. STIRR.
- D. ROCK.

ANSWER: B

184. In _____ each cluster is represented by one of the objects of the cluster located near the center.

- A. k-medoid.
- B. k-means.
- C. STIRR.
- D. ROCK.

ANSWER: A

185. Pick out a k-medoid algorithm.

- A. DBSCAN.
- B. BIRCH.
- C. PAM.
- D. CURE.

ANSWER: C

186. Pick out a hierarchical clustering algorithm.

- A. DBSCAN
- B. BIRCH.
- C. PAM.

SUB : 410244(D) DMW

D. CURE.

ANSWER: A

187. CLARANS stands for _____.

A. CLARA Net Server.

B. Clustering Large Application RAnge Network Search.

C. Clustering Large Applications based on RANdomized Search.

D. CLustering Application Randomized Search.

ANSWER: C

188. BIRCH is a _____.

A. agglomerative clustering algorithm.

B. hierarchical algorithm.

C. hierarchical-agglomerative algorithm.

D. divisive.

ANSWER: C

189. The cluster features of different subclusters are maintained in a tree called _____.

A. CF tree.

B. FP tree.

C. FP growth tree.

D. B tree.

ANSWER: A

190. The _____ algorithm is based on the observation that the frequent sets are normally very few in

number compared to the set of all itemsets.

A. A priori.

B. Clustering.

C. Association rule.

D. Partition.

ANSWER: D

191. The partition algorithm uses _____ scans of the databases to discover all frequent sets.

A. two.

B. four.

C. six.

D. eight.

ANSWER: A

192. The basic idea of the apriori algorithm is to generate _____ item sets of a particular size & scans

the database.

A. candidate.

B. primary.

C. secondary.

D. superkey.

ANSWER: A

193. _____ is the most well known association rule algorithm and is used in most commercial products.

A. Apriori algorithm.

B. Partition algorithm.

C. Distributed algorithm.

D. Pincer-search algorithm.

ANSWER: A

194. An algorithm called _____ is used to generate the candidate item sets for each pass after the first.

A. apriori.

B. apriori-gen.

SUB : 410244(D) DMW

C. sampling.

D. partition.

ANSWER: B

195. The basic partition algorithm reduces the number of database scans to _____ & divides it into

partitions.

A. one.

B. two.

C. three.

D. four.

ANSWER: B

196. _____ and prediction may be viewed as types of classification.

A. Decision.

B. Verification.

C. Estimation.

D. Illustration.

ANSWER: C

197. _____ can be thought of as classifying an attribute value into one of a set of possible classes.

A. Estimation.

B. Prediction.

C. Identification.

D. Clarification.

ANSWER: B

198. Prediction can be viewed as forecasting a _____ value.

A. non-continuous.

B. constant.

C. continuous.

D. variable.

ANSWER: C

199. _____ data consists of sample input data as well as the classification assignment for the data.

A. Missing.

B. Measuring.

C. Non-training.

D. Training.

ANSWER: D

200. Rule based classification algorithms generate _____ rule to perform the classification.

A. if-then.

B. while.

C. do while.

D. switch.

ANSWER: A

201. _____ are a different paradigm for computing which draws its inspiration from neuroscience.

A. Computer networks.

B. Neural networks.

C. Mobile networks.

D. Artificial networks.

ANSWER: B

202. The human brain consists of a network of _____.

A. neurons.

B. cells.

SUB : 410244(D) DMW

C. Tissue.

D. muscles.

ANSWER: A

203. Each neuron is made up of a number of nerve fibres called _____.

A. electrons.

B. molecules.

C. atoms.

D. dendrites.

ANSWER: D

204. The _____ is a long, single fibre that originates from the cell body.

A. axon.

B. neuron.

C. dendrites.

D. strands.

ANSWER: A

205. A single axon makes _____ of synapses with other neurons.

A. ones.

B. hundreds.

C. thousands.

D. millions.

ANSWER: C

206. _____ is a complex chemical process in neural networks.

A. Receiving process.

B. Sending process.

C. Transmission process.

D. Switching process.

ANSWER: C

207. _____ is the connectivity of the neuron that give simple devices their real power. a. b. c. d.

A. Water.

B. Air.

C. Power.

D. Fire.

ANSWER: D

208. _____ are highly simplified models of biological neurons.

A. Artificial neurons.

B. Computational neurons.

C. Biological neurons.

D. Technological neurons.

ANSWER: A

209. The biological neuron's _____ is a continuous function rather than a step function.

A. read.

B. write.

C. output.

D. input.

ANSWER: C

210. The threshold function is replaced by continuous functions called _____ functions.

A. activation.

B. deactivation.

C. dynamic.

D. standard.

ANSWER: A

211. The sigmoid function also knows as _____ functions.

A. regression.

SUB : 410244(D) DMW

- B. logistic.
- C. probability.
- D. neural.

ANSWER: B

212. MLP stands for _____.

- A. mono layer perception.
- B. many layer perception.
- C. more layer perception.
- D. multi layer perception.

ANSWER: D

213. In a feed- forward networks, the connctions between layers are _____ from input to output.

- A. bidirectional.
- B. unidirectional.
- C. multidirectional.
- D. directional.

ANSWER: B

214. The network topology is constrained to be _____.

- A. feedforward.
- B. feedbackward.
- C. feed free.
- D. feed busy.

ANSWER: A

215. RBF stands for _____.

- A. Radial basis function.
- B. Radial bio function.
- C. Radial big function.
- D. Radial bi function.

ANSWER: A

216. RBF have only _____ hidden layer.

- A. four.
- B. three.
- C. two.
- D. one.

ANSWER: D

217. RBF hidden layer units have a receptive field which has a _____; that is, a particular input

value at which they have a maximal output.

- A. top.
- B. bottom.
- C. centre.
- D. border.

ANSWER: C

218. _____ training may be used when a clear link between input data sets and target output values

does not exist.

- A. Competitive.
- B. Perception.
- C. Supervised.
- D. Unsupervised.

ANSWER: D

219. _____ employs the supervised mode of learning.

- A. RBF.

SUB : 410244(D) DMW

- B. MLP.
- C. MLP & RBF.
- D. ANN.

ANSWER: C

220. _____ design involves deciding on their centres and the sharpness of their Gaussians.

- A. DR.
- B. AND.
- C. XOR.
- D. RBF.

ANSWER: D

221. _____ is the most widely applied neural network technique.

- A. ABC.
- B. PLM.
- C. LMP.
- D. MLP.

ANSWER: D

222. SOM is an acronym of _____.

- A. self-organizing map.
- B. self origin map.
- C. single organizing map.
- D. simple origin map.

ANSWER: A

223. _____ is one of the most popular models in the unsupervised framework.

- A. SOM.
- B. SAM.
- C. OSM.
- D. MSO.

ANSWER: A

224. The actual amount of reduction at each learning step may be guided by _____.

- A. learning cost.
- B. learning level.
- C. learning rate.
- D. learning time.

ANSWER: C

225. The SOM was a neural network model developed by _____.

- A. Simon King.
- B. Teuvokohonen.
- C. Tomoki Toda.
- D. Julia.

ANSWER: B

226. SOM was developed during _____.

- A. 1970-80.
- B. 1980-90.
- C. 1990 -60.
- D. 1979 -82.

ANSWER: D

227. Investment analysis used in neural networks is to predict the movement of _____ from previous data.

- A. engines.
- B. stock.
- C. patterns.

SUB : 410244(D) DMW

D. models.

ANSWER: B

228. SOMs are used to cluster a specific _____ dataset containing information about the patient's drugs etc.

A. physical.

B. logical.

C. medical.

D. technical.

ANSWER: C

229. GA stands for _____.

A. Genetic algorithm

B. Gene algorithm.

C. General algorithm.

D. Geo algorithm.

ANSWER: A

230. GA was introduced in the year _____.

A. 1955.

B. 1965.

C. 1975.

D. 1985.

ANSWER: C

231. Genetic algorithms are search algorithms based on the mechanics of natural _____.

A. systems.

B. genetics.

C. logistics.

D. statistics.

ANSWER: B

232. GAs were developed in the early _____.

A. 1970.

B. 1960.

C. 1950.

D. 1940.

ANSWER: A

233. The RSES system was developed in _____.

A. Poland.

B. Italy.

C. England.

D. America.

ANSWER: A

234. Crossover is used to _____.

A. recombine the population's genetic material.

B. introduce new genetic structures in the population.

C. to modify the population's genetic material.

D. All of the above.

ANSWER: A

235. The mutation operator _____.

A. recombine the population's genetic material.

B. introduce new genetic structures in the population.

C. to modify the population's genetic material.

D. All of the above.

ANSWER: B

236. Which of the following is an operation in genetic algorithm?

SUB : 410244(D) DMW

- A. Inversion.
- B. Dominance.
- C. Genetic edge recombination.
- D. All of the above.

ANSWER: D

237. _____ is a system created for rule induction.

- A. RBS.
- B. CBS.
- C. DBS.
- D. LERS.

ANSWER: D

238. NLP stands for _____.

- A. Non Language Process.
- B. Nature Level Program.
- C. Natural Language Page.
- D. Natural Language Processing.

ANSWER: D

239. Web content mining describes the discovery of useful information from the _____ contents.

- A. text.
- B. web.
- C. page.
- D. level.

ANSWER: B

240. Research on mining multi-types of data is termed as _____ data.

- A. graphics.
- B. multimedia.
- C. meta.
- D. digital.

ANSWER: B

241. _____ mining is concerned with discovering the model underlying the link structures of the web.

- A. Data structure.
- B. Web structure.
- C. Text structure.
- D. Image structure.

ANSWER: B

242. _____ is the way of studying the web link structure.

- A. Computer network.
- B. Physical network.
- C. Social network.
- D. Logical network.

ANSWER: C

243. The _____ propose a measure of standing a node based on path counting.

- A. open web.
- B. close web.
- C. link web.
- D. hidden web.

ANSWER: B

244. In web mining, _____ is used to find natural groupings of users, pages, etc.

- A. clustering.
- B. associations.
- C. sequential analysis.
- D. classification.

SUB : 410244(D) DMW

ANSWER: A

245. In web mining, _____ is used to know the order in which URLs tend to be accessed.

- A. clustering.
- B. associations.
- C. sequential analysis.
- D. classification.

ANSWER: C

246. In web mining, _____ is used to know which URLs tend to be requested together.

- A. clustering.
- B. associations.
- C. sequential analysis.
- D. classification.

ANSWER: B

247. _____ describes the discovery of useful information from the web contents.

- A. Web content mining.
- B. Web structure mining.
- C. Web usage mining.
- D. All of the above.

ANSWER: A

248. _____ is concerned with discovering the model underlying the link structures of the web.

- A. Web content mining.
- B. Web structure mining.
- C. Web usage mining.
- D. All of the above.

ANSWER: B

249. The _____ engine for a data warehouse supports query-triggered usage of data

- A. NNTP
- B. SMTP
- C. OLAP
- D. POP

ANSWER: C

250. _____ displays of data such as maps, charts and other graphical representation allow data to be presented compactly to the users.

- A. Hidden
- B. Visual
- C. Obscured
- D. Concealed

ANSWER: B

Name of the Teacher: V. R. Vasekar	
Class: BE AY: 2020-21	Subject: Data Mining and Warehousing SEM: I
UNIT-1	
1)	Binary attribute are
	<ul style="list-style-type: none"> a) This takes only two values. In general, these values will be 0 and 1 and they can be coded as one bit b) The natural environment of a certain species c) Systems that can be used without knowledge of internal operations d) None of these
Ans:	a
Explanation:	All statement are true about Machine Learning.
2)	"Efficiency and scalability of data mining algorithms" issues come under?
	<ul style="list-style-type: none"> a) Mining Methodology and User Interaction Issues b) Performance Issues c) Diverse Data Types Issues d) None of the above
Ans:	b
Explanation:	In order to effectively extract the information from huge amount of data in databases, data mining algorithm must be efficient and scalable.
3)	_____ is not a data mining functionality?
	<ul style="list-style-type: none"> a) Clustering and Analysis b) Selection and interpretation c) Classification and regression d) Characterization and Discrimination
Ans:	b
Explanation:	Selection and interpretation
4)	_____ is the output of KDD
	<ul style="list-style-type: none"> a) Query b) Data c) Useful Information d) information
Ans:	c
Explanation:	Useful Information
5)	Which of the following is not belong to data mining? it is unsupervised learning ?
	<ul style="list-style-type: none"> a) Knowledge extraction b) Data archaeology c) Data exploration d) Data transformation

Ans:	d
Explanation:	Data transformation
6)	Which of the following is the right approach to Data Mining?
	e) Infrastructure, exploration, analysis, exploitation, interpretation f) Infrastructure, exploration, analysis, interpretation, exploitation g) Infrastructure, analysis, exploration, interpretation, exploitation None of these
Ans:	b
Explanation:	Infrastructure, exploration, analysis, interpretation, exploitation
7)	Background knowledge referred to
	a) Additional acquaintance used by a learning algorithm to facilitate the learning process b) A neural network that makes use of a hidden layer c) It is a form of automatic learning. d) None of these
Ans:	a
Explanation:	Additional acquaintance used by a learning algorithm to facilitate the learning process
8)	Data mining is
	a) The actual discovery phase of a knowledge discovery process b) The stage of selecting the right data for a KDD process c) A subject-oriented integrated time variant non-volatile collection of data in support of management d) None of these
Ans:	a
Explanation:	The actual discovery phase of a knowledge discovery process
09)	Data selection is
	a) The actual discovery phase of a knowledge discovery process b) The stage of selecting the right data for a KDD process c) A subject-oriented integrated time variant non-volatile collection of data in support of management d) None of these
Ans:	b
Explanation:	The stage of selecting the right data for a KDD process
10)	The Example of nominal attribute is
	a) Hair_color b) smoker c) temperature d) drink size

Ans:	a
Explanation:	Nominal means “relating to names.” The values of a nominal attribute are symbols or names of things
11)	The Example of binary attribute is
	<ul style="list-style-type: none"> a) gender b) drink_size c) tempertaure d) professionl_rank
Ans	b
Explanation:	A binary attribute is a nominal attribute with only two categories or states:0 or1
12)	The Example of ordinary attribute is
	<ul style="list-style-type: none"> a) Years_of_experience b) age c) occupation d) customer_id
Ans:	b
Explanation:	An ordinal attribute is an attribute with possible values that have a meaningful order or ranking among them
13)	Data cleaning includes ____
	<ul style="list-style-type: none"> a. Handling missing values and noisy data b. Reduction of attributes c. Relevant attribute selection d. Sample data selection
Ans:	a
Explanation:	Data cleaning (or data cleansing) routines attempt to fill in missing values, smooth out noise while identifying outliers, and correct inconsistencies in the data.
14)	To deal with missing values, the following strategy is used__
	<ul style="list-style-type: none"> e. Use a measure of central tendency f. Reduction of attribute g. Sample data selection h. Data converted into other form
Ans:	a
Explanation:	measures of central tendency, which indicate the “middle” value of a data distribution
15)	Noise is ____
	<ul style="list-style-type: none"> a) Missing value from dataset b) Inaccurate data c) a random error or variance in a measured variable d) the data whose value known to user
Ans:	c
Explanation:	

16)	At the time of data integration following problem occurs____
	<ul style="list-style-type: none"> a) Selection of proper values b) Raw data conversion c) Entity identification d) Attribute subset selection
Ans:	c
Explanation:	Schema integration and object matching can be tricky.
17)	Which of the following is not example of data reduction strategy?
	<ul style="list-style-type: none"> a) Outlier detection b) Principal Component Analysis c) Attribute subset selection d) Wavelet transforms
Ans:	a
Explanation:	Outlier detection
18)	Data Transformation Strategies includes____
	<ul style="list-style-type: none"> a) smoothing b) Attribute construction c) Normalization d) All of the above
Ans:	d
Explanation:	Smoothing, attribute construction and normalization includes in data transformation
19)	Data Discretization is used for____
	<ul style="list-style-type: none"> a) transforms numeric data by mapping values to interval or concept labels b) smoothing c) Attribute construction d) Normalization
Ans:	a
Explanation:	transforms numeric data by mapping values to interval or concept labels
20)	KDD stands for
	<ul style="list-style-type: none"> a) K data values b) Knowledge discovery from dataset c) K dataset d) None of the above
Ans.	b
Explanation	Knowledge discovery from dataset
21)	Data transformation includes:

	<ul style="list-style-type: none"> a) data are transformed and consolidated into forms appropriate for mining by performing summary or aggregation operations b) an essential process where intelligent methods are applied to extract data patterns c) data relevant to the analysis task are retrieved from the database d) it is used for knowledge representation.
Ans	a
Explanation	data are transformed and consolidated into forms appropriate for mining by performing summary or aggregation operations
22)	Pattern evaluation includes__
	<ul style="list-style-type: none"> a) data are transformed and consolidated into forms appropriate for mining by performing summary or aggregation operations b) an essential process where intelligent methods are applied to extract data patterns c) data relevant to the analysis task are retrieved from the database d) Identify the truly interesting patterns representing knowledge based on interestingness measures
Ans	d
Explanation	To identify the truly interesting patterns representing knowledge based on interestingness measures
23)	In KDD, the knowledge representation term used for__
	<ul style="list-style-type: none"> a) data are transformed and consolidated into forms appropriate for mining by performing summary or aggregation operations b) an essential process where intelligent methods are applied to extract data patterns c) visualization and knowledge representation techniques are used to present mined knowledge to users d) Identify the truly interesting patterns representing knowledge based on interestingness measures
Ans	c
Explanation	visualization and knowledge representation techniques are used to present mined knowledge to users
24)	Data mining functionalities are used to__
	<ul style="list-style-type: none"> a) to specify the kinds of patterns or knowledge to be found in data mining tasks b) to select data c) to find missing values d) to analyze the mining result
Ans	a
Explanation	a) Data mining functionalities are used to specify the kinds of patterns or

	knowledge to be found in data mining tasks
25)	The challenging issues in data mining research_____
	a) efficiency and scalability b) dealing with diverse data types c) user interaction d) all of the above
Ans	d
Explanation	There are many challenging issues in data mining research. Areas include mining methodology, user interaction, efficiency and scalability, and dealing with diverse data types. Data mining research has strongly impacted society and will continue to do so in the future

Name and Sign of Subject Teacher

Things I do for LCU

Name of the Teacher: V. R. Vasekar	
Class: BE AY: 2020-21	Subject: Data Mining and Warehousing SEM: II
UNIT-2 Data Warehouse	
1. ____ is a subject oriented, integrated, time variant, non-volatile collection of data in support of management decisions.	
	a) Data Mining b) Data Warehousing c) Web mining d) Text mining
Ans:	b
Explanation:	Data Warehousing
2. Data Warehouse is	
	a) Read only b) Write only c) Read and write only d) none
Ans:	a
Explanation:	Because of historical data storage
3. Expansion for DSS in DW is ____	
	a) Decision Single System b) Decision storable system c) Decision Support System d) Data Support System
Ans:	c
Explanation:	Decision support system
4. The important aspect of data warehouse environment is that data found within the data warehouse is ____	
	a) Subject oriented b) Time-variant c) Integrated d) All of the above
Ans:	d
Explanation:	All are correct
5. The time horizon in Data warehouse is usually ____	
	a) 1-2 year b) 3-4 year c) 5-6 years d) 5-10 years
Ans:	d
Explanation:	5 to 10 years
6. The data is stored , retrieved and updated in ____	

	a) OLAP b) OLTP c) SMTP d) FTP
Ans:	b
Explanation:	Online Analytical Transaction processing
7. ___describes the data oriented in the data warehouse	
	a) Relational data b) Operational data c) Metadata d) Informational data
Ans:	c
Explanation:	metadata
8. ___ predicts the future trends and behaviours, allowing business managers to make proactive knowledge-driven decisions	
	a) Data warehouse b) Data mining c) Datamarts d) metadata
Ans:	b
Explanation:	
9. ___ is the heart of Datawarehouse	
	a) Data mining database server b) Data warehouse database servers c) Data mart database servers d) Relational database servers
Ans:	b
Explanation:	Data warehouse database servers
10. ___ is the specialized data warehouse database	
	a) Oracle b) DBZ c) Informix d) Redbricks
Ans:	d
Explanation:	Redbricks
11.---defines the structure of the data held in operational databases and used by operational applications	
	a) User-level metadata b) Data warehouse metadata c) Operational metadata d) Data mining metadata
Ans	c
Explanation:	Operational metadata


12.----holds the catalog of the warehouse database system	
	a) Application level metadata b) Algorithmic level metadata c) Departmental level metadata d) Core warehouse metadata
Ans:	b
Explanation:	Algorithmic level metadata
13. ____maps the core warehouse metadata to business concepts, familiar and useful to end-users	
	a) Application level metadata. b) User level metadata.C. c) Enduser level metadata. d) Core level metadata
Ans:	a
Explanation:	
14. The star schema is composed of _____ fact table.	
	a) One b) Two c) Three d) four
Ans:	a
Explanation:	Only one fact table
15. The source of all data warehouse data is the__	
	a) operational environment b) informal environment c) formal environment. d) technology environmen
Ans:	a
Explanation:	
16.The @active data warehouse architecture includes which of the following?	
	a) At least one data mart b) Data that can extracted from numerous internal and external sources c) Near real-time updates d) All of the above.
Ans:	d
Explanation:	
17.An operational system is which of the following?	
	a) A system that is used to run the business in real time and is based on historical data. b) A system that is used to run the business in real time and is based on current data. c) A system that is used to support decision making and is based on

	current data. d) A system that is used to support decision making and is based on historical data.
Ans:	b
Explanation:	
18.A data warehouse is which of the following?	
	a) Can be updated by end users. b) Contains numerous naming conventions and formats. c) Organized around important subject areas d) Contains only current data.
Ans:	c
Explanation:	Data warehouse is subject oriented
19. Good performance can be achieved in a data mart environment by extensive use of	
	a) Indexes b) creating profile records c) volumes of data d) all of the above
Ans:	d
Explanation:	
20.	Warehouse administrator responsible for
	a) Administrator b) Maintenance c) both a and b d) none of the above
Ans	c
Explanation	
21. What is data cube?	
	a) allows data to be modeled and viewed in multiple dimensions b) data with dimensions c) data values d) description about data
Ans.	a
23 .Which of the following is not a multidimensional data model?	
	a) Star schema b) Fact constellation c) Snowflake schemas d) Entity-relationship model
Ans	d
Explanation	Three models of data warehouse: star, snowflake and fact constellation
24. Snowflake schema consists of ___ fact tables	
	a) One b) Two c) Three

	d) four
Ans	a
Explanation	Having only one fact table and many dimension tables
25. Fact constellation consists of __ fact tables	
	a) one b) two c) three d) many
Ans	d
Explanation	Many fact tables and many dimension tables

Name and Sign of Subject Teacher

1. is an essential process where intelligent methods are applied to extract data patterns.

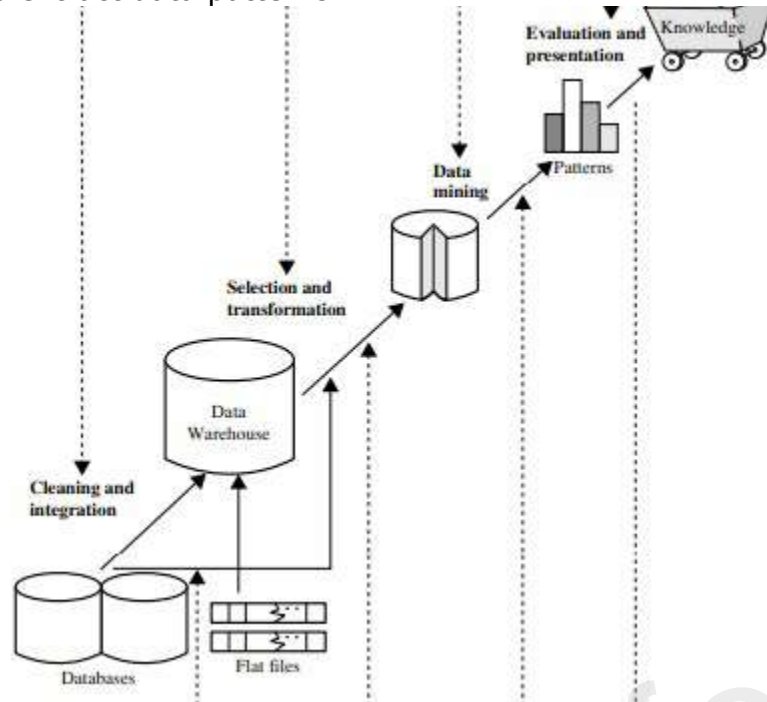

A) Data warehousing

B) Data mining

C) Text mining

D) Data selection

2. Data mining can also applied to other forms such as

i) Data streams

ii) Sequence data

iii) Networked data

iv) Text data

v) Spatial data

- A) i, ii, iii and v only
- B) ii, iii, iv and v only
- C) i, iii, iv and v only
- D) All i, ii, iii, iv and v**

3. Which of the following is not a data mining functionality?

A) Characterization and Discrimination

- B) Classification and regression
- C) Selection and interpretation
- D) Clustering and Analysis

4. is a summarization of the general characteristics or features of a target class of data.

A) Data Characterization

- B) Data Classification
- C) Data discrimination
- D) Data selection

5. is a comparison of the general features of the target class data objects against the general features of objects from one or multiple contrasting classes.

A) Data Characterization

B) Data Classification

C) Data discrimination

D) Data selection

6. Strategic value of data mining is

A) cost-sensitive

B) work-sensitive

C) time-sensitive

D) technical-sensitive

7. is the process of finding a model that describes and distinguishes data classes or concepts.

A) Data Characterization

B) Data Classification

C) Data discrimination

D) Data selection

8. The various aspects of data mining methodologies is/are

i) Mining various and new kinds of knowledge

ii) Mining knowledge in multidimensional space

iii) Pattern evaluation and pattern or constraint-guided mining.

iv) Handling uncertainty, noise, or incompleteness of data

A) i, ii and iv only

B) ii, iii and iv only

C) i, ii and iii only

D) All i, ii, iii and iv

9. The full form of KDD is

A) Knowledge Database

B) Knowledge Discovery Database

C) Knowledge Data House

D) Knowledge Data Definition

10. The out put of KDD is

A) Data

B) Information

C) Query

D) Useful information

Things I do for LCC

Data Warhouse & Data Mining 700 - MCQ's

TOPIC ONE – INTRODUCTION TO DATA MINING

EASY QUESTIONS

1. Data mining is an integral part of _____.

- A. SE.
- B. DBMS.
- C. KDD.
- D. OS.

ANSWER: C

2. _____ is a subject-oriented, integrated, time-variant, non-volatile collection of data in support of management decisions.

- A. Data Mining.
- B. Data Warehousing.
- C. Web Mining.
- D. Text Mining.

ANSWER: B

3. KDD describes the _____.

- A. whole process of extraction of knowledge from data
- B. extraction of data
- C. extraction of information
- D. extraction of rules

ANSWER: A

4. The data Warehouse is _____.

- A. read only.
- B. write only.
- C. read write only.
- D. none.

ANSWER: A

5. Expansion for DSS in DW is _____.

- A. Decision Support system.
- B. Decision Single System.
- C. Data Storable System.
- D. Data Support System.

ANSWER: A

6. The important aspect of the data warehouse environment is that data found within the data warehouse is _____.

- A. subject-oriented.
- B. time-variant.
- C. integrated.
- D. All of the above.

ANSWER: D

7. The data is stored, retrieved & updated in _____.

A. OLAP.

B. OLTP.

C. SMTP.

D. FTP.

ANSWER: B

8. _____ describes the data contained in the data warehouse.

A. Relational data.

B. Operational data.

C. Metadata.

D. Informational data.

ANSWER: C

9. _____ predicts future trends & behaviors, allowing business managers to make proactive, knowledge-driven decisions.

A. Data warehouse.

B. Data mining.

C. Datamarts.

D. Metadata.

ANSWER: B

10. _____ is the heart of the warehouse.

A. Data mining database servers.

B. Data warehouse database servers.

C. Data mart database servers.

D. Relational data base servers.

ANSWER: B

11. _____ defines the structure of the data held in operational databases and used by operational applications.

A. User-level metadata.

B. Data warehouse metadata.

C. Operational metadata.

D. Data mining metadata.

ANSWER: C

12. _____ is held in the catalog of the warehouse database system.

A. Application level metadata.

B. Algorithmic level metadata.

C. Departmental level metadata.

D. Core warehouse metadata.

ANSWER: B

13. _____ maps the core warehouse metadata to business concepts, familiar and useful to end users.

A. Application level metadata.

B. User level metadata.

C. Enduser level metadata.

D. Core level metadata.

ANSWER: A

14. Data can be updated in _____ environment.

- A. data warehouse.
- B. data mining.
- C. operational.
- D. informational.

ANSWER: C

15. Record cannot be updated in _____.

- A. OLTP
- B. files
- C. RDBMS
- D. data warehouse

ANSWER: D

16. Detail data in single fact table is otherwise known as _____.

- A. monoatomic data.
- B. diatomic data.
- C. atomic data.
- D. multiatomic data.

ANSWER: C

17. A data warehouse is _____.

- A. updated by end users.
- B. contains numerous naming conventions and formats
- C. organized around important subject areas.
- D. contains only current data.

ANSWER: C

18. _____ is data about data.

- A. Metadata.
- B. Microdata.
- C. Minidata.
- D. Multidata.

ANSWER: A

19. _____ is an important functional component of the metadata.

- A. Digital directory.
- B. Repository.
- C. Information directory.
- D. Data dictionary.

ANSWER: C

20. The term that is not associated with data cleaning process is _____.

- A. domain consistency.
- B. deduplication.
- C. disambiguation.
- D. segmentation.

ANSWER: D

21. Capability of data mining is to build _____ models.

- A. retrospective.
- B. interrogative.
- C. predictive.
- D. imperative.

ANSWER: C

22. _____ is a process of determining the preference of customer's majority.

A. Association.

B. Preferencing.

C. Segmentation.

D. Classification.

ANSWER: B

23. Exceptional reporting in data warehousing is otherwise called as _____.

A. exception.

B. alerts.

C. errors.

D. bugs.

ANSWER: B

24. The full form of KDD is _____.

A. Knowledge database.

B. Knowledge discovery in database.

C. Knowledge data house.

D. Knowledge data definition.

ANSWER: B

25. Removing duplicate records is a process called _____.

A. recovery.

B. data cleaning.

C. data cleansing.

D. data pruning.

ANSWER: B

26. _____ helps to integrate, maintain and view the contents of the data warehousing system.

A. Business directory.

B. Information directory.

C. Data dictionary.

D. Database.

ANSWER: B

27. Discovery of cross-sales opportunities is called _____.

A. segmentation.

B. visualization.

C. correction.

D. association.

ANSWER: D

28. Data marts that incorporate data mining tools to extract sets of data are called _____.

A. independent data mart.

B. dependent data marts.

C. intra-entry data mart.

D. inter-entry data mart.

ANSWER: B

29. A directory to help the DSS analyst locate the contents of the data warehouse is seen in _____.

- A. Current detail data.
- B. Lightly summarized data.
- C. Metadata.
- D. Older detail data.

ANSWER: C

30. Which of the following is not an old detail storage medium?

- A. Phot Optical Storage.
- B. RAID.
- C. Microfinche.
- D. Pen drive.

ANSWER: D

31. The dimension tables describe the _____.

- A. entities.
- B. facts.
- C. keys.
- D. units of measures.

ANSWER: B

32. Which of the following is not the other name of Data mining?

- A. Exploratory data analysis.
- B. Data driven discovery.
- C. Deductive learning.
- D. Data integration.

ANSWER: D

33. Which of the following is a predictive model?

- A. Clustering.
- B. Regression.
- C. Summarization.
- D. Association rules.

ANSWER: B

34. Which of the following is a descriptive model?

- A. Classification.
- B. Regression.
- C. Sequence discovery.
- D. Association rules.

ANSWER: C

35. A _____ model identifies patterns or relationships.

- A. Descriptive.
- B. Predictive.
- C. Regression.
- D. Time series analysis.

ANSWER: A

36. A predictive model makes use of _____.

- A. current data.
- B. historical data.
- C. both current and historical data.
- D. assumptions.

ANSWER: B

37. _____ maps data into predefined groups.

- A. Regression.
- B. Time series analysis
- C. Prediction.
- D. Classification.

ANSWER: D

38. _____ is used to map a data item to a real valued prediction variable.

- A. Regression.
- B. Time series analysis.
- C. Prediction.
- D. Classification.

ANSWER: B

39. In _____, the value of an attribute is examined as it varies over time.

- A. Regression.
- B. Time series analysis.
- C. Sequence discovery.
- D. Prediction.

ANSWER: B

40. In _____ the groups are not predefined.

- A. Association rules.
- B. Summarization.
- C. Clustering.
- D. Prediction.

ANSWER: C

41. _____ is the input to KDD.

- A. Data.
- B. Information.
- C. Query.
- D. Process.

ANSWER: A

42. The output of KDD is _____.

- A. Data.
- B. Information.
- C. Query.
- D. Useful information.

ANSWER: D

43. The KDD process consists of _____ steps.

- A. three.
- B. four.
- C. five.
- D. six.

ANSWER: C

44. Treating incorrect or missing data is called as _____.

A. selection.

B. preprocessing.

C. transformation.

D. interpretation.

ANSWER: B

45. Converting data from different sources into a common format for processing is called as _____.

A. selection.

B. preprocessing.

C. transformation.

D. interpretation.

ANSWER: C

46. Various visualization techniques are used in _____ step of KDD.

A. selection.

B. transformaiion.

C. data mining.

D. interpretation.

ANSWER: D

47. Extreme values that occur infrequently are called as _____.

A. outliers.

B. rare values.

C. dimensionality reduction.

D. Inliers

ANSWER: A

48. Box plot and scatter diagram techniques are _____.

A. Graphical.

B. Geometric.

C. Icon-based.

D. Pixel-based.

ANSWER: B

49. _____ is used to proceed from very specific knowledge to more general information.

A. Induction.

B. Compression.

C. Approximation.

D. Substitution.

ANSWER: A

50. Describing some characteristics of a set of data by a general model is viewed as

A. Induction.

B. Compression.

C. Approximation.

D. Summarization.

ANSWER: B

51. _____ helps to uncover hidden information about the data.

A. Induction.

B. Compression.

C. Approximation.

D. Summarization.

ANSWER: C

52. Incorrect or invalid data is known as _____.

A. changing data.

B. noisy data.

C. outliers.

D. missing data.

ANSWER: B

53. The _____ of data could result in the disclosure of information that is deemed to be confidential.

A. authorized use.

B. unauthorized use.

C. authenticated use.

D. unauthenticated use.

ANSWER: B

54. _____ data are noisy and have many missing attribute values.

A. Preprocessed.

B. Cleaned.

C. Real-world.

D. Transformed.

ANSWER: C

55. _____ describes the discovery of useful information from the web contents.

A. Web content mining.

B. Web structure mining.

C. Web usage mining.

D. Web development.

ANSWER: A

56. _____ is concerned with discovering the model underlying the link structures of the web.

A. Web content mining.

B. Web structure mining.

C. Web usage mining.

D. Web development.

ANSWER: B

57. A _____ algorithm takes all the data at once and tries to create a hypothesis based on this data.

A. supervised.

B. batch learning.

C. unsupervised.

D. incremental learning.

ANSWER: B

58. A _____ algorithm takes a new piece of information at each learning cycle and tries to revise the theory using new data.

A. supervised.

B. batch learning.

C. unsupervised.

D. incremental learning.

ANSWER: B

59. _____ is used to find the vaguely known data.

- A. SQL.
- B. KDD.
- C. Data mining.
- D. Sybase.

ANSWER: C

60. The easiest way to gain access to the data and facilitate effective decision making is to set up a _____.

- A. database.
- B. data mart.
- C. data warehouse.
- D. operational.

ANSWER: C

61. Smaller local data warehouse is called as _____.

- A. data mart.
- B. database.
- C. data model.
- D. meta data.

ANSWER: B

62. The _____ data are stored in data warehouse.

- A. operational.
- B. historical.
- C. transactional.
- D. optimized.

ANSWER: B

63. A decision support system is a system that _____.

- A. can constantly change over time.
- B. cannot change.
- C. copies the data.
- D. supports the system.

ANSWER: A

64. Metadata is used by the end users for _____.

- A. managing database.
- B. structuring database.
- C. querying purposes.
- D. making decisions.

ANSWER: C

65. The _____ techniques are used to load information from operational database to data warehouse.

- A. reengineering.
- B. reverse.
- C. transfer.
- D. replication.

ANSWER: D

66. In machine learning _____ phase try to find the patterns from observations.

- A. observation
- B. theory
- C. analysis
- D. prediction

ANSWER: C

67. Information content is closely related to _____ and transparency.

- A. algorithm.
- B. search space.
- C. learning.
- D. statistical significance.

ANSWER: D

68. The _____ is used to express the hypothesis describing the concept.

- A. computer language.
 - B. algorithm.
 - C. definition.
 - D. theory
- ANSWER: A

69. A definition of a concept is complete if it recognizes _____.

- A. all the information.
- B. all the instances of a concept.
- C. only positive examples.
- D. negative examples.

ANSWER: B

70. The results of machine learning algorithms are always have to be checked for their _____.

- A. observations.
- B. calculations
- C. programs.
- D. statistical relevance.

ANSWER: D

71. A _____ is necessary condition for KDDs effective implement.

- A. data set.
- B. database.
- C. data warehouse.
- D. data.

ANSWER: C

72. KDD is a _____.

- A. new technology that is use to store data.
- B. multidisciplinary field of research.
- C. database technology.
- D. expert system.

ANSWER: B

INTERMEDIATE QUESTIONS

73. The generic two-level data warehouse architecture includes _____.

- A. at least one data mart.
- B. data that can be extracted from numerous internal and external sources.
- C. near real-time updates.
- D. far real-time updates.

ANSWER: C

74. Reconciled data is _____.

- A. data stored in the various operational systems throughout the organization.
- B. current data intended to be the single source for all decision support systems.
- C. data stored in one operational system in the organization.
- D. data that has been selected and formatted for end-user support applications.

ANSWER: B

75. Transient data is _____.

- A. data in which changes to existing records cause the previous version of the records to be eliminated.
- B. data in which changes to existing records do not cause the previous version of the records to be eliminated.
- C. data that are never altered or deleted once they have been added.
- D. data that are never deleted once they have been added.

ANSWER: A

76. The extract process is _____.

- A. capturing all of the data contained in various operational systems.
- B. capturing a subset of the data contained in various operational systems.
- C. capturing all of the data contained in various decision support systems.
- D. capturing a subset of the data contained in various decision support systems.

ANSWER: B

77. Data transformation includes _____.

- A. a process to change data from a detailed level to a summary level.
- B. a process to change data from a summary level to a detailed level.
- C. joining data from one source into various sources of data.
- D. separating data from one source into various sources of data.

ANSWER: A

78. _____ is the goal of data mining.

- A. To explain some observed event or condition.
- B. To confirm that data exists.
- C. To analyze data for expected relationships.
- D. To create a new data warehouse.

ANSWER: A

79. Business Intelligence and data warehousing is not used for _____.

- A. Forecasting.
- B. Data Mining.
- C. Analysis of large volumes of product sales data.
- D. Discarding data.

ANSWER: D

80. Classification rules are extracted from _____.

A. root node.

B. decision tree.

C. siblings.

D. branches.

ANSWER: B

81. Reducing the number of attributes to solve the high dimensionality problem is called as _____.

A. dimensionality curse.

B. dimensionality reduction.

C. cleaning.

D. Overfitting.

ANSWER: B

82. Data that are not of interest to the data mining task is called as _____.

A. missing data.

B. changing data.

C. irrelevant data.

D. noisy data.

ANSWER: C

83. Data mining helps in _____.

A. inventory finalisation.

B. sales.

C. marketing products.

D. Debt collection.

ANSWER: A

84. Which of the following is not a desirable feature of any efficient algorithm?

A. to reduce number of input operations.

B. to reduce number of output operations.

C. to be efficient in computing.

D. to have maximal code length.

ANSWER: D

85. All set of items whose support is greater than the user-specified minimum support are called as

A. border set.

B. frequent set.

C. maximal frequent set.

D. lattice.

ANSWER: B

86. Metadata describes _____.

A. contents of database.

B. structure of contents of database.

C. structure of database.

D. database itself.

ANSWER: B

87. The partition of overall data warehouse is _____.

A. database.

B. data cube.

C. data mart.

D. operational data.

ANSWER: C

88. The information on two attributes is displayed in _____ in scatter diagram.

A. visualization space.

B. scatter space.

C. cartesian space.

D. interactive space.

ANSWER: C

89. OLAP is used to explore the _____ knowledge.

A. shallow.

B. deep.

C. multidimensional.

D. hidden.

ANSWER: C

90. Hidden knowledge can be found by using _____.

A. searching algorithm.

B. pattern recognition algorithm.

C. searching algorithm.

D. clues.

ANSWER: B

91. The next stage to data selection in KDD process _____.

A. enrichment.

B. coding.

C. cleaning.

D. reporting.

ANSWER: C

92. Enrichment means _____.

A. adding external data.

B. deleting data.

C. cleaning data.

D. selecting the data.

ANSWER: A

93. The decision support system is used only for _____.

A. cleaning.

B. coding.

C. selecting.

D. queries.

ANSWER: D

94. Which of the following is closely related to statistical significance and transparency?

A. Classification Accuracy.

B. Transparency.

C. Statistical significance.

D. Search Complexity.

ANSWER: B

95. _____ is the technique which is used for discovering patterns in dataset at the beginning of data mining process.

- A. Kohonen map.
- B. Visualization.
- C. OLAP.
- D. SQL.

ANSWER: B

96. _____ is the heart of knowledge discovery in database process.

- A. Selection.
- B. Data warehouse.
- C. Data mining.
- D. Creative coding.

ANSWER: D

97. In KDD and data mining, noise is referred to as _____.

- A. repeated data.
- B. complex data.
- C. meta data.
- D. random errors in database.

ANSWER: D

98. The technique of learning by generalizing from examples is _____.

- A. incremental learning.
- B. inductive learning.
- C. hybrid learning.
- D. generalized learning.

ANSWER: B

99. The _____ plays an important role in artificial intelligence.

- A. programming skill.
- B. scheduling.
- C. planning.
- D. learning capabilities.

ANSWER: D

100. Data mining is used to refer _____ stage in knowledge discovery in database.

- A. selection.
- B. retrieving.
- C. discovery.
- D. coding.

ANSWER: C

101. _____ could generate rule automatically.

- A. KDD.
- B. machine learning.
- C. artificial intelligence.
- D. expert system.

ANSWER: B

102. A good introduction to machine learning is the idea of _____.

- A. concept learning.
- B. content learning.
- C. theory of falsification.

D. Poppers law.

ANSWER: A

103. The algorithms that are controlled by human during their execution is _____ algorithm.

A. unsupervised.

B. supervised.

C. batch learning.

D. incremental.

ANSWER: B

104. Background knowledge depends on the form of _____.

A. theoretical knowledge.

B. hypothesis.

C. formulae.

D. knowledge representation.

ANSWER: D

ADVANCED QUESTIONS

105. Dimensionality reduction reduces the data set size by removing _____.

A. relevant attributes.

B. irrelevant attributes.

C. derived attributes.

D. composite attributes.

ANSWER: B

106. The main organizational justification for implementing a data warehouse is to provide _____.

A. cheaper ways of handling transportation.

B. decision support.

C. storing large volume of data.

D. access to data.

ANSWER: C

107. Multidimensional database is otherwise known as _____.

A. RDBMS

B. DBMS

C. EXTENDED RDBMS

D. EXTENDED DBMS

ANSWER: B

108. _____ are designed to overcome any limitations placed on the warehouse by the nature of the relational data model.

A. Operational database.

B. Relational database.

C. Multidimensional database.

D. Data repository.

ANSWER: C

109. If a set is a frequent set and no superset of this set is a frequent set, then it is called _____.

A. maximal frequent set.

B. border set.

C. lattice.

D. infrequent sets.

ANSWER: A

110. The goal of _____ is to discover both the dense and sparse regions of a data set.

A. Association rule.

B. Classification.

C. Clustering.

D. Genetic Algorithm.

ANSWER: C

111. Rule based classification algorithms generate _____ rule to perform the classification.

A. if-then.

B. while.

C. do while.

D. switch.

ANSWER: A

112. _____ training may be used when a clear link between input data sets and target output values does not exist.

A. Competitive.

B. Perception.

C. Supervised.

D. Unsupervised.

ANSWER: D

113. Web content mining describes the discovery of useful information from the _____ contents.

A. text.

B. web.

C. page.

D. level.

ANSWER: B

114. Research on mining multi-types of data is termed as _____ data.

A. graphics.

B. multimedia.

C. meta.

D. digital.

ANSWER: B

115. _____ is the way of studying the web link structure.

A. Computer network.

B. Physical network.

C. Social network.

D. Logical network.

ANSWER: C

116. In web mining, _____ is used to find natural groupings of users, pages, etc.

A. clustering.

B. associations.

C. sequential analysis.

D. classification.

ANSWER: A

117. In web mining, _____ is used to know which URLs tend to be requested together.

- A. clustering.
- B. associations.
- C. sequential analysis.
- D. classification.

ANSWER: B

118. The _____ engine for a data warehouse supports query-triggered usage of data

- A. NNTP
- B. SMTP
- C. OLAP
- D. POP

ANSWER: C

119. _____ displays of data such as maps, charts and other graphical representation allow data to be presented compactly to the users.

- A. Hidden
- B. Visual
- C. Obscured
- D. Concealed

ANSWER: B

120. Which of the following are the important qualities of good learning algorithm.

- A. Consistent, Complete.
- B. Information content, Complex.
- C. Complete, Complex.
- D. Transparent, Complex.

ANSWER: A

TOPIC TWO – GETTING TO KNOW YOUR DATA

EASY QUESTIONS

121. The _____ is a symbolic representation of facts or ideas from which information can potentially be extracted.

- A. knowledge.
- B. data.
- C. algorithm.
- D. program.

ANSWER: B

122. A collection of interesting and useful patterns in database is called _____.

- A. knowledge.
- B. information.
- C. data.
- D. algorithm.

ANSWER: A

123. The main organizational justification for implementing a data warehouse is to provide _____.

- A. cheaper ways of handling transportation.
- B. decision support.
- C. storing large volume of data.
- D. access to data.

ANSWER: C

124. The process of finding the right formal representing of a certain body of knowledge in order to represent it in knowledge based system is _____.

A. re-engineering.

B. replication.

C. knowledge engineering.

D. reverse engineering.

ANSWER: C

125. OR methods deals with _____ type of data.

A. quantitative.

B. qualitative.

C. standard.

D. predict.

ANSWER: A

126. _____ analysis divides data into groups that are meaningful, useful, or both.

A. Cluster.

B. Association.

C. Classification.

D. Relation.

ANSWER: A

127. A representation of data objects as columns and attributes as rows is called _____.

A. matrix.

B. data matrix.

C. table.

D. file.

ANSWER: B

128. Which of the following is not a data mining attribute?

A. nominal.

B. ordinal.

C. interval.

D. multiple.

ANSWER: D

129. Patterns of machine-language program are _____.

A. definitive theories.

B. hypothesis.

C. not-definitive theories.

D. quantitative.

ANSWER: B

130. Nominal and ordinal attributes are collectively referred to as _____ attributes.

A. qualitative.

B. perfect.

C. consistent.

D. optimized.

ANSWER: A

131. A data set can often be viewed as a collection of _____.

A. data mart.

B. data.

C. data object.

D. template.

ANSWER: C

132. An important element in machine learning is _____.

A. flow.

B. knowledge.

C. observation.

D. language.

ANSWER: C

133. _____ is the closeness of repeated measurements to one another.

A. Precision.

B. Bias.

C. Accuracy.

D. non-scientific.

ANSWER: A

ANSWER: B

134. Which of the following is not a data mining attribute?

A. nominal.

B. ordinal.

C. interval.

D. multiple.

ANSWER: D

135. Patterns of machine-language program are _____.

A. definitive theories.

B. hypothesis.

C. not-definitive theories.

D. quantitative.

ANSWER: B

136. Nominal and ordinal attributes are collectively referred to as _____ attributes.

A. qualitative.

B. perfect.

C. consistent.

D. optimized.

ANSWER: A

137. A data set can often be viewed as a collection of _____.

A. data mart.

B. data.

C. data object.

D. template.

ANSWER: C

138. An important element in machine learning is _____.

A. flow.

B. knowledge.

C. observation.

D. language.

ANSWER: C

139. _____ is used for discrete target variable.

- A. Nominal.
- B. Classification.**
- C. Clustering.
- D. Association.

ANSWER: B

140. A goal of data mining includes which of the following?

- A. To explain some observed event or condition**
- B. To confirm that data exists
- C. To analyze data for expected relationships
- D. To create a new data warehouse

ANSWER: A

141. is a subject-oriented, integrated, time-variant, nonvolatile collection of data in support of management decisions.

- A. Data Mining.
- B. Data Warehousing.**
- C. Web Mining.
- D. Text Mining.

ANSWER: B

142. Collection, analysis, interpretation or explanation of data.

- A. Statistics**
- B. Information retrieval
- C. Data mining
- D. Cluster analysis

Answer: A

143. Data objects represents

- A. Values
- B. Entity**
- C. Data
- D. Attributes

Answer : B

INTERMEDIATE QUESTIONS

144. The term that is not associated with data cleaning process is _____.

- A. domain constance.
- B. de-duplication.
- C. disambiguation.
- D. segmentation.**

ANSWER: D

The _____ is a useful method of discovering patterns at the beginning of data mining process.

- A. calculating distance.
- B. visualization techniques.
- C. decision trees.
- D. association rules.

ANSWER: B

145. Data mining methodology states that in optimal situation data mining is an ____.

- A. standard process.
- B. complete process.
- C. creative process.
- D. ongoing process.

ANSWER: D

146. _____ is a knowledge discovery process.

- A. Data cleaning.
- B. Data warehousing.
- C. Data mining.
- D. Data transformation.

ANSWER: A

147. OLAP is used for _____.

- A. online application processing.
- B. online analytical processing.
- C. online aptitude processing.
- D. online administration and processing.

ANSWER: B

148. Which of the following is not an issue related to concept learning

- A. Supervised learning.
- B. Unsupervised learning.
- C. Self learning.
- D. Concept learning.

ANSWER: D

149. Removing duplicate records is a process called _____.

- A. recovery.
- B. data cleaning.
- C. data cleansing.
- D. data pruning.

ANSWER: B

150. Data marts that incorporate data mining tools to extract sets of data is called _____.

- A. independent data mart.
- B. dependent data marts.
- C. intra-entry data mart.
- D. inter-entry data mart.

ANSWER: B

151. The problem of finding hidden structure in unlabelled data is called...

- A. Supervised learning
- B. Unsupervised learning
- C. Reinforcement learning
- D. Semisupervised learning

ANSWER : B

152. Task of inferring a model from labelled training data is called

- A. Supervised learning
- B. Unsupervised learning
- C. Reinforcement learning

D. Semisupervised learning

ANSWER : B

153. Self-organizing maps are an example of...

A. Supervised learning

B. Unsupervised learning

C. Reinforcement learning

D. Missing data imputation

ANSWER : A

154. The time horizon in Data warehouse is usually

A. 1-2 years.

B. 3-4years.

C. 5-6 years.

D. 5-10 years.

ANSWER: D

155. Classification rules are extracted from

A. root node

B. decision tree.

C. siblings.

D. branches.

ANSWER: B

156. Which one of the following is not a part of empirical cycle in scientific research?

A. Observation

B. Theory.

C. Self learning.

D. Prediction.

ANSWER: C

157. In machine learning _____ phase try to find the patterns from observations.

A. observation

B. theory

C. analysis

D. prediction

ANSWER: C

158. ANSWER: D

Data warehouse architecture is based on _____.

A. DBMS.

B. RDBMS.

C. Sybase.

D. SQL Server.

ANSWER: B

ADVANCED QUESTIONS

159. The ____ algorithm can be applied in cleaning data.

A. search.

B. pattern recognition.

C. learning.

D. clustering.

ANSWER: B

160. _____ is the type of pollution that is difficult to trace.

- A. Duplication of records.
- B. Ambiguitation.
- C. Lack of domain consistency.
- D. Lack of information.

ANSWER: C

161. The statement that is true about data mining is _____.

- A. data mining is not a single technique.
- B. it finds the hidden patterns from data set.
- C. it is a real discovery process.
- D. all forms of pollutions are found during the data mining stage itself.

ANSWER: D

162. The first step in data mining project is _____.

- A. rough analysis of data set using traditional query tools.
- B. cleaning the data.
- C. recognizing the patterns.
- D. visualizing the patterns.

ANSWER: A

163. SQL can find _____ type of data.

- A. narrow data.
- B. multidimensional data.
- C. shallow data.
- D. hidden data.

ANSWER: C

164. _____ is used to find relationship between multidimensional data.

- A. K-nearest neighbor.
- B. Decision trees.
- C. Association rules.
- D. OLAP tools.

ANSWER: D

165. Which one of the following is not true about OLAP?

- A. They create no new knowledge.
- B. OLAP is powerful that data mining tool.
- C. They cannot search for new solution.
- D. OLAP tool store their data in special multidimensional format.

ANSWER: B

166. Genetic algorithm is viewed as a kind of _____.

- A. meta learning strategy.
- B. machine learning.
- C. evolution.
- D. OLAP tool.

ANSWER: A

167. The _____ is a knowledge that can be found by using pattern recognition algorithm.

- A. hidden knowledge.
- B. deep.
- C. shallow.

D. multidimensional.

ANSWER: A

168. Shannons notation of information content of message is_____.

A. $\log 1$ divided by n equals $\log n$.

B. $\log n$ equals $\log 1$ divided by n .

C. $\log 1$ divided by n equals minus $\log n$.

D. \log minus $n = \log 1$ divided by n .

ANSWER: C

169. Which of the following features usually applies to data in a data warehouse

A. Data are often deleted.

B. Most applications consist of transactions.

C. Data are rarely deleted.

D. Relatively few records are processed by applications.

ANSWER: C

170. Which of the following is true

A. The data warehouse consists of data marts and operational data

B. The Data Warehouse consists of data marts and application data.

C. The Data Warehouse is used as a source for the operational data.

D. The operational data are used as a source for the data warehouse

ANSWER: D

171. How do you better define a data warehouse as

A. Can be updated by end users.

B. Contains numerous naming conventions and formats.

C. Organized around important subject areas.

D. Contains only current data.

ANSWER: C

172. Which of the following is an operational system

A. A system that is used to run the business in real time and is based on historical data

B. A system that is used to run the business in real time and is based on current data.

C. A system that is used to support decision making and is based on current data.

D. A system that is used to support decision making and is based on historical data.

ANSWER: B

173. The generic two-level data warehouse architecture includes _____.

A. at least one data mart.

B. data that can be extracted from numerous internal and external sources.

C. near off-time updates.

D. historic data.

ANSWER: B

174. Which of the following is reconciled data

A. Current data intended to be the single source for all decision support systems

B. Data stored in the various operational systems throughout the organization.

C. Data stored in one operational system in the organization.

D. Data that has been selected and formatted for end-user support applications.

ANSWER: A

175. Which of the following is an extract process

- A. Capturing all of the data contained in various operational systems.
- B. Capturing a subset of the data contained in various operational systems.
- C. Capturing all of the data contained in various decision support systems.
- D. Capturing a subset of the data contained in various decision support systems.

ANSWER: B

176. Which of the following is the not a types of clustering?

- A. K-means.
- B. Hiearachical.
- C. Partitional.
- D. Splitting.

ANSWER: D

177. Data Transformation includes_____.

- A. a process to change data from a detailed level to a summary level.
- B. a process to change data from a summary level to a detailed level.
- C. joining data from one source into various sources of data.
- D. separating data from one source into various sources of data.

ANSWER: A

178. The _____ is called a multi field transformation.

- A. conversion of data from one field into multiple fields.
- B. conversion of data from fields into field.
- C. conversion of data from double fields into multiple fields
- D. conversion of data from one field to one field.

ANSWER: A

179. Which of the given technology is not well-suited for data mining

- A. Expert system technology.
- B. Data visualization.
- C. Technology limited to specific data types such as numeric data types.
- D. Parallel architecture.

ANSWER: C

180. What is true about the multidimensional model?

- A. It typically requires less disk storage.
- B. It typically requires more disk storage.
- C. Typical business queries requiring aggregate functions take more time.
- D. Typical business queries requiring aggregate functions take more time.

ANSWER: B

181. Which of the following function involves data cleaning, data standardizing and summarizing

- A. Storing data.
- B. Transforming data.
- C. Data acquisition.
- D. Data Access.

ANSWER: B

182. Which of the following problems bog down the development of data mining projects

- A. Financial problem.
- B. Lack of technical assistance.
- C. Lack of long-term vision.

D. Legal and privacy restrictions.

ANSWER: C

183. _____ is the closeness of repeated measurements to one another.

A. Precision.

B. Bias.

C. Accuracy.

D. non-scientific.

ANSWER: A

184. Which of the following matrix consist asymmetric data?

A. Sparse data matrix.

B. Identity matrix.

C. Confusion matrix.

D. Cross matrix.

ANSWER: A

185. Which of the following matrix consist asymmetric data?

A. Sparse data matrix.

B. Identity matrix.

C. Confusion matrix.

D. Cross matrix.

ANSWER: A

186. You are given data about seismic activity in Japan, and you want to predict a magnitude of the next earthquake, this is an example of

Supervised learning

Unsupervised learning

Serration

Dimensionality reduction

ANSWER: A

187. Algorithm is

A. It uses machine-learning technique. Here a program can learn from past experience.

B. Computational procedure that takes some values as input and procedure takes some value as output

C. Science of making machines perform tasks that would require intelligence when performed by humans

D. Processing procedure

ANSWER: A

188. The information on two attributes is displayed in _____ in scatter diagram.

A. visualization space.

B. scatter space.

C. cartesian space.

D. interactive space.

ANSWER: C

189. K-nearest neighbor is one of the _____.

A. learning technique.

B. OLAP tool.

C. purest search technique.

D. data warehousing tool.

ANSWER: C

190. In K- nearest neighbor the input is translated to _____.

- A. values
- B. points in multidimensional space
- C. strings of characters
- D. nodes

ANSWER: B

191. What is a tag cloud?

- A. Is a visualization of statistics of user-preferred order.
- B. Collection of data objects.
- C. Data analysis
- D. Data mining application

Answer: A

192. Analysis of variance is a statistical method of comparing the _____ of several populations.

- A. standard deviations
- B. variances
- C. means
- D. proportions

Answer: A

193. _____ is the specialized data warehouse database.

- A. Oracle.
- B. DBZ.
- C. Informix.
- D. Redbrick.

ANSWER: D

194. The source of all data warehouse data is the _____.

- A. operational environment.
- B. informal environment.
- C. formal environment.
- D. technology environment.

ANSWER: A

195. Which of the following is a descriptive model?

- A. Classification.
- B. Regression.
- C. Sequence discovery.
- D. Association rules.

ANSWER: C

196. A _____ model identifies patterns or relationships.

- A. Descriptive.
- B. Predictive.
- C. Regression.
- D. Time series analysis.

ANSWER: A

Things I do for LCU



Dr.G.R.Damodaran College of Science

(Autonomous, affiliated to the Bharathiar University, recognized by the UGC) Re-accredited at the 'A' Grade Level by the **NAAC** and ISO 9001:2008 Certified
CRISL rated 'A' (TN) for MBA and MIB Programmes

II M.Sc(IT) [2012-2014]

Semester III

Core: Data Warehousing and Mining - 363U1

Multiple Choice Questions.

1. _____ is a subject-oriented, integrated, time-variant, nonvolatile collection of data in support of management decisions.

- A. Data Mining.
- B. Data Warehousing.
- C. Web Mining.
- D. Text Mining.

ANSWER: B

2. The data Warehouse is _____.

- A. read only.
- B. write only.
- C. read write only.
- D. none.

ANSWER: A

3. Expansion for DSS in DW is _____.

- A. Decision Support system.
- B. Decision Single System.
- C. Data Storable System.
- D. Data Support System.

ANSWER: A

4. The important aspect of the data warehouse environment is that data found within the data warehouse is _____.

- A. subject-oriented.
- B. time-variant.
- C. integrated.
- D. All of the above.

ANSWER: D

5. The time horizon in Data warehouse is usually _____.

- A. 1-2 years.
- B. 3-4years.
- C. 5-6 years.
- D. 5-10 years.

ANSWER: D

6. The data is stored, retrieved & updated in _____.

- A. OLAP.
- B. OLTP.
- C. SMTP.

D. FTP.

ANSWER: B

7. _____describes the data contained in the data warehouse.

- A. Relational data.
- B. Operational data.
- C. Metadata.
- D. Informational data.

ANSWER: C

8. _____predicts future trends & behaviors, allowing business managers to make proactive, knowledge-driven decisions.

- A. Data warehouse.
- B. Data mining.
- C. Datamarts.
- D. Metadata.

ANSWER: B

9. _____ is the heart of the warehouse.

- A. Data mining database servers.
- B. Data warehouse database servers.
- C. Data mart database servers.
- D. Relational data base servers.

ANSWER: B

10. _____ is the specialized data warehouse database.

- A. Oracle.
- B. DBZ.
- C. Informix.
- D. Redbrick.

ANSWER: D

11. _____defines the structure of the data held in operational databases and used by operational applications.

- A. User-level metadata.
- B. Data warehouse metadata.
- C. Operational metadata.
- D. Data mining metadata.

ANSWER: C

12. _____ is held in the catalog of the warehouse database system.

- A. Application level metadata.
- B. Algorithmic level metadata.
- C. Departmental level metadata.
- D. Core warehouse metadata.

ANSWER: B

13. _____maps the core warehouse metadata to business concepts, familiar and useful to end users.

- A. Application level metadata.
- B. User level metadata.
- C. Enduser level metadata.
- D. Core level metadata.

ANSWER: A

14. _____ consists of formal definitions, such as a COBOL layout or a database schema.
- A. Classical metadata.
 - B. Transformation metadata.
 - C. Historical metadata.
 - D. Structural metadata.

ANSWER: A

15. _____ consists of information in the enterprise that is not in classical form.
- A. Mushy metadata.
 - B. Differential metadata.
 - C. Data warehouse.
 - D. Data mining.

ANSWER: A

16. . _____ databases are owned by particular departments or business groups.
- A. Informational.
 - B. Operational.
 - C. Both informational and operational.
 - D. Flat.

ANSWER: B

17. The star schema is composed of _____ fact table.
- A. one.
 - B. two.
 - C. three.
 - D. four.

ANSWER: A

18. The time horizon in operational environment is _____.
- A. 30-60 days.
 - B. 60-90 days.
 - C. 90-120 days.
 - D. 120-150 days.

ANSWER: B

19. The key used in operational environment may not have an element of _____.
- A. time.
 - B. cost.
 - C. frequency.
 - D. quality.

ANSWER: A

20. Data can be updated in _____ environment.
- A. data warehouse.
 - B. data mining.
 - C. operational.
 - D. informational.

ANSWER: C

21. Record cannot be updated in _____.
- A. OLTP
 - B. files
 - C. RDBMS

D. data warehouse
ANSWER: D

22. The source of all data warehouse data is the_____.
- A. operational environment.
 - B. informal environment.
 - C. formal environment.
 - D. technology environment.

ANSWER: A

23. Data warehouse contains_____data that is never found in the operational environment.
- A. normalized.
 - B. informational.
 - C. summary.
 - D. denormalized.

ANSWER: C

24. Data redundancy between the environments results in less than _____percent.
- A. one.
 - B. two.
 - C. three.
 - D. four.

ANSWER: A

25. Bill Inmon has estimated_____of the time required to build a data warehouse, is consumed in the conversion process.
- A. 10 percent.
 - B. 20 percent.
 - C. 40 percent
 - D. 80 percent.

ANSWER: D

26. Detail data in single fact table is otherwise known as_____.
- A. monoatomic data.
 - B. diatomic data.
 - C. atomic data.
 - D. multiatomic data.

ANSWER: C

27. _____test is used in an online transactional processing environment.
- A. MEGA.
 - B. MICRO.
 - C. MACRO.
 - D. ACID.

ANSWER: D

28. _____ is a good alternative to the star schema.
- A. Star schema.
 - B. Snowflake schema.
 - C. Fact constellation.
 - D. Star-snowflake schema.

ANSWER: C

29. The biggest drawback of the level indicator in the classic star-schema is that it limits_____.

- A. quantify.
- B. qualify.
- C. flexibility.
- D. ability.

ANSWER: C

30. A data warehouse is _____.

- A. updated by end users.
- B. contains numerous naming conventions and formats
- C. organized around important subject areas.
- D. contains only current data.

ANSWER: C

31. An operational system is _____.

- A. used to run the business in real time and is based on historical data.
- B. used to run the business in real time and is based on current data.
- C. used to support decision making and is based on current data.
- D. used to support decision making and is based on historical data.

ANSWER: B

32. The generic two-level data warehouse architecture includes _____.

- A. at least one data mart.
- B. data that can extracted from numerous internal and external sources.
- C. near real-time updates.
- D. far real-time updates.

ANSWER: C

33. The active data warehouse architecture includes _____.

- A. at least one data mart.
- B. data that can extracted from numerous internal and external sources.
- C. near real-time updates.
- D. all of the above.

ANSWER: D

34. Reconciled data is _____.

- A. data stored in the various operational systems throughout the organization.
- B. current data intended to be the single source for all decision support systems.
- C. data stored in one operational system in the organization.
- D. data that has been selected and formatted for end-user support applications.

ANSWER: B

35. Transient data is _____.

- A. data in which changes to existing records cause the previous version of the records to be eliminated.
- B. data in which changes to existing records do not cause the previous version of the records to be eliminated.
- C. data that are never altered or deleted once they have been added.
- D. data that are never deleted once they have been added.

ANSWER: A

36. The extract process is _____.

- A. capturing all of the data contained in various operational systems.
- B. capturing a subset of the data contained in various operational systems.
- C. capturing all of the data contained in various decision support systems.

D. capturing a subset of the data contained in various decision support systems.
ANSWER: B

37. Data scrubbing is _____.
- A. a process to reject data from the data warehouse and to create the necessary indexes.
 - B. a process to load the data in the data warehouse and to create the necessary indexes.
 - C. a process to upgrade the quality of data after it is moved into a data warehouse.
 - D. a process to upgrade the quality of data before it is moved into a data warehouse

ANSWER: D

38. The load and index is _____.
- A. a process to reject data from the data warehouse and to create the necessary indexes.
 - B. a process to load the data in the data warehouse and to create the necessary indexes.
 - C. a process to upgrade the quality of data after it is moved into a data warehouse.
 - D. a process to upgrade the quality of data before it is moved into a data warehouse.

ANSWER: B

39. Data transformation includes _____.
- A. a process to change data from a detailed level to a summary level.
 - B. a process to change data from a summary level to a detailed level.
 - C. joining data from one source into various sources of data.
 - D. separating data from one source into various sources of data.

ANSWER: A

40. _____ is called a multifield transformation.
- A. Converting data from one field into multiple fields.
 - B. Converting data from fields into field.
 - C. Converting data from double fields into multiple fields.
 - D. Converting data from one field to one field.

ANSWER: A

41. The type of relationship in star schema is _____.
- A. many-to-many.
 - B. one-to-one.
 - C. one-to-many.
 - D. many-to-one.

ANSWER: C

42. Fact tables are _____.
- A. completely demoralized.
 - B. partially demoralized.
 - C. completely normalized.
 - D. partially normalized.

ANSWER: C

43. _____ is the goal of data mining.
- A. To explain some observed event or condition.
 - B. To confirm that data exists.
 - C. To analyze data for expected relationships.
 - D. To create a new data warehouse.

ANSWER: A

44. Business Intelligence and data warehousing is used for _____.
- A. Forecasting.

- B. Data Mining.
- C. Analysis of large volumes of product sales data.
- D. All of the above.

ANSWER: D

45. The data administration subsystem helps you perform all of the following, except_____.

- A. backups and recovery.
- B. query optimization.
- C. security management.
- D. create, change, and delete information.

ANSWER: D

46. The most common source of change data in refreshing a data warehouse is _____.

- A. queryable change data.
- B. cooperative change data.
- C. logged change data.
- D. snapshot change data.

ANSWER: A

47. _____ are responsible for running queries and reports against data warehouse tables.

- A. Hardware.
- B. Software.
- C. End users.
- D. Middle ware.

ANSWER: C

48. Query tool is meant for _____.

- A. data acquisition.
- B. information delivery.
- C. information exchange.
- D. communication.

ANSWER: A

49. Classification rules are extracted from _____.

- A. root node.
- B. decision tree.
- C. siblings.
- D. branches.

ANSWER: B

50. Dimensionality reduction reduces the data set size by removing _____.

- A. relevant attributes.
- B. irrelevant attributes.
- C. derived attributes.
- D. composite attributes.

ANSWER: B

51. _____ is a method of incremental conceptual clustering.

- A. CORBA.
- B. OLAP.
- C. COBWEB.
- D. STING.

ANSWER: C

52. Effect of one attribute value on a given class is independent of values of other attribute is called _____.

- A. value independence.
- B. class conditional independence.
- C. conditional independence.
- D. unconditional independence.

ANSWER: A

53. The main organizational justification for implementing a data warehouse is to provide _____.

- A. cheaper ways of handling transportation.
- B. decision support.
- C. storing large volume of data.
- D. access to data.

ANSWER: C

54. Maintenance of cache consistency is the limitation of _____.

- A. NUMA.
- B. UNAM.
- C. MPP.
- D. PMP.

ANSWER: C

55. Data warehouse architecture is based on _____.

- A. DBMS.
- B. RDBMS.
- C. Sybase.
- D. SQL Server.

ANSWER: B

56. Source data from the warehouse comes from _____.

- A. ODS.
- B. TDS.
- C. MDDB.
- D. ORDBMS.

ANSWER: A

57. _____ is a data transformation process.

- A. Comparison.
- B. Projection.
- C. Selection.
- D. Filtering.

ANSWER: D

58. The technology area associated with CRM is _____.

- A. specialization.
- B. generalization.
- C. personalization.
- D. summarization.

ANSWER: C

59. SMP stands for _____.

- A. Symmetric Multiprocessor.
- B. Symmetric Multiprogramming.
- C. Symmetric Metaprogramming.

D. Symmetric Microprogramming.
ANSWER: A

60. _____ are designed to overcome any limitations placed on the warehouse by the nature of the relational data model.

- A. Operational database.
- B. Relational database.
- C. Multidimensional database.
- D. Data repository.

ANSWER: C

61. _____ are designed to overcome any limitations placed on the warehouse by the nature of the relational data model.

- A. Operational database.
- B. Relational database.
- C. Multidimensional database.
- D. Data repository.

ANSWER: C

62. MDDDB stands for _____.

- A. multiple data doubling.
- B. multidimensional databases.
- C. multiple double dimension.
- D. multi-dimension doubling.

ANSWER: B

63. _____ is data about data.

- A. Metadata.
- B. Microdata.
- C. Minidata.
- D. Multidata.

ANSWER: A

64. _____ is an important functional component of the metadata.

- A. Digital directory.
- B. Repository.
- C. Information directory.
- D. Data dictionary.

ANSWER: C

65. EIS stands for _____.

- A. Extended interface system.
- B. Executive interface system.
- C. Executive information system.
- D. Extendable information system.

ANSWER: C

66. _____ is data collected from natural systems.

- A. MRI scan.
- B. ODS data.
- C. Statistical data.
- D. Historical data.

ANSWER: A

67. _____ is an example of application development environments.

- A. Visual Basic.
- B. Oracle.
- C. Sybase.
- D. SQL Server.

ANSWER: A

68. The term that is not associated with data cleaning process is _____.

- A. domain consistency.
- B. deduplication.
- C. disambiguation.
- D. segmentation.

ANSWER: D

69. _____ are some popular OLAP tools.

- A. Metacube, Informix.
- B. Oracle Express, Essbase.
- C. HOLAP.
- D. MOLAP.

ANSWER: A

70. Capability of data mining is to build _____ models.

- A. retrospective.
- B. interrogative.
- C. predictive.
- D. imperative.

ANSWER: C

71. _____ is a process of determining the preference of customer's majority.

- A. Association.
- B. Preferencing.
- C. Segmentation.
- D. Classification.

ANSWER: B

72. Strategic value of data mining is _____.

- A. cost-sensitive.
- B. work-sensitive.
- C. time-sensitive.
- D. technical-sensitive.

ANSWER: C

73. _____ proposed the approach for data integration issues.

- A. Ralph Campbell.
- B. Ralph Kimball.
- C. John Raphlin.
- D. James Gosling.

ANSWER: B

74. The terms equality and roll up are associated with _____.

- A. OLAP.
- B. visualization.
- C. data mart.
- D. decision tree.

ANSWER: C

75. Exceptional reporting in data warehousing is otherwise called as _____.

- A. exception.
- B. alerts.
- C. errors.
- D. bugs.

ANSWER: B

76. _____ is a metadata repository.

- A. Prism solution directory manager.
- B. CORBA.
- C. STUNT.
- D. COBWEB.

ANSWER: A

77. _____ is an expensive process in building an expert system.

- A. Analysis.
- B. Study.
- C. Design.
- D. Information collection.

ANSWER: D

78. The full form of KDD is _____.

- A. Knowledge database.
- B. Knowledge discovery in database.
- C. Knowledge data house.
- D. Knowledge data definition.

ANSWER: B

79. The first International conference on KDD was held in the year _____.

- A. 1996.
- B. 1997.
- C. 1995.
- D. 1994.

ANSWER: C

80. Removing duplicate records is a process called _____.

- A. recovery.
- B. data cleaning.
- C. data cleansing.
- D. data pruning.

ANSWER: B

81. _____ contains information that gives users an easy-to-understand perspective of the information stored in the data warehouse.

- A. Business metadata.
- B. Technical metadata.
- C. Operational metadata.
- D. Financial metadata.

ANSWER: A

82. _____ helps to integrate, maintain and view the contents of the data warehousing system.

- A. Business directory.
- B. Information directory.
- C. Data dictionary.
- D. Database.

ANSWER: B

83. Discovery of cross-sales opportunities is called _____.

- A. segmentation.
- B. visualization.
- C. correction.
- D. association.

ANSWER: D

84. Data marts that incorporate data mining tools to extract sets of data are called _____.

- A. independent data mart.
- B. dependent data marts.
- C. intra-entry data mart.
- D. inter-entry data mart.

ANSWER: B

85. _____ can generate programs itself, enabling it to carry out new tasks.

- A. Automated system.
- B. Decision making system.
- C. Self-learning system.
- D. Productivity system.

ANSWER: D

86. The power of self-learning system lies in _____.

- A. cost.
- B. speed.
- C. accuracy.
- D. simplicity.

ANSWER: C

87. Building the informational database is done with the help of _____.

- A. transformation or propagation tools.
- B. transformation tools only.
- C. propagation tools only.
- D. extraction tools.

ANSWER: A

88. How many components are there in a data warehouse?

- A. two.
- B. three.
- C. four.
- D. five.

ANSWER: D

89. Which of the following is not a component of a data warehouse?

- A. Metadata.
- B. Current detail data.
- C. Lightly summarized data.
- D. Component Key.

ANSWER: D

90. _____ is data that is distilled from the low level of detail found at the current detailed leve.
- A. Highly summarized data.
 - B. Lightly summarized data.
 - C. Metadata.
 - D. Older detail data.

ANSWER: B

91. Highly summarized data is _____.
- A. compact and easily accessible.
 - B. compact and expensive.
 - C. compact and hardly accessible.
 - D. compact.

ANSWER: A

92. A directory to help the DSS analyst locate the contents of the data warehouse is seen in _____.
- A. Current detail data.
 - B. Lightly summarized data.
 - C. Metadata.
 - D. Older detail data.

ANSWER: C

93. Metadata contains atleast _____.
- A. the structure of the data.
 - B. the algorithms used for summarization.
 - C. the mapping from the operational environment to the data warehouse.
 - D. all of the above.

ANSWER: D

94. Which of the following is not a old detail storage medium?
- A. Phot Optical Storage.
 - B. RAID.
 - C. Microfinche.
 - D. Pen drive.

ANSWER: D

95. The data from the operational environment enter _____ of data warehouse.
- A. Current detail data.
 - B. Older detail data.
 - C. Lightly summarized data.
 - D. Highly summarized data.

ANSWER: A

96. The data in current detail level resides till _____ event occurs.
- A. purge.
 - B. summarization.
 - C. archived.
 - D. all of the above.

ANSWER: D

97. The dimension tables describe the _____.
- A. entities.
 - B. facts.
 - C. keys.

D. units of measures.

ANSWER: B

98. The granularity of the fact is the _____ of detail at which it is recorded.

- A. transformation.
- B. summarization.
- C. level.
- D. transformation and summarization.

ANSWER: C

99. Which of the following is not a primary grain in analytical modeling?

- A. Transaction.
- B. Periodic snapshot.
- C. Accumulating snapshot.
- D. All of the above.

ANSWER: B

100. Granularity is determined by _____.

- A. number of parts to a key.
- B. granularity of those parts.
- C. both A and B.
- D. none of the above.

ANSWER: C

101. _____ of data means that the attributes within a given entity are fully dependent on the entire primary key of the entity.

- A. Additivity.
- B. Granularity.
- C. Functional dependency.
- D. Dimensionality.

ANSWER: C

102. A fact is said to be fully additive if _____.

- A. it is additive over every dimension of its dimensionality.
- B. additive over atleast one but not all of the dimensions.
- C. not additive over any dimension.
- D. None of the above.

ANSWER: A

103. A fact is said to be partially additive if _____.

- A. it is additive over every dimension of its dimensionality.
- B. additive over atleast one but not all of the dimensions.
- C. not additive over any dimension.
- D. None of the above.

ANSWER: B

104. A fact is said to be non-additive if _____.

- A. it is additive over every dimension of its dimensionality.
- B. additive over atleast one but not all of the dimensions.
- C. not additive over any dimension.
- D. None of the above.

ANSWER: C

105. Non-additive measures can often combined with additive measures to create new _____.

- A. additive measures.
- B. non-additive measures.
- C. partially additive.
- D. All of the above.

ANSWER: A

106. A fact representing cumulative sales units over a day at a store for a product is a _____.

- A. additive fact.
- B. fully additive fact.
- C. partially additive fact.
- D. non-additive fact.

ANSWER: B

107. _____ of data means that the attributes within a given entity are fully dependent on the entire primary key of the entity.

- A. Additivity.
- B. Granularity.
- C. Functional Dependency.
- D. Dependency.

ANSWER: C

108. Which of the following is the other name of Data mining?

- A. Exploratory data analysis.
- B. Data driven discovery.
- C. Deductive learning.
- D. All of the above.

ANSWER: D

109. Which of the following is a predictive model?

- A. Clustering.
- B. Regression.
- C. Summarization.
- D. Association rules.

ANSWER: B

110. Which of the following is a descriptive model?

- A. Classification.
- B. Regression.
- C. Sequence discovery.
- D. Association rules.

ANSWER: C

111. A _____ model identifies patterns or relationships.

- A. Descriptive.
- B. Predictive.
- C. Regression.
- D. Time series analysis.

ANSWER: A

112. A predictive model makes use of _____.

- A. current data.
- B. historical data.
- C. both current and historical data.
- D. assumptions.

ANSWER: B

113. _____ maps data into predefined groups.

- A. Regression.
- B. Time series analysis
- C. Prediction.
- D. Classification.

ANSWER: D

114. _____ is used to map a data item to a real valued prediction variable.

- A. Regression.
- B. Time series analysis.
- C. Prediction.
- D. Classification.

ANSWER: B

115. In _____, the value of an attribute is examined as it varies over time.

- A. Regression.
- B. Time series analysis.
- C. Sequence discovery.
- D. Prediction.

ANSWER: B

116. In _____ the groups are not predefined.

- A. Association rules.
- B. Summarization.
- C. Clustering.
- D. Prediction.

ANSWER: C

117. Link Analysis is otherwise called as _____.

- A. affinity analysis.
- B. association rules.
- C. both A & B.
- D. Prediction.

ANSWER: C

118. _____ is a the input to KDD.

- A. Data.
- B. Information.
- C. Query.
- D. Process.

ANSWER: A

119. The output of KDD is _____.

- A. Data.
- B. Information.
- C. Query.
- D. Useful information.

ANSWER: D

120. The KDD process consists of _____ steps.

- A. three.
- B. four.

C. five.

D. six.

ANSWER: C

121. Treating incorrect or missing data is called as _____.

A. selection.

B. preprocessing.

C. transformation.

D. interpretation.

ANSWER: B

122. Converting data from different sources into a common format for processing is called as _____.

A. selection.

B. preprocessing.

C. transformation.

D. interpretation.

ANSWER: C

123. Various visualization techniques are used in _____ step of KDD.

A. selection.

B. transformaiion.

C. data mining.

D. interpretation.

ANSWER: D

124. Extreme values that occur infrequently are called as _____.

A. outliers.

B. rare values.

C. dimensionality reduction.

D. All of the above.

ANSWER: A

125. Box plot and scatter diagram techniques are _____.

A. Graphical.

B. Geometric.

C. Icon-based.

D. Pixel-based.

ANSWER: B

126. _____ is used to proceed from very specific knowledge to more general information.

A. Induction.

B. Compression.

C. Approximation.

D. Substitution.

ANSWER: A

127. Describing some characteristics of a set of data by a general model is viewed as _____

A. Induction.

B. Compression.

C. Approximation.

D. Summarization.

ANSWER: B

128. _____ helps to uncover hidden information about the data.

- A. Induction.
- B. Compression.
- C. Approximation.
- D. Summarization.

ANSWER: C

129. _____ are needed to identify training data and desired results.

- A. Programmers.
- B. Designers.
- C. Users.
- D. Administrators.

ANSWER: C

130. Overfitting occurs when a model _____.

- A. does fit in future states.
- B. does not fit in future states.
- C. does fit in current state.
- D. does not fit in current state.

ANSWER: B

131. The problem of dimensionality curse involves _____.

- A. the use of some attributes may interfere with the correct completion of a data mining task.
- B. the use of some attributes may simply increase the overall complexity.
- C. some may decrease the efficiency of the algorithm.
- D. All of the above.

ANSWER: D

132. Incorrect or invalid data is known as _____.

- A. changing data.
- B. noisy data.
- C. outliers.
- D. missing data.

ANSWER: B

133. ROI is an acronym of _____.

- A. Return on Investment.
- B. Return on Information.
- C. Repetition of Information.
- D. Runtime of Instruction

ANSWER: A

134. The _____ of data could result in the disclosure of information that is deemed to be confidential.

- A. authorized use.
- B. unauthorized use.
- C. authenticated use.
- D. unauthenticated use.

ANSWER: B

135. _____ data are noisy and have many missing attribute values.

- A. Preprocessed.
- B. Cleaned.
- C. Real-world.
- D. Transformed.

ANSWER: C

136. The rise of DBMS occurred in early _____.

- A. 1950's.
- B. 1960's
- C. 1970's
- D. 1980's.

ANSWER: C

137. SQL stand for _____.

- A. Standard Query Language.
- B. Structured Query Language.
- C. Standard Quick List.
- D. Structured Query list.

ANSWER: B

138. Which of the following is not a data mining metric?

- A. Space complexity.
- B. Time complexity.
- C. ROI.
- D. All of the above.

ANSWER: D

139. Reducing the number of attributes to solve the high dimensionality problem is called as _____.

- A. dimensionality curse.
- B. dimensionality reduction.
- C. cleaning.
- D. Overfitting.

ANSWER: B

140. Data that are not of interest to the data mining task is called as _____.

- A. missing data.
- B. changing data.
- C. irrelevant data.
- D. noisy data.

ANSWER: C

141. _____ are effective tools to attack the scalability problem.

- A. Sampling.
- B. Parallelization
- C. Both A & B.
- D. None of the above.

ANSWER: C

142. Market-basket problem was formulated by _____.

- A. Agrawal et al.
- B. Steve et al.
- C. Toda et al.
- D. Simon et al.

ANSWER: A

143. Data mining helps in _____.

- A. inventory management.
- B. sales promotion strategies.

- C. marketing strategies.
- D. All of the above.

ANSWER: D

144. The proportion of transaction supporting X in T is called _____.

- A. confidence.
- B. support.
- C. support count.
- D. All of the above.

ANSWER: B

145. The absolute number of transactions supporting X in T is called _____.

- A. confidence.
- B. support.
- C. support count.
- D. None of the above.

ANSWER: C

146. The value that says that transactions in D that support X also support Y is called _____.

- A. confidence.
- B. support.
- C. support count.
- D. None of the above.

ANSWER: A

147. If T consist of 500000 transactions, 20000 transaction contain bread, 30000 transaction contain jam, 10000 transaction contain both bread and jam. Then the support of bread and jam is _____.

- A. 2%
- B. 20%
- C. 3%
- D. 30%

ANSWER: A

148. 7 If T consist of 500000 transactions, 20000 transaction contain bread, 30000 transaction contain jam, 10000 transaction contain both bread and jam. Then the confidence of buying bread with jam is _____.

- A. 33.33%
- B. 66.66%
- C. 45%
- D. 50%

ANSWER: D

149. The left hand side of an association rule is called _____.

- A. consequent.
- B. onset.
- C. antecedent.
- D. precedent.

ANSWER: C

150. The right hand side of an association rule is called _____.

- A. consequent.
- B. onset.
- C. antecedent.
- D. precedent.

ANSWER: A

151. Which of the following is not a desirable feature of any efficient algorithm?

- A. to reduce number of input operations.
- B. to reduce number of output operations.
- C. to be efficient in computing.
- D. to have maximal code length.

ANSWER: D

152. All set of items whose support is greater than the user-specified minimum support are called as _____.

- A. border set.
- B. frequent set.
- C. maximal frequent set.
- D. lattice.

ANSWER: B

153. If a set is a frequent set and no superset of this set is a frequent set, then it is called _____.

- A. maximal frequent set.
- B. border set.
- C. lattice.
- D. infrequent sets.

ANSWER: A

154. Any subset of a frequent set is a frequent set. This is _____.

- A. Upward closure property.
- B. Downward closure property.
- C. Maximal frequent set.
- D. Border set.

ANSWER: B

155. Any superset of an infrequent set is an infrequent set. This is _____.

- A. Maximal frequent set.
- B. Border set.
- C. Upward closure property.
- D. Downward closure property.

ANSWER: C

156. If an itemset is not a frequent set and no superset of this is a frequent set, then it is _____.

- A. Maximal frequent set
- B. Border set.
- C. Upward closure property.
- D. Downward closure property.

ANSWER: B

157. A priori algorithm is otherwise called as _____.

- A. width-wise algorithm.
- B. level-wise algorithm.
- C. pincer-search algorithm.
- D. FP growth algorithm.

ANSWER: B

158. The A Priori algorithm is a _____.

- A. top-down search.

- B. breadth first search.
- C. depth first search.
- D. bottom-up search.

ANSWER: D

159. The first phase of A Priori algorithm is _____.

- A. Candidate generation.
- B. Itemset generation.
- C. Pruning.
- D. Partitioning.

ANSWER: A

160. The second phase of A Priori algorithm is _____.

- A. Candidate generation.
- B. Itemset generation.
- C. Pruning.
- D. Partitioning.

ANSWER: C

161. The _____ step eliminates the extensions of (k-1)-itemsets which are not found to be frequent, from being considered for counting support.

- A. Candidate generation.
- B. Pruning.
- C. Partitioning.
- D. Itemset eliminations.

ANSWER: B

162. The a priori frequent itemset discovery algorithm moves _____ in the lattice.

- A. upward.
- B. downward.
- C. breadthwise.
- D. both upward and downward.

ANSWER: A

163. After the pruning of a priori algorithm, _____ will remain.

- A. Only candidate set.
- B. No candidate set.
- C. Only border set.
- D. No border set.

ANSWER: B

164. The number of iterations in a priori _____.

- A. increases with the size of the maximum frequent set.
- B. decreases with increase in size of the maximum frequent set.
- C. increases with the size of the data.
- D. decreases with the increase in size of the data.

ANSWER: A

165. MFCS is the acronym of _____.

- A. Maximum Frequency Control Set.
- B. Minimal Frequency Control Set.
- C. Maximal Frequent Candidate Set.
- D. Minimal Frequent Candidate Set.

ANSWER: C

166. Dynamuc Itemset Counting Algorithm was proposed by ____.

- A. Bin et al.
- B. Argawal et at.
- C. Toda et al.
- D. Simon et at.

ANSWER: A

167. Itemsets in the _____ category of structures have a counter and the stop number with them.

- A. Dashed.
- B. Circle.
- C. Box.
- D. Solid.

ANSWER: A

168. The itemsets in the _____category structures are not subjected to any counting.

- A. Dashes.
- B. Box.
- C. Solid.
- D. Circle.

ANSWER: C

169. Certain itemsets in the dashed circle whose support count reach support value during an iteration move into the _____.

- A. Dashed box.
- B. Solid circle.
- C. Solid box.
- D. None of the above.

ANSWER: A

170. Certain itemsets enter afresh into the system and get into the _____, which are essentially the supersets of the itemsets that move from the dashed circle to the dashed box.

- A. Dashed box.
- B. Solid circle.
- C. Solid box.
- D. Dashed circle.

ANSWER: D

171. The itemsets that have completed on full pass move from dashed circle to _____.

- A. Dashed box.
- B. Solid circle.
- C. Solid box.
- D. None of the above.

ANSWER: B

172. The FP-growth algorithm has _____ phases.

- A. one.
- B. two.
- C. three.
- D. four.

ANSWER: B

173. A frequent pattern tree is a tree structure consisting of _____.

- A. an item-prefix-tree.

- B. a frequent-item-header table.
- C. a frequent-item-node.
- D. both A & B.

ANSWER: D

174. The non-root node of item-prefix-tree consists of _____ fields.

- A. two.
- B. three.
- C. four.
- D. five.

ANSWER: B

175. The frequent-item-header-table consists of _____ fields.

- A. only one.
- B. two.
- C. three.
- D. four.

ANSWER: B

176. The paths from root node to the nodes labelled 'a' are called _____.

- A. transformed prefix path.
- B. suffix subpath.
- C. transformed suffix path.
- D. prefix subpath.

ANSWER: D

177. The transformed prefix paths of a node 'a' form a truncated database of pattern which co-occur with a is called _____.

- A. suffix path.
- B. FP-tree.
- C. conditional pattern base.
- D. prefix path.

ANSWER: C

178. The goal of _____ is to discover both the dense and sparse regions of a data set.

- A. Association rule.
- B. Classification.
- C. Clustering.
- D. Genetic Algorithm.

ANSWER: C

179. Which of the following is a clustering algorithm?

- A. A priori.
- B. CLARA.
- C. Pincer-Search.
- D. FP-growth.

ANSWER: B

180. _____ clustering technique start with as many clusters as there are records, with each cluster having only one record.

- A. Agglomerative.
- B. divisive.
- C. Partition.
- D. Numeric.

ANSWER: A

181. _____ clustering techniques starts with all records in one cluster and then try to split that cluster into small pieces.

- A. Agglomerative.
- B. Divisive.
- C. Partition.
- D. Numeric.

ANSWER: B

182. Which of the following is a data set in the popular UCI machine-learning repository?

- A. CLARA.
- B. CACTUS.
- C. STIRR.
- D. MUSHROOM.

ANSWER: D

183. In _____ algorithm each cluster is represented by the center of gravity of the cluster.

- A. k-medoid.
- B. k-means.
- C. STIRR.
- D. ROCK.

ANSWER: B

184. In _____ each cluster is represented by one of the objects of the cluster located near the center.

- A. k-medoid.
- B. k-means.
- C. STIRR.
- D. ROCK.

ANSWER: A

185. Pick out a k-medoid algorithm.

- A. DBSCAN.
- B. BIRCH.
- C. PAM.
- D. CURE.

ANSWER: C

186. Pick out a hierarchical clustering algorithm.

- A. DBSCAN
- B. BIRCH.
- C. PAM.
- D. CURE.

ANSWER: A

187. CLARANS stands for _____.

- A. CLARA Net Server.
- B. Clustering Large Application Range Network Search.
- C. Clustering Large Applications based on RANdomized Search.
- D. CLustering Application Randomized Search.

ANSWER: C

188. BIRCH is a _____.

- A. agglomerative clustering algorithm.
- B. hierarchical algorithm.
- C. hierarchical-agglomerative algorithm.
- D. divisive.

ANSWER: C

189. The cluster features of different subclusters are maintained in a tree called _____.

- A. CF tree.
- B. FP tree.
- C. FP growth tree.
- D. B tree.

ANSWER: A

190. The _____ algorithm is based on the observation that the frequent sets are normally very few in number compared to the set of all itemsets.

- A. A priori.
- B. Clustering.
- C. Association rule.
- D. Partition.

ANSWER: D

191. The partition algorithm uses _____ scans of the databases to discover all frequent sets.

- A. two.
- B. four.
- C. six.
- D. eight.

ANSWER: A

192. The basic idea of the apriori algorithm is to generate _____ item sets of a particular size & scans the database.

- A. candidate.
- B. primary.
- C. secondary.
- D. superkey.

ANSWER: A

193. _____ is the most well known association rule algorithm and is used in most commercial products.

- A. Apriori algorithm.
- B. Partition algorithm.
- C. Distributed algorithm.
- D. Pincer-search algorithm.

ANSWER: A

194. An algorithm called _____ is used to generate the candidate item sets for each pass after the first.

- A. apriori.
- B. apriori-gen.
- C. sampling.
- D. partition.

ANSWER: B

195. The basic partition algorithm reduces the number of database scans to _____ & divides it into partitions.

- A. one.
- B. two.
- C. three.
- D. four.

ANSWER: B

196. _____ and prediction may be viewed as types of classification.

- A. Decision.
- B. Verification.
- C. Estimation.
- D. Illustration.

ANSWER: C

197. _____ can be thought of as classifying an attribute value into one of a set of possible classes.

- A. Estimation.
- B. Prediction.
- C. Identification.
- D. Clarification.

ANSWER: B

198. Prediction can be viewed as forecasting a _____ value.

- A. non-continuous.
- B. constant.
- C. continuous.
- D. variable.

ANSWER: C

199. _____ data consists of sample input data as well as the classification assignment for the data.

- A. Missing.
- B. Measuring.
- C. Non-training.
- D. Training.

ANSWER: D

200. Rule based classification algorithms generate _____ rule to perform the classification.

- A. if-then.
- B. while.
- C. do while.
- D. switch.

ANSWER: A

201. _____ are a different paradigm for computing which draws its inspiration from neuroscience.

- A. Computer networks.
- B. Neural networks.
- C. Mobile networks.
- D. Artificial networks.

ANSWER: B

202. The human brain consists of a network of _____.

- A. neurons.
- B. cells.
- C. Tissue.

D. muscles.
ANSWER: A

203. Each neuron is made up of a number of nerve fibres called _____.
A. electrons.
B. molecules.
C. atoms.
D. dendrites.

ANSWER: D

204. The _____ is a long, single fibre that originates from the cell body.
A. axon.
B. neuron.
C. dendrites.
D. strands.

ANSWER: A

205. A single axon makes _____ of synapses with other neurons.
A. ones.
B. hundreds.
C. thousands.
D. millions.

ANSWER: C

206. _____ is a complex chemical process in neural networks.
A. Receiving process.
B. Sending process.
C. Transmission process.
D. Switching process.

ANSWER: C

207. _____ is the connectivity of the neuron that give simple devices their real power. a. b. c. d.
A. Water.
B. Air.
C. Power.
D. Fire.

ANSWER: D

208. _____ are highly simplified models of biological neurons.
A. Artificial neurons.
B. Computational neurons.
C. Biological neurons.
D. Technological neurons.

ANSWER: A

209. The biological neuron's _____ is a continuous function rather than a step function.
A. read.
B. write.
C. output.
D. input.

ANSWER: C

210. The threshold function is replaced by continuous functions called _____ functions.
A. activation.

- B. deactivation.
- C. dynamic.
- D. standard.

ANSWER: A

211. The sigmoid function also knows as _____ functions.

- A. regression.
- B. logistic.
- C. probability.
- D. neural.

ANSWER: B

212. MLP stands for _____.

- A. mono layer perception.
- B. many layer perception.
- C. more layer perception.
- D. multi layer perception.

ANSWER: D

213. In a feed- forward networks, the connctetions between layers are _____ from input to output.

- A. bidirectional.
- B. unidirectional.
- C. multidirectional.
- D. directional.

ANSWER: B

214. The network topology is constrained to be _____.

- A. feedforward.
- B. feedbackward.
- C. feed free.
- D. feed busy.

ANSWER: A

215. RBF stands for _____.

- A. Radial basis function.
- B. Radial bio function.
- C. Radial big function.
- D. Radial bi function.

ANSWER: A

216. RBF have only _____ hidden layer.

- A. four.
- B. three.
- C. two.
- D. one.

ANSWER: D

217. RBF hidden layer units have a receptive field which has a _____; that is, a particular input value at which they have a maximal output.

- A. top.
- B. bottom.
- C. centre.
- D. border.

ANSWER: C

218. _____ training may be used when a clear link between input data sets and target output values does not exist.

- A. Competitive.
- B. Perception.
- C. Supervised.
- D. Unsupervised.

ANSWER: D

219. _____ employs the supervised mode of learning.

- A. RBF.
- B. MLP.
- C. MLP & RBF.
- D. ANN.

ANSWER: C

220. _____ design involves deciding on their centres and the sharpness of their Gaussians.

- A. DR.
- B. AND.
- C. XOR.
- D. RBF.

ANSWER: D

221. _____ is the most widely applied neural network technique.

- A. ABC.
- B. PLM.
- C. LMP.
- D. MLP.

ANSWER: D

222. SOM is an acronym of _____.

- A. self-organizing map.
- B. self origin map.
- C. single organizing map.
- D. simple origin map.

ANSWER: A

223. _____ is one of the most popular models in the unsupervised framework.

- A. SOM.
- B. SAM.
- C. OSM.
- D. MSO.

ANSWER: A

224. The actual amount of reduction at each learning step may be guided by _____.

- A. learning cost.
- B. learning level.
- C. learning rate.
- D. learning time.

ANSWER: C

225. The SOM was a neural network model developed by _____.

- A. Simon King.

- B. Teuvokohonen.
- C. Tomoki Toda.
- D. Julia.

ANSWER: B

226. SOM was developed during _____.

- A. 1970-80.
- B. 1980-90.
- C. 1990 -60.
- D. 1979 -82.

ANSWER: D

227. Investment analysis used in neural networks is to predict the movement of _____ from previous data.

- A. engines.
- B. stock.
- C. patterns.
- D. models.

ANSWER: B

228. SOMs are used to cluster a specific _____ dataset containing information about the patient's drugs etc.

- A. physical.
- B. logical.
- C. medical.
- D. technical.

ANSWER: C

229. GA stands for _____.

- A. Genetic algorithm
- B. Gene algorithm.
- C. General algorithm.
- D. Geo algorithm.

ANSWER: A

230. GA was introduced in the year _____.

- A. 1955.
- B. 1965.
- C. 1975.
- D. 1985.

ANSWER: C

231. Genetic algorithms are search algorithms based on the mechanics of natural_____.

- A. systems.
- B. genetics.
- C. logistics.
- D. statistics.

ANSWER: B

232. GAs were developed in the early _____.

- A. 1970.
- B. 1960.
- C. 1950.
- D. 1940.

ANSWER: A

233. The RSES system was developed in _____.

- A. Poland.
- B. Italy.
- C. England.
- D. America.

ANSWER: A

234. Crossover is used to _____.

- A. recombine the population's genetic material.
- B. introduce new genetic structures in the population.
- C. to modify the population's genetic material.
- D. All of the above.

ANSWER: A

235. The mutation operator _____.

- A. recombine the population's genetic material.
- B. introduce new genetic structures in the population.
- C. to modify the population's genetic material.
- D. All of the above.

ANSWER: B

236. Which of the following is an operation in genetic algorithm?

- A. Inversion.
- B. Dominance.
- C. Genetic edge recombination.
- D. All of the above.

ANSWER: D

237. . _____ is a system created for rule induction.

- A. RBS.
- B. CBS.
- C. DBS.
- D. LERS.

ANSWER: D

238. NLP stands for _____.

- A. Non Language Process.
- B. Nature Level Program.
- C. Natural Language Page.
- D. Natural Language Processing.

ANSWER: D

239. Web content mining describes the discovery of useful information from the _____ contents.

- A. text.
- B. web.
- C. page.
- D. level.

ANSWER: B

240. Research on mining multi-types of data is termed as _____ data.

- A. graphics.
- B. multimedia.

- C. meta.
 - D. digital.
- ANSWER: B

241. _____ mining is concerned with discovering the model underlying the link structures of the web.

- A. Data structure.
- B. Web structure.
- C. Text structure.
- D. Image structure.

ANSWER: B

242. _____ is the way of studying the web link structure.

- A. Computer network.
- B. Physical network.
- C. Social network.
- D. Logical network.

ANSWER: C

243. The _____ propose a measure of standing a node based on path counting.

- A. open web.
- B. close web.
- C. link web.
- D. hidden web.

ANSWER: B

244. In web mining, _____ is used to find natural groupings of users, pages, etc.

- A. clustering.
- B. associations.
- C. sequential analysis.
- D. classification.

ANSWER: A

245. In web mining, _____ is used to know the order in which URLs tend to be accessed.

- A. clustering.
- B. associations.
- C. sequential analysis.
- D. classification.

ANSWER: C

246. In web mining, _____ is used to know which URLs tend to be requested together.

- A. clustering.
- B. associations.
- C. sequential analysis.
- D. classification.

ANSWER: B

247. _____ describes the discovery of useful information from the web contents.

- A. Web content mining.
- B. Web structure mining.
- C. Web usage mining.
- D. All of the above.

ANSWER: A

248. _____ is concerned with discovering the model underlying the link structures of the web.

- A. Web content mining.
- B. Web structure mining.
- C. Web usage mining.
- D. All of the above.

ANSWER: B

249. A link is said to be _____ link if it is between pages with different domain names.

- A. intrinsic.
- B. transverse.
- C. direct.
- D. contrast.

ANSWER: B

250. A link is said to be _____ link if it is between pages with the same domain name.

- A. intrinsic.
- B. transverse.
- C. direct.
- D. contrast.

ANSWER: A

Staff Name
LAXMI.SREE.B.R.

Things I do for L

	marks	question	A	B	C	D	ans
0	1	To integrate heterogeneous databases, how many approaches are there in Data Warehousing?	2	3	4	5	Data warehousing involves data cleaning, data integration, and data consolidations. To integrate heterogeneous databases, we have the following two approaches: Query Driven Approach, Update Driven Approach
1	1	_____ refers to the description and model regularities or trends for objects whose behavior changes over time.	Evolution Analysis	Outlier Analysis	Prediction	Classification	Evolution Analysis: Evolution analysis refers to the description and model regularities or trends for objects whose behavior changes over time.
2	1	The mapping or classification of a class with some predefined group or class is known as?	Data Discrimination	Data Characterization	Data Set	Data Sub Structure	Data Discrimination: It refers to the mapping or classification of a class with some predefined group or class
3	1	In which step of Knowledge Discovery, multiple data sources are combined?	Data Integration	Data Cleaning	Data Selection	Data Transformation	Data Integration: multiple data sources are combined.
4	1	What is the strategic value of data mining?	Time-sensitive	Work-sensitive.	Cost-sensitive	Technical-sensitive.	Time-Sensitive is the strategic value of data mining.
5	2	The first step involved in knowledge discovery is?	Data Cleaning	Data Selection	Data Transformation	Data Integration	The first step involved in the knowledge discovery is Data Integration.
6	2	Which of the following is not a data mining functionality?	Selection and interpretation	Classification and regression	Characterization and Discrimination	Clustering and Analysis	Selection and interpretation is not a function of data mining
7	2	In Data Characterization, the class under study is called as?	Target Class	Initial Class	Study Class	Final Class	Data Characterization: This refers to summarizing data of class under study. This class under study is called Target Class.
8	2	Capability of data mining is to build _____ models.	Predictive.	Interrogative.	Retrospective.	Imperative.	The predictive model has the capability of data mining

	marks	question	A	B	C	D	ans
9	2	"Handling of relational and complex types of data" issue comes under?	Diverse Data Types Issues	Performance Issues	Mining Methodology and User Interaction Issues	None	The database may contain complex data objects, multimedia data objects, spatial data, temporal data, etc. One system can't mine all this kind of data.
10	2	What is true about data mining?	All	Data mining also involves other processes such as Data Cleaning, Data Integration, Data Transformation	Data mining is the procedure of mining knowledge from data.	Data Mining is defined as the procedure of extracting information from huge sets of data	Data Mining is defined as extracting information from huge sets of data. In other words, we can say that data mining is the procedure of mining knowledge from data. The information or knowledge is extracted so that it can be used.
11	2	What is KDD	Knowledge Discovery Database	Knowledge Database	Knowledge Data House	Knowledge Data Definition	The KDD stands for Knowledge Discovery Database.
12	2	Which of the following is the correct application of data mining?	All	Corporate Analysis & Risk Management	Fraud Detection	Market Analysis and Management	Data mining is highly useful in the following domains: Market Analysis and Management, Corporate Analysis & Risk Management, Fraud Detection
13	2	Which of the following is not a data mining metric?	All	Time complexity.	ROI	Space complexity.	All of the above are algorithm metrics.
14	2	DMQL stands for?	Data Mining Query Language	Dataset Mining Query Language	DBMiner Query Language	Data Marts Query Language	The Data Mining Query Language (DMQL) was proposed by Han, Fu, Wang, et al. for the DBMiner data mining system.

	marks	question	A	B	C	D	ans
15	2	The analysis performed to uncover interesting statistical correlations between associated-attribute-value pairs is called?	Mining of Correlations	Mining of Clusters	Mining of Association	None	Mining of Correlations: It is a kind of additional analysis performed to uncover interesting statistical correlations between associated-attribute-value pairs or between two item sets to analyze that if they have positive, negative, or no effect on each other.
16	2	What is the use of data cleaning?	All	Correct the inconsistencies in data	Transformations to correct the wrong data.	To remove the noisy data	Data cleaning is a technique that is applied to remove the noisy data and correct the inconsistencies in data. Data cleaning involves transformations to correct the wrong data. Data cleaning is performed as a data preprocessing step while preparing the data for a data warehouse.
17	2	"Efficiency and scalability of data mining algorithms" issues come under?	Performance Issues	Mining Methodology and User Interaction Issues	Diverse Data Types Issues	None	In order to effectively extract the information from a huge amount of data in databases, the data mining algorithm must be efficient and scalable.
18	3	Data mining helps in _____.	All	Sales promotion strategies.	Marketing strategies.	Inventory management.	All are the properties of data mining
19	3	_____ may be defined as the data objects that do not comply with the general behavior or model of the data available.	Outlier Analysis	Evolution Analysis	Prediction	Classification	Outlier Analysis: Outliers may be defined as the data objects that do not comply with the general behavior or model of the data available.
20	3 is a comparison of the general features of the target class data objects against the general features of objects from one or multiple contrasting classes.	Data discrimination	Data Classification	Data Characterization	Data selection	Data discrimination is the feature

	marks	question	A	B	C	D	ans
21	3	A sequence of patterns that occur frequently is known as?	Frequent Subsequence	. Frequent Item Set	Frequent Sub Structure	All of the above	Frequent Subsequence: A sequence of patterns that occur frequently such as purchasing a camera is followed by a memory card.
22	3	----- is an essential process where intelligent methods are applied to extract data patterns.	Data mining	Data warehousing	Text mining	Data selection	Data mining is an essential process where AI is used.
23	3	Does the pattern evaluation issue come under?	Mining Methodology and User Interaction Issues	Performance Issues	Diverse Data Types Issues	None of the above	Pattern evaluation: The patterns discovered should be interesting because either they represent common knowledge or lack of novelty.
24	3	What predicts future trends & behaviors, allowing business managers to make proactive, knowledge-driven decisions.	Data mining.	Data warehouse.	Datamarts.	Metadata.	Data mining predicts future trends.
25	3	Which of the following is the other name of Data mining?	All	Data-driven discovery.	Deductive learning.	Exploratory data analysis.	All the above are the name of data mining
26	3	How many categories of functions involved in Data Mining?	2	3	4	5	There are two categories of functions involved in Data Mining: 1. Descriptive, 2. Classification and Prediction
27	3	Does Data Mining System Classification consist of?	All	Machine Learning	Information Science	Database Technology	A data mining system can be classified according to the following criteria: Database Technology, Statistics, Machine Learning, Information Science, Visualization, Other Disciplines
28	3	Which of the following is the correct disadvantage of the Query-Driven Approach in Data Warehousing?	All	It is very inefficient and very expensive for frequent queries.	This approach is expensive for queries that require aggregations.	The Query Driven Approach needs complex integration and filtering processes.	All statements are a disadvantage of the Query-Driven Approach in Data Warehousing.
29	3	Which of the following is the correct advantage of the Update-Driven Approach in Data Warehousing?	Both A and B	The data can be copied, processed, integrated, annotated, summarized, and restructured in the semantic data store in advance.	This approach provides high performance.	None	Both A and B are the advantages of the Update-Driven Approach in Data Warehousing.

	marks	question	A	B	C	D	ans
30	1	SELECT item name, color, clothes SIZE, SUM(quantity)\nFROM sales\nGROUP BY rollup(item name, color, clothes SIZE);\nHow many grouping is possible in this rollup?\n	4	8	2	1	{ (item name, color, clothes size), (item name, color), (item name), () }.
31	1	The operation of changing the dimensions used in a cross-tab is called as _____	Pivoting	Alteration	Piloting	Renewing	We can change the dimensions used in a cross tab. The operation of changing a dimension used in a cross-tab is called pivoting.
32	1	OLAP stands for	Online analytical processing	Online analysis processing	Online transaction processing	Online aggregate processing	OLAP is the manipulation of information to support decision making.
33	1	State true or false: In OLAP, analysts cannot view a dimension in different levels of detail.	"False"	"True"	None	None	In OLAP, analysts cannot view a dimension in different levels of detail. The different levels of detail are classified into a hierarchy.
34	1	Data that can be modeled as dimension attributes and measure attributes are called _____ data.	Multidimensional	Singledimensional	Measured	Dimensional	Given a relation used for data analysis, we can identify some of its attributes as measure attributes, since they measure some value, and can be aggregated upon.
35	1	Business Intelligence and data warehousing is used for _____.	All	Data Mining.	Analysis of large volumes of product sales data.	Forecasting	All are used in data ware house
36	1	The operation of moving from coarser granular data to finer granular data is called _____	Drill down	Increment	Rollback	Reduction	OLAP systems permit users to view the data at any level of granularity. The process of moving from finer granular data to coarser granular data is called as drill- down.
37	2	The operation of moving from finer-granularity data to a coarser granularity (using aggregation) is called a _____	Rollup	Drill down	Dicing	Pivoting	The opposite operation—that of moving from coarser- granularity data to finer-granularity data—is called a drill down.

	marks	question	A	B	C	D	ans
38	2	State true or false: OLAP systems can be implemented as client-server systems	"True"	"False"	None	None	OLAP systems can be implemented as client-server systems. Most of the current OLAP systems are implemented as client-server systems.
39	2	Data that can be modelled as dimension attributes and measure attributes are called _____	Multi-dimensional data	Mono-dimensional data	Measurable data	Efficient data	Data that can be modeled as dimension attributes and measure attributes are called multi-dimensional data.
40	2	The process of viewing the cross-tab (Single dimensional) with a fixed value of one attribute is	Slicing	Dicing	Pivoting	Both Slicing and Dicing	The slice operation selects one particular dimension from a given cube and provides a new sub-cube. Dice selects two or more dimensions from a given cube and provides a new sub-cube.
41	2	The time horizon in Data warehouse is usually _____.	5-10 years.	3-4 years	5-6 years.	1-2 years.	5 to 10 years is the horizon time
42	2	How many dimensions of multi-dimensional data do cross tabs enable analysts to view?	2	1	3	None	Cross-tabs enables analysts to view two dimensions of multi-dimensional data, along with the summaries of the data.
43	2	What do data warehouses support?	OLAP	OLTP	OLAP and OLTP	Operational databases	OLAP support data warehouses
44	2	Data warehouse architecture is based on _____.	RDBMS	DBMS	Sybase.	SQL Server	RDBMS is the data warehouse architecture.
45	2	What does collector_type_id stands for in the following code snippet? core.sp_remove_collector_type [@collector_type_uid =] 'collector_type_uid'	uniqueidentifier	membership role	directory	None	collector_type_uid is the GUID for the collector type.
46	2	The generalization of cross-tab which is represented visually is _____ which is also called as a data cube.	Two-dimensional cube	Multidimensional cube	N-dimensional cube	Cuboid	Each cell in the cube is identified for the values for the three-dimensional attributes.
47	2	The source of all data warehouse data is the_____.	Operational environment.	Informal environment.	Formal environment.	Technology environment	Operational environment is the source of data warehouse

	marks	question	A	B	C	D	ans
48	3	What is the sum of all components of a normalized histogram?	1	-1	0	None	A normalized histogram, $p(rk) = \frac{n_k}{n}$ Where, n is total number of pixels in image, r_k the k th gray level and n_k total pixels with gray level r_k . Here, $p(rk)$ gives the probability of occurrence of r_k .
49	3	Which of the following OLAP systems do not exist?	None	MOLAP	ROLAP	HOLAP	HOLAP means Hybrid OLAP, MOLAP means multidimensional OLAP, ROLAP means relational OLAP. This means all of the above OLAP systems exist.
50	3	We want to add the following capabilities to Table2: show the data for 3 age groups (20-39, 40-60, over 60), 3 revenue groups (less than \$10,000, \$10,000-\$30,000, over \$30,000) and add a new type of account: Money market. The total number of measures will be:	More than 100	4	Between 10 and 30 (boundaries include D.	Between 40 and 60 (boundaries include D.	More than 100 is the capabilities to Table2
51	3	The _____ function allows substitution of values in an attribute of a tuple	Decode	Unknown	Cube	Substitute	The decode function allows substitution of values in an attribute of a tuple. The decode function does not always work as we might like for null values because predicates on null values evaluate to unknown.
52	3	The operation of moving from finer granular data to coarser granular data is called _____	Roll up	Increment	Reduction	Drill down	OLAP systems permit users to view the data at any level of granularity. The process of moving from finer granular data to coarser granular data is called as a roll-up.
53	3	The _____ engine for a data warehouse supports query-triggered usage of data	OLAP	SMTP	NNTP	POP	OLAP is the engine of data warehouse
54	3	In SQL the cross-tabs are created using	Slice	Dice	Pivot	All	Pivot (sum(quantity) for color in ('dark', 'pastel', 'white')).

	marks	question	A	B	C	D	ans
55	3	Which one of the following is the right syntax for DECODE?	DECODE (expression, search, result [, search, result]... [, default])	DECODE (expression, result [, search, result]... [, default], search)	DECODE (search, result [, search, result]... [, default], expression)	DECODE (search, expression, result [, search, result]... [, default])	The right syntax for DECODE is DECODE (expression, search, result [, search, result]... [, default])
56	3	The value at the intersection of the row labeled "India" and the column "Savings" in Table2 should be:	800000	300000	200000	300000	800,000 is value at the intersection of the row labeled "India" and the column "Savings" in Table2
57	3	_____ is the heart of the warehouse.	Data warehouse database servers	Data mining database servers.	Data mart database servers.	Relational data base servers.	The heart of data warehouse is Data warehouse database servers.
58	3	{ (item name, color, clothes size), (item name, color), (item name, clothes size), (color, clothes size), (item name), (color), (clothes size), () }	None	Group by the cubic	Group by	Group by rollup	'Group by cube' is used.
59	3	The data Warehouse is _____.	Read-only.	Write only.	Read write only	None	The data warehouse is read-only
60	1	Cluster analysis is a type of... ?	Unsupervised data mining	Supervised data mining	Depends on the data	Can not say	Unsupervised data mining is the cluster analysis
61	1	Challenges of clustering includes?	All	Scalability	Noisy data	High dimensionality of data	All are the challenges of clustering
62	1	Which of the following combination is incorrect?	None	Continuous – correlation similarity	Binary – manhattan distance	Continuous – euclidean distance	You should choose a distance/similarity that makes sense for your problem.
63	1	Hierarchical clustering should be primarily used for exploration.	"True"	"False"	None	None	Hierarchical clustering is deterministic.
64	1	In clustering high dimensional data comes with problems like?	All	Reduction of algorithm performance	Reduction in algorithm efficiency	Increase in complexity	All mention are the problems od clustering
65	1	Which of the following clustering requires merging approach?	Hierarchical	Partitional	Naive Bayes	None	Hierarchical clustering requires a defined distance as well.
66	1	Which of the following is required by K-means clustering?	All	Number of clusters	Initial guess as to cluster centroids	Defined distance metric	K-means clustering follows the partitioning approach.
67	1	Which clustering procedure is characterized by the formation of a tree like structure?	Hierarchical clustering	Optimizing partitioning	Partition based clustering	Density clustering	Hierarchical clustering is tree like structure.
68	1	Point out the wrong statement.	k-nearest neighbor is same as k- means	none er	k-means clustering aims to partition n observations into k clusters	k-means clustering is a method of vector quantization	k-nearest neighbor has nothing to do with k-means.
69	2	What is dissimilarity?	Both a and b	A metric that is used to measure the closeness of objects.	A metric that is used in clustering.	None	Dissimilarity means metric used in clustering and closeness of objects.

	marks	question	A	B	C	D	ans
70	2	The most important part of ... is selecting the attributes on which clustering is done?	Formulating the clustering problem	Data preprocessing for clustering	Deciding the clustering procedure	Analysing the cluster	Formulating the clustering problem is the important part of clustering.
71	2	K-means is not deterministic and it also consists of number of iterations.	"True"	"False"	None	None	K-means clustering produces the final estimate of cluster centroids.
72	2	k-means clustering is also referred to as?	Non-hierarchical clustering	Optimizing partitioning	Divisive clustering	Agglomerative clustering	Non-hierarchical clustering is called as k-means clustering
73	2	Which is not a type of clustering?	Decision driven	Similarity based	Density based	Partition Based	All other are the type of clustering
74	2	Which of the following is finally produced by Hierarchical Clustering?	Tree showing how close things are to each other	Final estimate of cluster centroids	Assignment of each point to clusters	All	Hierarchical clustering is an agglomerative approach.
75	2	Which of the following is not clustering technique?	Derivative	Agglomerative	Partitioning	Density Based	Derivative is not a clustering technique.
76	2	Which of the following function is used for k-means clustering?	k-means	k-mean	heatmap	None	K-means requires a number of clusters.
77	2	Which of the below sentences is true with respect of clustering?	In clustering, larger the distance the more similar the object	The dendrogram is read from right to left	Clustering should be done on samples of 300 or more	Cluster analysis reduces the number of objects, not the number of variables, by grouping them into a much smaller number of clusters	In clustering, larger the distance the more similar the object is true for clustering.
78	2	Clustering is what type of learning?	Unsupervised	supervised	Semi-supervised	None	Unsupervised is a type of learning
79	2	Point out the correct statement.	All	Hierarchical clustering is also called HCA	In general, the merges and splits are determined in a greedy manner	The choice of an appropriate metric will influence the shape of the clusters	Some elements may be close to one another according to one distance and farther away according to another.
80	2	Hierarchical clustering is slower than non-hierarchical clustering?	"True"	"False"	Depends on data	Can not say	Hierarchical clustering is slower than non-hierarchical clustering
81	3	When does a model is said to do over-fitting?	It does not fit in future state	It does not fit in current state	It does not fit in both current and future state	None	It does not fit in future state is a model.
82	3	What is a cluster?	Group of similar objects with significant dissimilarity with objects of other groups	Group objects having a similar feature from a group of similar objects.	Simplification of data to make it ready for a classification algorithm.	None	The group of similar objects with significant dissimilarity with objects of other groups is called as cluster

	marks	question	A	B	C	D	ans
83	3	Which method of analysis does not classify variables as dependent or independent?	Cluster analysis	Discriminant analysis	Analysis of variance	Regression analysis	Cluster analysis is not classify variables as dependent or independent
84	3	In clustering ?	Groups are not predefined	Groups are predefined	Depends on the data	Can not say	Groups are not predefined in clustering
85	3	Which of the following are clustering techniques?	All	Density Based	Partitioning	Agglomerative	All are the clustering techniques.
86	3	What is clustering?	Process of grouping similar objects	Process of classifying new object	Both a and b	None of the above	Clustering is a group of similar objects
87	3	When is density based clustering preferred?	All	Not sure about the number of clusters present	Noise and outliers are present	Clusters are irregular or intertwined	All are the density based clustering
88	3	In the K-means clustering algorithm the distance between cluster centroid to each object is calculated usingmethod.	Euclidean distance	Cluster distance	Cluster width	None	Euclidean distance is the k-means clustering algorithm.
89	1	Which technique finds the frequent itemsets in just two database scans?	Partitioning	Sampling	Hashing	Dynamic itemset counting	Partitioning is technique that finds the frequent itemsets
90	1	What is association rule mining?	Finding of strong association rules using frequent itemsets	Same as frequent itemset mining	Using association to analyse correlation rules	None	Finding of strong association rules using frequent itemsets is an association rule.
91	1	An itemset whose no proper super-itemset has same support is closed itemsets	An itemset which is both closed and frequent	A frequent itemset	A closed itemset A closed itemset	None	An itemset which is both closed and frequent are closed frequent itemsets.
92	1	Which of the following is true?	Both apriori and FP-Growth uses horizontal data format	Both apriori and FP-Growth uses vertical data format	Apriori uses horizontal and FP-Growth uses vertical data format	Apriori uses vertical and FP-Growth uses horizontal data format	Both apriori and FP-Growth uses horizontal data format is true
93	1	What will happen if support is reduced?	Some itemsets will add to the current set of frequent itemsets	The number of frequent itemsets remains same	Some itemsets will become infrequent while others will become frequent	Can not say	Support is reduced by some itemsets will add to the current set of frequent itemsets
94	1	How do you calculate Confidence(A -> B)?	$\frac{\text{Support}(A \cup B)}{\text{Support}(A)}$	$\frac{\text{Support}(A \cup B)}{\text{Support}(B)}$	$\frac{\text{Support}(A \cup B)}{\text{Support}(A)}$	$\frac{\text{Support}(A \cup B)}{\text{Support}(B)}$	None
95	1	What is the principle on which Apriori algorithm work?	If a rule is infrequent, its specialized rules are also infrequent	If a rule is infrequent, its generalized rules are also infrequent	Both a and b	None	The Apriori algorithm works on if a rule is infrequent, its specialized rules are also infrequent
96	1	What does Apriori algorithm	It mines all frequent patterns through pruning rules with lesser support	It mines all frequent patterns through pruning rules with higher support	Both a and b	None of the above	Apriori algorithm works on It mines all frequent patterns through pruning rules with lesser support

	marks	question	A	B	C	D	ans
97	2	What are maximal frequent itemsets?	A frequent itemset whose no super-itemset is frequent	A frequent itemset whose super-itemset is also frequent	A non-frequent itemset whose super-itemset is frequent	None	A frequent itemset whose no super-itemset is frequent is maximal frequent itemsets.
98	2	What is not true about FP growth algorithms?	It expands the original database to build FP trees.	There are chances that FP trees may not fit in the memory.	FP trees are very expensive to build .	It mines frequent itemsets without candidate generation.	It expands the original database to build FP trees is not true
99	2	Which of these is not a frequent pattern mining algorithm?	Decision trees	FP growth	Apriori	Eclat	Decision trees is not a frequent pattern mining algorithm
100	2	This clustering algorithm terminates when mean values computed for the current iteration of the algorithm are identical to the computed mean values for the previous iteration	K-Means clustering	Conceptual clustering	Expectation maximization	Agglomerative clustering	K-Means clustering is the current iteration of the algorithm.
101	2	Which of the following is not null invariant measure(that does not considers null transactions)?	lift	max_confidence	cosine measure	all_confidence	lift is not null invariant measure
102	2	What is the difference between absolute and relative support?	Absolute - Minimum support count threshold and Relative - Minimum support threshold	Absolute - Minimum support threshold and Relative - Minimum support count threshold	Both mean same	None	None
103	2	Can FP growth algorithm be used if FP tree cannot be fit in memory?	No	Yes	Both a and b	None of the above	No we cannot use FP growth algorithm
104	2	What are closed itemsets?	An itemset whose no proper super-itemset has same support	An itemset for which at least one proper super-itemset has same support	An itemset for which at least super-itemset has same confidence	An itemset whose no proper super-itemset has same confidence	An itemset whose no proper super-itemset has same support is closed itemsets
105	2	What does FP growth algorithm do?	It mines all frequent patterns by constructing a FP tree	It mines all frequent patterns through pruning rules with higher support	It mines all frequent patterns through pruning rules with lesser support	All	FP growth algorithm do all frequent patterns by constructing a FP tree.
106	2	What do you mean by support(A)?	A Number of transactions containing A / Total number of transactions	Total Number of transactions not containing A	Total number of transactions containing	Number of transactions not containing A / Total number of transactions Ans: Number of transactions containing A / Total number of transactions	Support (A) means Number of transactions containing A / Total number of transactions
107	2	Find all strong association rules given the support is 0.6 and confidence is 0.8.	→ I5, →	→ I5, → → I2	Null rule set	Cannot be determined	None
108	3	When do you consider an association rule interesting?	If it satisfies both min_support and min_confidence	If it only satisfies min_confidence	If it only satisfies min_support If it satisfies both min_support and min_confidence	There are other measures to check so	If it satisfies both min_support and min_confidence association rule works

	marks	question	A	B	C	D	ans
109	3	When is sub-itemset pruning done?	When both a and b is true	A frequent itemset 'P' is a proper subset of another frequent itemset 'Q'	Support (P) = Support(Q)	When a is true and b is not	both are true when sub-itemset pruning is done
110	3	What is the effect of reducing min confidence criteria on the same?	Some association rules will add to the current set of association rules	Number of association rules remains same.	Some association rules will become invalid while others might become a rule.	Can not say	Some association rules will add to the current set of association rules is the effect of reducing min confidence criteria on the same
111	3	Which of the following is direct application of frequent itemset mining?	Market Basket Analysis	Social Network Analysis	Outlier Detection	Intrusion Detection	Market Basket Analysis is direct application of frequent itemset mining.
112	3	Why is correlation analysis important? For questions given below consider the data Transactions : 1. I1, I2, I3, I4, I5, I6 2. I7, I2, I3, I4, I5, I6 3. I1, I8, I4, I5 4. I1, I9, I10, I4, I6 5. I10, I2, I4, I11, I5	To weed out uninteresting frequent itemsets	To make apriori memory efficient	To find large number of interesting itemsets	To restrict the number of database iterations	To weed out uninteresting frequent itemsets is correlation analysis
113	3	The apriori algorithm works in a ..and ..fashion?	Bottom-up and breath-first	Top-down and breath-first	Bottom-up and depth-first	Top-down and depth-first	Apriori algorithm works in bottom-up and breath-first fashion.
114	3	Which algorithm requires fewer scans of data?	FP growth	Apriori	Both a and b	None	FP growth algorithm requires fewer scans of data
115	3	Find odd man out:	DBSCAN	K mean	PAM	K medoid	None
116	3	What techniques can be used to improve the efficiency of apriori algorithm?	All	Transaction Reduction	Partitioning	Hash-based techniques	All techniques are used to improve the efficiency of apriori algorithm
117	3	What is the relation between candidate and frequent itemsets?	A frequent itemset must be a candidate itemset	A candidate itemset is always a frequent itemset	No relation between the two	Both are same	Relation between candidate and frequent itemsets is frequent itemset must be a candidate itemset
118	3	What are Max_confidence, Cosine similarity, All_confidence?	Pattern evaluation measure	Measures to improve efficiency of apriori	Frequent pattern mining algorithms	None	Pattern evaluation measure are Max_confidence, Cosine similarity, All_confidence
119	1	End Nodes are represented by _____	Triangles	Squares	Disks	Circles	None
120	1	Multivariate split is where the partitioning of tuples is based on a combination of attributes rather than on a single attribute.	"True"	"False"	None	None	None
121	1	Self-organizing maps are an example of	Unsupervised learning	Supervised learning	Reinforcement learning	Missing data imputation	None
122	1	Assume you want to perform supervised learning and to predict number of newborns according to size of storks' population (http://www.brixtonhealth.com/storksBabies.pdf), it is an example of	Regression	Classification	Clustering	Structural equation modeling	Regression can predict number of newborns according to size of storks' population

	marks	question	A	B	C	D	ans
123	1	Some telecommunication company wants to segment their customers into distinct groups to send appropriate subscription offers, this is an example of	Unsupervised learning	Data extraction	Serration	Supervised learning	Unsupervised learning is telecommunication company
124	1	Decision Nodes are represented by _____	Squares	Disks	Circles	Triangles	None
125	1	In the example of predicting number of babies based on storks' population size, number of babies is	Outcome	Feature	Attribute	Observation	Outcome is the example of predicting numbers.
126	1	Cost complexity pruning algorithm is used in?	CART	C4	ID3	All	None
127	1	Attribute selection measures are also known as splitting rules.	"True"	"False"	None	None	Attribute selection measures are also known as splitting rules
128	1	How will you counter over-fitting in decision tree?	By pruning the longer rules	By creating new rules	Both By pruning the longer rules' and 'By creating new rules'	None of the options	By pruning the longer rules you can counter over-fitting in decision tree
129	1	Gain ratio tends to prefer unbalanced splits in which one partition is much smaller than the other.	"True"	"False"	None	None	Gain ratio tends to prefer unbalanced splits in which one partition is much smaller than the other.
130	2	Which of the following classifications would best suit the student performance classification systems?	If...then... analysis	Market-basket analysis	Regression analysis	Cluster analysis	If...then... analysis is the best suit the student performance classification systems
131	2	A _____ is a decision support tool that uses a tree-like graph or model of decisions and their possible consequences, including chance event outcomes, resource costs, and utility.	Decision tree	Graphs	Trees	Neural Networks	Refer the definition of Decision tree.
132	2	Cost complexity pruning algorithm is used in?	CART	C4.5	ID3	All	CART is the cost complexity used
133	2	The problem of finding hidden structure in unlabeled data is called	Unsupervised learning	Supervised learning	Reinforcement learning	Data extraction	Unsupervised learning is unlabeled data
134	2	You are given data about seismic activity in Japan, and you want to predict a magnitude of the next earthquake, this is in an example of	Supervised learning	Unsupervised learning	Serration	Dimensionality reduction	None
135	2	What is the approach of basic algorithm for decision tree induction?	Greedy	Top Down	Procedural	Step by Step	Greedy approach is basic algorithm for decision tree induction
136	2	Choose from the following that are Decision Tree nodes?	All	End Nodes	Chance Nodes	Decision Nodes	None
137	2	Which of the following sentences are true?	All	A pruning set of class labelled tuples is used to estimate cost complexity.	The best pruned tree is the one that minimizes the number of encoding bits.	In pre-pruning a tree is 'pruned' by halting its construction early.	All statements are true
138	2	Which of the following is not involve in data mining?	Knowledge extraction	Data transformation	Data exploration	Data archaeology	Data transformation is not involved in data mining

	marks	question	A	B	C	D	ans
139	2	Gini index does not favour equal sized partitions.	"False"	"True"	None	None	Gini index favour equal sized partitions
140	3	What is Decision Tree?	Flow-Chart & Structure in which internal node represents test on an attribute, each branch represents outcome of test and each leaf node represents class label	Structure in which internal node represents test on an attribute, each branch represents outcome of test and each leaf node represents class label	Flow-Chart	None	Refer the definition of Decision tree.
141	3	Which one of these is not a tree based learner?	Bayesian classifier	ID3	CART	Random Forest	None
142	3	Task of inferring a model from labeled training data is called	Supervised learning	Unsupervised learning	Reinforcement learning	Complex learning	Task of inferring a model from labeled training data is called Supervised learning
143	3	What are two steps of tree pruning work?	Postpruning and Prepruning	Pessimistic pruning and Optimistic pruning	Cost complexity pruning and time complexity pruning	None of the options	Postpruning and Prepruning are two steps of tree pruning.
144	3	What are tree-based classifiers?	Both	Classifiers that perform a series of condition checking with one attribute at a time	Classifiers which form a tree with each attribute at one level	None	Both are tree-based classifiers
145	3	Which one of these is a tree based learner?	Random Forest	Bayesian Belief Network	Bayesian classifier	Rule based	Random Forest is the tree-based learner.
146	3	Which of the following are the advantage/s of Decision Trees?	All	Use a white box model, If given result is provided by a model	Worst, best and expected values can be determined for different scenarios	Possible Scenarios can be added	None
147	3	When the number of classes is large Gini index is not a good choice.	"True"	"False"	None	None	Gini index is not a good choice
148	3	Discriminating between spam and ham e-mails is a classification task, true or false?	"True"	"False"	None	None	None
149	1	Point out the wrong statement.	Simple random sampling of time series is probably the best way to resample times series data.	Three parameters are used for time series splitting	Horizon parameter is the number of consecutive values in test set sample	All	Simple random sampling of time series is probably not the best way to resample times series data.
150	1	The cluster sampling, stratified sampling or systematic samplings are types of _____	Random sampling	Indirect sampling	Direct sampling	Non random sampling	The cluster sampling, stratified sampling or systematic samplings are types of random sampling.
151	1	Which of the following can be used to generate balanced cross-validation groupings from a set of data?	createFolds	createSample	createResample	None	createResample can be used to make simple bootstrap samples.

	marks	question	A	B	C	D	ans
152	1	Which of the following is classified as unknown or exact value that represents the whole population?	Parameter	Guider	Predictor	Estimator	The unknown or exact value that represents the whole population is called as parameter. Generally parameters are defined by small Roman symbols.
153	1	Which of the following is NOT supervised learning?	PCA	Decision Tree	Linear Regression	Naive Bayesian	PCA is a technique for reducing the dimensionality of large datasets, increasing interpretability but at the same time minimizing information loss.
154	1	In which of the following types of sampling the information is carried out under the opinion of an expert?	Judgement sampling	Convenience sampling	Purposive sampling	Quota sampling	In judgement sampling is carried under an opinion of an expert. The judgement sampling often results in a bias because of the variance in the expert opinion.
155	1	Which of the following package tools are present in caret?	All	Feature selection	Model tuning	Pre-processing	There are many different modeling functions in R.
156	1	Which of the following can be used to create sub-samples using a maximum dissimilarity approach?	maxDissim	minDissim	inmaxDissim	All	Splitting is based on the predictors.
157	2	Which of the factors affect the performance of learner system does not include?	Good data structures	Training scenario	Type of feedback	Representation scheme used	Factors that affect the performance of learner system does not include good data structures.
158	2	Which of the following function can be used to create balanced splits of the data?	createDataPartition	newDataPartition	renameDataPartition	None	If the argument to this function is a factor, the random sampling occurs within each class and should preserve the overall class distribution of the data.
159	2	In language understanding, the levels of knowledge that does not include?	Empirical	Syntactic	Phonological	Logical	In language understanding, the levels of knowledge that do not include empirical knowledge.
160	2	Which of the following function can create the indices for time series type of splitting?	createTimeSlices	newTimeSlices	binTimeSlices	None	Rolling forecasting origin techniques are associated with time series type of splitting.

	marks	question	A	B	C	D	ans
161	2	The selected clusters in a clustering sampling are known as _____	Elementary units	Primary units	Secondary units	Proportional units	In Cluster the population is divided into various groups called as clusters. The selected clusters in a sample are called as elementary units.
162	2	Among the following which is not a horn clause?	$p \rightarrow \emptyset q$	$\emptyset p \vee q$	$p \rightarrow q$	p	$p \rightarrow \emptyset q$ is not a horn clause.
163	2	High entropy means that the partitions in classification are	Not pure	Pure	Useful	Useless	Entropy is a measure of the randomness in the information being processed. The higher the entropy, the harder it is to draw any conclusions from that information.\nIt is a measure of disorder or purity or unpredictability or uncertainty.\n
164	2	A sample size is considered large in which of the following cases?	$n > \text{or} = 30$	$n > \text{or} = 50$	$n < \text{or} = 30$	$n < \text{or} = 50$	Generally a sample having 30 or more sample values is called a large sample. By the Central Limit Theorem such a sample follows a Normal Distribution.
165	2	The method of selecting a desirable portion from a population which describes the characteristics of whole population is called as _____	Sampling	Segregating	Dividing	Implanting	The method of selecting a desirable portion from a population that describes the characteristics of the whole population is called as Sampling.
166	2	Which of the following statements about Naive Bayes is incorrect?	Attributes are statistically dependent of one another given the class value.	Attributes are equally important.	Attributes are statistically independent of one another given the class value.	Attributes can be nominal or numeric	Attributes are statistically dependent of one another given the class value Attributes are statistically independent of one another given the class value.
167	2	Sampling error increases as we increase the sampling size.	"False"	"True"	None	None	Sampling error is inversely proportional to the sampling size. As the sampling size increases the sampling error decreases.

	marks	question	A	B	C	D	ans
168	2	Point out the correct statement.	All	Caret includes several functions to pre-process the predictor data	The function dummyVars can be used to generate a complete set of dummy variables from one or more factors	Asymptotics are used for inference usually	The function dummyVars takes a formula and a data set and outputs an object that can be used to create the dummy variables using the predict method.
169	2	If the mean of population is 29 then the mean of sampling distribution is _____	29	30	21	31	In a sampling distribution the mean of the population is equal to the mean of the sampling distribution. Hence mean of population=29. Hence mean of sampling distribution=29.
170	3	Caret stands for classification and regression training.	"True"	"False"	None	None	The caret package is a set of functions that attempt to streamline the process for creating predictive models.
171	3	Caret does not use the proxy package.	"False"	"True"	None	None	Caret uses the proxy package.
172	3	A model of language consists of the categories which does not include?	Structural units	Role structure of units	System constraints	Language units	A model of language consists of the categories which does not include structural units.
173	3	Suppose we want to make a voters list for the general elections 2019 then we require _____	Census	Sampling error	Random error	Simple error	Study of population is called a Census. Hence for making a voter list for the general elections 2019 we require Census.
174	3	Different learning methods does not include?	Introduction	Analogy	Deduction	Memorization	Different learning methods does not include the introduction.
175	3	Suppose we would like to perform clustering on spatial data such as the geometrical locations of houses. We wish to produce clusters of many different sizes and shapes. Which of the following methods is the most appropriate?	Density-based clustering	Decision Trees	Model-based clustering	K-means clustering	The density-based clustering methods recognize clusters based on the density function distribution of the data object. For clusters with arbitrary shapes, these algorithms connect regions with sufficiently high densities into clusters.

	marks	question	A	B	C	D	ans
176	3	Which of the following function can be used to maximize the minimum dissimilarities?	All	minDiss	avgDiss	sumDiss	sumDiss can be used to maximize the total dissimilarities.
177	3	In sampling distribution what does the parameter k represents _____	Sampling interval	Secondary interval	Multi stage interval	Sub stage interval	In sampling distribution the parameter k represents Sampling interval. It represents the distance between which data is taken.
178	3	A machine learning problem involves four attributes plus a class. The attributes have 3, 2, 2, and 2 possible values each. The class has 3 possible values. How many maximum possible different examples are there?	72	24	48	12	Maximum possible different examples are the products of the possible values of each attribute and the number of classes; $3 * 2 * 2 * 2 * 3 = 72$

Things I do for LCU

1Data selection is:

- A. The actual discovery phase of a knowledge discovery process
- B. The stage of selecting the right data for a KDD process
- C. A subject-oriented integrated time variant non-volatile collection of data in support of management
- D. None of these

Answer: B

2Discovery is:

- A. It is hidden within a database and can only be recovered if one is given certain clues (an example IS encrypted information).
- B. The process of executing implicit previously unknown and potentially useful information from data
- C. An extremely complex molecule that occurs in human chromosomes and that carries genetic information in the form of genes.
- D. None of these

Answer: B

3Data mining is:

- A. The actual discovery phase of a knowledge discovery process
- B. The stage of selecting the right data for a KDD process
- C. A subject-oriented integrated time variant non-volatile collection of data in support of management
- D. None of these

Answer: A

4Knowledge engineering is:

- A. The process of finding the right formal representation of a certain body of knowledge in order to represent it in a knowledge-based system
- B. It automatically maps an external signal space into a system's internal representational space. They are useful in the performance of classification tasks.
- C. A process where an individual learns how to carry out a certain task when making a transition from a situation in which the task cannot be carried out to a situation in which the same task under the same circumstances can be carried out.
- D. None of these

Answer: A

5KDD (Knowledge Discovery in Databases) is referred to:

- A. Non-trivial extraction of implicit previously unknown and potentially useful information from data
- B. Set of columns in a database table that can be used to identify each record within this table uniquely.
- C. collection of interesting and useful patterns in a database
- D. none of these

6Knowledge is referred to:

- A. Non-trivial extraction of implicit previously unknown and potentially useful information from data
- B. Set of columns in a database table that can be used to identify each record within this table uniquely
- C. collection of interesting and useful patterns in a database
- D. none of these

Answer: C

7Operational database is:

- A. A measure of the desired maximal complexity of data mining algorithms

- B. A database containing volatile data used for the daily operation of an organization
- C. Relational database management system
- D. None of these

Answer: B

8 Which of the following is not a data mining functionality?

- A. Characterization and Discrimination
- B. Classification and regression
- C. Selection and interpretation
- D. Clustering and Analysis

Answer: C

9 The various aspects of data mining methodologies is/are

- i. Mining various and new kinds of knowledge
- ii. Mining knowledge in multidimensional space
- iii. Pattern evaluation and pattern or constraint-guided mining.
- iv) Handling uncertainty, noise, or incompleteness of data

10 The full form of KDD is

- A. Knowledge Database
- B. Knowledge Discovery Database
- C. Knowledge Data House
- D. Knowledge Data Definition

Answer: B

11 The output of KDD is

- A. Data
- B. Information
- C. Query
- D. Useful information/Knowledge

Answer: D

12 The process of removing the deficiencies and loopholes in the data is called as

- A. Aggregation of data
- B. Extracting of data
- C. Cleaning up of data.
- D. Loading of data

Answer: C

13 Which of the following process includes data cleaning, data integration, data selection, data transformation, data mining, pattern evolution and knowledge presentation?

- A. KDD process
- B. ETL process
- C. KTL process
- D. MDX process

Answer: A

14 Data mining application domains are

- A. Biomedical
- B. DNA data analysis
- C. Financial data analysis
- D. Retail industry and telecommunication industry
- E. All (a), (b), (c) and (d) above.

Answer: E

15 Which of the following is/are the Data mining tasks?

- A. Regression
- B. Classification
- C. Clustering
- D. inference of associative rules
- E. All (a), (b), (c) and (d) above.

Answer: E

16 Which of the following is not an ETL tool?

- A. Informatica
- B. Oracle warehouse builder
- C. Datastage
- D. Visual studio

Answer: D

17 _____ is not a data mining functionality?

- A. Clustering and Analysis
- B. Selection and interpretation
- C. Classification and regression
- D. Characterization and Discrimination

ANSWER: B

18 To remove noise and inconsistent data _____ is needed.

(A)

Data Cleaning

(B)

Data Transformation

(C)

Data Reduction

(D)

Data Integration

Answer: A

19 Multiple data sources may be combined is called as _____

(A)

Data Reduction

(B)

Data Cleaning

(C)

Data Integration

(D)

Data Transformation

Answer:C

20What is the use of data cleaning?

- A. to remove the noisy data
- B. correct the inconsistencies in data
- C. transformations to correct the wrong data.
- D. All of the above

Answer:D

21Data set {brown, black, blue, green , red} is example of Select one:

- A. Continuous attribute
- B. Ordinal attribute
- C. Numeric attribute
- D. Nominal attribute

Answer:D

22Binary attribute are

A.

This takes only two values. In general, these values will be 0 and 1 and .they can be coded as one bit

B.

The natural environment of a certain species

C.

Systems that can be used without knowledge of internal operations

D.

None of these

Answer:A

23Euclidean distance measure is

A.

A stage of the KDD process in which new data is added to the existing selection.

B.

The process of finding a solution for a problem simply by enumerating all possible solutions according to some pre-defined order and then testing them

C.

The distance between two points as calculated using the Pythagoras theorem

D. None of These

24 If there is a very strong correlation between two variables then the correlation coefficient must be

- a. any value larger than 1
- b. much smaller than 0, if the correlation is negative
- c. much larger than 0, regardless of whether the correlation is negative or positive
- d. None of these alternatives is correct.

Answer: B

Things I do for LCU

Which of the following is a good alternative to the star schema?

- A. Snowflake schema
- B. Star schema
- C. Star snowflake schema
- D. Fact constellation

ANSWER: D

Patterns that can be discovered from a given database are which type

- A. More than one type
- B. Multiple types always
- C. One type only
- D. No specific type

ANSWER: A

A star schema has what type of relationship between a dimension and fact table?

- A. Many-to-many
- B. One-to-one
- C. One-to-many
- D. All of the above.

ANSWER: C

A snowflake schema is which of the following types of tables?

- A. Fact
- B. Dimension
- C. Helper
- D. All of the above

ANSWER: D

Euclidean distance measure is

- A. A stage of the KDD process in which new data is added to the existing selection.
- B. The process of finding a solution for a problem simply by enumerating all possible solutions according to some pre-defined order and then testing them
- C. The distance between two points as calculated using the Pythagoras theorem
- D. None of these

ANSWER: C

Which one manages both current and historic transactions?

- A. OLTP
- B. OLAP
- C. Spread sheet
- D. XML

Answer: B

The data Warehouse is_____.

- A. ReadOnly
- B. WriteOnly
- C. Read and write only
- D. None of these

ANSWER: A

Expansion for DSS in DW is_____.

- A. Decision Support system
- B. Decision Single System
- C. Data Storable System
- D. Data support system

ANSWER: A

The time horizon in Data warehouse is usually _____.

- A. 1-2 years
- B. 3-4 years
- C. 5-6 years
- D. 5-10 years

ANSWER: D

_____describes the data contained in the data warehouse

- A. Relational data
- B. Operational Data
- C. Meta Data
- D. Informational Data

ANSWER: C

Treating incorrect or missing data is called as _____.

- A. Selection.
- B. Preprocessing
- C. Transformation
- D. Interpretation

ANSWER: B

Converting data from different sources into a common format for processing is called as_____.

- A. Selection.
- B. Preprocessing
- C. Transformation
- D. Interpretation

ANSWER: C

Which is not a property of data warehouse?

- A. Subject oriented
- B. Time variant
- C. Volatile
- D. collection from heterogeneous sources

ANSWER: C

Data warehousing is used in_____

- A. Transaction System
- B. Database management system
- C. Decision support system
- D. Expert system

ANSWER: C

What are the characteristics of OLAP systems?

- A. Query driven
- B. More users
- C. Integrated

D. Store current data

ANSWER: C

Data warehouse is based on_____

- A. two dimensional model
- B. three dimensional model
- C. Multi dimensional model
- D. Unidimensional model

ANSWER: C

Data warehousing is related to_____

- A. delete data
- B. Update data
- C. Write new data
- D. scan and load data for analysis

ANSWER: D

Multidimensional model of data warehouse called as_____

- A. data structure
- B. table
- C. tree
- D. data cube

ANSWER: D

OLAP usage is_____

- A. Repetative
- B. Adhoc
- C. Frequently
- D. Daily

ANSWER: B

In data warehousing what is time-variant data?

- A. Data in the warehouse is only accurate and valid at some point in time or over time interval
- B. Data in the warehouse is always accurate and valid
- C. Data in the warehouse is not accurate
- D. Data in the warehouse is only accurate sometimes

ANSWER: A

Is the data in a data warehouse generally updated in real-time?

- A. YES
- B. NO

ANSWER: B

What is a Star Schema?

- A. A star schema consists of a fact table with a single table for each dimension
- B. A star schema is a type of database system
- C. A star schema is used when exporting data from the database
- D. None of these

ANSWER: A

What is a Snowflake Schema?

- A. Each dimension table is normalized, which may create additional

tables attached to the dimension tables

- B. A Snowflake schema is a type of database system
- C. A Snowflake schema is used when exporting data from the database
- D. None of these

ANSWER: A

What does the acronym ETL stands for?

- A. Explain, Transfer and Lead
- B. Extract, Transform and Load
- C. Extract, Transfer and Load
- D. Effect, Transfer and Load

ANSWER: B

What is the system of data warehousing mostly used for?

- A. Data integration and Data Mining
- B. Data Mining and Data Storage
- C. Reporting and Data Analysis
- D. Data Cleaning and Data Storage

ANSWER: C

Which small logical units do data warehouses hold large amounts of information?

- A. Data Storage
- B. Data Marts
- C. Access layers
- D. Data Miners

ANSWER: B

Why do we need ODS?

- A. To update data periodically
- B. To prepare data for ETL
- C. To back up data
- D. To prepare data for regression

ANSWER: B

Which one is correct for data warehousing?

- A. It can be updated by end users
- B. It can solve all business questions
- C. It is designed for focus subject areas
- D. It contains only current data

ANSWER: C

Why do we apply in snowflake schema?

- A. Aggregation
- B. Normalization
- C. Specialization
- D. Generalization

ANSWER: B

The data collected in data warehouse can be used for analyzing purposes.

- A. TRUE
- B. FALSE

ANSWER: A

A snowflake schema is a normalized star schema

- A. TRUE
- B. FALSE

ANSWER: A

A fact table is related to dimensional table as a ____ relationship

- A. 1:M
- B. M:N
- C. M:1
- D. 1:1

ANSWER: C

Data warehouse contains _____ data that is never found in the operational environment

- A. normalized.
- B. Informational
- C. Summary
- D. Denormalized

ANSWER: C

Things I do for LCU

Identify correct type of attribute.

- A. nominal
- B. binary
- C. ordinal
- D. All of these

ANSWER: D

Minkowski distance is a function used to find the distance between two

- A. Binary vectors
- B. Boolean-valued vectors
- C. Real-valued vectors
- D. Categorical vectors

ANSWER: C

Which distance measure is similar to Simple Matching Coefficient (SMC)?

- A. Euclidean
- B. Hamming
- C. Jaccard
- D. Manhattan

ANSWER: B

Data set of designation {Professor, Assistant Professor, Associate Professor} is example of _____ attribute.

- A. Continuous
- B. Ordinal
- C. Numeric
- D. Nominal

ANSWER: D

Identify correct example of ordinal attributes?

- A. Price of product
- B. Age of person
- C. Car colors
- D. Students Grade

ANSWER: D

Identify the correct example of Nominal Attributes.

- A. Weight of person in Kg
- B. Income categories – HIGH, MEDIUM, LOW
- C. Mobile number
- D. All above

ANSWER: B

Consider the two objects i and j with nominal attributes, the dissimilarity between these objects are calculated using below equation:

$d(i,j) = (p-m)/p$. In this formula what p and m represents?

- A. m is the number of matches, p is the total number of rows in the dataset
- B. m is the number of matches, p is the total number of variables/features
- C. m is the matrix, p is the total number of variables/features

D. All are wrong

ANSWER: B

When objects are represented using single attribute, the proximity value 1 indicates :

- A. Objects are similar
- B. Objects are dissimilar
- C. Not equal
- D. Reflexive

ANSWER: A

The name of the table used for measuring similarity between objects represented using 2 or more binary attributes is:

- A. Square Matrix
- B. Contingency Table
- C. Triangular Matrix
- D. None of the above

ANSWER: B

Gender is the example of Asymmetric Binary Attribute.

- A. TRUE
- B. FALSE

ANSWER: B

Identify correct equation of Jaccard Coefficient:

- A. $J = f_{11} / (f_{01} + f_{10} + f_{11})$
- B. $J = (f_{11} + f_{00}) / (f_{01} + f_{10} + f_{11})$
- C. $J = (f_{11} + f_{00}) / (f_{01} + f_{10})$
- D. None of these

ANSWER: A

If distance d is given we can calculate similarity using equation $s = d - 1$. (True/ False)

- A. True
- B. False

ANSWER: A

What equation we get when r parameter =2 in Minkowski Distance formula?

- A. Manhattan distance
- B. Euclidean distance
- C. LMaximum Distance
- D. All

ANSWER: B

Identify the distance measure to calculate distance between two objects:

- A. Manhattan
- B. L2
- C. L1
- D. Contingency Matrix

ANSWER: A

_____ is a generalization of Manhattan, Euclidean and Max Distance

- A. Euclidean Distance
- B. Minkowski Distance
- C. Manhattan distance
- D. Jaccard Distance

ANSWER: B

_____ distance is based on L2 norm.

- A. Euclidean Distance
- B. Minkowski Distance
- C. Manhattan distance
- D. Jaccard Distance

ANSWER: A

_____ distance is based on L1 norm.

- A. Euclidean Distance
- B. Minkowski Distance
- C. Manhattan distance
- D. Jaccard Distance

ANSWER: C

_____ refers to a similarity or dissimilarity

- A. Distance
- B. Proximity
- C. Euclidean
- D. Manhattan

ANSWER: B

Which is not the type of attribute used in distance measure?

- A. Ordinal
- B. Nominal
- C. Binary
- D. Rank

ANSWER: D

_____ method is used to find the distance between two objects represented by Nominal attributes.

- A. Euclidean Distance
- B. Minkowski Distance
- C. Manhattan distance
- D. Simple Matching

ANSWER: D

_____ method is used to find the distance between two objects represented by numerical attributes.

- A. Euclidean Distance
- B. Minkowski Distance
- C. Manhattan distance
- D. All of these

ANSWER: D

_____ method is used to find the distance between two objects represented by Binary attributes.

- A. Euclidean Distance
- B. Minkowski Distance

- C. Manhattan distance
- D. Jaccard coefficient

ANSWER: D

Contingency table is prepared for _____ attribute data.

- A. Ordinal
- B. Nominal
- C. Binary
- D. Integer

ANSWER: C

Which is not the property of distance?

- A. Distance is nonnegative number
- B. Distance of an object to itself is 0
- C. Distance is a symmetric function
- D. Distance is negative number

ANSWER: D

If d_1 and d_2 are two vectors, identify correct equation of cosine similarity.

- A. $\text{Cos}(d_1, d_2) = (d_1 \cdot d_2) / ||d_1|| ||d_2||$
- B. $\text{Cos}(d_1, d_2) = ||d_1|| ||d_2|| / (d_1 \cdot d_2)$
- C. $\text{Cos}(d_1, d_2) = (d_1 \cdot d_2)$
- D. $\text{Cos}(d_1, d_2) = (d_1 \cdot d_2) / ||d_1||$

ANSWER: A

Which are the applications of proximity measures?

- A. Classification
- B. Clustering
- C. KNN classifier
- D. All of these

ANSWER: D

If o_1 and o_2 are two objects and distance between these objects is 1 then o_1 and o_2 are totally similar (True/false)

- A. True
- B. False

ANSWER: B

If o_1 and o_2 are two objects and distance between these objects is 1 then o_1 and o_2 are totally dissimilar (True/false)

- A. True
- B. False

ANSWER: A

_____ matrix represents the distance between all objects in the dataset

- A. Confusion
- B. Dissimilarity
- C. Similarity
- D. Square

ANSWER: B

If o_1 and o_2 are two objects and distance between these objects is 1

then it means_____

- A. o1 and o2 are totally similar
- B. o1 and o2 are totally dissimilar
- C. o1 and o2 are similar
- D. o1 and o2 are partially dissimilar

ANSWER: B

If o1 and o2 are two objects and distance between these objects is zero then o1 and o2 are totally dissimilar (True/false)

- A. True
- B. False

ANSWER: B

If o1 and o2 are two objects and distance between these objects is zero then it means_____

- A. o1 and o2 are totally similar
- B. o1 and o2 are totally dissimilar
- C. o1 and o2 are similar
- D. o1 and o2 are partially dissimilar

ANSWER: A

If o1 and o2 are two objects and distance between these objects is zero then o1 and o2 are totally similar (True/false)

- A. True
- B. False

ANSWER: A

Identify the correct subtype of Binary attribute.

- A. Ordinal
- B. Asymmetric
- C. Symmetric
- D. Both B and C

ANSWER: D

_____ Is higher when objects are more alike

- A. Dissimilarity
- B. Distance
- C. Similarity
- D. Accuracy

ANSWER: C

_____ Lower when objects are more alike.

- A. Dissimilarity
- B. Recall
- C. Similarity
- D. Accuracy

ANSWER: A

MCQ
SUBJECT: DATA MINING AND WAREHOUSING
UNIT-I

1. _____ is as finding hidden information in a database.
 - a) Data mining
 - b) Database access
 - c) DBMS
 - d) Data warehouse.
2. KDD means _____ discovery in databases.
 - a) King
 - b) Kite
 - c) Knowledge
 - d) Kind
3. _____ model makes a prediction about values of data using known results found from different data.
 - a) Descriptive
 - b) Preference
 - c) Predictive
 - d) Algorithm
4. _____ maps data into predefined grouped or classes.
 - a) Classification
 - b) Regression
 - c) Prediction
 - d) Summarization
5. _____ model identifies patterns or relationships in data.
 - a) Predictive
 - b) Non-predictive
 - c) Descriptive
 - d) Unpredictable
6. _____ is the use of algorithm to extract the information and patterns derived by the KDD process.
 - a) Data mining
 - b) Data base
 - c) Data access
 - d) Data processing
7. _____ is the process of finding useful information and patterns in data.
 - a) Data mining
 - b) KDD
 - c) Data warehouse
 - d) Data processing
8. _____ is a type of classification where an input pattern is classified into one of several classes based on predefined classes
 - a) Pattern recognition
 - b) TSA
 - c) Clustering

- d) Prediction
9. _____ is used to map data item into real valued prediction variable.
- a) Clustering
 - b) Classification
 - c) Regression
 - d) TSA
10. _____ is used to visualize the time series.
- a) Time series plot
 - b) Watch dog
 - c) Time series analysis
 - d) Grouping
11. Clustering is also called as _____.
- a) Grouping
 - b) Segmentation
 - c) Unsupervised learning
 - d) All the above
12. Summarization is also called as _____.
- a) Characterization
 - b) Generalization
 - c) Simple description
 - d) All the above
13. _____ maps data into sunsets with associated simple description .
- a) Summarization
 - b) Association Rules
 - c) Classification
 - d) Clustering
14. _____ refers to the DM task of uncovering relationships among data.
- a) Link analysis
 - b) Clustering
 - c) TSA
 - d) Summarization
15. _____ is a model that identifies specific types of data association.
- a) TSA
 - b) Sequence discovery
 - c) Clustering
 - d) Association Rules
16. _____ is used to determine sequential patterns in data.
- a) TSA
 - b) Sequence discovery
 - c) Clustering
 - d) Association rules
17. The definition of KDD includes the keyword _____.
- a) Useful
 - b) This
 - c) DM
 - d) All the above

18. In transformation _____ is used to reduce the number of possible data values being considered.
- a) Data reduction
 - b) Data interchange
 - c) Errorneous of data
 - d) Clearence of data
19. _____ techniques are used to make the data easier to mine and more useful and to provide meaningful results.
- a) Preprocessing
 - b) Selection
 - c) Transformation
 - d) Interpretation
20. _____ refers to the visual representation of data.
- a) GUI
 - b) Interpretation
 - c) Visualization
 - d) Hybrid
21. _____ techniques include the box plot and scatter diagram.
- a) Graphical
 - b) Geometric
 - c) Icon-based
 - d) Pixel-based
22. _____ is used to proceed from specific knowledge to more general information.
- a) Compression
 - b) Induction
 - c) Hybrid
 - d) Pruning
23. _____ occurs when the model does not fit future states.
- a) Overfitting
 - b) Human interaction
 - c) Outliers
 - d) Integration
24. There are many data entries that do not fit nicely into derived model.
- a) Overfitting
 - b) Human interaction
 - c) Outliers
 - d) Integration
25. IR stands for_____.
- a) Information reduction
 - b) Information retrieval
 - c) Information results
 - d) Information relation
26. _____ is a software that is used to access the database.
- a) DBMS
 - b) OLTP
 - c) SQL
 - d) CFMS

27. _____ data is said to be invalid or incorrect.
- a) Missing data
 - b) Irrelevant data
 - c) Noisy data
 - d) Changing data
28. ROI stands for _____.
- a) Return on investment
 - b) Return on instruction
 - c) Return on information
 - d) Return on invalid data
29. The use of other attributes that increase the complexity and decrease in algorithm is called _____.
- a) Dimensionality Curse
 - b) Dimensionality reduction
 - c) Dimensionality attribute
 - d) Dimensionality
30. _____ techniques are targeted to such application as fraud detection, criminal suspects, prediction of terrorist.
- a) DM
 - b) DB
 - c) DBMS
 - d) OLTP
31. _____ access a database using a well defined query stated in language such as SQL.
- a) DBMS
 - b) DBS
 - c) KDD
 - d) Database queries
32. A database is partitioned into disjoint grouping of similar tuples called _____.
- a) Clustering
 - b) Classification
 - c) Segmentation
 - d) Generlization
33. _____ finds occurrences of a predefined pattern in data.
- a) Patterning
 - b) Pattern recognition
 - c) Patterning of data
 - d) Pattern analysis
34. In KDD, the input to the process is known as _____ and the Output is _____.
- a) Informtion , data
 - b) Field,record
 - c) Record,field
 - d) Data ,information
35. In KDD,obtaining the data from various DB, files,and other sources is called _____.
- a) Preprocessing
 - b) Selection
 - c) Tranformation
 - d) Evaluation

36. Link analysis is otherwise called as_____.
- a) Association
 - b) Association rule
 - c) Affinity analysis
 - d) All the above
37. Prediction application include _____.
- a) Flooding
 - b) Speech recognition
 - c) Machine learning
 - d) All the above
38. In regression, some type of error analysis is used to determine which function is_____.
- a) Good
 - b) Best
 - c) Excellent
 - d) Bad
39. Data mining is otherwise called as_____.
- a) Data analysis
 - b) Data discovery
 - c) Deductive learning
 - d) All the above
40. The rise of DBMS tool is_____.
- a) 1960
 - b) 1970
 - c) 1980
 - d) 1990
41. The metrics used include the traditional metrics of space and time based on _____.
- a) Complexity analysis
 - b) Effectiveness
 - c) Usefulness of data
 - d) Scalability
42. _____ data are noisy and have many missing attributes values.
- a) Real world
 - b) Abstract
 - c) Assumption
 - d) Authorized
43. The use of _____ data is found in GIS data base .
- a) Missing
 - b) Irrelevant
 - c) Noisy
 - d) Multimedia
44. A large DB can be viewed as using_____ to help uncover hidden information about the data.
- a) Search
 - b) Compression

- c) Approximation
 - d) Querying
45. Interfaces between technical experts and domain comes under_____ issues.
- a) Overfitting
 - b) Human interaction
 - c) Outlier
 - d) Application
46. The data Mining process can itself be vies a type of _____ underlying database.
- a) Querying
 - b) Induction
 - c) Search
 - d) Processing
47. ____ requests may be treated as special,unusual or one time needs.
- a) KDD
 - b) DM
 - c) DBMS
 - d) DB
48. _____ and _____ are effective tools to attack scalability problems.
- a) Dimensionality & Parallelization
 - b) Sampling & Dimensionality
 - c) Effectiveness & Sampling
 - d) Sampling & Parallelization
49. Large data set is otherwise called as _____.
- a) Massive datasets
 - b) High datasets
 - c) Noisy datasets
 - d) Irrelevant datasets
50. KDD process consists of _____ steps .
- a) One
 - b) Three
 - c) Four
 - d) Five

UNIT-II

51. _____ models describe the relationship between I/O through algebraic equation.
- a) Parametric
 - b) Non-parametric
 - c) Static
 - d) Dynamic
52. _____ may also be used to estimate error.
- a) Squared error
 - b) Root mean error
 - c) Mean Root square
 - d) Mean squared error
53. _____ assumes that a linear relationship exists between the input data and the output data.
- a) Bivariate regression
 - b) Correlation
 - c) Multiple regression
 - d) Linear regression
54. The _____ algorithm solves the estimation problem with incomplete data.
- a) Expectation maximization
 - b) Expectation minimization
 - c) Summarization-maximization
 - d) Summarization minimization
55. Decision tree uses a _____ techniques.
- a) Greedy
 - b) Divide & Conquer
 - c) Shortest Path
 - d) BFS
56. Null hypothesis and _____ hypothesis are two complementary hypothesis.
- a) Classical
 - b) Testing
 - c) Alternative
 - d) None of the above
57. The BIAS of an estimator is the difference between _____ & _____ values.
- a) Expected,actual
 - b) Actual ,Expected
 - c) Maximal,Minimal
 - d) Minimal,Maximal
58. An _____ estimator is one whose BIAS is 0.
- a) Unbiased
 - b) Rule biased
 - c) Mean Root square
 - d) Mean squared error

59. _____ is defined as the expected value of the squared difference between the estimate and the actual value.
- a) MSE
 - b) RMS
 - c) EM
 - d) MLE
60. The _____ may also be used to estimate error or another statistic to describe a distribution.
- a) RMS
 - b) MLE
 - c) EM
 - d) MSE
61. _____ is a technique to estimate the likelihood of a property given the set of data as evidence or input.
- a) Point Estimation
 - b) Models based on summarization
 - c) Bayes theorem
 - d) Hypothesis testing
62. In Box plot the Total range of the data value is divided into _____.
- a) Regions
 - b) Quartiles
 - c) Divisions
 - d) Partitions
63. _____ measure is used instead of similarity measures.
- a) Distance
 - b) Dissimilarity
 - c) Both a,b
 - d) None of the above
64. _____ relates the overlap to the average size of the two sets together.
- a) Dice
 - b) Jaccard
 - c) Cosine
 - d) Overlap
65. _____ is used to measure the overlap of two sets as related to the whole set caused by their union.
- a) Dice
 - b) Jaccard
 - c) Cosine
 - d) Overlap
66. _____ coefficient relates the overlap to the geometric average of the two sets.
- a) Dice
 - b) Jaccard
 - c) Cosine
 - d) Overlap

67. The _____ metrics determines the degree to which the two sets overlap.
- a) Dice
 - b) Jaccard
 - c) Cosine
 - d) Overlap
68. _____ is a predictive modeling technique used in classification ,clustering,etc.
- a) Neural networks
 - b) Decision tree
 - c) Genetic algorithm
 - d) All the above
69. The neural networks can be viewed as a directed graph with _____ nodes.
- a) Two
 - b) Three
 - c) Four
 - d) One
70. Internal nodes are also called as _____.
- a) Input
 - b) Output
 - c) Hidden
 - d) Sink
71. In neural networks _____ activation function produces a linear output value based on the input.
- a) Threshold
 - b) Step
 - c) Linear
 - d) Sigmoid
72. _____ is a bell shaped curve with output values in the range [0,1].
- a) Linear
 - b) Guassian
 - c) Hyperbolic
 - d) Sigmoid
73. In neural network , _____ is an S shaped curve with output values -1,1
- a) Sigmoid
 - b) Linear
 - c) Step
 - d) Hyperbolic
74. The crossover technique generates new individual called_____.
- a) Offspring
 - b) Children
 - c) Both a, b
 - d) None of the above
75. _____ is used to determine the best individuals in a population.
- a) Crossover
 - b) Mutation
 - c) Fitness function
 - d) All the above

76. The _____ operation randomly changes character in the offspring.
- a) Crossover
 - b) Mutation
 - c) Fitness function
 - d) Both a,b
77. _____ is defined by precise algorithms that indicate how to combine the given set of individual to produce new ones.
- a) Production
 - b) Reproduction
 - c) Genetic algorithms
 - d) Crossover
78. The activation function is also called as _____.
- a) Processing element function
 - b) Squashing function
 - c) Firing rule
 - d) All the above
79. The subsections of the chromosomes are called _____.
- a) Cross over
 - b) Genes
 - c) Alleles
 - d) Offspring
80. _____ is used to estimate error or to describe a distribution.
- a) RMS
 - b) MSE
 - c) SE
 - d) Jackknife
81. _____ can be defined as a value proportional to actual probability with specific distribution.
- a) Likelihood
 - b) Maximum Likelihood
 - c) Estimation
 - d) None of the above
82. In hypothesis testing O represents _____.
- a) Outliers
 - b) Observed data
 - c) Output
 - d) None of the above
83. One standard formula to measure linear correlation is the _____.
- a) Correlation coefficient
 - b) Classification
 - c) Clustering
 - d) Dissimilarity measures
84. _____ are often used instead of similarity measures.
- a) Distance
 - b) Dissimilarity measure
 - c) Both a,b
 - d) None of the above

85. A variation of sigmoid function is called_____.
- a) Gaussian
 - b) Hyperbolic
 - c) Linear
 - d) Threshold
86. Gaussian function is a _____ shaped curve.
- a) S
 - b) V
 - c) Bell
 - d) C
87. _____ is used to determine the best individuals in a population.
- a) Mutation
 - b) Fitness function
 - c) Crossover
 - d) Starting set
88. One of the most important components of a genetic algorithm is_____.
- a) How to select individual
 - b) How to select offspring
 - c) How to select crossover
 - d) How to select fitness
89. _____ coefficient is used to measure the overlap of two sets as related to whole set caused by their union.
- a) Dice
 - b) Jaccard
 - c) Cosine
 - d) Overlap
90. _____ coefficient is used to relates the overlap to the average size of two sets together.
- a) Dice
 - b) Jaccard
 - c) Cosine
 - d) Overlap
91. _____ coefficient relates the overlap to the geometric average of the two sets.
- a) Dice
 - b) Jaccard
 - c) Cosine
 - d) Overlap
92. The_____ metric determines the degree to which the two sets overlap.
- a) Overlap
 - b) Dice
 - c) Cosine
 - d) Jaccard
93. Rejection of null hypothesis causes another hypothesis called_____ hypothesis.
- a) Alternative
 - b) Similarity measure
 - c) Correlation
 - d) Mutation

94. The input nodes exist in _____ layer.
- a) Output
 - b) Input
 - c) Hidden
 - d) All the above
95. Internal nodes is called _____ nodes.
- a) Input
 - b) Output
 - c) Hidden
 - d) All the above
96. Artificial NNs can be classified based on the type of _____.
- a) Connectivity
 - b) Learning
 - c) Both a, b
 - d) None of the above
97. _____ occurs when the NNs is trained to fit one set to data.
- a) Outlier
 - b) Noisy data
 - c) Missing data
 - d) Overfitting
98. To avoid overfitting _____ NNs are advisable.
- a) Larger
 - b) Smaller
 - c) Medium
 - d) All the above
99. In sigmoid , c is a _____.
- a) Change
 - b) Constant
 - c) Crossover
 - d) Children
100. _____ is defined as the excepted value of the squared difference between the estimate and the actual value.
- a) MSE
 - b) RMSE
 - c) BIAS
 - d) RMS

UNIT-III

101. Estimation and prediction may be viewed as types of _____.
a) Clustering
b) Classification
c) Regression
d) Time Series
102. Classification performed by dividing the input space of potential database tuples into _____.
a) Regions
b) Class
c) Space
d) Sector
103. _____ values cause during both training and the classification process itself.
a) Data
b) Class
c) Predicate
d) Missing data
104. The performance of classification usually examined by evaluating the ____ of the classification.
a) Accuracy
b) Contribution
c) Special value
d) Missing values
105. Classification true positives and false positives are calculated by the following curve.
a) MOC
b) NOC
c) ROC
d) COC
106. The _____ matrix illustrates the accuracy of the solution to a classification problem.
a) Confusion
b) Mutation
c) Crossover
d) Gaussian
107. _____ problems deal with estimation of an output value based on input values.
a) Prediction
b) Classification
c) Clustering
d) Regression

108. _____ is erroneous data.
- a) OC
 - b) Regression
 - c) Noise
 - d) Linear model
109. Which are data values that are exceptions to the usual and expected data?
- a) Outliers
 - b) Noise
 - c) Regression
 - d) Poor fit
110. The _____ classification can be viewed as both a descriptive and a predictive type of algorithm.
- a) Naive
 - b) Bayes
 - c) Naive bayes
 - d) Prediction
111. The similarity (or) distance measures may be used to identify the _____ of different items in the database.
- a) Likeness
 - b) A likeness
 - c) Outliers
 - d) Centroid
112. A straightforward distance based approach assuming the each class C_i is represented by__.
- a) Centroid
 - b) Outlier
 - c) Medoid
 - d) KNN
113. Expand : KNN
- a) K Normal Neighbors
 - b) K Nearest Neighbor
 - c) K Normal Nextvalue
 - d) K Nearest Nest
114. The decision tree approach to classification is to divide search space into _____ regions.
- a) Square
 - b) Triangular
 - c) Circular
 - d) Rectangular

115. In DT ,each internal node is labled with an _____.
a) Class
b) Attribute
c) Arc
d) Database
116. In DT, each leaf node labled with _____.
a) Class
b) Attribute
c) Arc
d) Link
117. The _____ technique to building a DT is based on information theory and attempts to minimize the expected number of comparisons.
a) CART
b) ID3
c) C.4.5
d) ROC
118. Neural networks are more robust than DTs because of the _____.
a) Arcs
b) Links
c) Weights
d) Classes
119. In NN, the normal approach used for processing is called _____.
a) Activation function
b) Interconnections
c) Training data
d) Propagation
120. The NN starting state is modified based on feedback of its performance is referred to as _____.
a) Supervised
b) Unsupervised
c) Both (a) and (b)
d) None of these
121. _____ learning can also be performed if the output is not known.
a) Supervised
b) Unsupervised
c) Neither (a) or (b)
d) Oral

122. The Mean Squared Error (MSE) is found by _____.
a) $(y_i - d_i)^2/2$
b) $(y_i + d_i)^2/2$
c) $(d_i - y_i)^2/2$
d) $(d_i + y_i)^2/2$
123. The _____ can be used to find a total error over all nodes in the network.
a) RDF
b) ROC
c) MSE
d) CMC
124. Which learning technique that adjusts weights in the NN by propagating weight changes backward from the sink to the source nodes?
a) Propagation
b) perceptrons
c) MSE
d) Back propagation
125. In radial basis function (RBF) central point value is _____.
a) 0
b) 1
c) +1
d) -1
126. The simplest Neural Network is called a _____.
a) Neuron
b) Gene
c) Perceptron
d) Single neuron
127. In rule-based algorithms, _____ rules that cover all cases.
a) if-else
b) if-then
c) switch-case
d) nested if
128. The _____ is used to predict a future classification value.
a) Genetic algorithm
b) Decision Tree
c) Rule-based Algorithm
d) Neural Network

129. Multiple independent approaches can be applied to a classification problem is referred to as ____.
- a) CMC
 - b) RBF
 - c) ROC
 - d) DCS
130. In which technique the classifier that has the best accuracy in database sample?
- a) CMC
 - b) RBF
 - c) DCS
 - d) ROC
131. OC stands for_____.
- a) Operating characteristics
 - b) Operating curve
 - c) Operating classifications
 - d) None of the above
132. Rule based classification algorithms generate _____ rules to perform the classifications.
- a) If
 - b) Then
 - c) If-then
 - d) If - else
133. In OC curve , the horizontal axis has the percentage of _____Positives for a sample DB.
- a) False
 - b) True
 - c) Either a, b
 - d) None of the above
134. In OC curve , the vertical axis has the percentage of _____Positives for a sample DB.
- a) False
 - b) True
 - c) Either a, b
 - d) None of the above
135. The_____ approach is most useful in classification problem.
- a) Incremental rule
 - b) Cluster
 - c) NN
 - d) Decision tree

136. _____ techniques use labeling of the items to assist In the classification process.
- a) Intrinsic
 - b) Extrinsic
 - c) Overlapping
 - d) Numerical
137. A _____ curve shows the relationship between false positives and true positives.
- a) BOC
 - b) ROS
 - c) ROC
 - d) BOS
138. Task of CART is_____.
- a) Only regression
 - b) Only classification
 - c) Both a,b
 - d) None of the above
139. A variation of the complete link algorithm is called _____ algorithm.
- a) Nearest
 - b) Neighbour
 - c) Farthest Neighbour
 - d) All the above
140. K nearest neighbor is a classification scheme based on the use of_____.
- a) Distance Measure
 - b) Similarity
 - c) Complete link
 - d) Average
141. A perceptron is a _____ neuron with multiple inputs and one output.
- a) single
 - b) Multiple
 - c) Double
 - d) None of the above
142. The classes that exist for a classification problem are indeed _____.
- a) Equivalence classes
 - b) Variance classes
 - c) Mean classes
 - d) Median
143. The formula for straight line is_____.
- a) $Y=mx+b$
 - b) $y=mx$
 - c) $Y=M+b$
 - d) $Y=m$

144. _____ are data values that are exception to the usual and expected data.
- a) Outliers
 - b) Noise
 - c) Error
 - d) Overfit
145. _____ is an erroneous data.
- a) Overfit
 - b) Outlier
 - c) Noise
 - d) Missing
146. _____ problems deal with the estimation of output value based on input value.
- a) Bayesian classification
 - b) K nearest Neighbour
 - c) Regression
 - d) All the above
147. _____ problem can be thought of as estimating the formula for a straight line.
- a) Regression
 - b) Linear regression
 - c) Bayesian classification
 - d) K nearest neighbour
148. Logistic regression uses _____ technique.
- a) Box plot
 - b) Logistic curve
 - c) Straight line
 - d) Logistic line
149. Decision tree is otherwise called as _____.
- a) Classification tree
 - b) Regression tree
 - c) K nearest neighbor
 - d) Clustering tree
150. Data objects are described by a number of _____ that capture the basic characteristics of an object.
- a) Data sets
 - b) Elements
 - c) Record
 - d) Attribute

UNIT-IV

151. _____ is similar to classification in that data are grouped.
- a) Classification
 - b) Regression
 - c) Clustering
 - d) DT
152. One of the first domain in which clustering was used as _____ taxonomy.
- a) Biological
 - b) Zoological
 - c) Mathematical
 - d) Scientific
153. Cluster results are _____.
- a) Static
 - b) Realistic
 - c) Acoustic
 - d) Dynamic
154. _____ clustering, the algorithm creates only one set of clusters.
- a) Dynamic
 - b) Hierarchical
 - c) Partitional
 - d) Static
155. With _____ clustering, a nested set of clusters to be created.
- a) Partitional
 - b) Hierarchical
 - c) Dynamic
 - d) Static
156. In similarity measures, metric attributes satisfy the _____ inequality.
- a) Rectangular
 - b) Triangular
 - c) Square
 - d) Circle
157. The _____ is the “middle” of the cluster it need not be actual point in the cluster.
- a) Radius
 - b) Diameter
 - c) Centroid
 - d) Metoid

158. The cluster is represented by one centrally located object in the cluster called a_____.
- a) Centroid
 - b) Medoid
 - c) Radius
 - d) Diameter
159. The _____ is the square root of the average mean squared distance from any point in the cluster to centroid.
- a) Radius
 - b) Medoid
 - c) Diameter
 - d) Centroid
160. The _____ is the square root of the average mean squared distance between all pairs of points in the cluster.
- a) Radius
 - b) Medoid
 - c) Diameter
 - d) Centroid
161. Largest distance between an element in one cluster and an element in the other is_____.
- a) Single Link
 - b) Complete Link
 - c) Average Link
 - d) Centroid
162. Smallest distance between an element in the cluster and an element in the other is_____.
- a) Centroid
 - b) Medoid
 - c) Complete link
 - d) Single link
163. _____ are sample points with values much different from those of the remaining set of data.
- a) Centroid
 - b) Medoid
 - c) Outliers
 - d) Compression
164. In hierarchical clustering , a tree data structure is called _____.
- a) Connected component
 - b) Dendrogram
 - c) Minimum spanning tree
 - d) Bond energy

165. The root in the dendrogram tree contains ____ clusters ,where all elements aretogether.
- a) Four
 - b) Three
 - c) Two
 - d) One
166. The space complexity for hierarchical algorithms is_____.
- a) $O(n)$
 - b) $O(N+2)$
 - c) $O(n^2)$
 - d) $O(2N)$
167. A _____ component is a graph in which there exists a path between any two vertices.
- a) Connected
 - b) Unconnected
 - c) Nested
 - d) Stylish
168. A _____ is a maximal graph in which there is an edge between vertices.
- a) Connected graph
 - b) Clique
 - c) Candidates
 - d) Dendrogram
169. The ____are sample points with values much different from those of the remaining set of data.
- a) Clusters
 - b) Outliers
 - c) Candidates
 - d) Mining
170. _____is the process of identifying outliers in a set of data.
- a) Outlier detection
 - b) Outlier avoidance
 - c) Outlier collision
 - d) Outlier prediction
171. The outliers can be detected by well-known tests such as _____-.
- a) Chi-square test
 - b) Random test
 - c) Discordancy test
 - d) Unit test

172. Clustering applications include plant and _____ classifications.
- a) Medical
 - b) Biological
 - c) Zoological
 - d) Animal
173. _____ clustering, all items are initially placed in one cluster and clusters are repeated.
- a) Random
 - b) Divisive
 - c) Nearest neighbour
 - d) Partitional
174. BEA stands for_____.
- a) Band Echo Algorithm
 - b) Bond Echo Algorithm
 - c) Balance Energy Algorithm
 - d) Bond Energy Algorithm
175. _____is an iterative clustering algorithm.
- a) K-means
 - b) LARGE DB
 - c) KDD
 - d) BEA
176. The nearest neighbor algorithm uses _____technique.
- a) Single link
 - b) Complete link
 - c) Average link
 - d) Centroid
177. The PAM algorithm also called _____algorithm.
- a) K-means
 - b) K-medoids
 - c) K-centroid
 - d) K-radius
178. The time complexity of nearest neighbor algorithm is_____.
- a) $O(n)$
 - b) $O(N+2)$
 - c) $O(n^2)$
 - d) $O(2N)$

179. In a distributed database, each resulting cluster is called a _____.
a) Horizontal Fragment
b) Vertical Fragment
c) Both(a) & (b)
d) None
180. In neural network, the number of input nodes is the same as the number of _____.
a) Levels
b) Clusters
c) Points
d) Attributes
181. The goal of _____ is to discover both the dense and sparse regions of a data set.
a) Association rule
b) Classification
c) Clustering
d) Genetic Algorithm
182. _____ clustering techniques starts with all records in one cluster and then try to split that cluster into small pieces.
a) Agglomerative
b) Divisive
c) Partition
d) Numeric
183. _____ seeks to find groups of closely related observations so that observations that belong the same cluster are more similar to each other.
a) Association
b) Anomaly detection
c) Clustering
d) None
184. In web mining, _____ is used to find natural groupings of users, pages, etc.
a) Clustering
b) Associations
c) Sequential analysis
d) Classification
185. In _____ algorithm each cluster is represented by the center of gravity of the cluster.
a) k-medoid
b) k-means
c) STIRR
d) ROCK

186. In _____ each cluster is represented by one of the objects of the cluster located near the center.
- a) k-medoid
 - b) k-means
 - c) STIRR
 - d) ROCK
187. Pick out a k-medoid algorithm.
- a) DBSCAN
 - b) BIRCH
 - c) PAM
 - d) CURE
188. Pick out a hierarchical clustering algorithm.
- a) DBSCAN
 - b) BIRCH
 - c) PAM
 - d) CURE
189. _____ is the process of identifying outliers in a set of data.
- a) Outlier
 - b) Outlier detection
 - c) Segmentation
 - d) Processing
190. The space complexity of adjacency matrix is_____.
- a) $O(n)$
 - b) $O(kn)$
 - c) $O(n^2)$
 - d) None of the above
191. A variation of complete link algorithm is called the _____.
- a) Farthest nearest neighbor
 - b) Nearest neighbor
 - c) Average
 - d) Single
192. A tree data structure called_____ is used to illustrate the hierarchical clustering technique.
- a) Dendogramming
 - b) Dendo
 - c) Dendogram
 - d) Dendograms

193. The term _____ indicates the ability of these NN to organize the nodes into clusters based on the similarity between them.
- a) Competitive
 - b) Non-competitive
 - c) Self organizing
 - d) None of the above
194. CF stands for_____
- a) Clustering Features
 - b) Clustering future
 - c) Classification Features
 - d) Classification Future
195. The space complexity for K-means is_____.
- a) $O(n)$
 - b) $O(kn)$
 - c) n
 - d) $O(n^2)$
196. The squared error algorithm has _____ type.
- a) Hierarchical
 - b) Partitional
 - c) Mixed
 - d) Agglomerative.
197. The time complexity for single link algorithm is_____.
- a) $O(kn^2)$
 - b) $O(n)$
 - c) $O(kn)$
 - d) $O(n^2)$
198. The squared error clustering algorithm minimizes_____ .
- a) Error
 - b) Squared error
 - c) Square
 - d) All the above
199. With _____ clustering the algorithm creates only one set of clusters.
- a) Partitional
 - b) Hierarchical
 - c) Agglomerative
 - d) None of the above

200. _____ techniques use labeling of the items to assist in the classification process.

- a) Intrinsic
- b) Extrinsic
- c) Both a,b
- d) All the above

UNIT-V

201. The purchasing of one product when another product is purchased represents an_____.

- a) Decision Tree
- b) Association Rule
- c) Classification
- d) Clustering

202. The _____ of an item is the percentage of transactions in which that item occurs.

- a) Confidence
- b) Support
- c) Association rule
- d) Itemset

203. The _____ is called the number of scans of the database.

- a) Support
- b) Confidence
- c) Strength
- d) Both (b) & (c)

204. Potentially large item sets are called _____.

- a) Support
- b) Confidence
- c) Candidates
- d) Itemset

205. In association rule algorithm, the notation “P” indicates.

- a) Confidence
- b) Candidates
- c) Partitions
- d) Transactions

206. Any subset of a large itemset must be _____.

- a) Small
- b) Medium
- c) Average
- d) Large

207. The large itemsets are also said to be _____closure.
- a) Upward
 - b) Middleware
 - c) Downward
 - d) None
208. Additional candidates are determined by applying the _____ border function.
- a) Positive
 - b) Negative
 - c) Average
 - d) Medium
209. The Apriori algorithm shows the sample is performed using a support called ____.
- a) High
 - b) Low
 - c) Average
 - d) Smalls
210. The basic _____ reduces the number of database scans to two.
- a) Divisive algorithm
 - b) Parallel algorithm
 - c) Partition algorithm
 - d) Sampling algorithm
211. The candidates are partitioned and counted separately at each processor is called_____.
- a) Data parallelism
 - b) Task parallelism
 - c) Candidates
 - d) Data reduction
212. One data parallelism algorithm is the _____.
- a) MSE
 - b) FIS
 - c) DDA
 - d) CDA
213. One task parallelism algorithm is called _____.
- a) CDA
 - b) MSE
 - c) DDA
 - d) BCD

214. An algorithm all rules that satisfy a given support and confidence level is called____.
- a) Target
 - b) Type
 - c) Data type
 - d) Data source
215. The most common data structure used to store the candidates itemsets and their counts is a_____.
- a) Binary tree
 - b) B-tree
 - c) Balanced tree
 - d) Hash tree
216. Which technique is used to improve on the performance of an algorithm given distribution Or amount of main memory?
- a) Architecture
 - b) Optimization
 - c) Parallelism
 - d) Itemset
217. A leaf node in the hash tree contains_____.
- a) Attributes
 - b) Itemset
 - c) Candidates
 - d) Data
218. One incremental approach,_____is based on the Apriori algorithm.
- a) CDA
 - b) DDA
 - c) fast update
 - d) slow update
219. A variation of generalized rules are _____ association rules.
- a) Multiple-level
 - b) Hierarchical-level
 - c) Multi-level
 - d) Hybrid-level
220. A _____ association rule is one that involves categorical and quantitative data.
- a) Categorical
 - b) Qualitative
 - c) Quantitative
 - d) Spanning

221. MIS stands for _____.
a) Medium item support
b) Maximum item support
c) Minimum item support
d) Medium item scale
222. A __rule is defined as a set of itemsets that are correlated.
a) Correlation
b) Co-efficient
c) MIS
d) Modification
223. $\text{Correlation}(A \Rightarrow B) = \text{_____?}$
a) $P(A, B) / P(A)P(B)$
b) $(b)P(A) / (P(A) P(B))$
c) $P(B) / P(A) P(B)$
d) $P(A) P(B) / P(A) - P(B)$
224. Conviction has a value of ____ if A and B are not related.
a) 0
b) 1
c) 2
d) ∞
225. Which one is not an association rule algorithm?
a) Apriori
b) CDA
c) DDA
d) PAM
226. _____ algorithms may be able to adapt better to limited main memory.
a) Divisive
b) Sampling
c) Partitioning
d) Distributed
227. During the _____ scan, additional candidates are generated and counted.
a) First
b) Second
c) Third
d) Fourth

228. Chi-squared statistic is denoted by the _____symbol.
- a) X^2
 - b) $E[X]$
 - c) $2X$
 - d) X^3
229. ____ are used to show the relationships between data items.
- a) Clustering
 - b) Regression
 - c) Association rules
 - d) Classification
230. The most two important property of an association rules are _____.
- a) Support, confidence
 - b) Itemset, data
 - c) Neuron, gene
 - d) Lift, interest
231. A _____ is defined as a set of itemsets that are correlated.
- a) Correlation rule
 - b) Association rule
 - c) Conviction
 - d) Probability of correlation
232. Confidence or strength are indicated by _____.
- a) ©
 - b) ®
 - c> €
 - d) α
233. In association rule l stands for_____.
- a) Large item sets in L
 - b) Set of large item set
 - c) Both a,b
 - d) None of the above
234. _____is the most well known association rule algorithm and is used in most commercial products.
- a) Apriori algorithm
 - b) Partition algorithm
 - c) Distributed algorithm
 - d) Pincer-search algorithm

235. The basic idea of the apriori algorithm is to generate _____ item sets of a particular size & scans the database.
- a) Candidate
 - b) Primary
 - c) Secondary
 - d) Superkey
236. The number of iterations in a priori _____.
- a) Increases with the size of the maximum frequent set.
 - b) Decreases with increase in size of the maximum frequent set.
 - c) Increases with the size of the data.
 - d) Decreases with the increase in size of the data.
237. After the pruning of a priori algorithm, _____ will remain.
- a) Only candidate set
 - b) No candidate set
 - c) Only border set
 - d) No border set
238. The a priori frequent itemset discovery algorithm moves _____ in the lattice.
- a) Upward
 - b) Downward
 - c) Breadthwise
 - d) Both upward and downward
239. The _____ step eliminates the extensions of (k-1)-itemsets which are not found to be frequent, from being considered for counting support.
- a) Candidate generation
 - b) Pruning
 - c) Partitioning
 - d) Itemset eliminations
240. The second phase of A Priori algorithm is _____.
- a) Candidate generation
 - b) Itemset generation
 - c) Pruning
 - d) Partitioning
241. The first phase of A Priori algorithm is _____.
- a) Candidate generation
 - b) Itemset generation
 - c) Pruning
 - d) Partitioning

242. The A Priori algorithm is a _____.
- a) top-down search
 - b) breadth first search
 - c) depth first search
 - d) bottom-up search
243. A priori algorithm is otherwise called as _____.
- a) width-wise algorithm
 - b) level-wise algorithm
 - c) pincer-search algorithm
 - d) FP growth algorithm
244. The right hand side of an association rule is called _____.
- a) Consequent
 - b) Onset
 - c) Antecedent
 - d) Precedent
245. The left hand side of an association rule is called _____.
- a) Consequent
 - b) Onset
 - c) Antecedent
 - d) Precedent
246. The value that says that transactions in D that support X also support Y is called _____.
- a) Confidence
 - b) Support
 - c) Support count
 - d) None Of the above
247. The absolute number of transactions supporting X in T is called _____.
- a) Confidence
 - b) Support
 - c) Support count
 - d) None Of the above
248. _____ are effective tools to attack the scalability problem.
- a) Sampling
 - b) Parallelization
 - c) Both A & B
 - d) None of the above

249. Discovery of cross-sales opportunities is called _____.

- a) Segmentation
- b) Visualization
- c) Correction
- d) Association

250. In web mining, _____ is used to know which URLs tend to be requested together.

- a) Clustering
- b) Associations
- c) Sequential analysis
- d) Classification

ANSWER KEY

UNIT-I

1	A	2	C	3	C	4	A	5	C	6	A	7	B	8	A	9	C	10	A
11	D	12	D	13	A	14	A	15	D	16	B	17	A	18	A	19	C	20	C
21	B	22	B	23	A	24	C	25	B	26	A	27	C	28	A	29	A	30	A
31	D	32	C	33	B	34	D	35	B	36	D	37	D	38	B	39	D	40	B
41	A	42	A	43	D	44	C	45	B	46	A	47	A	48	D	49	A	50	D

UNIT-II

51	A	52	B	53	D	54	A	55	B	56	C	57	A	58	A	59	A	60	A
61	C	62	B	63	C	64	A	65	B	66	C	67	D	68	B	69	B	70	C
71	C	72	B	73	A	74	C	75	C	76	B	77	B	78	C	79	B	80	A
81	A	82	B	83	A	84	C	85	B	86	C	87	B	88	A	89	B	90	A
91	C	92	A	93	A	94	B	95	C	96	C	97	D	98	B	99	B	100	A

UNIT-III

101	B	102	A	103	D	104	A	105	C	106	A	107	D	108	C	109	A	110	C
111	B	112	A	113	B	114	D	115	B	116	C	117	B	118	C	119	D	120	A
121	B	122	A	123	C	124	D	125	A	126	C	127	B	128	D	129	A	130	C
131	A	132	C	133	A	134	C	135	B	136	B	137	C	138	C	139	C	140	A
141	A	142	A	143	A	144	A	145	C	146	C	147	B	148	B	149	A	150	D

UNIT-IV

151	C	152	A	153	D	154	C	155	B	156	B	157	C	158	B	159	A	160	C
161	B	162	D	163	C	164	B	165	D	166	C	167	A	168	B	169	B	170	A
171	C	172	D	173	B	174	D	175	A	176	A	177	B	178	C	179	B	180	D
181	C	182	B	183	C	184	A	185	B	186	A	187	C	188	A	189	B	190	C
191	A	192	C	193	C	194	A	195	A	196	B	197	A	198	B	199	A	200	B

UNIT-V

201	B	202	B	203	D	204	C	205	C	206	D	207	C	208	B	209	D	210	C
211	B	212	D	213	C	214	A	215	D	216	B	217	C	218	C	219	A	220	C
221	C	222	A	223	A	224	B	225	D	226	A	227	B	228	A	229	C	230	A
231	A	232	D	233	A	234	A	235	A	236	A	237	B	238	A	239	B	240	C
241	A	242	B	243	A	244	C	245	A	246	A	247	C	248	C	249	D	250	B

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. What does the leaf node in decision tree indicates

- A : sub tree
- B : class label
- C : testing node
- D : condition

Q.no 2. sensitivity is also known as

- A : false rate
- B : recall
- C : negative rate
- D : recognition rate

Q.no 3. the negative tuples that were correctly labeled by the classifier

- A : False positives(FP)
- B : True positives(TP)
- C : True negatives (TN)
- D : False negatives(FN)

Q.no 4. Removing duplicate records is a process called

- A : recovery
- B : data cleaning
- C : data cleansing
- D : data pruning

Q.no 5. For Apriori algorithm, what is the first phase?

- A : Pruning
- B : Partitioning
- C : Candidate generation
- D : Itemset generation

Q.no 6. Multi-class classification makes the assumption that each sample is assigned to

- A : one and only one label
- B : many labels
- C : one or many labels
- D : no label

Q.no 7. Multilevel association rules can be mined efficiently using

- A : Support
- B : Confidence
- C : Support count

D : Concept Hierarchies under support-confidence framework

Q.no 8. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 9. Self-training is the simplest form of

A : supervised classification

B : semi-supervised classification

C : unsupervised classification

D : regression

Q.no 10. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 11. Hidden knowledge referred to

A : A set of databases from different vendors, possibly using different database paradigms

B : An approach to a problem that is not guaranteed to work but performs well in most cases

C : Information that is hidden in a database and that cannot be recovered by a simple SQL query

D : None of these

Q.no 12. The schema is collection of stars. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 13. The Synonym for data mining is

A : Data warehouse

B : Knowledge discovery in database

C : ETL

D : Business Intelligence

Q.no 14. Which of the following are methods for supervised classification?

A : Decision tree

B : K-Means

C : Hierarchical

D : Apriori

Q.no 15. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 16. Color is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : numeric

Q.no 17. What are two steps of tree pruning work?

A : Pessimistic pruning and Optimistic pruning

B : Postpruning and Prepruning

C : Cost complexity pruning and time complexity pruning

D : None of the options

Q.no 18. A data cube is defined by

A : Dimensions

B : Facts

C : Dimensions and Facts

D : Dimensions or Facts

Q.no 19. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 20. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 21. Lazy learner classification approach is

A : learner waits until the last minute before constructing model to classify

B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 22. Cross validation involves

A : testing the machine on all possible ways by substituting the original sample into training set

B : testing the machine on all possible ways by dividing the original sample into training and validation sets.

C : testing the machine with only validation sets

D : testing the machine on only testing datasets.

Q.no 23. The rule is considered as interesting if

A : They satisfy both minimum support and minimum confidence threshold

B : They satisfy both maximum support and maximum confidence threshold

C : They satisfy maximum support and minimum confidence threshold

D : They satisfy minimum support and maximum confidence threshold

Q.no 24. Data independence means

A : Data is defined separately and not included in programs

B : Programs are not dependent on the physical attributes of the data

C : Programs are not dependent on the logical attributes of the data

D : Programs are not dependent on the physical attributes as well as logical attributes of the data

Q.no 25. Which of the following is a predictive model?

A : Clustering

B : Regression

C : Summarization

D : Association rules

Q.no 26. The data cubes are generally

A : 1 Dimensional

B : 2 Dimensional

C : 3 Dimensional

D : n-Dimensional

Q.no 27. Identify the example of sequence data

A : weather forecast

B : data matrix

C : market basket data

D : genomic data

Q.no 28. The frequent-item-header-table consists of number fields

A : Only one

B : Two

C : Three

D : Four

Q.no 29. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 30. Which of the following activities is a data mining task?

A : Monitoring the heart rate of a patient for abnormalities

B : Extracting the frequencies of a sound wave

C : Predicting the outcomes of tossing a (fair) pair of dice

D : Dividing the customers of a company according to their profitability

Q.no 31. When do you consider an association rule interesting?

A : If it only satisfies minimum support

B : If it only satisfies minimum confidence

C : If it satisfies both minimum support and minimum confidence

D : There are other measures to check interesting rules

Q.no 32. What is the approach of basic algorithm for decision tree induction?

A : Greedy

B : Top Down

C : Procedural

D : Step by Step

Q.no 33. What do you mean by support(A)?

A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 34. Which of the following probabilities are used in the Bayes theorem.

A : $P(C_i | X)$

B : $P(C_i)$

C : $P(X | C_i)$

D : $P(X)$

Q.no 35. In which step of Knowledge Discovery, multiple data sources are combined?

A : Data Cleaning

B : Data Integration

C : Data Selection

D : Data Transformation

Q.no 36. The Galaxy Schema is also called as

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 37. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

- A : Multiclassification
- B : Multi-label classification
- C : Imbalanced classification
- D : Binary Classification

Q.no 38. What type of data do you need for a chi-square test?

- A : Categorical
- B : Ordinal
- C : Interval
- D : Scales

Q.no 39. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data. Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

- A : Imbalanced problems should not be measured using Accuracy metric.
- B : Accuracy metric is not a good idea for imbalanced class problems.
- C : Precision and recall metrics aren't good for imbalanced class problems.
- D : Precision and recall metrics are good for imbalanced class problems.

Q.no 40. Which of the following property typically does not hold for similarity measures between two objects ?

- A : Symmetry
- B : Definiteness
- C : Triangle inequality
- D : Transitive

Q.no 41. Cost complexity pruning algorithm is used in?

- A : CART
- B : C4.5

C : ID3

D : ALL

Q.no 42. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 43. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 44. Ordinal attribute has three distinct values such as Fair, Good, and Excellent.

If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 45. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 46. Which is the most well known association rule algorithm and is used in most commercial products.

- A : Apriori algorithm
- B : Pincer-search algorithm
- C : Distributed algorithm
- D : Partition algorithm

Q.no 47. What is the another name of Supremum distance?

- A : Wighted Euclidean distance
- B : City Block distance
- C : Chebyshev distance
- D : Euclidean distance

Q.no 48. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

- A : Precision= 0.90
- B : Precision= 0.79
- C : Precision= 0.45
- D : Precision= 0.68

Q.no 49. How the bayesian network can be used to answer any query?

- A : Full distribution
- B : Joint distribution
- C : Partial distribution
- D : All of the mentioned

Q.no 50. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

- A : Suffix path
- B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 51. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 52. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 53. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 54. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 55. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 56. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 57. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 58. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 59. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 60. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Things I do for LCC

Answer for Question No 1. is b

Answer for Question No 2. is b

Answer for Question No 3. is c

Answer for Question No 4. is b

Answer for Question No 5. is c

Answer for Question No 6. is a

Answer for Question No 7. is d

Answer for Question No 8. is b

Answer for Question No 9. is b

Answer for Question No 10. is b

Answer for Question No 11. is c

Answer for Question No 12. is c

Answer for Question No 13. is b

Answer for Question No 14. is a

Answer for Question No 15. is a

Answer for Question No 16. is a

Answer for Question No 17. is b

Answer for Question No 18. is c

Answer for Question No 19. is a

Answer for Question No 20. is a

Answer for Question No 21. is a

Answer for Question No 22. is c

Answer for Question No 23. is a

Answer for Question No 24. is d

Answer for Question No 25. is b

Answer for Question No 26. is d

Answer for Question No 27. is d

Answer for Question No 28. is b

Answer for Question No 29. is c

Answer for Question No 30. is a

Answer for Question No 31. is c

Answer for Question No 32. is a

Answer for Question No 33. is c

Answer for Question No 34. is a

Answer for Question No 35. is b

Answer for Question No 36. is c

Answer for Question No 37. is a

Answer for Question No 38. is a

Answer for Question No 39. is c

Answer for Question No 40. is c

Answer for Question No 41. is a

Answer for Question No 42. is d

Answer for Question No 43. is b

Answer for Question No 44. is c

Answer for Question No 45. is a

Answer for Question No 46. is a

Answer for Question No 47. is c

Answer for Question No 48. is a

Answer for Question No 49. is b

Answer for Question No 50. is d

Answer for Question No 51. is d

Answer for Question No 52. is d

Answer for Question No 53. is a

Answer for Question No 54. is b

Answer for Question No 55. is d

Answer for Question No 56. is a

Answer for Question No 57. is a

Answer for Question No 58. is a

Answer for Question No 59. is a

Answer for Question No 60. is b

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Postpruning is

A : Removing branches from fully grown tree

B : Stop constructing tree if this would result in the measure falling below a threshold

C : construting a new tree

D : Flow-Chart

Q.no 2. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 3. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 4. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 5. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 6. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 7. Which of the following is not a type of constraints?

A : Data constraints

B : Rule constraints

C : Knowledge type constraints

D : Time constraints

Q.no 8. Bayesian classification is based on

A : probability for the hypothesis

B : Support

C : tree induction

D : Trees

Q.no 9. Which one of the following is true for decision tree

A : Decision tree is useful in decision making

B : Decision tree is similar to OLTP

C : Decision Tree is similar to cluster analysis

D : Decision tree needs to find probabilities of hypothesis

Q.no 10. Hidden knowledge referred to

A : A set of databases from different vendors, possibly using different database paradigms

B : An approach to a problem that is not guaranteed to work but performs well in most cases

C : Information that is hidden in a database and that cannot be recovered by a simple SQL query

D : None of these

Q.no 11. What is an alternative form of Euclidean distance?

A : L1 norm

B : L2 norm

C : Lmax norm

D : L norm

Q.no 12. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 13. What are closed frequent itemsets?

A : A closed itemset

B : A frequent itemset

C : An itemset which is both closed and frequent

D : Not frequent itemset

Q.no 14. A decision tree is also known as

A : general tree

B : binary tree

C : prediction tree

D : None of the options

Q.no 15. cross-validation and bootstrap methods are common techniques for assessing

A : accuracy

B : Precision

C : recall

D : performance

Q.no 16. A multidimensional data model is typically organized around a central theme which is represented by

A : Dimension table

B : Fact table

C : Dimension table and Fact table

D : Dimension table or Fact table

Q.no 17. The problem of agents to learn from the environment by their interactions with dynamic environment is done in

A : Reinforcement learning

B : Multi-label classification

C : Binary Classification

D : Multiclassification

Q.no 18. Entropy is a measure of

A : impurity of an attribute

B : Purity of an attribute

C : Weight of an attribute

D : Class of an attribute

Q.no 19. the negative tuples that were correctly labeled by the classifier

A : False positives(FP)

B : True positives(TP)

C : True negatives (TN)

D : False negatives(FN)

Q.no 20. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 21. What is another name of data matrix?

A : Single mode

B : Two mode

C : Multi mode

D : Large mode

Q.no 22. Which of the following is a predictive model?

A : Clustering

B : Regression

C : Summarization

D : Association rules

Q.no 23. The rule is considered as interesting if

A : They satisfy both minimum support and minimum confidence threshold

B : They satisfy both maximum support and maximum confidence threshold

C : They satisfy maximum support and minimum confidence threshold

D : They satisfy minimum support and maximum confidence threshold

Q.no 24. Data independence means

A : Data is defined separately and not included in programs

B : Programs are not dependent on the physical attributes of the data

C : Programs are not dependent on the logical attributes of the data

D : Programs are not dependent on the physical attributes as well as logical attributes of the data

Q.no 25. What do you mean by support(A)?

A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 26. If first object X and Y coordinates are 3 and 5 respectively and second object X and Y coordinates are 10 and 3 respectively, then what is Manhattan distance between these two objects?

A : 8

B : 13

C : 9

D : 10

Q.no 27. Number of records are comparatively more in

A : OLAP

B : OLTP

C : Same in OLAP and OLTP

D : Can not compare

Q.no 28. Which of the following operations are used to calculate proximity measures for ordinal attribute?

A : Replacement and discretization

B : Replacement and characterizarion

C : Replacement and normalization

D : Normalization and discretization

Q.no 29. Which of the following is necessary operation to calculate dissimilarity between ordinal attributes?

A : Replacement of ordinal categories

B : Correlation coefficient

C : Discretization

D : Randomization

Q.no 30. Multilevel association rule mining is

A : Association rules generated from candidate-generation method

B : Association rules generated from without candidate-generation method

C : Association rules generated from mining data at multiple abstarction level

D : Association rules generated from frequent itemsets

Q.no 31. In a decision tree each leaf node represents

A : Test conditions

B : Class labels

C : Attribute values

D : Decision

Q.no 32. The Galaxy Schema is also called as

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 33. For mining frequent itemsets, the Data format used by Apriori and FP-Growth algorithms are

- A : Apriori uses horizontal and FP-Growth uses vertical data format
- B : Apriori uses vertical and FP-Growth uses horizontal data format
- C : Apriori and FP-Growth both uses vertical data format
- D : Apriori and FP-Growth both uses horizontal data format

Q.no 34. The property of Apriori algorithm is

- A : All nonempty subsets of a frequent itemsets must also be frequent
- B : All empty subsets of a frequent itemsets must also be frequent
- C : All nonempty subsets of a frequent itemsets must be not frequent
- D : All nonempty subsets of a frequent itemsets can frequent or not frequent

Q.no 35. It is the main technique employed for data selection.

- A : Noise
- B : Sampling
- C : Clustering
- D : Histogram

Q.no 36. The probability of a hypothesis before the presentation of evidence is called as

- A : Apriori probability
- B : subjective probability
- C : posterior probability

D : conditional probability

Q.no 37. In which step of Knowledge Discovery, multiple data sources are combined?

A : Data Cleaning

B : Data Integration

C : Data Selection

D : Data Transformation

Q.no 38. Some company wants to divide their customers into distinct groups to send offers this is an example of

A : Data Extraction

B : Data Classification

C : Data Discrimination

D : Data Selection

Q.no 39. The accuracy of a classifier on a given test set is the percentage of

A : test set tuples that are correctly classified by the classifier

B : test set tuples that are incorrectly classified by the classifier

C : test set tuples that are incorrectly misclassified by the classifier

D : test set tuples that are not classified by the classifier

Q.no 40. Which of the following is measure of document similarity?

A : Cosine dissimilarity

B : Sine similarity

C : Sine dissimilarity

D : Cosine similarity

Q.no 41. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 42. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 43. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 44. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Fourty Five

Q.no 45. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Traingle inequality

Q.no 46. Ordinal attribute has three distinct values such as Fair, Good, and Excellent.

If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 47. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 48. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 49. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 50. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 51. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 52. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 53. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 54. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 55. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

A : 7

B : 9

C : 10

D : 11

Q.no 56. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 57. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 58. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 59. Rotating the axes in a 3-D cube is the examplele of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 60. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Things I do for LCC

Answer for Question No 1. is a

Answer for Question No 2. is d

Answer for Question No 3. is c

Answer for Question No 4. is d

Answer for Question No 5. is a

Answer for Question No 6. is b

Answer for Question No 7. is d

Answer for Question No 8. is a

Answer for Question No 9. is a

Answer for Question No 10. is c

Answer for Question No 11. is b

Answer for Question No 12. is b

Answer for Question No 13. is c

Answer for Question No 14. is c

Answer for Question No 15. is a

Answer for Question No 16. is b

Answer for Question No 17. is a

Answer for Question No 18. is a

Answer for Question No 19. is c

Answer for Question No 20. is d

Answer for Question No 21. is b

Answer for Question No 22. is b

Answer for Question No 23. is a

Answer for Question No 24. is d

Answer for Question No 25. is c

Answer for Question No 26. is c

Answer for Question No 27. is b

Answer for Question No 28. is c

Answer for Question No 29. is a

Answer for Question No 30. is c

Answer for Question No 31. is b

Answer for Question No 32. is c

Answer for Question No 33. is d

Answer for Question No 34. is a

Answer for Question No 35. is b

Answer for Question No 36. is a

Answer for Question No 37. is b

Answer for Question No 38. is b

Answer for Question No 39. is a

Answer for Question No 40. is d

Answer for Question No 41. is d

Answer for Question No 42. is b

Answer for Question No 43. is a

Answer for Question No 44. is b

Answer for Question No 45. is a

Answer for Question No 46. is c

Answer for Question No 47. is c

Answer for Question No 48. is a

Answer for Question No 49. is b

Answer for Question No 50. is a

Answer for Question No 51. is a

Answer for Question No 52. is d

Answer for Question No 53. is b

Answer for Question No 54. is d

Answer for Question No 55. is b

Answer for Question No 56. is d

Answer for Question No 57. is b

Answer for Question No 58. is c

Answer for Question No 59. is a

Answer for Question No 60. is b

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Which angle is used to measure document similarity?

A : Sin

B : Tan

C : Cos

D : Sec

Q.no 2. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 3. cross-validation and bootstrap methods are common techniques for assessing

A : accuracy

B : Precision

C : recall

D : performance

Q.no 4. The task of building decision model from labeled training data is called as

A : Supervised Learning

B : Unsupervised Learning

C : Reinforcement Learning

D : Structure Learning

Q.no 5. A multidimensional data model is typically organized around a central theme which is represented by

A : Dimension table

B : Fact table

C : Dimension table and Fact table

D : Dimension table or Fact table

Q.no 6. How can one represent document to calculate cosine similarity?

A : Vector

B : Matirx

C : List

D : Term frequency vector

Q.no 7. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 8. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 9. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 10. OLAP database design is

A : Application-oriented

B : Object-oriented

C : Goal-oriented

D : Subject-oriented

Q.no 11. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 12. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 13. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 14. Color is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : numeric

Q.no 15. The schema is collection of stars. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 16. Data used to build a data mining model.

A : Validation Data

B : Training Data

C : Testing Data

D : Hidden Data

Q.no 17. The problem of agents to learn from the environment by their interactions with dynamic environment is done in

A : Reinforcement learning

B : Multi-label classification

C : Binary Classification

D : Multiclassification

Q.no 18. accuracy is used to measure

A : classifier's true abilities

B : classifier's analytic abilities

C : classifier's decision abilities

D : classifier's predictive abilities

Q.no 19. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 20. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non- supervised

Q.no 21. What is uniform support in multilevel association rule mining?

A : Use of minimum support

B : Use of minimum support and confidence

C : Use of same minimum threshold at each abstraction level

D : Use of minimum support and support count

Q.no 22. Which of the following activities is a data mining task?

A : Monitoring the heart rate of a patient for abnormalities

B : Extracting the frequencies of a sound wave

C : Predicting the outcomes of tossing a (fair) pair of dice

D : Dividing the customers of a company according to their profitability

Q.no 23. Which of the following operation is correct about supremum distance?

A : It gives maximum difference between any attribute of the objects

B : It gives minimum difference between any attribute of the objects

C : It gives maximum difference between first attribute of the objects

D : It gives minimum difference between first attribute of the objects

Q.no 24. Frequent patterns generated from association can be used for classification is called

A : Naïve Bays

B : Associative Classification

C : Predictive Mining

D : Decision Tree

Q.no 25. Holdout and random subsampling are common techniques for assessing

A : K-Fold validation

B : cross validation

C : accuracy

D : sampling

Q.no 26. Which statement is true about the decision tree attribute selection process

A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 27. Which of the following is not correct use of cross validation?

- A : Selecting variables to include in a model
- B : Comparing predictors
- C : Selecting parameters in prediction function
- D : classification

Q.no 28. In asymmetric attribute

- A : No value is considered important over other values
- B : All values are equal
- C : Only non-zero value is important
- D : Range of values is important

Q.no 29. When do you consider an association rule interesting?

- A : If it only satisfies minimum support
- B : If it only satisfies minimum confidence
- C : If it satisfies both minimum support and minimum confidence
- D : There are other measures to check interesting rules

Q.no 30. How will you counter over-fitting in decision tree?

- A : By creating new rules
- B : By pruning the longer rules
- C : Both By pruning the longer rules' and ' By creating new rules'
- D : BY creating new tree

Q.no 31. It is the main technique employed for data selection.

- A : Noise
- B : Sampling
- C : Clustering
- D : Histogram

Q.no 32. If A, B are two sets of items, and A is a subset of B. Which of the following statement is always true?

A : Support(A) is less than or equal to Support(B)

B : Support(A) is greater than or equal to Support(B)

C : Support(A) is equal to Support(B)

D : Support(A) is not equal to Support(B)

Q.no 33. Which is the wrong combination.

A : True negative=correctly indentified

B : False negative=incorrectly identified

C : False positive=correctly identified

D : True positive=correctly identified

Q.no 34. The data cubes are generally

A : 1 Dimensional

B : 2 Dimensional

C : 3 Dimensional

D : n-Dimensional

Q.no 35. A nearest neighbor approach is best used

A : with large-sized datasets.

B : when irrelevant attributes have been removed from the data.

C : when a generalized model of the data is desireable.

D : when an explanation of what has been found is of primary importance.

Q.no 36. The confusion matrix is a useful tool for analyzing

A : Regression

B : Classification

C : Sampling

D : Cross validation

Q.no 37. The rule is considered as intersting if

- A : They satisfy both minimum support and minimum confidence threshold
- B : They satisfy both maximum support and maximum confidence threshold
- C : They satisfy maximum support and minimum confidence threshold
- D : They satisfy minimum support and maximum confidence threshold

Q.no 38. What type of data do you need for a chi-square test?

- A : Categorical
- B : Ordinal
- C : Interval
- D : Scales

Q.no 39. Sensitivity is also referred to as

- A : misclassification rate
- B : true negative rate
- C : True positive rate
- D : correctness

Q.no 40. Number of records are comparatively more in

- A : OLAP
- B : OLTP
- C : Same in OLAP and OLTP
- D : Can not compare

Q.no 41. How the bayesian network can be used to answer any query?

- A : Full distribution
- B : Joint distribution
- C : Partial distribution
- D : All of the mentioned

Q.no 42. Which operation is required to calculate Hamming distacne between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 43. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 44. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support(V1) is greater than support (V2)

B : support(V3) is greater than support (V2)

C : support(V1) is greater than support(V3)

D : support(V2) is greater than support(V3)

Q.no 45. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 46. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 47. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 48. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 49. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 50. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 51. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 52. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 53. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Triangle inequality

Q.no 54. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 55. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 56. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 57. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

A : 7

B : 9

C : 10

D : 11

Q.no 58. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 59. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 60. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Things I do for LCC

Answer for Question No 1. is c

Answer for Question No 2. is d

Answer for Question No 3. is a

Answer for Question No 4. is a

Answer for Question No 5. is b

Answer for Question No 6. is d

Answer for Question No 7. is c

Answer for Question No 8. is b

Answer for Question No 9. is c

Answer for Question No 10. is d

Answer for Question No 11. is b

Answer for Question No 12. is b

Answer for Question No 13. is a

Answer for Question No 14. is a

Answer for Question No 15. is c

Answer for Question No 16. is b

Answer for Question No 17. is a

Answer for Question No 18. is d

Answer for Question No 19. is a

Answer for Question No 20. is c

Answer for Question No 21. is c

Answer for Question No 22. is a

Answer for Question No 23. is a

Answer for Question No 24. is b

Answer for Question No 25. is c

Answer for Question No 26. is b

Answer for Question No 27. is d

Answer for Question No 28. is c

Answer for Question No 29. is c

Answer for Question No 30. is b

Answer for Question No 31. is b

Answer for Question No 32. is b

Answer for Question No 33. is c

Answer for Question No 34. is d

Answer for Question No 35. is b

Answer for Question No 36. is b

Answer for Question No 37. is a

Answer for Question No 38. is a

Answer for Question No 39. is c

Answer for Question No 40. is b

Answer for Question No 41. is b

Answer for Question No 42. is d

Answer for Question No 43. is c

Answer for Question No 44. is b

Answer for Question No 45. is d

Answer for Question No 46. is b

Answer for Question No 47. is c

Answer for Question No 48. is d

Answer for Question No 49. is a

Answer for Question No 50. is a

Answer for Question No 51. is d

Answer for Question No 52. is a

Answer for Question No 53. is a

Answer for Question No 54. is a

Answer for Question No 55. is d

Answer for Question No 56. is d

Answer for Question No 57. is b

Answer for Question No 58. is a

Answer for Question No 59. is d

Answer for Question No 60. is b

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. How can one represent document to calculate cosine similarity?

- A : Vector
- B : Matirx
- C : List
- D : Term frequency vector

Q.no 2. In Data Characterization, class under study is called as?

- A : Study Class
- B : Intial Class
- C : Target Class
- D : Final Class

Q.no 3. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 4. the negative tuples that were correctly labeled by the classifier

A : False positives(FP)

B : True positives(TP)

C : True negatives (TN)

D : False negatives(FN)

Q.no 5. A person trained to interact with a human expert in order to capture their knowledge.

A : knowledge programmer

B : knowledge developer

C : knowledge engineer

D : knowledge extractor

Q.no 6. Removing duplicate records is a process called

A : recovery

B : data cleaning

C : data cleansing

D : data pruning

Q.no 7. Self-training is the simplest form of

A : supervised classification

B : semi-supervised classification

C : unsupervised classification

D : regression

Q.no 8. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 9. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 10. The task of building decision model from labeled training data is called as

A : Supervised Learning

B : Unsupervised Learning

C : Reinforcement Learning

D : Structure Learning

Q.no 11. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 12. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 13. A decision tree is also known as

A : general tree

B : binary tree

C : prediction tree

D : None of the options

Q.no 14. Supervised learning and unsupervised clustering both require at least one

A : hidden attribute

B : output attribute

C : input attribute

D : categorical attribute

Q.no 15. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 16. Which angle is used to measure document similarity?

A : Sin

B : Tan

C : Cos

D : Sec

Q.no 17. Hidden knowledge referred to

A : A set of databases from different vendors, possibly using different database paradigms

B : An approach to a problem that is not guaranteed to work but performs well in most cases

C : Information that is hidden in a database and that cannot be recovered by a simple SQL query

D : None of these

Q.no 18. The example of knowledge type constraints in constraint based mining is

A : Association or Correlation

B : Rule templates

C : Task relevant data

D : Threshold measures

Q.no 19. Which technique finds the frequent itemsets in just two database scans?

A : Partitioning

B : Sampling

C : Hashing

D : Dynamic itemset counting

Q.no 20. A data matrix in which attributes are of the same type and asymmetric is called

A : Pattern matrix

B : Sparse data matrix

C : Document term matrix

D : Normal matrix

Q.no 21. Specificity is also referred to as

A : true negative rate

B : correctness

C : misclassification rate

D : True positive rate

Q.no 22. If first object X and Y coordinates are 3 and 5 respectively and second object X and Y coordinates are 10 and 3 respectively, then what is Manhattan distance between these two objects?

A : 8

B : 13

C : 9

D : 10

Q.no 23. Which of the following property typically does not hold for similarity measures between two objects ?

A : Symmetry

B : Definiteness

C : Triangle inequality

D : Transitive

Q.no 24. The property of Apriori algorithm is

A : All nonempty subsets of a frequent itemsets must also be frequent

B : All empty subsets of a frequent itemsets must also be frequent

C : All nonempty subsets of a frequent itemsets must be not frequent

D : All nonempty subsets of a frequent itemsets can frequent or not frequent

Q.no 25. One of the most well known software used for classification is

A : Java

B : C4.5

C : Oracle

D : C++

Q.no 26. This supervised learning technique can process both numeric and categorical input attributes.

A : linear regression

B : Bayes classifier

C : logistic regression

D : backpropagation learning

Q.no 27. A lattice of cuboids is called as

- A : Data cube
- B : Dimesnion lattice
- C : Master lattice
- D : Fact table

Q.no 28. K-fold Cross Validation envisages

- A : partitioning of the original sample into one sample.
- B : partitioning of the original sample into 'k' equal sized sub-samples.
- C : partitioning of the original sample into 'k' unequal sized sub-samples.
- D : partitioning of the original sample into 'k' random samples.

Q.no 29. The fact table contains

- A : The names of the facts
- B : Keys to each of the related dimension tables
- C : Facts and keys
- D : Facts or keys

Q.no 30. In asymmetric attribute

- A : No value is considered important over other values
- B : All values are equal
- C : Only non-zero value is important
- D : Range of values is important

Q.no 31. Which of the following operation is correct about supremum distance?

- A : It gives maximum difference between any attribute of the objects
- B : It gives minimum difference between any attribute of the objects
- C : It gives maximum difference between first attribute of the objects
- D : It gives minimum difference between first attribute of the objects

Q.no 32. What type of matrix is required to represent binary data for proximity measures?

- A : Normal matrix
- B : Sparse matrix
- C : Dense matrix
- D : Contingency matrix

Q.no 33. Sensitivity is also referred to as

- A : misclassification rate
- B : true negative rate
- C : True positive rate
- D : correctness

Q.no 34. What is the limitation behind rule generation in Apriori algorithm?

- A : Need to generate a huge number of candidate sets
- B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching
- C : Dropping itemsets with valued information
- D : Both (a) and (b)

Q.no 35. If A, B are two sets of items, and A is a subset of B. Which of the following statement is always true?

- A : $\text{Support}(A)$ is less than or equal to $\text{Support}(B)$
- B : $\text{Support}(A)$ is greater than or equal to $\text{Support}(B)$
- C : $\text{Support}(A)$ is equal to $\text{Support}(B)$
- D : $\text{Support}(A)$ is not equal to $\text{Support}(B)$

Q.no 36. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

- A : Replacement discretization and distance measure
- B : Replacement characterization and distance measure

C : Normalization discretization and distance measure

D : Replacement normalization and distance measure

Q.no 37. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

A : Imbalanced problems should not be measured using Accuracy metric.

B : Accuracy metric is not a good idea for imbalanced class problems.

C : Precision and recall metrics aren't good for imbalanced class problems.

D : Precision and recall metrics are good for imbalanced class problems.

Q.no 38. Some company wants to divide their customers into distinct groups to send offers this is an example of

A : Data Extraction

B : Data Classification

C : Data Discrimination

D : Data Selection

Q.no 39. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 40. What is another name of data matrix?

A : Single mode

B : Two mode

C : Multi mode

D : Large mode

Q.no 41. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 42. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 43. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 44. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 45. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

A : 7

B : 9

C : 10

D : 11

Q.no 46. Which of the following sentence is FALSE regarding regression?

- A : It relates inputs to outputs.
- B : It is used for prediction.
- C : It may be used for interpretation.
- D : It discovers causal relationships.

Q.no 47. This technique uses mean and standard deviation scores to transform real-valued attributes.

- A : decimal scaling
- B : min-max normalization
- C : z-score normalization
- D : logarithmic normalization

Q.no 48. The problem of finding hidden structure from unlabeled data is called as

- A : Supervised learning
- B : Unsupervised learning
- C : Reinforcement Learning
- D : Semisupervised learning

Q.no 49. These server performs the faster computation

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 50. Cost complexity pruning algorithm is used in?

- A : CART
- B : C4.5
- C : ID3
- D : ALL

Q.no 51. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 52. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, "If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 53. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset {Tea, milk} is antecedent and {sugar} is consequent

Q.no 54. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 55. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 56. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 57. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Q.no 58. Which operation is required to calculate Hamming distance between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 59. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 60. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Things I do for LCC

Answer for Question No 1. is d

Answer for Question No 2. is c

Answer for Question No 3. is b

Answer for Question No 4. is c

Answer for Question No 5. is c

Answer for Question No 6. is b

Answer for Question No 7. is b

Answer for Question No 8. is a

Answer for Question No 9. is a

Answer for Question No 10. is a

Answer for Question No 11. is d

Answer for Question No 12. is b

Answer for Question No 13. is c

Answer for Question No 14. is c

Answer for Question No 15. is b

Answer for Question No 16. is c

Answer for Question No 17. is c

Answer for Question No 18. is a

Answer for Question No 19. is a

Answer for Question No 20. is b

Answer for Question No 21. is a

Answer for Question No 22. is c

Answer for Question No 23. is c

Answer for Question No 24. is a

Answer for Question No 25. is b

Answer for Question No 26. is b

Answer for Question No 27. is a

Answer for Question No 28. is d

Answer for Question No 29. is c

Answer for Question No 30. is c

Answer for Question No 31. is a

Answer for Question No 32. is d

Answer for Question No 33. is c

Answer for Question No 34. is d

Answer for Question No 35. is b

Answer for Question No 36. is d

Answer for Question No 37. is c

Answer for Question No 38. is b

Answer for Question No 39. is b

Answer for Question No 40. is b

Answer for Question No 41. is b

Answer for Question No 42. is a

Answer for Question No 43. is b

Answer for Question No 44. is a

Answer for Question No 45. is b

Answer for Question No 46. is d

Answer for Question No 47. is c

Answer for Question No 48. is b

Answer for Question No 49. is b

Answer for Question No 50. is a

Answer for Question No 51. is b

Answer for Question No 52. is a

Answer for Question No 53. is d

Answer for Question No 54. is d

Answer for Question No 55. is d

Answer for Question No 56. is a

Answer for Question No 57. is b

Answer for Question No 58. is d

Answer for Question No 59. is c

Answer for Question No 60. is b

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. The problem of agents to learn from the environment by their interactions with dynamic environment is done in

- A : Reinforcement learning
- B : Multi-label classification
- C : Binary Classification
- D : Multiclassification

Q.no 2. Bayesian classification is based on

- A : probability for the hypothesis
- B : Support
- C : tree induction
- D : Trees

Q.no 3. Which of the following is correct about Proximity measures?

- A : Similarity
- B : Dissimilarity
- C : Similarity as well as Dissimilarity
- D : Neither similarity nor dissimilarity

Q.no 4. For Apriori algorithm, what is the second phase?

- A : Pruning
- B : Partitioning
- C : Candidate generation
- D : Itemset generation

Q.no 5. Learning algorithm which trains with combination of labeled and unlabeled data.

- A : Supervised
- B : Unsupervised
- C : Semi supervised
- D : Non- supervised

Q.no 6. The most widely used metrics and tools to assess a classification model are:

- A : Confusion Matrix
- B : Support
- C : Entropy
- D : Probability

Q.no 7. The schema is collection of stars. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation

D : Database schema

Q.no 8. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 9. Multilevel association rules can be mined efficiently using

A : Support

B : Confidence

C : Support count

D : Concept Hierarchies under support-confidence framework

Q.no 10. Which of the following is not a type of constraints?

A : Data constraints

B : Rule constraints

C : Knowledge type constraints

D : Time constraints

Q.no 11. Data matrix is also called as

A : Object by object structure

B : Object by attribute structure

C : Attribute by attribute structure

D : Attribute by object structure

Q.no 12. Each dimension is represented by only one table. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 13. How can one represent document to calculate cosine similarity?

A : Vector

B : Matirx

C : List

D : Term frequency vector

Q.no 14. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 15. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 16. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 17. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 18. cross-validation and bootstrap methods are common techniques for assessing

A : accuracy

B : Precision

C : recall

D : performance

Q.no 19. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 20. OLAP database design is

A : Application-oriented

B : Object-oriented

C : Goal-oriented

D : Subject-oriented

Q.no 21. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 22. This supervised learning technique can process both numeric and categorical input attributes.

- A : linear regression
- B : Bayes classifier
- C : logistic regression
- D : backpropagation learning

Q.no 23. For mining frequent itemsets, the Data format used by Apriori and FP-Growth algorithms are

- A : Apriori uses horizontal and FP-Growth uses vertical data format
- B : Apriori uses vertical and FP-Growth uses horizontal data format
- C : Apriori and FP-Growth both uses vertical data format
- D : Apriori and FP-Growth both uses horizontal data format

Q.no 24. How are metarules useful in mining of association rules?

- A : Allow users to specify threshold measures
- B : Allow users to specify task relevant data
- C : Allow users to specify the syntactic forms of rules
- D : Allow users to specify correlation or association

Q.no 25. A frequent pattern tree is a tree structure consisting of

- A : A frequent-item-node
- B : An item-prefix-tree
- C : A frequent-item-header table
- D : both B and C

Q.no 26. Learning with a complete system in mind with reference to interactions among the systems and subsystems with proper understanding of systemic boundaries is

- A : Multi-label classification
- B : Reinforcement learning
- C : Systemic learning
- D : Machine Learning

Q.no 27. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

- A : Multiclassification
- B : Multi-label classification
- C : Imbalanced classification
- D : Binary Classification

Q.no 28. Which of the following activities is a data mining task?

- A : Monitoring the heart rate of a patient for abnormalities
- B : Extracting the frequencies of a sound wave
- C : Predicting the outcomes of tossing a (fair) pair of dice
- D : Dividing the customers of a company according to their profitability

Q.no 29. The frequent-item-header-table consists of number fields

- A : Only one
- B : Two
- C : Three
- D : Four

Q.no 30. The rule is considered as interesting if

- A : They satisfy both minimum support and minimum confidence threshold
- B : They satisfy both maximum support and maximum confidence threshold
- C : They satisfy maximum support and minimum confidence threshold
- D : They satisfy minimum support and maximum confidence threshold

Q.no 31. What is the limitation behind rule generation in Apriori algorithm?

- A : Need to generate a huge number of candidate sets
- B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching
- C : Dropping itemsets with valued information

D : Both (a) and (b)

Q.no 32. What is another name of data matrix?

A : Single mode

B : Two mode

C : Multi mode

D : Large mode

Q.no 33. How will you counter over-fitting in decision tree?

A : By creating new rules

B : By pruning the longer rules

C : Both By pruning the longer rules' and ' By creating new rules'

D : BY creating new tree

Q.no 34. In a decision tree each leaf node represents

A : Test conditions

B : Class labels

C : Attribute values

D : Decision

Q.no 35. A lattice of cuboids is called as

A : Data cube

B : Dimension lattice

C : Master lattice

D : Fact table

Q.no 36. If first object X and Y coordinates are 3 and 5 respectively and second object X and Y coordinates are 10 and 3 respectively, then what is Manhattan distance between these two objects?

A : 8

B : 13

C : 9

D : 10

Q.no 37. one-versus-one(OVO) and one-versus-all (OVA) classification involves

A : more than two classes

B : Only two classes

C : Only one class

D : No class

Q.no 38. K-fold Cross Validation envisages

A : partitioning of the original sample into one sample.

B : partitioning of the original sample into 'k' equal sized sub-samples.

C : partitioning of the original sample into 'k' unequal sized sub-samples.

D : partitioning of the original sample into 'k' random samples.

Q.no 39. One of the most well known software used for classification is

A : Java

B : C4.5

C : Oracle

D : C++

Q.no 40. What do you mean by support(A)?

A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 41. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 42. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 43. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 44. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 45. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 46. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 47. Transforming a 3-D cube into a series of 2-D planes is the examplele of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 48. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 49. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Fourty Five

Q.no 50. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 51. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 52. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 53. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 54. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Triangle inequality

Q.no 55. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset {Tea, milk} is antecedent and {sugar} is consequent

Q.no 56. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 57. Which operation is required to calculate Hamming distance between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 58. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 59. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 60. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Answer for Question No 1. is a

Answer for Question No 2. is a

Answer for Question No 3. is c

Answer for Question No 4. is a

Answer for Question No 5. is c

Answer for Question No 6. is a

Answer for Question No 7. is c

Answer for Question No 8. is d

Answer for Question No 9. is d

Answer for Question No 10. is d

Answer for Question No 11. is b

Answer for Question No 12. is a

Answer for Question No 13. is d

Answer for Question No 14. is b

Answer for Question No 15. is c

Answer for Question No 16. is b

Answer for Question No 17. is d

Answer for Question No 18. is a

Answer for Question No 19. is a

Answer for Question No 20. is d

Answer for Question No 21. is d

Answer for Question No 22. is b

Answer for Question No 23. is d

Answer for Question No 24. is c

Answer for Question No 25. is d

Answer for Question No 26. is c

Answer for Question No 27. is a

Answer for Question No 28. is a

Answer for Question No 29. is b

Answer for Question No 30. is a

Answer for Question No 31. is d

Answer for Question No 32. is b

Answer for Question No 33. is b

Answer for Question No 34. is b

Answer for Question No 35. is a

Answer for Question No 36. is c

Answer for Question No 37. is a

Answer for Question No 38. is d

Answer for Question No 39. is b

Answer for Question No 40. is c

Answer for Question No 41. is d

Answer for Question No 42. is a

Answer for Question No 43. is d

Answer for Question No 44. is a

Answer for Question No 45. is b

Answer for Question No 46. is a

Answer for Question No 47. is a

Answer for Question No 48. is b

Answer for Question No 49. is b

Answer for Question No 50. is a

Answer for Question No 51. is c

Answer for Question No 52. is d

Answer for Question No 53. is a

Answer for Question No 54. is a

Answer for Question No 55. is d

Answer for Question No 56. is b

Answer for Question No 57. is d

Answer for Question No 58. is b

Answer for Question No 59. is a

Answer for Question No 60. is a

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Which angle is used to measure document similarity?

A : Sin

B : Tan

C : Cos

D : Sec

Q.no 2. Data mining is best described as the process of

A : identifying patterns in data

B : deducing relationships in data

C : representing data

D : simulating trends in data

Q.no 3. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 4. What does the leaf node in decision tree indicates

A : sub tree

B : class label

C : testing node

D : condition

Q.no 5. A multidimensional data model is typically organized around a central theme which is represented by

A : Dimension table

B : Fact table

C : Dimension table and Fact table

D : Dimension table or Fact table

Q.no 6. Data used to build a data mining model.

A : Validation Data

B : Training Data

C : Testing Data

D : Hidden Data

Q.no 7. The Synonym for data mining is

A : Data warehouse

B : Knowledge discovery in database

C : ETL

D : Business Intelligence

Q.no 8. Color is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : numeric

Q.no 9. Cotraining is one form of

A : sampling

B : Reinforcement learning

C : unsupervised classification

D : semi-supervised classification

Q.no 10. What is C4.5 is used to build

A : Decision tree

B : Regression Analysis

C : Induction

D : Association Rules

Q.no 11. Training process that generates tree is called as

A : Pruning

B : Rule generation

C : Induction

D : splitting

Q.no 12. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non- supervised

Q.no 13. Which of the following is not frequent pattern?

A : Itemsets

B : Subsequences

C : Substructures

D : Associations

Q.no 14. What is an alternative form of Euclidean distance?

A : L1 norm

B : L2 norm

C : Lmax norm

D : L norm

Q.no 15. Which one of the following is true for decision tree

A : Decision tree is useful in decision making

B : Decision tree is similar to OLTP

C : Decision Tree is similar to cluster analysis

D : Decision tree needs to find probabilities of hypothesis

Q.no 16. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 17. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 18. Which of the following are methods for supervised classification?

A : Decision tree

B : K-Means

C : Hierarchical

D : Apriori

Q.no 19. The schema is collection of stars. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 20. Removing duplicate records is a process called

A : recovery

B : data cleaning

C : data cleansing

D : data pruning

Q.no 21. The Galaxy Schema is also called as

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 22. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 23. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

A : Zero

B : Infinity

C : Two

D : One

Q.no 24. The accuracy of a classifier on a given test set is the percentage of

A : test set tuples that are correctly classified by the classifier

B : test set tuples that are incorrectly classified by the classifier

C : test set tuples that are incorrectly misclassified by the classifier

D : test set tuples that are not classified by the classifier

Q.no 25. A lattice of cuboids is called as

A : Data cube

B : Dimesnion lattice

C : Master lattice

D : Fact table

Q.no 26. What is uniform support in multilevel association rule minig?

A : Use of minimum support

B : Use of minimum support and confidence

C : Use of same minimum threshold at each abstraction level

D : Use of minimum support and support count

Q.no 27. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 28. The frequent-item-header-table consists of number fields

A : Only one

B : Two

C : Three

D : Four

Q.no 29. Which of these distributions is used for a testing hypothesis?

A : Normal Distribution

B : Chi-Squared Distribution

C : Gamma Distribution

D : Poisson Distribution

Q.no 30. What is the approach of basic algorithm for decision tree induction?

A : Greedy

B : Top Down

C : Procedural

D : Step by Step

Q.no 31. Joins will be needed to execute the query. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 32. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

A : Replacement discretization and distance measure

B : Replacement characterization and distance measure

C : Normalization discretization and distance measure

D : Replacement normalization and distance measure

Q.no 33. Some company wants to divide their customers into distinct groups to send offers this is an example of

A : Data Extraction

B : Data Classification

C : Data Discrimination

D : Data Selection

Q.no 34. Which statement is true about the KNN algorithm?

A : All attribute values must be categorical

B : The output attribute must be categorical.

C : Attribute values may be either categorical or numeric.

D : All attributes must be numeric.

Q.no 35. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 36. What type of data do you need for a chi-square test?

A : Categorical

B : Ordinal

C : Interval

D : Scales

Q.no 37. In which step of Knowledge Discovery, multiple data sources are combined?

A : Data Cleaning

B : Data Integration

C : Data Selection

D : Data Transformation

Q.no 38. Which of the following is measure of document similarity?

A : Cosine dissimilarity

B : Sine similarity

C : Sine dissimilarity

D : Cosine similarity

Q.no 39. How will you counter over-fitting in decision tree?

A : By creating new rules

B : By pruning the longer rules

C : Both By pruning the longer rules' and ' By creating new rules'

D : BY creating new tree

Q.no 40. In multilevel association rules, which strategy is employed

A : Top-down

B : Recursive

C : Bottom-up

D : Divide and conquer

Q.no 41. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 42. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 43. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 44. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 45. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 46. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 47. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

- A : Primary
- B : Secondary
- C : Superkey
- D : Candidate

Q.no 48. Which one of these is a tree based learner?

- A : Rule based
- B : Bayesian Belief Network
- C : Bayesian classifier
- D : Random Forest

Q.no 49. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

- A : Precision= 0.90
- B : Precision= 0.79
- C : Precision= 0.45
- D : Precision= 0.68

Q.no 50. Name the property of objects for which distance from first object to second and vice-versa is same.

- A : Symmetry
- B : Transitive
- C : Positive definiteness
- D : Traingle inequality

Q.no 51. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

- A : 7
- B : 9
- C : 10
- D : 11

Q.no 52. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 53. Ordinal attribute has three distinct values such as Fair, Good, and Excellent.

If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 54. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 55. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 56. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 57. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 58. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 59. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 60. Which operation is required to calculate Hamming distacne between two objects?

A : AND

B : OR

C : NOT

D : XOR

Answer for Question No 1. is c

Answer for Question No 2. is a

Answer for Question No 3. is a

Answer for Question No 4. is b

Answer for Question No 5. is b

Answer for Question No 6. is b

Answer for Question No 7. is b

Answer for Question No 8. is a

Answer for Question No 9. is d

Answer for Question No 10. is a

Answer for Question No 11. is c

Answer for Question No 12. is c

Answer for Question No 13. is d

Answer for Question No 14. is b

Answer for Question No 15. is a

Answer for Question No 16. is a

Answer for Question No 17. is b

Answer for Question No 18. is a

Answer for Question No 19. is c

Answer for Question No 20. is b

Answer for Question No 21. is c

Answer for Question No 22. is d

Answer for Question No 23. is a

Answer for Question No 24. is a

Answer for Question No 25. is a

Answer for Question No 26. is c

Answer for Question No 27. is d

Answer for Question No 28. is b

Answer for Question No 29. is b

Answer for Question No 30. is a

Answer for Question No 31. is b

Answer for Question No 32. is d

Answer for Question No 33. is b

Answer for Question No 34. is d

Answer for Question No 35. is c

Answer for Question No 36. is a

Answer for Question No 37. is b

Answer for Question No 38. is d

Answer for Question No 39. is b

Answer for Question No 40. is a

Answer for Question No 41. is c

Answer for Question No 42. is a

Answer for Question No 43. is d

Answer for Question No 44. is d

Answer for Question No 45. is d

Answer for Question No 46. is b

Answer for Question No 47. is d

Answer for Question No 48. is d

Answer for Question No 49. is a

Answer for Question No 50. is a

Answer for Question No 51. is b

Answer for Question No 52. is b

Answer for Question No 53. is c

Answer for Question No 54. is a

Answer for Question No 55. is c

Answer for Question No 56. is a

Answer for Question No 57. is d

Answer for Question No 58. is c

Answer for Question No 59. is d

Answer for Question No 60. is d

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. The Synonym for data mining is

- A : Data warehouse
- B : Knowledge discovery in database
- C : ETL
- D : Business Intelligence

Q.no 2. The example of knowledge type constraints in constraint based mining is

- A : Association or Correlation
- B : Rule templates
- C : Task relevant data
- D : Threshold measures

Q.no 3. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 4. The most widely used metrics and tools to assess a classification model are:

A : Confusion Matrix

B : Support

C : Entropy

D : Probability

Q.no 5. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 6. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 7. How can one represent document to calculate cosine similarity?

A : Vector

B : Matrix

C : List

D : Term frequency vector

Q.no 8. Cotraining is one form of

A : sampling

B : Reinforcement learning

C : unsupervised classification

D : semi-supervised classification

Q.no 9. Which is the keyword that distinguishes data warehouses from other data repository systems ?

A : Subject-oriented

B : Object-oriented

C : Client server

D : Time-invariant

Q.no 10. Self-training is the simplest form of

A : supervised classification

B : semi-supervised classification

C : unsupervised classification

D : regression

Q.no 11. Which of the following is correct about Proximity measures?

A : Similarity

B : Dissimilarity

C : Similarity as well as Dissimilarity

D : Neither similarity nor dissimilarity

Q.no 12. For Apriori algorithm, what is the first phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 13. Hidden knowledge referred to

A : A set of databases from different vendors, possibly using different database paradigms

B : An approach to a problem that is not guaranteed to work but performs well in most cases

C : Information that is hidden in a database and that cannot be recovered by a simple SQL query

D : None of these

Q.no 14. Color is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : numeric

Q.no 15. What is C4.5 is used to build

A : Decision tree

B : Regression Analysis

C : Induction

D : Association Rules

Q.no 16. Choose the correct concept hierarchy.

A : city < street < state < country

B : street < city < state < country

C : street > city > state > country

D : street > city > country > state

Q.no 17. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non- supervised

Q.no 18. An automatic car driver and business intelligent systems are examples of

A : Regression

B : Classification

C : Machine Learning

D : Reinforcement learning

Q.no 19. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 20. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 21. The Microsoft SQL Server 2000 is the example of

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 22. Multilevel association rule mining is

- A : Association rules generated from candidate-generation method
- B : Association rules generated from without candidate-generation method
- C : Association rules generated from mining data at multiple abstraction level
- D : Association rules generated from frequent itemsets

Q.no 23. For mining frequent itemsets, the Data format used by Apriori and FP-Growth algorithms are

- A : Apriori uses horizontal and FP-Growth uses vertical data format
- B : Apriori uses vertical and FP-Growth uses horizontal data format
- C : Apriori and FP-Growth both uses vertical data format
- D : Apriori and FP-Growth both uses horizontal data format

Q.no 24. What is uniform support in multilevel association rule mining?

- A : Use of minimum support
- B : Use of minimum support and confidence
- C : Use of same minimum threshold at each abstraction level
- D : Use of minimum support and support count

Q.no 25. It is the main technique employed for data selection.

- A : Noise
- B : Sampling
- C : Clustering
- D : Histogram

Q.no 26. Where does the bayes rule used?

- A : Solving queries
- B : Increasing complexity
- C : Decreasing complexity
- D : Answering probabilistic query

Q.no 27. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 28. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

A : Zero

B : Infinity

C : Two

D : One

Q.no 29. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 30. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 31. In which step of Knowledge Discovery, multiple data sources are combined?

A : Data Cleaning

B : Data Integration

C : Data Selection

D : Data Transformation

Q.no 32. In a decision tree each leaf node represents

- A : Test conditions
- B : Class labels
- C : Attribute values
- D : Decision

Q.no 33. Which of the following activities is a data mining task?

- A : Monitoring the heart rate of a patient for abnormalities
- B : Extracting the frequencies of a sound wave
- C : Predicting the outcomes of tossing a (fair) pair of dice
- D : Dividing the customers of a company according to their profitability

Q.no 34. To improve the accuracy of multiclass classification we can use

- A : cross validation
- B : sampling
- C : Error-detecting codes
- D : Error-correcting codes

Q.no 35. Cross validation involves

- A : testing the machine on all possible ways by substituting the original sample into training set
- B : testing the machine on all possible ways by dividing the original sample into training and validation sets.
- C : testing the machine with only validation sets
- D : testing the machine on only testing datasets.

Q.no 36. OLAP Summarization means

- A : Consolidated
- B : Primitive
- C : Highly detailed

D : Recent data

Q.no 37. Identify the example of sequence data

A : weather forecast

B : data matrix

C : market basket data

D : genomic data

Q.no 38. Which of the following is necessary operation to calculate dissimilarity between ordinal attributes?

A : Replacement of ordinal categories

B : Correlation coefficient

C : Discretization

D : Randomization

Q.no 39. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 40. Which of the following probabilities are used in the Bayes theorem.

A : $P(C_i | X)$

B : $P(C_i)$

C : $P(X | C_i)$

D : $P(X)$

Q.no 41. Ordinal attribute has three distinct values such as Fair, Good, and Excellent.

If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 42. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 43. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 44. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 45. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 46. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 47. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 48. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 49. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 50. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 51. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Traingle inequality

Q.no 52. Which operation is required to calculate Hamming distacne between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 53. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 54. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Fourty Five

Q.no 55. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 56. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 57. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 58. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 59. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 60. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Things I do for LCC

Answer for Question No 1. is b

Answer for Question No 2. is a

Answer for Question No 3. is d

Answer for Question No 4. is a

Answer for Question No 5. is b

Answer for Question No 6. is d

Answer for Question No 7. is d

Answer for Question No 8. is d

Answer for Question No 9. is a

Answer for Question No 10. is b

Answer for Question No 11. is c

Answer for Question No 12. is c

Answer for Question No 13. is c

Answer for Question No 14. is a

Answer for Question No 15. is a

Answer for Question No 16. is b

Answer for Question No 17. is c

Answer for Question No 18. is d

Answer for Question No 19. is b

Answer for Question No 20. is a

Answer for Question No 21. is c

Answer for Question No 22. is c

Answer for Question No 23. is d

Answer for Question No 24. is c

Answer for Question No 25. is b

Answer for Question No 26. is d

Answer for Question No 27. is b

Answer for Question No 28. is a

Answer for Question No 29. is d

Answer for Question No 30. is d

Answer for Question No 31. is b

Answer for Question No 32. is b

Answer for Question No 33. is a

Answer for Question No 34. is d

Answer for Question No 35. is c

Answer for Question No 36. is a

Answer for Question No 37. is d

Answer for Question No 38. is a

Answer for Question No 39. is c

Answer for Question No 40. is a

Answer for Question No 41. is c

Answer for Question No 42. is d

Answer for Question No 43. is b

Answer for Question No 44. is d

Answer for Question No 45. is c

Answer for Question No 46. is a

Answer for Question No 47. is a

Answer for Question No 48. is a

Answer for Question No 49. is a

Answer for Question No 50. is d

Answer for Question No 51. is a

Answer for Question No 52. is d

Answer for Question No 53. is b

Answer for Question No 54. is b

Answer for Question No 55. is c

Answer for Question No 56. is b

Answer for Question No 57. is c

Answer for Question No 58. is a

Answer for Question No 59. is c

Answer for Question No 60. is b

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Which one of the following is true for decision tree

- A : Decision tree is useful in decision making
- B : Decision tree is similar to OLTP
- C : Decision Tree is similar to cluster analysis
- D : Decision tree needs to find probabilities of hypothesis

Q.no 2. The first steps involved in the knowledge discovery is?

- A : Data Integration
- B : Data Selection
- C : Data Transformation
- D : Data Cleaning

Q.no 3. What is C4.5 is used to build

A : Decision tree

B : Regression Analysis

C : Induction

D : Association Rules

Q.no 4. Which of the following is not frequent pattern?

A : Itemsets

B : Subsequences

C : Substructures

D : Associations

Q.no 5. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 6. A data cube is defined by

A : Dimensions

B : Facts

C : Dimensions and Facts

D : Dimensions or Facts

Q.no 7. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 8. Which of the following is the data mining tool?

A : Borland C

B : Weka

C : Borland C++

D : Visual C

Q.no 9. Cotraining is one form of

A : sampling

B : Reinforcement learning

C : unsupervised classification

D : semi-supervised classification

Q.no 10. Each dimension is represented by only one table. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 11. What are two steps of tree pruning work?

A : Pessimistic pruning and Optimistic pruning

B : Postpruning and Prepruning

C : Cost complexity pruning and time complexity pruning

D : None of the options

Q.no 12. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 13. Choose the correct concept hierarchy.

A : city < street < state < country

B : street < city < state < country

C : street > city > state > country

D : street > city > country > state

Q.no 14. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 15. to evaluate a classifier's quality we use

A : confusion matrix

B : error detection code

C : error correction code

D : classifier

Q.no 16. accuracy is used to measure

A : classifier's true abilities

B : classifier's analytic abilities

C : classifier's decision abilities

D : classifier's predictive abilities

Q.no 17. Supervised learning and unsupervised clustering both require at least one

A : hidden attribute

B : output attribute

C : input attribute

D : categorical attribute

Q.no 18. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 19. What are closed frequent itemsets?

A : A closed itemset

B : A frequent itemset

C : An itemset which is both closed and frequent

D : Not frequent itemset

Q.no 20. In Data Characterization, class under study is called as?

A : Study Class

B : Intial Class

C : Target Class

D : Final Class

Q.no 21. A nearest neighbor approach is best used

A : with large-sized datasets.

B : when irrelevant attributes have been removed from the data.

C : when a generalized model of the data is desireable.

D : when an explanation of what has been found is of primary importance.

Q.no 22. Lazy learner classification approach is

A : learner waits until the last minute before constructing model to classify

B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 23. Which of the following probabilities are used in the Bayes theorem.

A : $P(C_i | X)$

B : $P(C_i)$

C : $P(X | C_i)$

D : $P(X)$

Q.no 24. A frequent pattern tree is a tree structure consisting of

A : A frequent-item-node

B : An item-prefix-tree

C : A frequent-item-header table

D : both B and C

Q.no 25. Holdout and random subsampling are common techniques for assessing

A : K-Fold validation

B : cross validation

C : accuracy

D : sampling

Q.no 26. Specificity is also referred to as

A : true negative rate

B : correctness

C : misclassification rate

D : True positive rate

Q.no 27. If A, B are two sets of items, and A is a subset of B. Which of the following statement is always true?

A : $\text{Support}(A)$ is less than or equal to $\text{Support}(B)$

B : $\text{Support}(A)$ is greater than or equal to $\text{Support}(B)$

C : $\text{Support}(A)$ is equal to $\text{Support}(B)$

D : $\text{Support}(A)$ is not equal to $\text{Support}(B)$

Q.no 28. To improve the accuracy of multiclass classification we can use

A : cross validation

B : sampling

C : Error-detecting codes

D : Error-correcting codes

Q.no 29. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) and (b)

Q.no 30. one-versus-one(OVO) and one-versus-all (OVA) classification involves

A : more than two classes

B : Only two classes

C : Only one class

D : No class

Q.no 31. OLAP Summarization means

A : Consolidated

B : Primitive

C : Highly detailed

D : Recent data

Q.no 32. When you use cross validation in machine learning, it means

A : you verify how accurate your model is on multiple and different subsets of data.

B : you verify how accurate your model is on same dataset.

C : you verify how accurate your model is on new dataset.

D : you verify how accurate your model on unknown dataset

Q.no 33. What is the approach of basic algorithm for decision tree induction?

- A : Greedy
- B : Top Down
- C : Procedural
- D : Step by Step

Q.no 34. Which of the following operations are used to calculate proximity measures for ordinal attribute?

- A : Replacement and discretization
- B : Replacement and characterizarion
- C : Replacement and normalization
- D : Normalization and discretization

Q.no 35. In Apriori algorithm, for generating e. g. 5 itemsets, we use

- A : Frequent 5 itemsets
- B : Frequent 3 itemsets
- C : Frequent 4 itemsets
- D : Frequent 6 itemsets

Q.no 36. Which of the following is a predictive model?

- A : Clustering
- B : Regression
- C : Summarization
- D : Association rules

Q.no 37. It is the main technique employed for data selection.

- A : Noise
- B : Sampling
- C : Clustering
- D : Histogram

Q.no 38. Some company wants to divide their customers into distinct groups to send offers this is an example of

- A : Data Extraction
- B : Data Classification
- C : Data Discrimination
- D : Data Selection

Q.no 39. In asymmetric attribute

- A : No value is considered important over other values
- B : All values are equal
- C : Only non-zero value is important
- D : Range of values is important

Q.no 40. A lattice of cuboids is called as

- A : Data cube
- B : Dimesnion lattice
- C : Master lattice
- D : Fact table

Q.no 41. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

- A : 0.6
- B : 0.75
- C : 0.8
- D : 0.7

Q.no 42. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

- A : Suffix path
- B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 43. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 44. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 45. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 46. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 47. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 48. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 49. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 50. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 51. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 52. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 53. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 54. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 55. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 56. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 57. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 58. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 59. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 60. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Answer for Question No 1. is a

Answer for Question No 2. is d

Answer for Question No 3. is a

Answer for Question No 4. is d

Answer for Question No 5. is b

Answer for Question No 6. is c

Answer for Question No 7. is d

Answer for Question No 8. is b

Answer for Question No 9. is d

Answer for Question No 10. is a

Answer for Question No 11. is b

Answer for Question No 12. is b

Answer for Question No 13. is b

Answer for Question No 14. is a

Answer for Question No 15. is a

Answer for Question No 16. is d

Answer for Question No 17. is c

Answer for Question No 18. is c

Answer for Question No 19. is c

Answer for Question No 20. is c

Answer for Question No 21. is b

Answer for Question No 22. is a

Answer for Question No 23. is a

Answer for Question No 24. is d

Answer for Question No 25. is c

Answer for Question No 26. is a

Answer for Question No 27. is b

Answer for Question No 28. is d

Answer for Question No 29. is d

Answer for Question No 30. is a

Answer for Question No 31. is a

Answer for Question No 32. is a

Answer for Question No 33. is a

Answer for Question No 34. is c

Answer for Question No 35. is c

Answer for Question No 36. is b

Answer for Question No 37. is b

Answer for Question No 38. is b

Answer for Question No 39. is c

Answer for Question No 40. is a

Answer for Question No 41. is a

Answer for Question No 42. is d

Answer for Question No 43. is c

Answer for Question No 44. is b

Answer for Question No 45. is a

Answer for Question No 46. is a

Answer for Question No 47. is d

Answer for Question No 48. is a

Answer for Question No 49. is b

Answer for Question No 50. is a

Answer for Question No 51. is b

Answer for Question No 52. is d

Answer for Question No 53. is b

Answer for Question No 54. is c

Answer for Question No 55. is a

Answer for Question No 56. is a

Answer for Question No 57. is a

Answer for Question No 58. is c

Answer for Question No 59. is d

Answer for Question No 60. is b

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. For Apriori algorithm, what is the second phase?

- A : Pruning
- B : Partitioning
- C : Candidate generation
- D : Itemset generation

Q.no 2. Which of these is not a frequent pattern mining algorithm?

- A : Decision trees
- B : Eclat
- C : FP growth
- D : Apriori

Q.no 3. Which of the following is not a type of constraints?

A : Data constraints

B : Rule constraints

C : Knowledge type constraints

D : Time constraints

Q.no 4. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 5. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 6. Choose the correct concept hierarchy.

A : city < street < state < country

B : street < city < state < country

C : street > city > state > country

D : street > city > country > state

Q.no 7. Supervised learning and unsupervised clustering both require at least one

A : hidden attribute

B : output attribute

C : input attribute

D : categorical attribute

Q.no 8. The fact is also called as

A : Dimension

B : Key

C : Schema

D : Measure

Q.no 9. The most widely used metrics and tools to assess a classification model are:

A : Conusion Matrix

B : Support

C : Entropy

D : Probability

Q.no 10. A person trained to interact with a human expert in order to capture their knowledge.

A : knowledge programmer

B : knowledge developer

C : knowledge engineer

D : knowledge extractor

Q.no 11. Training process that generates tree is called as

A : Pruning

B : Rule generation

C : Induction

D : splitting

Q.no 12. The schema is collection of stars. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 13. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 14. to evaluate a classifier's quality we use

A : confusion matrix

B : error detection code

C : error correction code

D : classifier

Q.no 15. For Apriori algorithm, what is the first phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 16. The example of knowledge type constraints in constraint based mining is

A : Association or Correlation

B : Rule templates

C : Task relevant data

D : Threshold measures

Q.no 17. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 18. A data cube is defined by

A : Dimensions

B : Facts

C : Dimensions and Facts

D : Dimensions or Facts

Q.no 19. Which one of the following is true for decision tree

A : Decision tree is useful in decision making

B : Decision tree is similar to OLTP

C : Decision Tree is similar to cluster analysis

D : Decision tree needs to find probabilities of hypothesis

Q.no 20. What are two steps of tree pruning work?

A : Pessimistic pruning and Optimistic pruning

B : Postpruning and Prepruning

C : Cost complexity pruning and time complexity pruning

D : None of the options

Q.no 21. The Microsoft SQL Server 2000 is the example of

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 22. The property of Apriori algorithm is

A : All nonempty subsets of a frequent itemsets must also be frequent

B : All empty subsets of a frequent itemsets must also be frequent

C : All nonempty subsets of a frequent itemsets must be not frequent

D : All nonempty subsets of a frequent itemsets can frequent or not frequent

Q.no 23. Multilevel association rule mining is

A : Association rules generated from candidate-generation method

B : Association rules generated from without candidate-generation method

C : Association rules generated from mining data at multiple abstraction level

D : Association rules generated from frequent itemsets

Q.no 24. Which of the following activities is a data mining task?

A : Monitoring the heart rate of a patient for abnormalities

B : Extracting the frequencies of a sound wave

C : Predicting the outcomes of tossing a (fair) pair of dice

D : Dividing the customers of a company according to their profitability

Q.no 25. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 26. Sensitivity is also referred to as

A : misclassification rate

B : true negative rate

C : True positive rate

D : correctness

Q.no 27. In Apriori algorithm, for generating e. g. 5 itemsets, we use

A : Frequent 5 itemsets

B : Frequent 3 itemsets

C : Frequent 4 itemsets

D : Frequent 6 itemsets

Q.no 28. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

A : Multiclassification

B : Multi-label classification

C : Imbalanced classification

D : Binary Classification

Q.no 29. A lattice of cuboids is called as

A : Data cube

B : Dimesnion lattice

C : Master lattice

D : Fact table

Q.no 30. Specificity is also referred to as

A : true negative rate

B : correctness

C : misclassification rate

D : True positive rate

Q.no 31. To improve the accuracy of multiclass classification we can use

A : cross validation

B : sampling

C : Error-detecting codes

D : Error-correcting codes

Q.no 32. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 33. The Galaxy Schema is also called as

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 34. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

A : Imbalanced problems should not be measured using Accuracy metric.

B : Accuracy metric is not a good idea for imbalanced class problems.

C : Precision and recall metrics aren't good for imbalanced class problems.

D : Precision and recall metrics are good for imbalanced class problems.

Q.no 35. one-versus-one(OVO) and one-versus-all (OVA) classification involves

A : more than two classes

B : Only two classes

C : Only one class

D : No class

Q.no 36. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 37. OLAP Summarization means

A : Consolidated

B : Primitive

C : Highly detailed

D : Recent data

Q.no 38. A frequent pattern tree is a tree structure consisting of

A : A frequent-item-node

B : An item-prefix-tree

C : A frequent-item-header table

D : both B and C

Q.no 39. The confusion matrix is a useful tool for analyzing

A : Regression

B : Classification

C : Sampling

D : Cross validation

Q.no 40. Cross validation involves

A : testing the machine on all possible ways by substituting the original sample into training set

B : testing the machine on all possible ways by dividing the original sample into training and validation sets.

C : testing the machine with only validation sets

D : testing the machine on only testing datasets.

Q.no 41. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 42. Ordinal attribute has three distinct values such as Fair, Good, and Excellent.

If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 43. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 44. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

A : 7

B : 9

C : 10

D : 11

Q.no 45. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 46. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 47. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 48. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Fourty Five

Q.no 49. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 50. Transforming a 3-D cube into a series of 2-D planes is the examplele of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 51. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 52. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 53. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 54. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 55. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 56. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 57. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 58. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 59. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 60. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Answer for Question No 1. is a

Answer for Question No 2. is a

Answer for Question No 3. is d

Answer for Question No 4. is d

Answer for Question No 5. is d

Answer for Question No 6. is b

Answer for Question No 7. is c

Answer for Question No 8. is d

Answer for Question No 9. is a

Answer for Question No 10. is c

Answer for Question No 11. is c

Answer for Question No 12. is c

Answer for Question No 13. is b

Answer for Question No 14. is a

Answer for Question No 15. is c

Answer for Question No 16. is a

Answer for Question No 17. is d

Answer for Question No 18. is c

Answer for Question No 19. is a

Answer for Question No 20. is b

Answer for Question No 21. is c

Answer for Question No 22. is a

Answer for Question No 23. is c

Answer for Question No 24. is a

Answer for Question No 25. is d

Answer for Question No 26. is c

Answer for Question No 27. is c

Answer for Question No 28. is a

Answer for Question No 29. is a

Answer for Question No 30. is a

Answer for Question No 31. is d

Answer for Question No 32. is b

Answer for Question No 33. is c

Answer for Question No 34. is c

Answer for Question No 35. is a

Answer for Question No 36. is c

Answer for Question No 37. is a

Answer for Question No 38. is d

Answer for Question No 39. is b

Answer for Question No 40. is c

Answer for Question No 41. is d

Answer for Question No 42. is c

Answer for Question No 43. is a

Answer for Question No 44. is b

Answer for Question No 45. is a

Answer for Question No 46. is b

Answer for Question No 47. is a

Answer for Question No 48. is b

Answer for Question No 49. is d

Answer for Question No 50. is a

Answer for Question No 51. is d

Answer for Question No 52. is c

Answer for Question No 53. is c

Answer for Question No 54. is b

Answer for Question No 55. is d

Answer for Question No 56. is c

Answer for Question No 57. is d

Answer for Question No 58. is c

Answer for Question No 59. is d

Answer for Question No 60. is b

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 2. OLAP database design is

A : Application-oriented

B : Object-oriented

C : Goal-oriented

D : Subject-oriented

Q.no 3. Multilevel association rules can be mined efficiently using

A : Support

B : Confidence

C : Support count

D : Concept Hierarchies under support-confidence framework

Q.no 4. accuracy is used to measure

A : classifier's true abilities

B : classifier's analytic abilities

C : classifier's decision abilities

D : classifier's predictive abilities

Q.no 5. Supervised learning and unsupervised clustering both require at least one

A : hidden attribute

B : output attribute

C : input attribute

D : categorical attribute

Q.no 6. The task of building decision model from labeled training data is called as

A : Supervised Learning

B : Unsupervised Learning

C : Reinforcement Learning

D : Structure Learning

Q.no 7. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 8. Multi-class classification makes the assumption that each sample is assigned to

A : one and only one label

B : many labels

C : one or many labels

D : no label

Q.no 9. Which of these is not a frequent pattern mining algorithm?

A : Decision trees

B : Eclat

C : FP growth

D : Apriori

Q.no 10. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 11. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 12. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 13. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 14. Each dimension is represented by only one table. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 15. Choose the correct concept hierarchy.

A : city < street < state < country

B : street < city < state < country

C : street > city > state > country

D : street > city > country > state

Q.no 16. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 17. Which angle is used to measure document similarity?

A : Sin

B : Tan

C : Cos

D : Sec

Q.no 18. Which of the following is the data mining tool?

A : Borland C

B : Weka

C : Borland C++

D : Visual C

Q.no 19. A decision tree is also known as

A : general tree

B : binary tree

C : prediction tree

D : None of the options

Q.no 20. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 21. What is the approach of basic algorithm for decision tree induction?

A : Greedy

B : Top Down

C : Procedural

D : Step by Step

Q.no 22. The rule is considered as interesting if

A : They satisfy both minimum support and minimum confidence threshold

B : They satisfy both maximum support and maximum confidence threshold

C : They satisfy maximum support and minimum confidence threshold

D : They satisfy minimum support and maximum confidence threshold

Q.no 23. For mining frequent itemsets, the Data format used by Apriori and FP-Growth algorithms are

A : Apriori uses horizontal and FP-Growth uses vertical data format

B : Apriori uses vertical and FP-Growth uses horizontal data format

C : Apriori and FP-Growth both uses vertical data format

D : Apriori and FP-Growth both uses horizontal data format

Q.no 24. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

A : Replacement discretization and distance measure

B : Replacement characterization and distance measure

C : Normalization discretization and distance measure

D : Replacement normalization and distance measure

Q.no 25. Multilevel association rule mining is

A : Association rules generated from candidate-generation method

B : Association rules generated from without candidate-generation method

C : Association rules generated from mining data at multiple abstraction level

D : Association rules generated from frequent itemsets

Q.no 26. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 27. What do you mean by support(A)?

A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 28. The fact table contains

A : The names of the facts

B : Keys to each of the related dimension tables

C : Facts and keys

D : Facts or keys

Q.no 29. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 30. The accuracy of a classifier on a given test set is the percentage of

A : test set tuples that are correctly classified by the classifier

B : test set tuples that are incorrectly classified by the classifier

C : test set tuples that are incorrectly misclassified by the classifier

D : test set tuples that are not classified by the classifier

Q.no 31. How will you counter over-fitting in decision tree?

A : By creating new rules

B : By pruning the longer rules

C : Both By pruning the longer rules' and ' By creating new rules'

D : BY creating new tree

Q.no 32. The confusion matrix is a useful tool for analyzing

A : Regression

B : Classification

C : Sampling

D : Cross validation

Q.no 33. If A, B are two sets of items, and A is a subset of B. Which of the following statement is always true?

A : Support(A) is less than or equal to Support(B)

B : Support(A) is greater than or equal to Support(B)

C : Support(A) is equal to Support(B)

D : Support(A) is not equal to Support(B)

Q.no 34. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) and (b)

Q.no 35. In asymmetric attribute

A : No value is considered important over other values

B : All values are equal

C : Only non-zero value is important

D : Range of values is important

Q.no 36. One of the most well known software used for classification is

A : Java

B : C4.5

C : Oracle

D : C++

Q.no 37. Identify the example of sequence data

A : weather forecast

B : data matrix

C : market basket data

D : genomic data

Q.no 38. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 39. Some company wants to divide their customers into distinct groups to send offers this is an example of

A : Data Extraction

B : Data Classification

C : Data Discrimination

D : Data Selection

Q.no 40. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 41. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 42. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

A : 7

B : 9

C : 10

D : 11

Q.no 43. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 44. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 45. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 46. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 47. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 48. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 49. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Fourty Five

Q.no 50. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 51. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support(V3) is greater than support (V2)

C : support(V1) is greater than support(V3)

D : support(V2) is greater than support(V3)

Q.no 52. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 53. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 54. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 55. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 56. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 57. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 58. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 59. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 60. Which operation is required to calculate Hamming distance between two objects?

A : AND

B : OR

C : NOT

D : XOR

Answer for Question No 1. is b

Answer for Question No 2. is d

Answer for Question No 3. is d

Answer for Question No 4. is d

Answer for Question No 5. is c

Answer for Question No 6. is a

Answer for Question No 7. is a

Answer for Question No 8. is a

Answer for Question No 9. is a

Answer for Question No 10. is d

Answer for Question No 11. is b

Answer for Question No 12. is b

Answer for Question No 13. is d

Answer for Question No 14. is a

Answer for Question No 15. is b

Answer for Question No 16. is d

Answer for Question No 17. is c

Answer for Question No 18. is b

Answer for Question No 19. is c

Answer for Question No 20. is a

Answer for Question No 21. is a

Answer for Question No 22. is a

Answer for Question No 23. is d

Answer for Question No 24. is d

Answer for Question No 25. is c

Answer for Question No 26. is d

Answer for Question No 27. is c

Answer for Question No 28. is c

Answer for Question No 29. is d

Answer for Question No 30. is a

Answer for Question No 31. is b

Answer for Question No 32. is b

Answer for Question No 33. is b

Answer for Question No 34. is d

Answer for Question No 35. is c

Answer for Question No 36. is b

Answer for Question No 37. is d

Answer for Question No 38. is d

Answer for Question No 39. is b

Answer for Question No 40. is b

Answer for Question No 41. is d

Answer for Question No 42. is b

Answer for Question No 43. is d

Answer for Question No 44. is a

Answer for Question No 45. is c

Answer for Question No 46. is b

Answer for Question No 47. is d

Answer for Question No 48. is a

Answer for Question No 49. is b

Answer for Question No 50. is a

Answer for Question No 51. is b

Answer for Question No 52. is c

Answer for Question No 53. is c

Answer for Question No 54. is b

Answer for Question No 55. is b

Answer for Question No 56. is a

Answer for Question No 57. is d

Answer for Question No 58. is a

Answer for Question No 59. is a

Answer for Question No 60. is d

DMW MCQ With Answers

1. What does Apriori algorithm do?

1. It mines all frequent patterns through pruning rules with lesser support
2. It mines all frequent patterns through pruning rules with higher support
3. Both a and b
4. None of these

Show Answer

It mines all frequent patterns through pruning rules with lesser support

2. What does FP growth algorithm do?

1. It mines all frequent patterns through pruning rules with lesser support
2. It mines all frequent patterns through pruning rules with higher support
3. It mines all frequent patterns by constructing a FP tree
4. All of these

Show Answer

It mines all frequent patterns by constructing a FP tree

3. What techniques can be used to improve the efficiency of apriori algorithm?

1. hash based techniques
2. transaction reduction
3. Partitioning
4. All of these

Show Answer

All of these

DMW MCQ With Answers

4. What do you mean by support(A)?

1. Total number of transactions containing A
2. Total Number of transactions not containing A
3. Number of transactions containing A / Total number of transactions
4. Number of transactions not containing A / Total number of transactions

Show Answer

Number of transactions containing A / Total number of transactions

5. Which of the following is direct application of frequent itemset mining?

1. Social Network Analysis
2. Market Basket Analysis
3. outlier detection
4. intrusion detection

Show Answer

Market Basket Analysis

6. What is not true about FP growth algorithms?

1. It mines frequent itemsets without candidate generation
2. There are chances that FP trees may not fit in the memory
3. FP trees are very expensive to build
4. It expands the original database to build FP trees

Show Answer

It expands the original database to build FP trees

7. When do you consider an association rule interesting?

1. If it only satisfies min_support

DMW MCQ With Answers

2. If it only satisfies min_confidence
3. If it satisfies both min_support and min_confidence
4. There are other measures to check so

Show Answer

If it satisfies both min_support and min_confidence

8. What is the difference between absolute and relative support?

1. Absolute -Minimum support count threshold and Relative-Minimum support threshold
2. Absolute-Minimum support threshold and Relative-Minimum support count threshold
3. Both a and b
4. None of these

Show Answer

Absolute -Minimum support count threshold and Relative-Minimum support threshold

9. What is the relation between candidate and frequent itemsets?

1. A candidate itemset is always a frequent itemset
2. A frequent itemset must be a candidate itemset
3. No relation between the two
4. None of these

Show Answer

A frequent itemset must be a candidate itemset

10. Which technique finds the frequent itemsets in just two database scans?

1. Partitioning

DMW MCQ With Answers

2. sampling
3. hashing
4. None of these

Show Answer

Partitioning

11. Which of the following is true?

1. Both apriori and FP-Growth uses horizontal data format
2. Both apriori and FP-Growth uses vertical data format
3. Both a and b
4. None of these

Show Answer

Both apriori and FP-Growth uses horizontal data format

12. What is the principle on which Apriori algorithm work?

1. If a rule is infrequent, its specialized rules are also infrequent
2. If a rule is infrequent, its generalized rules are also infrequent
3. Both a and b
4. None of these

Show Answer

If a rule is infrequent, its specialized rules are also infrequent

13. Which of these is not a frequent pattern mining algorithm

1. Apriori
2. FP growth
3. Decision trees

DMW MCQ With Answers

4. Eclat

Show Answer

Decision trees

14. Which algorithm requires fewer scans of data?

1. Apriori
2. FP growth
3. Both a and b
4. None of these

Show Answer

FP growth

15. What are Max_confidence, Cosine similarity, All_confidence?

1. Frequent pattern mining algorithms
2. Measures to improve efficiency of apriori
3. Pattern evaluation measure
4. None of these

Show Answer

Pattern evaluation measure

16. Linear regression – involves finding the_____ line to fit two attributes (or variables)

1. An itemset for which at least one proper super itemset has same support
2. An item set whose no proper super- itemset has same support
3. Both a and b
4. None of these

DMW MCQ With Answers

Show Answer

An item set whose no proper super- itemset has same support

17. What are closed frequent itemsets?

1. A closed itemset
2. A frequent itemset
3. An itemset which is both closed and frequent
4. None of these

Show Answer

An itemset which is both closed and frequent

18. What are maximal frequent itemsets?

1. A frequent item set whose no super-itemset is frequent
2. A frequent itemset whose super-itemset is also frequent
3. Both a and b
4. None of these

Show Answer

A frequent item set whose no super-itemset is frequent

19. Why is correlation analysis important?

1. To make apriori memory efficient
2. To weed out uninteresting frequent itemsets
3. To find large number of interesting itemsets
4. To restrict the number of database iterations

Show Answer

To weed out uninteresting frequent itemsets

DMW MCQ With Answers

20. What will happen if support is reduced?

1. Number of frequent itemsets remains same
2. Some itemsets will add to the current set of frequent itemsets
3. Some itemsets will become infrequent while others will become frequent
4. Can not say

Show Answer

Some itemsets will add to the current set of frequent itemsets

21. Can FP growth algorithm be used if FP tree cannot be fit in memory?

1. Yes
2. No
3. Both a and b
4. None of these

Show Answer

No

22. What is association rule mining?

1. Same as frequent itemset mining
2. Finding of strong association rules using frequent itemsets
3. Both a and b
4. None of these

Show Answer

Finding of strong association rules using frequent itemsets

23. What is frequent pattern growth?

DMW MCQ With Answers

1. Same as frequent itemset mining
2. Use of hashing to make discovery of frequent itemsets more efficient
3. Mining of frequent itemsets without candidate generation
4. None of these

Show Answer

Mining of frequent itemsets without candidate generation

24. When is sub-itemset pruning done?

1. A frequent itemset 'P' is a proper subset of another frequent itemset 'Q'
2. $\text{Support}(P) = \text{Support}(Q)$
3. When both a and b is true
4. When a is true and b is not

Show Answer

When both a and b is true

25. Which of the following is not null invariant measure(that does not considers null transactions)?

1. all_confidence
2. max_confidence
3. cosine measure
4. lift

Show Answer

lift

26. The apriori algorithm works in a ..and ..fashion?

1. top-down and depth-first

DMW MCQ With Answers

2. top-down and breath-first
3. bottom-up and depth-first
4. bottom-up and breath-first

Show Answer

bottom-up and breath-first

27. Our use of association analysis will yield the same frequent itemsets and strong association rules whether a specific item occurs once or three times in an individual transaction

1. TRUE
2. FALSE
3. Both a and b
4. None of these

Show Answer

TRUE

28. In association rule mining the generation of the frequent itemsets is the computational intensive step.

1. TRUE
2. FALSE
3. Both a and b
4. None of these

Show Answer

TRUE

29. The number of iterations in apriori __

1. increases with the size of the data

DMW MCQ With Answers

2. decreases with the increase in size of the data
3. increases with the size of the maximum frequent set
4. decreases with increase in size of the maximum frequent set

Show Answer

increases with the size of the maximum frequent set

30. Which of the following are interestingness measures for association rules?

1. recall
2. lift
3. accuracy
4. compactness

Show Answer

lift

31. Frequent item sets is

1. Superset of only closed frequent item sets
2. Superset of only maximal frequent item sets
3. Subset of maximal frequent item sets
4. Superset of both closed frequent item sets and maximal frequent item sets

Show Answer

Superset of both closed frequent item sets and maximal frequent item sets

32. Assume that we have a dataset containing information about 200 individuals. A supervised data mining session has discovered the following rule: IF age < 30 & credit card insurance = yes THEN life insurance = yes Rule

DMW MCQ With Answers

Accuracy: 70% and Rule Coverage: 63% How many individuals in the class life insurance= no have credit card insurance and are less than 30 years old?

1. 63
2. 30
3. 38
4. 70

Show Answer

38

33. In Apriori algorithm, if 1 item-sets are 100, then the number of candidate 2 item-sets are

1. 100
2. 4950
3. 200
4. 5000

Show Answer

4950

34. Significant Bottleneck in the Apriori algorithm is

1. Finding frequent itemsets
2. pruning
3. Candidate generation
4. Number of iterations

Show Answer

Candidate generation

35. Which Association Rule would you prefer

DMW MCQ With Answers

1. High support and medium confidence
2. High support and low confidence
3. Low support and high confidence
4. Low support and low confidence

Show Answer

Low support and high confidence

36. The apriori property means

1. If a set cannot pass a test, its supersets will also fail the same test
2. To decrease the efficiency, do level-wise generation of frequent item sets
3. To improve the efficiency, do level-wise generation of frequent item sets
4. If a set can pass a test, its supersets will fail the same test

Show Answer

If a set cannot pass a test, its supersets will also fail the same test

37. If an item set 'XYZ' is a frequent item set, then all subsets of that frequent item set are

1. undefined
2. not frequent
3. frequent
4. cant say

Show Answer

frequent

38. To determine association rules from frequent item sets

1. Only minimum confidence needed

DMW MCQ With Answers

2. Neither support not confidence needed
3. Both minimum support and confidence are needed
4. Minimum support is needed

Show Answer

Both minimum support and confidence are needed

39. If {A,B,C,D} is a frequent itemset, candidate rules which is not possible is

1. $C \rightarrow A$
2. $D \rightarrow ABCD$
3. $A \rightarrow BC$
4. $B \rightarrow ADC$

Show Answer

$D \rightarrow ABCD$

1. What is true about data mining?

1. Data Mining is defined as the procedure of extracting information from huge sets of data
2. Data mining also involves other processes such as Data Cleaning, Data Integration, Data Transformation
3. Data mining is the procedure of mining knowledge from data.
4. All of the above

Show Answer

All of the above

2. How many categories of functions involved in Data Mining?

DMW MCQ With Answers

1. 1
2. 2
3. 3
4. 4

Show Answer

2

3. The mapping or classification of a class with some predefined group or class is known as?

1. Data Characterization
2. Data Discrimination
3. Data Set
4. Data Sub Structure

Show Answer

Data Discrimination

4. The analysis performed to uncover interesting statistical correlations between associated-attribute-value pairs is called?

1. Mining of Association
2. Mining of Clusters
3. Mining of Correlations
4. None of the above

Show Answer

Mining of Correlations

DMW MCQ With Answers

5. _____ may be defined as the data objects that do not comply with the general behavior or model of the data available.

1. Outlier Analysis
2. Evolution Analysis
3. Prediction
4. Classification

Show Answer

Outlier Analysis

6. "Efficiency and scalability of data mining algorithms" issues comes under?

- A. Mining Methodology and User Interaction Issues
- B. Performance Issues
- C. Diverse Data Types Issues
- D. None of the above

Show Answer

Performance Issues

7. To integrate heterogeneous databases, how many approaches are there in Data Warehousing?

1. 1
2. 2
3. 3
4. 4

Show Answer

2

DMW MCQ With Answers

8. Which of the following is correct advantage of Update-Driven Approach in Data Warehousing?

- A. This approach provides high performance.
- B. The data can be copied, processed, integrated, annotated, summarized and restructured in the semantic data store in advance.
- C. Both A and B
- D. None Of the above

Show Answer

Both A and B

9. What is the use of data cleaning?

- A. to remove the noisy data
- B. correct the inconsistencies in data
- C. transformations to correct the wrong data.
- D. All of the above

Show Answer

All of the above

10. Data Mining System Classification consists of?

- A. Database Technology
- B. Machine Learning
- C. Information Science
- D. All of the above

Show Answer

All of the above

11. Which of the following is a good alternative to the star schema?

1. snow flake schema
2. star schema

DMW MCQ With Answers

3. star snow flake schema

4. fact constellation

Show Answer

fact constellation

12. Patterns that can be discovered from a given database are which type...

1. More than one type
2. Multiple type always
3. One type only
4. No specific type

Show Answer

More than one type

13. Background knowledge is...

1. It is a form of automatic learning.
2. A neural network that makes use of a hidden layer
3. The additional acquaintance used by a learning algorithm to facilitate the learning process
4. None of these

Show Answer

The additional acquaintance used by a learning algorithm to facilitate the learning process

14. Which of the following is true for Classification?

1. subdivision of a set
2. A measure of the accuracy
3. The task of assigning a classification

DMW MCQ With Answers

4. All of these

Show Answer

subdivision of a set

15. Data mining is?

1. time variant non-volatile collection of data
2. The actual discovery phase of a knowledge
3. The stage of selecting the right data
4. None of these

Show Answer

The actual discovery phase of a knowledge

16. ——— is not a data mining functionality?

- A) Clustering and Analysis
- B) Selection and interpretation
- C) Classification and regression
- D) Characterization and Discrimination

Show Answer

Selection and interpretation

17. Which of the following can also applied to other forms?

- a) Data streams & Sequence data
- b) Networked data
- c) Text & Spatial data
- d) All of these

Show Answer

All of these

18. ——— is the out put of KDD

DMW MCQ With Answers

- a) Query
- b) Useful Information
- c) Data
- d) information

Show Answer

Useful Information

19. What is noise?

- a) component of a network
- b) context of KDD and data mining
- c) aspects of a data warehouse
- d) None of these

Show Answer

context of KDD and data mining

data mining and warehousing mcq sppu

20. Firms that are engaged in sentiment mining are analyzing data collected from?

- A. social media sites.
- B. in-depth interviews.
- C. focus groups.
- D. experiments.

Show Answer

social media sites.

21. Which of the following forms of data mining assigns records to one of a predefined set of classes?

- (A). Classification
- (B). Clustering
- (C). Both A and B
- (D). None

DMW MCQ With Answers

Show Answer

Clustering

22. The learning which is used to find the hidden pattern in unlabeled data is called?

- (A). Unsupervised learning
- (B). Supervised learning
- (C). Reinforcement learning

Show Answer

Unsupervised learning

23. The learning which is the example of Self-organizing maps?

- (A). Reinforcement learning
- (B). Supervised learning
- (C). Unsupervised learning
- (D). Missing data imputation

Show Answer

Unsupervised learning

24. According to storks' population size, find the total number of babies from the following example of predicting the number of babies.

- (A). feature
- (B). outcome
- (C). attribute
- (D). observation

Show Answer

outcome

25. Which of the following is not belong to data mining?

DMW MCQ With Answers

- (A). Knowledge extraction
- (B). Data transformation
- (C). Data exploration
- (D). Data archaeology

Show Answer

Data archaeology

26. The learning which is used for inferring a model from labeled training data is called?

- (A). Unsupervised learning
- (B). Reinforcement learning
- (C). Supervised learning
- (D). Missing data imputation

Show Answer

Supervised learning

27. Which of the following is the right approach to Data Mining?

- (A). Infrastructure, exploration, analysis, exploitation, interpretation
- (B). Infrastructure, exploration, analysis, interpretation, exploitation
- (C). Infrastructure, analysis, exploration, interpretation, exploitation
- (D). None of these

Show Answer

Infrastructure, exploration, analysis, interpretation, exploitation

28. Which of the following terms is used as a synonym for data mining?

- (A). knowledge discovery in databases
- (B). data warehousing
- (C). regression analysis
- (D). parallel processing in databases

Show Answer

DMW MCQ With Answers

knowledge discovery in databases

29.is an essential process where intelligent methods are applied to extract data patterns

- A) Data Warehousing
- B) Data Mining
- C) Data Base
- D) Data Structure

Show Answer

Data Mining

30. Data mining requires

1. Large quantities of operational data stored over a period of time
2. Lots of tactical data
3. Several tape drives to store archival data
4. Large mainframe computers

Show Answer

Large quantities of operational data stored over a period of time

data mining and warehousing mcq questions

31. Data by itself is not useful unless

1. It is massive
2. It is processed to obtain information
3. It is collected as a raw data from diverse sources
4. It is properly stated

Show Answer

It is processed to obtain information

DMW MCQ With Answers

32. Which of the following is NOT example of ordinal attributes?

1. Zip codes
2. Ordered numbers
3. Ascending or descending names
4. Military ranks

Show Answer

Zip codes

33. In asymmetric attribute

1. Order of values is important
2. All values are equals
3. Only non-zero value is important
4. Range of values is important

Show Answer

Only non-zero value is important

34. Identify the example of Nominal attribute

1. Temperature
2. Mass
3. Salary
4. Gender

Show Answer

Gender

35. Which of the following is not a data pre-processing methods?

1. Data Visualization

DMW MCQ With Answers

2. Data Discretization
3. Data Cleaning
4. Data Reduction

Show Answer

Data Visualization

36. Correlation analysis is used for ____

1. Handling missing values
2. Identifying redundant attributes
3. Handling different data formats
4. Eliminating noise

Show Answer

Identifying redundant attributes

37. _____ combines data from multiple sources into a coherent store

1. Data Characterization
2. Data Classification
3. Data Integration
4. Data Selection

Show Answer

Data Integration

38. Which of the following is / are attribute subset selection criterion(s) ?

1. Forward selection
2. Backward elimination
3. Decision tree induction

DMW MCQ With Answers

4. All of the above

Show Answer

All of the above

39. Data mining can also applied to other forms such as.....

i) Data streams

ii) Sequence data

iii) Networked data

iv) Text data

v) Spatial data

A) i, ii, iii and v only

B) ii, iii, iv and v only

C) i, iii, iv and v only

D) All i, ii, iii, iv and v

Show Answer

All i, ii, iii, iv and v

40. ____ normalization is not very well efficient in handling the outliers

Min max

1. Min max

2. Z Score

3. Decimal Scaling

4. None of the above

Show Answer

Min max

Data mining and warehousing mcq with answers

41. The full form of KDD is.....

A) Knowledge Database

B) Knowledge Discovery Database

DMW MCQ With Answers

- C) Knowledge Data House
- D) Knowledge Data Definition

Show Answer

Knowledge Discovery Database

42. A collection of interesting and useful patterns in database is called ____

- A. knowledge.
- B. information.
- C. data.
- D. algorithm

Show Answer

knowledge.

43. Data is the process of finding a model that describes and distinguishes data classes or concepts.

- a)Characterization
- b)Mining
- c) clustering
- d)Classification

Show Answer

Classification

44. To remove noise and inconsistent data __ is needed

1. Data Transformation
2. Data Reduction
3. Data Integration
4. Data Cleaning

Show Answer

Data Cleaning

DMW MCQ With Answers

45. The terms equality and roll up are associated with _

1. OLTP
2. Visualization
3. Data mart
4. Decision Tree

Show Answer

Data mart

46. An operational system is which of the following?

- A. A system that is used to run the business in real time and is based on historical data.
- B. A system that is used to run the business in real time and is based on current data.
- C. A system that is used to support decision making and is based on current data.
- D. A system that is used to support decision making and is based on historical data.

Show Answer

A system that is used to run the business in real time and is based on current data.

47. Data warehouse is which of the following?

- A. Can be updated by end users.
- B. Contains numerous naming conventions and formats.
- C. Organized around important subject areas.
- D. Contains only current data.

Show Answer

Organized around important subject areas.

48. Data transformation includes which of the following?

DMW MCQ With Answers

- A. A process to change data from a detailed level to a summary level
- B. A process to change data from a summary level to a detailed level
- C. Joining data from one source into various sources of data
- D. Separating data from one source into various sources of data

Show Answer

A process to change data from a detailed level to a summary level

49. The allows the selection of the relevant information necessary for the data warehouse.

- A top-down view
- B data warehouse view
- C data source view
- D business query view

Show Answer

A top-down view

50. Which of the following is not a component of a data warehouse?

- A Metadata
- B Current detail data
- C Lightly summarized data
- D Component Key

Show Answer

Component Key

51. Which of the following is not a kind of data warehouse application?

- A Information processing
- B Analytical processing
- C Data mining
- D Transaction processing

Show Answer

DMW MCQ With Answers

Transaction processing

52. ___ is not associated with data cleaning process.

1. Deduplication
2. Domain consistency
3. Segmentation
4. Disambiguation

Show Answer

Segmentation

53. Dimensionality refers to

1. Cardinality of key values in a star schema
2. The data that describes the transactions in the fact table
3. The level of detail of data that is held in the fact table
4. The level of detail of data that is held in the dimension table

Show Answer

The data that describes the transactions in the fact table

54. Expansion for DSS in DW is

1. Decisive Strategic System
2. Data Support System
3. Data Store System
4. Decision Support system

Show Answer

Decision Support system

55. Data in a data warehouse

DMW MCQ With Answers

1. in a flat file format
2. can be normalised but often is not
3. must be in normalised form to at least 3NF
4. must be in normalised form to at least 2NF

Show Answer

can be normalised but often is not

56. Friendship structure of users in a social networking site can be considered as an example of ____

1. Record data
2. Ordered data
3. Graph data
4. None of the above

Show Answer

Graph data

57. A café owner wanted to compare how much revenue he gained from lattes across different months of the year. What type of variable is 'month'?

1. Continuous
2. Categorical
3. Discrete
4. Nominal

Show Answer

Categorical

DMW MCQ With Answers

58. An outlier is a _

1. Description of records in the data
2. Data point which is considered different from other data points
3. Record with missing attributes
4. Duplicate record

Show Answer

Data point which is considered different from other data points

59. Which of the following operations can be performed on ordinal attributes?

1. Distictness
2. Documents
3. Both of the above
4. None of the above

Show Answer

Both of the above

60. Height of a person, can be considered as an attribute of _____type?

1. Nominal
2. Ordinal
3. Interval
4. Ratio

Show Answer

Ratio

61. The cosine similarity measure counts for _

DMW MCQ With Answers

1. The Euclidian distance between vectors
2. The Manhattan distance between vectors
3. The similarity of documents
4. The dissimilarity of vectors

Show Answer

The similarity of documents

62. Formula for dissimilarity computation between two objects for categorical

variable is – here p is categorical variable and m denotes number of matches

1. $D(i, j) = p - m / p$
2. $D(i, j) = p - m / m$
3. $D(i, j) = m - p / p$
4. $D(i, j) = m - p / m$

Show Answer

$$D(i, j) = p - m / p$$

63. Euclidean and Manhattan distances between the objects P, Q and R (1, 2, 3) and (2, 1, 0) are _

1. 3.32, 4 respectively
2. 3.32, 5 respectively
3. 5, 3.32 respectively
4. 3.30, 3 respectively

Show Answer

3.32, 5 respectively

DMW MCQ With Answers

64. The main organisational justification for implementing a data warehouse is to provide

1. ETL from operation systems to strategic systems
2. Large scale transaction processing
3. Storing large volumes of data
4. Decision support

Show Answer

Decision support

65. A data warehouse

- a. must import data from transactional systems whenever significant changes occur in the transactional data
- b. works on live transactional data to provide up to date and valid results
- c. takes regular copies of transaction data
- d. takes preprocessed transaction data and stores in a way that is optimised for analysis

Show Answer

takes preprocessed transaction data and stores in a way that is optimised for analysis

66. Data warehouse contains _____ data that is seldom found in the operational environment

1. informational
2. normalized
3. denormalized
4. summary

Show Answer

DMW MCQ With Answers

summary

67. In a snowflake schema which of the following types of tables is considered?

1. Fact
2. Dimension
3. Both (a) and (b)
4. None of the above

Show Answer

Both (a) and (b)

68. Which of the following statements about data warehouse is true?

1. A data warehouse is necessary to all those organisations that are using relational OLTP
2. A data warehouse is useful to all organisations that currently use OLTP
3. A data warehouse is valuable to the organisations that need to keep an audit trail of their activities
4. A data warehouse is valuable only if the organisation has an interest in analysing historical data

Show Answer

A data warehouse is valuable only if the organisation has an interest in analysing historical data

69. When you ____ the data, you are aggregating the data to a higher level

1. Slice
2. Roll Up
3. Roll Down
4. Drill Down

DMW MCQ With Answers

Show Answer

Roll Up

70. The process of viewing the cross-tab (Single dimensional) with a fixed value of one attribute is _

1. Slicing
2. Dicing
3. Pivoting
4. Both Slicing and Dicing

Show Answer

Slicing

71. What do data warehouses support?

1. OLAP
2. OLTP
3. OLAP and OLTP
4. Operational databases

Show Answer

OLAP

72. A data cube consist of _

1. Dimensional data
2. Multidimensional data
3. No dimensional data
4. 1 dimensional data

Show Answer

DMW MCQ With Answers

Multidimensional data

73. Which type of data storage architecture gives fastest performance?

1. ROLAP
2. MOLAP
3. HOLAP
4. DOLAP

Show Answer

MOLAP

74. Dissimilarity can be defined as __

1. How much certain objects differ from each other
2. How much certain objects similar from each other
3. Dissimilarities are non negative numbers $d(i,j)$ that are small when i and j are close to each other and that become large when i and j are very different
4. Both (a) and (c)

Show Answer

Both (a) and (c)

75. _____ supports basic OLAP operations, including slice and dice, drill-down, roll-up and pivoting

1. Information processing
2. Analytical processing
3. Data processing
4. Transaction processing

DMW MCQ With Answers

Show Answer

Analytical processing

1. What is the type of relationship in star schema?

1. many-to-many.
2. one-to-one
3. many-to-one
4. one-to-many

Show Answer

one-to-many

2. Fact tables are _____.

1. completely demoralized.
2. partially demoralized.
3. completely normalized.
4. partially normalized.

Show Answer

completely normalized.

3. Data warehouse is volatile, because obsolete data are discarded

1. TRUE
2. FALSE

Show Answer

FALSE

DMW MCQ With Answers

4. Which is NOT a basic conceptual schema in Data Modeling of Data Warehouses?

1. Star schema
2. Tree schema
3. Snowflake schema
4. Fact constellations b

Show Answer

Tree schema

5. Which is NOT a valid OLAP Rule by E.F.Codd?

1. Accessibility
2. Transparency
3. Flexible reporting
4. Reliability

Show Answer

Reliability

6. Which is NOT a valid layer in Three-layer Data Warehouse Architecture in Conceptual View?

1. Processed data layer
2. Real-time data layer
3. Derived data layer
4. Reconciled data layer

Show Answer

Processed data layer

7. Among the types of fact tables which is not a correct type ?

DMW MCQ With Answers

1. Fact-less fact table
2. Transaction fact tables
3. Integration fact tables
4. Aggregate fact tables

Show Answer

Integration fact tables

8. Among the followings which is not a characteristic of Data Warehouse?

1. Integrated
2. Volatile
3. Time-variant
4. Subject oriented

Show Answer

Volatile

9. what is not considered as issues in data warehousing?

1. optimization
2. data transformation
3. extraction
4. inter mediation

Show Answer

inter mediation

10. which one is NOT considering as a standard query technique?

1. Drill-up
2. Drill-across

DMW MCQ With Answers

3. DSS
4. Pivoting

Show Answer

DSS

11. Among the following which is not a type of business data ?

1. Real time data
2. Application data
3. Reconciled data
4. Derived data

Show Answer

Application data

12. A data warehouse is which of the following?

1. Can be updated by end users.
2. Contains numerous naming conventions and formats.
3. Organized around important subject areas.
4. Contains only current data.

Show Answer

Organized around important subject areas.

13. A snowflake schema is which of the following types of tables?

1. Fact
2. Dimension
3. Helper
4. All of the above

DMW MCQ With Answers

Show Answer

All of the above

14. The extract process is which of the following?

1. Capturing all of the data contained in various operational systems
2. Capturing a subset of the data contained in various operational systems
3. Capturing all of the data contained in various decision support systems .
4. Capturing a subset of the data contained in various decision support systems

Show Answer

Capturing a subset of the data contained in various operational systems

15. The generic two-level data warehouse architecture includes which of the following?

1. At least one data mart
2. Data that can extracted from numerous internal and external sources
3. Near real-time updates
4. All of the above.

Show Answer

Data that can extracted from numerous internal and external sources

16. Which one is correct regarding MOLAP ?

1. Data is stored and fetched from the main data warehouse.
2. Use complex SQL queries to fetch data from the main warehouse
3. Large volume of data is used.
4. All are incorrect
5. A and B is correct.

DMW MCQ With Answers

Show Answer

Data is stored and fetched from the main data warehouse.

17. In terms of data warehouse, metadata can be define as,

1. Metadata is a road-map to data warehouse
2. Metadata in data warehouse defines the warehouse objects.
3. Metadata acts as a directory.
4. All are incorrect

Show Answer

All are incorrect

18. In terms of RLOP model, choose the most suitable answer

1. The warehouse stores atomic data.
2. The application layer generates SQL for the two dimensional view
3. The presentation layer provides the multidimensional view.
4. All are incorrect

Show Answer

All are incorrect

19. In the OLAP model, the _ provides the multidimensional view.

1. Data layer
2. Data link layer
3. Presentation layer
4. Application layer

Show Answer

Data layer

DMW MCQ With Answers

20. Which of the following is not true regarding characteristics of warehoused data?

1. Changed data will be added as new data
2. Data warehouse can contains historical data
3. Obsolete data are discarded
4. Users can change data once entered into the data warehouse

Show Answer

Users can change data once entered into the data warehouse

21. ETL is an abbreviation for Elevation, Transformation and Loading

1. TRUE
2. FALSE

Show Answer

FALSE

22. which is the core of the multidimensional model that consists of a large set of facts and a number of dimensions?

1. Multidimensional cube
2. Data model
3. Data cube
4. None of the above

Show Answer

Data cube

23. Which of the following statements is incorrect

1. ROLAPs have large data volumes
2. Data form of ROLAP is large multidimensional array made of cubes

DMW MCQ With Answers

3. MOLAP uses sparse matrix technology to manage data sparsity
4. Access for MOLAP is faster than ROLAP

Show Answer

Data form of ROLAP is large multidimensional array made of cubes

24. Which of the following standard query techniques increase the granularity

1. roll-up
2. drill-down
3. slicing
4. dicing

Show Answer

drill-down

25. The full form of OLAP is

1. Online Analytical Processing
2. Online Advanced Processing
3. Online Analytical Performance
4. Online Advanced Preparation

Show Answer

Online Analytical Processing

26. Which of the following statements is/are incorrect about ROLAP

1. ROLAP fetched data from data warehouse.
2. ROLAP data store as data cubes.
3. ROLAP use sparse matrix to manage data sparsity.

DMW MCQ With Answers

Show Answer

B and C

27. __ is a standard query technique that can be used within OLAP to zoom in to more detailed data by changing dimensions.

1. Drill-up
2. Drill-down
3. Pivoting
4. Drill-across

Show Answer

Drill-down

28. Which of the following statements is/are correct about Fact constellation

1. Fact constellation schema can be seen as a combination of many star schemas.
2. It is possible to create fact constellation schema, for each star schema or snowflake schema.
3. Can be identified as a flexible schema for implementation.

Show Answer

All are correct

29. How to describe the data contained in the data warehouse?.

1. Relational data
2. Operational data
3. Meta data
4. Informational data

Show Answer

DMW MCQ With Answers

Meta data

30. The output of an OLAP query is displayed as a

1. Pivot
2. Matrix
3. Excel
4. both B and C

Show Answer

both B and C : Matrix and Excel

31. One can perform Query operations in the data present in Data Warahouse

1. TRUE
2. FALSE

Show Answer

TRUE

32. A __ combines facts from multiple processes into a single fact table and eases the analytic burden on BI applications.

1. Aggregate fact table
2. Consolidated fact table
3. Transaction fact table
4. Accumulating snapshot fact table

Show Answer

Consolidated fact table

33. In OLAP operations, Slicing is the technique of ____

DMW MCQ With Answers

1. Selecting one particular dimension from a given cube and providing a new sub-cube
2. Selecting two or more dimensions from a given cube and providing a new sub-cube
3. Rotating the data axes in order to provide an alternative presentation of data
4. Performing aggregation on a data cube

Show Answer

Selecting one particular dimension from a given cube and providing a new sub-cube

34. Standalone data marts built by drawing data directly from operational or external sources of data or both are known as independent data marts

1. TRUE
2. FALSE

Show Answer

TRUE

35. Focusing on the modeling and analysis of data for decision makers, not on daily operations or transaction processing is known

1. Integrated
2. Time-variant
3. Subject oriented
4. Non-volatile

Show Answer

Subject oriented

36. Most of the time data warehouse is

DMW MCQ With Answers

1. Read
2. Write
3. Both

Show Answer

Read

37. Data granularity is ————— of details of data ?

1. summarization
2. transformation
3. level

Show Answer

level

38. Which one is not a type of fact?

1. Fully Addictive
2. Cumulative addictive
3. Semi Addictive
4. Non Addictive

Show Answer

Semi Addictive

39. When the level of details of data is reducing the data granularity goes higher

1. True
2. False

Show Answer

DMW MCQ With Answers

False

40. Data Warehouses are having summarized and reconciled data which can be used by decision makers

1. True
2. False

Show Answer

True

41. _____ refers to the currency and lineage of data in a data warehouse

1. Operational metadata
2. Business metadata
3. Technical metadata
4. End-User metadata

Show Answer

Operational metadata

1. Which of the following applied on warehouse?

1. write only
2. read only
3. both
4. a & b none

Show Answer

read only

DMW MCQ With Answers

2. Data can be store , retrive and updated in

1. SMTOP
2. OLTP
3. FTP
4. OLAP

Show Answer

OLTP

3. Data mining is Extraction of interesting (non-trivial, implicit, previously unknown and potentially useful) information or patterns from data in large databases

1. TRUE
2. FALSE

Show Answer

TRUE

4. Data in the real world is

1. incomplete
2. inconsitent
3. noisy
4. all of above

Show Answer

all of above

5. What are Measure of Data Quality

1. Accuracy
2. Completeness

DMW MCQ With Answers

3. Consistency

4. all

Show Answer

all

6. Data cleaning is fill in missing values, smooth noisy data, identify or remove outliers, and resolve inconsistencies

1. TRUE

2. FALSE

Show Answer

TRUE

7. Data integration is Integration of multiple databases, data cubes, or files

1. TRUE

2. FALSE

Show Answer

TRUE

8. Data transformation is Normalization and aggregation

1. TRUE

2. FALSE

Show Answer

TRUE

9. Data reduction Obtains reduced representation in volume but produces the same or similar analytical results

1. TRUE

2. FALSE

DMW MCQ With Answers

Show Answer

TRUE

10. Data discretization is Part of data reduction but with particular importance, especially for numerical data

1. TRUE
2. FALSE

Show Answer

TRUE

11. Missing data may be due to

1. equipment malfunction
2. inconsistent with other recorded data and thus deleted data not entered due to misunderstanding
3. certain data may not be considered important at the time of entry
4. all

Show Answer

all

12. Incorrect attribute values may due to

1. faulty data collection instruments
2. data entry problems
3. data transmission problems
4. all

Show Answer

all

13. data cleaning is not required for duplicate records

DMW MCQ With Answers

1. TRUE

2. FALSE

Show Answer

FALSE

14. Binning method first sort data and partition into (equi-depth) bins

1. TRUE

2. FALSE

Show Answer

TRUE

15. Data can be smoothed by fitting the data to a function, such as with regression.

1. TRUE

2. FALSE

Show Answer

TRUE

16. Linear regression – involves finding the_____ line to fit two attributes (or variables)

1. best

2. average

3. worst

Show Answer

best

17. Data cleaning is fill in ___ values

1. existing

DMW MCQ With Answers

2. missing

Show Answer

missing

18. Data transformation is _____ and aggregation

1. Normalization
2. Denormalization

Show Answer

Normalization

19. Data reduction Obtains reduced representation in volume but produces the _____ or similar analytical results

1. same
2. different

Show Answer

same

data mining and warehousing mcq sppu

20. Data discretization is Part of data reduction but with particular importance, especially for _____ data

1. Character
2. numerical

Show Answer

numerical

21. Redundant data occur often when integration of multiple databases

1. TRUE
2. FALSE

DMW MCQ With Answers

Show Answer

TRUE

22. The same attribute may have different names in different databases

1. TRUE
2. FALSE

Show Answer

TRUE

23. Careful integration of the data from multiple sources may help reduce/avoid redundancies and inconsistencies

1. TRUE
2. FALSE

Show Answer

TRUE

24. Correlation coefficient is also called Pearson's product moment coefficient

1. TRUE
2. FALSE

Show Answer

TRUE

25. Min-max normalization performs a linear transformation on the original data.

1. TRUE
2. FALSE

Show Answer

DMW MCQ With Answers

TRUE

26. The values for an attribute, A, are normalized based on the mean and standard deviation of A

1. Min-max normalization
2. z-score normalization

Show Answer

z-score normalization

27. The values for an attribute, A, are normalized based on the mean and standard deviation of A in z-score normalization

1. TRUE
2. FALSE

Show Answer

TRUE

28. z-score normalization is useful when the actual minimum and maximum of attribute A are unknown

1. TRUE
2. FALSE

Show Answer

TRUE

29. Normalization by decimal scaling normalizes by moving the decimal point of values of attribute A.

1. TRUE
2. FALSE

Show Answer

DMW MCQ With Answers

TRUE

30. Data reduction obtains a reduced representation of the data set that is much smaller in volume but yet produces the same (or almost the same) analytical results

1. TRUE
2. FALSE

Show Answer

TRUE

data mining and warehousing mcq questions

31. Run Length Encoding is lossless

1. TRUE
2. FALSE

Show Answer

TRUE

32. Jpeg compression is

1. lossy
2. lossless

Show Answer

lossy

33. Wavelet Transform Decomposes a signal into different frequency subbands

1. TRUE
2. FALSE

Show Answer

DMW MCQ With Answers

TRUE

34. Principal Component Analysis (PCA) is used for dimensionality reduction

1. TRUE
2. FALSE

Show Answer

TRUE

35. Normalization by _____ scaling normalizes by moving the decimal point of values of attribute A

1. binary
2. octal
3. decimal

Show Answer

decimal

36. Data cube aggregation is normalization

1. TRUE
2. FALSE

Show Answer

TRUE

37. ordinal attribute have values from an _____ set

1. ordered
2. unordered

Show Answer

ordered

DMW MCQ With Answers

38. Nominal attribute have values from an _____ set

1. TRUE
2. FALSE

Show Answer

FALSE

39. Run Length Encoding is

1. lossy
2. lossless

Show Answer

lossless

1. A priori algorithm operates in ____ method

- a. Bottom-up search method
- b. Breadth-first search method
- c. None of above
- d. Both a & b**

2. A bi-directional search takes advantage of ____ process

- a. Bottom-up process
- b. Top-down process
- c. None

d. Both a & b

3. The pincer-search has an advantage over a priori algorithm when the largest frequent item set is long.

- a. True**
- b. false

DMW MCQ With Answers

4. MCFS stand for

- a. **Maximum Frequent Candidate Set**
- b. Minimal Frequent Candidate Set
- c. None of above

5. MFCS helps in pruning the candidate set

- a. **True**
- b. False

6. DIC algorithm stands for ____

- a. **Dynamic itemset counting algorithm**
- b. Dynamic itself counting algorithm
- c. Dynamic item set countless algorithms
- d. None of above

7. If the item set is in a dashed circle while completing a full pass it moves towards

- a. Dashed circle
- b. Dashed box
- c. Solid Box
- d. **Solid circle**

8. If the item set is in the dashed box then it moves into a solid box after completing a full pass

- a. **True**
- b. False

9. The dashed arrow indicates the movement of the item set

- a. True
- b. **False**

10. The vertical arrow indicates the movement of the item set after reaching the frequency threshold

- a. **True**
- b. False

11. Frequent set properties are:

- a. Downward closure property

DMW MCQ With Answers

b. Upward closure property

c. A & B

d. None of these

12. Any subset of a frequent set is a frequent set is

A. Downward closure property

B. Upward closure property

C. A and b

13. Periodic maintenance of a data mart means

a. Loading

b. Refreshing

c. Purging

d. All are true

14. The Fp-tree Growth algorithm was proposed by

a. Srikant

b. Aggrawal

c. Hanetal

d. None of these

15. The main idea of the algorithm is to maintain a frequent pattern tree of the date set. An extended prefix tree structure starting crucial and quantitative information about frequent sets

a. Priori Algorithm

b. Pinchers Algorithm

c. FP- Tree Growth algo.

d. All of these

16. The data warehousing and data mining technologies have extensive potential applications in the govt in various central govt sectors such as :

a. Agriculture

b. Rural Development

c. Health and Energy

d. all of the true

17. ODS Stands for

a. External operational data sources

DMW MCQ With Answers

- b. operational data source
- c. output data source
- d. none of the above

18. Good performance can be achieved in a data mart environment by extensive use of

- a. Indexes
- b. creating profile records
- c. volumes of data
- d. all of the above**

19. Features of Fp tree are

- (i). It is dependent on the support threshold
- (ii). It depends on the ordering of the items
- (iii). It depends on the different values of trees
- (iv). It depends on frequent itemsets with respect to give information

- a. (i) & (ii)**
- b. (iii) & (iv)
- c. (i) & (iii)
- d. (ii) only

20. For a list T, we denote head_t as its first element and body_t as the remaining part of the list (the portion of the list T often removal of head_t) thus t is

- a. {head} {body}
- b. {head_t} {body_t}**
- c. {t_{head}} {t_{body}}
- d. None of these

21. Partition Algorithm executes in

- a. One phase
- b. Two-Phase**
- c. Three phase
- d. None of these

22. In the First Phase of the Partition Algorithm

- a. Logically divides into a number of non-overlapping partitions**

DMW MCQ With Answers

- b. Logically divides into a number of overlapping Partitions
- c. Not divides into partitions
- d. Divides into non-logically and non-overlapping Partitions

23. Functions of the second phase of the partition algorithm are

- a. Actual support of item sets are generated
- b. Frequent itemsets are identified
- c. Both (a) & (b)**
- d. None of these

24. Partition algorithm is based on the

- a. Size of the global Candidate set**
- b. Size of the local Candidate set
- c. Size of frequent itemsets
- d. No. Of item sets

25. Pincer search algorithm based on the principle of

- a. Bottom-up
- b. Top-Down
- c. Directional
- d. Bi-Directional**

26. Pincer-Search Method Algorithm contains

- (i) Frequent item set in a bottom-up manner
 - (ii) Recovery procedure to recover candidates
 - (iii) List of maximal frequent itemsets
 - (iv) Generate a number of partitions
- a. (i) only
 - b. (i) & (iii) only
 - c. (i),(iii) & (iv)
 - d. (i),(ii)&(iii)**

27. Is a full-breadth search, where no background knowledge of frequent itemsets is used for pruning?

- a. Level-crises filtering by the single item
- b. Level-by-level independent**

DMW MCQ With Answers

- c. Multi-level mining with uniform support
- d. Multi-level mining with reduced support

28. Disadvantage of uniform support is

- a. Items at lower levels of abstraction will occur as frequently.
- b. If the minimum support threshold is set too high, I could miss several meaningful associations
- c. Both (a) & (b)**
- d. None of these

29. Warehouse administrator responsible for

- a. Administrator
- b. maintenance
- c. both a and b**
- d. none of the above

30. The pincer-search has an advantage over a priori algorithm when the largest frequent itemset is long

- a. True**
- b. false

31. What are the common approaches to tree pruning?

- a. Prepruning and Postpruning approach.**
- b. Prepruning.
- c. Postpruning.
- d. None of the above.

32. Tree pruning methods address this problem of ____?

- a. Overfitting the branches
- b. Overfitting the data**
- c. a and b both
- d. None of the above

33. What is the Full Form of MDL.

- a. Maximum Description Length
- b. Minimum Description Length**
- c. Mean Described Length
- d. Minimum Described Length

DMW MCQ With Answers

34. State that the Statements are True / False:

a. Post pruning approach Removes Branches from a 'Fully Grown' Tree.

a. True

b. False

b. The "Best Pruned Tree is the one that maximizes the number of encoding bits.

a. True

b. False

35. Upon halting, the node becomes a ____

A. Heap

B. Subset

C. Leaf

D. Superset

36. demographic and neural clustering are methods of clustering based on

a. data types

b. methodology of calculation

c. Inter record distance

d. all of the above

37. POS stands for

a. Peer of sale

b. Point of sale

c. part of the sale

d. none of the above

38. Classification and Prediction are two forms of

a. Data analysis

b. Decision Tree

c. A and B

d. None of these

39. Classification predicts

a. Categorical labels

b. Prediction models continued valued function

DMW MCQ With Answers

c. A and B

d. None of these

40. True / False

a. Each Tuple is assumed to belong to a predefined class as determined by one of the attributes, called the class label attribute.

b. The individual tuples making up the training set are referred to as the training data set.

c. Classification and Regression are the two major type of data analysis.

Ans. A-True, B-True, C-False

41. True / False

a. Classification and Regression are the two major type of data analysis.

b. Classification is used to predict discrete or nominal values.

c. Regression is used to predict continuous or ordered values.

d. All are true

42. Classification and Prediction have numerous applications:

a. Credit approval

b. Medical diagnosis

c. Performance prediction & selective marketing

d. All of these

43. Class label of each training sample is provided with this step is known as

a. Unsupervised learning

b. Supervised learning

c. Training samples

d. Clustering

44. Decision tree is based on

a. Bottom-down technique

b. Top-down technique

c. Divide-and-conquer manner

d. Top-down recursive divide-and-conquer manner

45. Recursive Partitioning stops in Decision Tree when

a. All samples for a given node belong to the same class.

b. There are no remaining attributes on which samples may be further

DMW MCQ With Answers

partitioned.

c. There are no samples for the branch test.

d. All the above.

46. To select the test attribute of each node in a decision tree we use

a. Entity Selection Measure

b. Data Selection Measure

c. Information Gain Measure

d. None of these

47. Test attribute for the current node in the decision tree is chosen on the basis of

a. Lowest entity gain

b. Highest data gain

c. Highest Information Gain

d. Lowest Attribute Gain

48. Advantage of the Information-theoretic approach of the decision tree is

a. Minimizes the expected number of tests needed

b. Minimizes the number of Nodes

c. Maximizes the number of nodes

d. Maximizes the number of tests

49. Let us be the no. of samples of S in class C_i then expected information to classify a given sample is given by

a. $L(s_1, s_2, \dots, s_m) = -\log_2(p_i)$

b. $L(s_1, s_2, \dots, s_m) = -\sum p_i \log_2(p_i)$

c. $L(s_1, s_2, \dots, s_m) = \sum p_i \log_2 x$

d. $L(s_1, s_2, \dots, s_m) = \sum p_i \log_2(p_i)$

50. Steps applied to the data in order to improve the accuracy, efficiency, and scalability are:-

a. Data cleaning

b. Relevance analysis

c. Data transformation

d. All of the above

DMW MCQ With Answers

51. The process used to remove or reduce noise and the treatment of missing values

- a. **Data cleaning**
- b. Relevance analysis
- c. Data transformation
- d. None of above

52. Relevance analysis may be performed on the data by removing any irrelevant attribute from the process.

- a. **True**
- b. False

53. Classification and prediction method can be affected by:-

- a. Accuracy & Speed
- b. Robustness & Scalability
- c. Interpretability
- d. **All of the above**

54. In a decision tree internal node denotes a test on an attribute and Leaf nodes represent classes or class distributions

- a. **True**
- b. false

55. ____ attempts to identify and remove branches, with Improving accuracy

- a. decision tree
- b. **tree pruning**
- c. both of them
- d. none of above

56. To deal with larger data sets, a sampling method, called ____

- a. **Clara**
- b. Dara
- c. Pam
- d. None

57. What is the Full Form of CLARA.

- a. **Clustering Large Applicant**
- b. Close Large Applicant

DMW MCQ With Answers

c. Clustering Large Applications

d. None of the above

58. What is the Full Form of CLARANS.

a. Clustering Large Applications Based Upon Randomized Search

b. Close Large Applicant Based Upon Role Search

c. Clustering Large Applicant Based Upon Randomized Search

d. None of the above

59. Which Algorithm was proposed that combines the Sapling Technique with PAM.

a. CLARA

b. CLARANS

c. Both a and b

d. None of these.

60. Which are the two type of Hierarchical Clustering?

a. Agglomerative Hierarchical Clustering and Density Hierarchical Clustering

b. Agglomerative Hierarchical Clustering and Divisive Hierarchical Clustering

c. Divisive Hierarchical Clustering and Density Hierarchical Clustering

d. None of the above

61. Cluster is a :

a. The process of grouping a set of physical or abstract objects into classes of similar objects is called clustering.

b. A cluster of data objects can be treated collectively as one group in many applications

c. Cluster analysis is an important human activity.

d. All of the above

62. Cluster analysis tools based on

a. K-means

b. K-medosis

c. A and B

d. None of these

63. S-Plus, SPSS, SAS software packages use for

a. Data Mining

DMW MCQ With Answers

b. Classification

c. Clustering

d. Prediction

64. Unsupervised learning is an example of

a. Classification and prediction

b. Classification and Regression

c. clustering

d. Data Mining

65. Requirement of Clustering in Data Mining

a. Scalability

b. Ability to deal with different types of attributes

c. Ability to deal with noisy data

d. Discovery of clusters with arbitrary shape

e. Minimal requirement for domain knowledge to determine input parameters

f. Insensitivity to the order of input records

g. High dimensionality

h. Constraint-based clustering

(a). a, c, d, f

(b). g, h

(c). All of these

(d.) None of these

66. Clustering method can be classified

a. Partitioning Methods

b. Hierarchical methods

c. Density-based methods

d. All of these

67. Hierarchical methods can be classified

a. Agglomerative Approach

b. Divisive Approach

c. A and B

d. None of these

DMW MCQ With Answers

68. Agglomerative approach is called as

a. Bottom-up Approach

b. Top-Down Approach

c. A and B

d. None of these

69. Top-Down Approach is

a. Agglomerative Approach

b. Divisive Approach

70. Drawback of Hierarchical Methods

a. Suffer from the fact that once a step is done, it can never be undone.

b. A technique is that they cannot correct erroneous decision.

c. Both a & b

d. None of these

71. Two approaches to improving the quality of hierarchical clustering:

a. Perform careful analysis of object "linkages" at each hierarchical partitioning, such as in CURE and Chameleon

b. Integrate Hierarchical agglomeration and iterative relocation by first using a hierarchical agglomerative algorithm and refining the result using an iterative relocation

c. Both a & b

d. None of these

72. Classical Portioning methods are

a. k-means and k-median

b. k-means and k-medoids

c. k-modes only

d. none of these

73. K-means technique is based on

a. Centroid Object

b. Reference object

c. Representative object

d. Partition Object

DMW MCQ With Answers

74. K-medoids technique is based on

- a. Centroid Object
- b. Representative object**
- c. Partition Object
- d. None of these

75. The k-means and the k-modes methods can be integrated to cluster data with mixed numeric and categorical values, resulting in

- a. k-median method
- b. k-partition method
- c. k-prototypes method**
- d. k-medoids method

76. The squared-error criterion is used in a k-means method defined as

- a. $E = \sum_{i=1}^n \sum_{j=1}^k [p - m_i]$
- b. $E = \sum_{i=1}^n \sum_{j=1}^k [m_i]_2$
- c. $E = \sum_{i=1}^n \sum_{j=1}^k [p]_2$
- d. $E = \sum_{i=1}^n \sum_{j=1}^k [p - m_i]_2$**

77. The Computational Complexity of the k-means method algorithm is

- a. $O(\log x)$
- b. $\Theta(nkt)$
- c. $O(nkt)$**
- d. $\Theta(\log x)$

78. Which Method is more Robust-k-means or k-medoids?

- a. The k means is more robust in the presence of noise
- b. The k-medoids method is more robust in the presence of noise and outliers**
- c. The k-medoids method is more robust due to no. of partitions
- d. The k means is more robust due to its less complexity

79. First k-medoids algorithm introduced is

- a. Prototype Above Medoids
- b. Partition Below Medoids
- c. Prototype Around Medoids
- d. Partitioning Around Medoids**

DMW MCQ With Answers

80. PAM stands for

- a. Prototype Above Medoids
- b. Prototype Around Means
- c. Partitioning Around Medoids**
- d. Partitioning Above Means

81. Which statements are true for k-means

- (i). It can apply only when the mean of the cluster is defined.
 - (ii). It is not suitable for discovering clusters with non-convex shapes
 - (iii). This method is relatively efficient in processing only small data.
- a. (i) only
 - b. (i) & (ii) only**
 - c. (iii) only
 - d. All the above

82. DBSCAN stands for:

- a. Divisive Based Clustering Method
- b. Density-Based Clustering Method**
- c. Both a & b
- d. None of above

83. DBSCAN defines a cluster as a maximal set of density – Connected points

- a. True**
- b. False

84. For a non-negative value ϵ , $N_\epsilon(O_i) = \{ O_j \in D \mid d(O_i, O_j) \leq \epsilon \}$

- a. True**
- b. false

85. The ____ client is a desktop that relies on the server to which it is connected for the majority of its computing power.

- a. thin**
- b. none
- c. thick
- d. web server

DMW MCQ With Answers

86. An object is said to be the Core Object if

- a. $N_e(O) \geq \text{MinPts}$
- b. $N(O) \geq \text{MaxPts}$
- c. none of above
- d. both a & b

87. The density-reachability relation is transitive but not symmetric

- a. **True**
- b. False

88. Non-core objects are:-

- a. border object
- b. noise object
- c. non-object
- d. **both a & b**

89. DBSCAN algorithm can classify into:

- a. classified
- b. unclassified
- c. noise
- d. **all of above**

90. Unsupervised learning is an example of

- a. Classification and prediction
- b. Classification and Regression
- c. **clustering**
- d. Data Mining

91. Data can be classified as

- a. reference data
- b. transaction data and derived data
- c. derived data
- d. **all of the above**

92. Reference and transaction data originates from

- a. **operational system**
- b. Unnormalized data

DMW MCQ With Answers

- c. data marts
- d. all are true

93. Derived data is derived from

- a. reference data
- b. transaction data
- c. reference and transaction data**
- d. none of the above

94. Unnormalized data, which is the basis for online analytical processing tools are prepared periodically but is directly based on detailed ____.

- a. reference data**
- b. transaction data
- c. reference and transaction data
- d. none of the above

95. The data mart is loaded with data from a data warehouse by means of a ____

- a. load program**
- b. process
- c. project
- d. all is valid

96. The chief considerations for a Load program are:

- a. frequency and schedule
- b. total or partial refreshment
- c. customization and re-sequencing
- d. all are true**

97. Periodic maintenance of a data mart means

- a. all are true**
- b. loading
- c. refreshing
- d. purging

98. Detailed level data, summary level, preprocessed and Adhoc data are data in

- a. data warehouse

DMW MCQ With Answers

b. data mart

c. both

d. none of the above

99. Data sources in the data warehouse are referred to as

a. External data source

b. Operational data source

c. External operational data source

d. none of the above

100. ____ Table help and enable the end-users of the data mart to relate the data to its expanded version.

a. data

b. reference

c. both a and b

d. none of the above

1. OLTP stands for ____.

Ans. Online Analytical Processing

2. OLTP handles day to day business transactions (true/false)

Ans. True

3. Updates on the Data Warehouse is allowed (true/false)

Ans. False

4. Data Warehouse is a database that is designed for facilitating ____ and ____.

Ans. Query and Analysis

5. Data Warehouse is defined as subject-oriented, integrated, time-variant and ____.

Ans. Non-Volatile

6. Data Warehouse contains only aggregated data and individual transactions (true/false)

Ans. True

DMW MCQ With Answers

7. List the types of the data warehouse.

Ans. Real-time, federated and distributed

8. ____ data Warehouse will allow changes in the information to be monitored and recorded over time.

Ans. time-variant

9. The Data Warehouse functions as ____ and an Executive Information System (EIS).

Ans. DSS

10. Data about data is called ____.

Ans. Metadata

11. Data Warehouse contains data for ____ purpose.

Ans. Analysis

12. Data Warehouse is a storehouse of ____ data.

Ans. Historical

13. In most organizations, two groups of people are key to the success of the project, ____ and ____.

Ans. Senior Management and Working Management

14. OLTP systems are designed for ____.

Ans. Real-time business operations

15. Data Warehouses does not require real-time validation (True / False)

Ans. True

16. In most organizations, two groups of people are key to the success of the project, ____ and ____.

Ans. Senior Management,

17. In Data Warehouse, the requirements are gathered subject area wise. (True / False)

Ans. True

DMW MCQ With Answers

18. The 3 major functions that needed to be performed for getting the data ready into the Data Warehouse are extraction, transformation and ____.

Ans. Loading

19. ____ and ____ of data take place on a large scale in the data staging area.

Ans. Sorting and Merging

20. Knowledge discovery is called ____.

Ans. Data Mining

21. The main purpose of E-R modelling is

- a. To remove redundancy
- b. To improve analysis for decision-making
- c. To record historical data
- d. None

Ans. a

22. E-R modelling and Dimensional modelling are the same (True / False)

Ans. No

23. A Dimension is an entity or subject area, which can group the data (True / False)

Ans. True

24. Dimensional model consists of ____ and ____ tables.

Ans. Dimensions and fact tables

25. ____ is often used in dimensional modelling.

Ans. Text data

26. Fact –tables usually consist of ____to____ relationships.

Ans. Many to many

27. Dimensional model can be implemented with the following databases,

- a. Relational database
- b. MDDDB
- c. Flat files
- d. Excel data files

DMW MCQ With Answers

e. None

Ans. a

28. Customer name change in the dimensional model comes under ____.

Ans. Slowly-changing-dimension

29. The most popular model for the data warehouse is ____.

Ans. Multidimensional model

30. Which of the following schema supports the normalization in dimensional modelling?

a. Star Schema

b. Snow-Flake schema

c. Fact-Constellation

Ans. a

31. Each dimension table is in ____ relationship with the central fact table.

Ans. One-to-many

32. Dimensional table and a fact table can be connected with the following database keys:

a. Foreign key

b. Surrogate key

c. Candidate key

Ans. a

33. For sales analysis units sold is a ____ kind of measure.

Ans. Additive numeric measure

34. OLAP tools are data accessing and discovery tools (True / False)

Ans. True

35. In Data Warehouse a system with multiple architectures is called ____

Ans. Federated Data Warehouse architecture

36. Data marts are,

a) Department level

b) Limited in size

c) Read-only

DMW MCQ With Answers

d) All the above

Ans. d

37. Data Warehouse functions are a Decision support system and ____.

Ans. EIS

38. Info Data extraction, ____ and ____ encompass the areas of data acquisition and data storage.

Ans. Transformation and Loading

39. Populating all the Data Warehouse tables for the very first time is called ____.

Ans. Initial Load

40. Which of the following are open source ETL tools?

- a) SAS Data Integrator
- b) Ascetical Data Stage
- c) Cognos Decision Stream
- d) Microsoft DTS
- e) Clover

Ans. Clover

41. Average daily balances ____ attribute.

Ans. Derived attribute

42. OLAP stands for ____

Ans. Online analytical processing

43. OLAP tools enable the user to access the data in Data Warehouse in an interactive manner (True / False)

Ans. True

44. ERP and CRM are ____ kinds of systems.

Ans. OLTP

45. Data cube contains ____ and ____.

Ans. Dimensions and Facts

46. A dimensional table contains hierarchies (True / False)

Ans. true

DMW MCQ With Answers

47. Which of the following are the intermediate servers that stand in between a relational back-end server and client front-end tools?

- a. ROLAP
- b. MOLAP
- c. HOLAP
- d. All the above

Ans. all

48. The advantage of using a data cube is that it allows fast indexing to precomputed summarized data. (True / False)

Ans. true

49. In Data Warehouse, a single record link to all the duplicate record in the sources systems is called ____.

Ans. De-duplication

50. Sorting the data in the given source file is a transformation (True / False).

Ans. True

51. OLTP is abbreviated as ____

Ans. Online transaction processing

52. Query response time is ____ kind of metadata.

Ans. Operational metadata

53. Key hierarchies and key performance indicators are ____ kind of Metadata.

Ans. Business metadata

54. Storing, data mapping and transformation from source systems to the data warehouse fall into:

- a. Technical metadata
- b. Operational metadata
- c. Business metadata

Ans. a

55. According to Ralph Kimball, Back-room metadata guides:

- a. Extraction

DMW MCQ With Answers

- b. Cleaning
- c. Loading processes
- d. All the above

Ans. d

56. One tool that can allow data warehouse managers to deal with metadata is called ____.

Ans. Repository

57. Access rights, protocols are ____ metadata.

Ans. Administrative metadata

58. Data about data is called ____.

Ans. Metadata

59. Information can be converted into knowledge about ____ patterns and future trends.

Ans. Historical

60. Data about data is called ____.

Ans. Metadata

61. The ____ software gives the user the opportunity to look at the data from a variety of different dimensions.

Ans. Multidimensional Analysis

62. ____ Optimization techniques are based on the concepts of genetic combination, mutation, and natural selection.

Ans. Genetic algorithms

63. Based on the overall requirements of business intelligence, the ____ layer is required to extract, cleanse and transform data into load files for the information warehouse.

Ans. Data integration

64. Data Mining is not a business solution; it is just a technology. (True/False)

Ans. True

65. ____ is used to refer to systems and technologies that provide the business with the means for decision-makers to extract personalized meaningful

DMW MCQ With Answers

information about their business and industry.

Ans. Business Intelligence

66. OLAP Supports ____ user access and multiple queries.

Ans. Multiple

67. Statistics techniques are incorporated into Data mining methods.
(True/False).

Ans. True

68. A priori algorithm operates in ____ method

- a. Bottom-up search method
- b. Breadth-first search method
- c. None of the above
- d. Both a & b

Ans. D

69. A bi-directional search takes advantage of ____ process

- a. Bottom-up process
- b. Top-down process
- c. None
- d. Both a & b

Ans. D

70. The pincer-search has an advantage over a priori algorithm when the largest frequent itemset is long. (True/false)

Ans. True

1. Information can be converted into knowledge about ____ patterns and future trends.

Ans: Historical

2. Data about data is called ____.

Ans: Metadata

DMW MCQ With Answers

3. Facts, numbers, or text is called ____.

Ans: Data

4. ____ and ____ are the key to emerging Business Intelligence technologies.

Ans: Data warehouse and data mining

5. Data mining is also called ____.

Ans: Knowledge discovery

6. Online Analytical Processing (OLAP) is a technology that is used to create ____ software.

Ans: Decision support

7. OLAP Supports ____ user access and multiple queries.

Ans: Multiple

8. Statistics techniques are incorporated into Data mining methods. (True/False).

Ans: True

9. ____ Optimization techniques are based on the concepts of genetic combination, mutation, and natural selection.

Ans: Genetic algorithms

10. What is Mineset?

Ans: MineSet is software that provides tools for searching, sorting, filtering and drilling down enabling previously complex data models to be viewed intuitively through real-time 3-D graphical representation.

11. A data warehouse refers to a database that is maintained separately from an organization's operational databases. (True/False)

Ans: True

12. A data warehouse is usually constructed by integrating multiple heterogeneous sources. (True/False)

Ans: True

13. ____ system is customer-oriented and is used for transaction and query processing by clerks, clients, and information technology professionals.

Ans: OLTP

DMW MCQ With Answers

14. A ___ allows data to be modelled and viewed in multiple Dimensions.

Ans: Data cube

15. In ___ schema some dimension tables are normalized, thereby further splitting the data into additional tables.

Ans: Snowflake

16. The ___ data model is commonly used in the design of relational databases.

Ans: Entity-relationship

17. Data warehouses and OLAP tools are based on ___ data model.

Ans: Multidimensional

18. The ___ exposes the information being captured, stored, and managed by operational systems.

Ans: Data source view

19. ___ are the intermediate servers that stand in between a relational back – end server and client front – end tools.

Ans: Relational OLAP (ROLAP) servers

20. A ___ is a set of views over operational databases.

Ans: Virtual warehouse

21. The ___ software gives the user the opportunity to look at the data from a variety of different dimensions.

Ans: Multidimensional Analysis

22. Which of the following statements defines Business Intelligence?

A. Converting data into knowledge and making it available throughout the organization

B. Analytical software and solutions for gathering, consolidating, analyzing and providing access to information in a way that is supposed to let the users of an enterprise make better business decisions.

C. Both A & B

Ans: C. Both A & B

DMW MCQ With Answers

23. Based on the overall requirements of business intelligence, the ____ layer is required to extract, cleanse and transform data into load files for the information warehouse.

Ans: Data integration

24. Data Mining is not a business solution; it is just a technology. (True/False)

Ans: True

25. ____ is a random error or variance in measured variables.

Ans: Noise

26. State true or false

I. BI applications can also help managers to be better informed about actions that a company's competitors are taking

II. BI can help companies share selected strategic information with business partners.

III. BI 2.0" is used to describe the acquisition, provision and analysis of "real-time" data

A. i-T, ii-F, iii-F

B. i-T, ii-T, iii-F

C. i-T, ii-F, iii-T

D. i-T, ii-T, iii-T

Ans: D.

27. ____ routines attempt to fill in missing values, smooth out noise while identifying outliers, and correct inconsistencies in the data.

Ans: Data cleaning

28. ____ is used to refer to systems and technologies that provide the business with the means for decision-makers to extract personalized meaningful information about their business and industry.

Ans: Business Intelligence

29. In ____ each value in a bin is replaced by the mean value of the bin.

Ans: Smoothing by bin means

DMW MCQ With Answers

30. ___ regression involves finding the “best” line to fit two variables so that one variable can be used to predict the other.

Ans: Linear

31. ___ works to remove the noise from the data that includes techniques like binning, clustering, and regression.

Ans: Smoothing

32. Redundancies can be detected by correlation analysis. (True/False)

Ans: True

33. The ___ technique uses encoding mechanisms to reduce the data set size.

Ans: Data compression

34. In which Strategy of data reduction redundant attributes are detected.

A. Date cube aggregation

B. Numerosity reduction

C. Data compression

D. Dimension reduction

Ans: D. Dimension reduction

35. ___ hierarchies can be used to reduce the data by collecting and replacing low-level concepts by higher-level concepts.

Ans: Concept

36. The ___ rule can be used to segment numeric data into relatively uniform, “natural” intervals.

Ans: 3-4-5

37. Oracle, SQL/Server, DB2 are examples for ___.

Ans: DBMS

38. Data Base Management System (DBMS) supports query languages. (True/False)

Ans: True

39. The ___ item sets find all sets of items (items sets) whose support is greater than the user-specified minimum support, σ .

Ans: Frequent set

DMW MCQ With Answers

40. A frequent set is a ____ if it is a frequent set and no superset of this is a frequent set.

Ans: Maximal frequent set

41. ____ techniques are used to detect relationships or associations between specific values of categorical variables in large data sets.

Ans: Association rule mining

42. A Decision Tree is a ____ model.

Ans: Predictive model

43. Using a decision tree, only categorical variables would be modelled. (True/False).

Ans: False

44. Clustering is an unsupervised learning method (True/false).

Ans: False

45. Neural networks are made up of many ____.

Ans: Artificial neurons

46. For a given transaction database T , a ____ is an expression of the form $X \Rightarrow Y$, where X and Y are subsets of A and $X \Rightarrow Y$ holds with confidence τ , if $\tau\%$ of transactions in D support X also support Y .

Ans: Association rule

47. The ____ rule describes associations between quantitative items or attributes.

Ans: Quantitative association

48. The ____ step eliminates the extensions of $(k-1)$ – itemsets, which are not found to be frequent, from being considered for counting support.

Ans: Pruning

49. In the first phase of the Partition algorithm, the algorithm logically divides the database into a number of ____.

Ans: non – overlapping partitions.

50. The a priori algorithm operates in a ____ and ____.

Ans: bottom-up, breadth-first search method.

DMW MCQ With Answers

51. ___ algorithm works like a train running over the data, with stops at intervals M between transactions. When the train reaches the end of the transaction file it completes one path.

Ans: DIC Algorithm

52. FP–Tree Growth Algorithm can be implemented in ___ Phases.

Ans: Two

53. FP – tree stands for ___.

Ans: Frequent pattern tree

54. Data mining systems should provide capabilities to mine association rules at multiple levels of abstraction and traverse easily among different abstraction spaces (True/False).

Ans: True

55. Which one of the following is alternative search strategies for mining multiple-level associations with reduced support?

- a) Level – by level independent
- b) Level – cross-filtering by a single item
- c) Level – cross-filtering by k – itemset:
- d) All the above

Ans: d) All the above

56. Which of the following is NOT a common binning strategy?

- a) Equiwidth binning,
- b) Equidepth binning,
- c) Homogeneity – based binning,
- d) Equilength binning

Ans: d) Equilength binning

57. Association rules that involve two or more dimension or predicates can be referred to as ___.

Ans: Multidimensional association rules.

58. An algorithm that performs a series of “walks” through itemset space is called a ___.

Ans: Random walk algorithm.

DMW MCQ With Answers

59. What are knowledge type constraints?

Ans: They specify the type of knowledge to be mined.

60. A standard measure of within-cluster similarity is ____.

Ans: variance

61. The process of grouping a set of physical or abstract objects into classes of similar objects is called ____.

Ans: Cluster

62. Clustering may also be considered as ____.

Ans: Segmentation

63. Clustering is also called:

- a. Segmentation
- b. Compression
- c. Partitions with similar objects
- d. All the above

Ans: d. All the above

64. Clustering is used only in data mining (True/False).

Ans: True

65. Clustering is a form of learning by observation rather than ____.

Ans: By example

66. Weight and height of an individual fall into ____ kind of variables.

Ans: Continuous

67. In the K-means algorithm for partitioning, each cluster is represented by the ____ of objects in the cluster.

Ans: Means

68. K-means clustering requires prior knowledge about number clusters required as its input.(True/False).

Ans: True

69. One form of unsupervised learning is ____.

Ans: Clustering

DMW MCQ With Answers

70. ___ software provides a set of partitioned clustering algorithms that treat the clustering problem as an optimization process.

Ans: CLUTO

71. Data classification is a ___ step process.

Ans: Two

72. ___ can be viewed as the construction and use of a model to assess the class of an unlabeled sample, or to assess the value or value ranges of an attribute that a given sample is likely to have.

Ans: Prediction

73. ___ of data removes or reduces noise (by applying smoothing techniques) and the treatment of missing values.

Ans: Pre-processing

74. ___ method refers to the ability to construct the model efficiently given a large amount of data.

Ans: Scalability

75. What is a decision tree?

Ans: This is a flow – chart – like a tree structure, where each internal node denotes a test on an attribute, each branch represents an outcome of the test, and leaf nodes represent classes or class distributions.

76. The basic algorithm for decision tree induction is a ___ algorithm.

Ans: greedy

77. The ___ measure is used to select the test attribute at each node in the tree.

Ans: information gain

78. A user session is a ___ record spanning the entire Web.

Ans: Clickstream record

79. ___ is simple text files that are automatically generated every time someone accesses one Website.

Ans: Log File

DMW MCQ With Answers

80. ___ files are frequently used in sequential mining.

Ans: Web log files

81. ___ is used to examine the structure of a particular website and collate and analyze related data.

Ans: Structural mining

82. Which of the following techniques are concerned about user navigation accessing?

- a. Web structural mining
- b. Web usage mining
- c. Web content mining
- d. Web data definition mining

Ans: b. Web usage mining

83. Web data is ___.

- a. Structured data
- b. Un-structured data
- c. Only text data
- d. Binary data

Ans: b. Un-structured data

84. ___ Web mining involves the development of Sophisticated Artificial Intelligence systems.

Ans: an agent-based approach

85. The ___ approaches to Web mining have generally focused on techniques for integrating and organizing the heterogeneous and semi-structured data on the Web into more structured and high-level collections of resources.

Ans: database

86. Association rules involving multimedia objects can be mined in ___ and ___ databases.

Ans: Image and video

87. In ___ approach, the signature of an image includes color histograms based on the color composition of an image regardless of its scale or orientation.

Ans: Color histogram-based signature

DMW MCQ With Answers

88. Which of the following are the measures of the text retrieval documents?

- a. Precision
- b. Recall
- c. F-score
- d. a,b,c

Ans: d. a,b,c

89. Data stored in most text databases are ____.

Ans: Semi-structured

90. Which of the following is the first step in text retrieval systems?

- a. Stemming
- b. Term words finding
- c. Tokenization
- d. Replacing the null data with keywords

Ans: c. Tokenization

91. Which of the following are the stop words?

- a. A
- b. The
- c. of
- d. a,b,c

Ans: d. a,b,c

92. Text databases are also called ____.

Ans: Document databases

93. Insurance and direct mail are two industries that rely on ____ to make profitable business decisions.

Ans: data analysis

94. To aid decision-making, analysts construct ____ models using warehouse data to predict the outcomes of a variety of decision alternatives.

Ans: predictive

95. A ____ profile is a model that predicts the future purchasing behaviour of an individual customer, given historical transaction data for both the individual

DMW MCQ With Answers

and for the larger population of all of a particular company's customers.

Ans: predictive

96. Data mining can be used to help predict future patient behaviour and to improve treatment programs (True/False).

Ans: True

98. Data mining in the telecommunication industry helps to understand the business involved, identify telecommunication patterns (True/False).

Ans: True

99. GDP stands for ____.

Ans: gross domestic product

100. ____ is proving to be a critical link between theory, simulation, and experiment.

Ans: data-intensive computing

101. IDS are based on ____ that are developed by the manual encoding of expert knowledge.

Ans: Handcrafted signatures

102. Choose the correct option.

Data mining can be used to improve ____.

- a) Efficiency
- b) Quality of data
- c) Marketing
- d) All the above

Ans: D. All the above.

103. To improve accuracy, data mining programs are used to analyze audit data and extract features that can distinguish normal activities from intrusions. (True/False)

Ans: True

104. Data mining-based IDSs (especially anomaly detection systems) have higher false-positive rates than traditional handcrafted signature-based methods. (True/False)

Ans: True

DMW MCQ With Answers

105. ____ is a new class of intrusion detection algorithms that do not rely on labelled data.

Ans: Unsupervised anomaly detection

106. ____ algorithm uses the frequency distribution of each feature's values to proportionally generate a sufficient amount of anomalies.

Ans: Distribution Based Artificial Anomaly

107. OLAP typically includes the following kinds of analyses: simple, comparison, trend, ____ and ____.

Ans: Variance and ranking

108. Patient Rule Induction Method (PRIM) and Weighted Item Sets (WIS), is a type of ____ technique.

Ans: Association rule

109. ____ tools cannot discover high average regions or find new patterns in data.

Ans: OLAP

110. ____ method is useful for finding patterns or associations between attributes.

Ans: WIS

1. Data Warehouse is defined as subject-oriented, integrated, time-variant and ____.

- a. Volatile
- b. Distributed
- c. Non-Volatile
- d. None of the above

Ans: c

2. Which one of the following is not a tool for Data warehouse development?

- a. COGNOS
- b. SCCS
- c. Informatica

DMW MCQ With Answers

d. Business Objects

Ans: b

3. The Data Warehouse does not cater to the Real-time operational requirements of the enterprise. (True/False).

Ans: True

4. Data Warehouse contains data for ___ purpose.

a. Real-Time Operation

b. Analysis

c. Validation

d. All of the above

Ans: b

5. In Data Warehouse, the requirements are gathered subject area wise. (True/False)

Ans: True

6. Which of the following is a Source Data Component in Data Warehouse?

a. Production Data

b. Sales Data

c. Marketing Data

d. Purchase Data

Ans: a

7. Data Marts are.

a. Department level

b. Limited in size

c. Read-only

d. All the above

Ans: d

8. The three major Data Staging Components are Data Extraction, Data Transformation and ___.

a. Data Retrieval

b. Data Loading

c. Data Refresh

d. Data Access

Ans: d

9. Dimensional model can be implemented with the following databases.

a. Relation database

b. MDDB

c. Flat files

DMW MCQ With Answers

d. Excel data files

Ans: a

10. Fact-Tables usually consists of ___ relationships.

- a. Many to many
- b. One too many
- c. One to one
- d. Many to one

Ans: a

11. Each Dimension table has a ___ relationship to the fact table.

- a. Many to many
- b. One too many
- c. Many to one
- d. One to one

Ans: b

2. Dimensional table and a fact table can be connected with the following database keys:

- a. Foreign key
- b. Surrogate key
- c. Candidate key
- d. All of the above

Ans: a

13. In Data Warehouse, a single record link to all the duplicate record in the source systems is called ___.

- a. Decoding of fields
- b. De-duplication
- c. Merging of Information
- d. Summarization

Ans: b

14. Which of the following is not a type of data loading?

- a. Initial load
- b. Incremental load
- c. Iterative load
- d. Full refresh

Ans: c

15. Adding value to the data to give it more meaning is called ___.

- a. Data cleansing
- b. Data profiling

DMW MCQ With Answers

- c. Data integration
- d. Data Enrichment

Ans: d

16. How many levels does CMM have?

- a. One
- b. Four
- c. Five
- d. Two

Ans: c

17. The full form of CMM is:

- a. Capability Maturity Model
- b. Capability Model Maturity
- c. Comprehensive Material Management
- d. Computer Material Management

Ans: a

18. OLAP stands for.

- a. On-Line Application Processing
- b. On-Line Analytical Processing
- c. On-Line Ability Processing
- d. None of the above

Ans: b

19. Which of the following are the intermediate servers that stand in between a relational back-end server and client front end tools?

- a. ROLAP
- b. MOLAP
- c. HOLAP
- d. All of the above

Ans: d

20. A dimensional table does not contain hierarchies. (True/False)

Ans: True

21. ___ is used as a (dynamic) indexing method in relational database management systems.

- a. Bit map indexing
- b. B+ tree indexing
- c. Compression indexing
- d. Clustered indexing

Ans: b

DMW MCQ With Answers

22. Parallelism improve processing for.

- a. Large table scans and joins
- b. Creation of large indexes
- c. Bulk inserts, update and deletes
- d. All of the above

Ans: d

23. According to Ralph Kimball, Back-room metadata guides.

- a. Extraction
- b. Cleaning
- c. Loading processes
- d. All the above

Ans: d

24. Storing, data mapping and transformation from source systems to the Data Warehouse fall into:

- a. Technical metadata
- b. Operational metadata
- c. Business metadata
- d. None of the above

Ans: a

25. Key hierarchies and key performance indicators are ___ kind of metadata.

- a. Technical metadata
- b. Operational metadata
- c. Business metadata
- d. None of the above

Ans: c

26. Which of the following is the white box testing?

- a. Unit testing
- b. Regression
- c. User accepting testing
- d. Integration testing

Ans: a

27. Which of the following are the main areas of testing that should be done for the ETL process.

- a. Making sure that all the records in the source system that should be brought into the warehouse and all the components of the ETL process are complete.
- b. All of the extracted source data is correctly transformed into dimension tables and fact tables
- c. All of the extracted and transformed data is successfully loaded into Data

DMW MCQ With Answers

Warehouse

d. All of the above

Ans: d

28. The advantage of using a data cube is that it allows fast indexing to pre-computed summarized data. (True/False)

Ans: True

29. RAID stands for.

a. Rapid Application integration and Development

b. Redundant Array of Inexpensive Disks

c. Redundant Application of Inexpensive Disks

d. Redundant Array of Integrated Disks

Ans: b

30. Which of the following analytic tools should be used for extracting the data from the Data Warehouse?

a. OLAP tools

b. Data mining tools

c. SQL

d. All the above

Ans: d

31. Which of the following data mining technique is used for optimization?

a. Artificial Neural Networks

b. If then rule induction

c. Genetic algorithms

d. Decision trees

Ans: c

32. Which of the following tools provide enterprise intelligence?

a. Data mining

b. Data warehouse

c. Databases

d. None of the above

Ans: a

33. Predictive modelling requires which of the following Data set for initial model creation?

a. Training data set

b. Test data set

c. Raw data set

DMW MCQ With Answers

d. All of the above

Ans: a

34. Click stream data is used for the following.

- a. To track the user activity on the web page
- b. To study customer buying patterns
- c. Feed about web site design
- d. All the above

Ans: d

35. Which of the following is the private network to access the data through the web.

- a. Internet
- b. Extranet
- c. Intranet
- d. None of the above

Ans: c

36. Web-enabling the Data Warehouse uses the following as the information delivery mechanism.

- a. Web technology
- b. Grid computing
- c. Artificial intelligence
- d. None of these

Ans: a

37. Web house is what kind of network?

- a. Distributed system
- b. Client and server only
- c. Parallel system
- d. None of the above

Ans: a

38. The system delivers the result of requests for information through remote browsers is called.

- a. Web browser
- b. Information delivery
- c. Data presentation
- d. Data dissemination

Ans: b

39. Who is called the Father of Data Warehouse?

- a. Charles Babbage
- b. Ralph Kimball

DMW MCQ With Answers

- c. Bill Inmon
- d. Fritz Bauer

Ans: c

40. Which of the following schema supports the normalization in dimensional modelling.

- a. Star schema
- b. Snow-Flake schema
- c. Fact-Constellation
- d. None of these

Ans: b

41. CMMI means ____.

- a. Capability Model Maturity Integration
- b. Comprehensive Material Management Information
- c. Capability Maturity Model Information
- d. Capability Maturity Model Integration

Ans: d

42. Data Cubes contains ____ and ____.

- a. Facts, Information
- b. Dimensions, Weight
- c. Dimensions, Facts
- d. Data, Information

Ans: c

43. The hypercube is the cube with ____ dimensions.

- a. Three
- b. Two
- c. Four
- d. One

Ans: c

44. Writing the same data to two disk drives connected to the same controller is known as ____.

- a. Data Duplexing
- b. Data Mirroring
- c. Disk Striping
- d. Data Profiling

Ans: b

45. ____ provides the Enterprise with intelligence and ____ provides the Enterprise with a memory.

DMW MCQ With Answers

- a. Data Warehouse, Databases
- b. Databases, Data Mining
- c. Data mining, Data warehouse
- d. Data Warehouse, Data Mining

Ans: c

46. Which of the following is an open-source Data mining tool?

- a. Clementine
- b. Intelligent Miner
- c. Weka3
- d. Enterprise Miner

Ans: c

47. In the star schema, the dimension table is ___ and the fact table is ___.

- a. Wide, Wide
- b. Wide, Deep
- c. Deep, Wide
- d. Deep, Deep

Ans: b

48. Which of the following is an open-source ETL tool?

- a. Cover
- b. SAS data Integrator
- c. Cognos Decision Stream
- d. Microsoft DTS

Ans: a

49. Confirmed dimension allows user to:

- a. Share non-Key dimension data
- b. Query Across fact tables with consistency
- c. Work on fact and business subjects for which all users have the same meaning
- d. All of the above

Ans: d

50. Which of the following is true for the CMM level2?

- a. Data quality issues are acknowledged
- b. Major problems are handled as and when they surfaced
- c. Both a and b.
- d. None of these

Ans: c

51. Data Warehouse is ___ triggered whereas OLTP is ___ triggered.

- a. Event, User

DMW MCQ With Answers

- b. System, User
- c. System, Event
- d. Insert, Update

Ans: b

52. UAT means.

- a. User Acquisition Test
- b. User Acceptance Test
- c. Usage Acceptance Test
- d. Usage Ambiguity Test

Ans: b

53. Meta Data means.

- a. Data about Data
- b. Catalogue of data
- c. Data Warehouse Roadmap
- d. All of the above

Ans: d

54. Which of the following interfaces are used to access the Data Warehouse?

- a. Browser
- b. Search engine
- c. Active X applets
- d. All the above

Ans: d

55. Data mining is ____ driven approach not ____ driven approach.

- a. Event, Data
- b. Data, User
- c. User, Event
- d. User, Data

Ans: b

56. Which of the following is true for Administrative Metadata?

- a. Access rights, protocols, physical location, retention criteria
- b. Protocols, audit controls, source tables, usage statistics
- c. Access rights, audit control, process automation, usage statistics
- d. Audit control, schema definition, physical location, retention criteria

Ans: a

57. Which of the following RAID level does not implement error checking?

- a. RAID1
- b. RAID (0+1)

DMW MCQ With Answers

- c. RAID0
- d. RAID5

Ans: c

58. ____ and ____ of data take place on a large scale in the data staging area.

- a. Sorting, searching
- b. Searching, merging
- c. Sorting, merging
- d. Searching, acquisition

Ans: c

59. True/False

- 1. Data Warehouse contains only aggregated data and individual transactions.
- 2. A dimension is an entity or Subject area, which can group the data.
- 3. E-R modelling and dimensional modelling are the same.

- a. 1-T, 2-F, 3-T
- b. 1-F, 2-F, 3-F
- c. 1-T, 2-T, 3-F
- d. 1-F, 2-T, 3-T

Ans: c

60. True/False

- 1. Sorting the data in the given source file is a transformation
- 2. OLAP tools enable the user to access the data in Data Warehouse in an interactive manner.
- 3. Data mining is a data-driven approach, not a user-driven approach

- a. 1-T, 2-T, 3-T
- b. 1-F, 2-F, 3-F
- c. 1-T, 2-T, 3-F
- d. 1-F, 2-T, 3-T

Ans: a

- 1. Which of the following is the most important when deciding on the data structure of a data mart?

- (a) XML data exchange standards
- (b) Data access tools to be used**
- (c) Metadata naming conventions
- (d) Extract, Transform, and Load (ETL) tool to be used
- (e) All (a), (b), (c) and (d) above.

- 2. The process of removing the deficiencies and loopholes in the data is called

DMW MCQ With Answers

as

- (a) Aggregation of data
- (b) Extracting of data
- (c) Cleaning up of data.**
- (d) Loading of data
- (e) Compression of data.

3. Which one manages both current and historic transactions?

- (a) OLTP
- (b) OLAP**
- (c) Spread sheet
- (d) XML
- (e) All (a), (b), (c) and (d) above.

4. Which of the following is the collection of data objects that are similar to one another within the same group?

- (a) Partitioning
- (b) Grid
- (c) Cluster**
- (d) Table
- (e) Data source.

5. Which of the following employees data mining techniques to analyze the intent of a user query, provided additional generalized or associated information relevant to the query?

- (a) Iceberg query method
- (b) Data analyzer
- (c) Intelligent query answering**
- (d) DBA
- (e) Query parser.

6. Which of the following process includes data cleaning, data integration, data selection, data transformation, data mining, pattern evolution and knowledge presentation?

- (a) KDD process**
- (b) ETL process
- (c) KTL process
- (d) MDX process
- (e) None of the above.

7. At which level we can create dimensional models?

- (a) Business requirements level
- (b) Architecture models level**

DMW MCQ With Answers

- (c) Detailed models level
- (d) Implementation level
- (e) Testing level.

8. Which of the following is not related to dimension table attributes?

- (a) Verbose
- (b) Descriptive
- (c) Equally unavailable**
- (d) Complete
- (e) Indexed.

9. Data warehouse bus matrix is a combination of

- (a) Dimensions and data marts**
- (b) Dimensions and facts
- (c) Facts and data marts
- (d) Dimensions and detailed facts
- (e) All (a), (b), (c) and (d) above.

10. Which of the following is not the managing issue in the modeling process?

- (a) Content of primary units column
- (b) Document each candidate data source
- (c) Do regions report to zones
- (d) Walk through business scenarios
- (e) Ensure that the transaction edit flat is used for analysis.**

11. Data modeling technique used for data marts is

- (a) Dimensional modeling**
- (b) ER – model
- (c) Extended ER – model
- (d) Physical model
- (e) Logical model.

12. A warehouse architect is trying to determine what data must be included in the warehouse. A meeting has been arranged with a business analyst to understand the data requirements, which of the following should be included in the agenda?

- (a) Number of users
- (b) Corporate objectives
- (c) Database design
- (d) Routine reporting**
- (e) Budget.

13. An OLAP tool provides for

DMW MCQ With Answers

- (a) Multidimensional analysis
- (b) Roll-up and drill-down
- (c) Slicing and dicing**
- (d) Rotation
- (e) Setting up only relations.

14. The Synonym for data mining is

- (a) Data warehouse
- (b) Knowledge discovery in database
- (c) ETL**
- (d) Business intelligence
- (e) OLAP.

15. Which of the following statements is true?

- (a) A fact table describes the transactions stored in a DWH
- (b) A fact table describes the granularity of data held in a DWH
- (c) The fact table of a data warehouse is the main store of descriptions of the transactions stored in a DWH
- (d) The fact table of a data warehouse is the main store of all of the recorded transactions over time**
- (e) A fact table maintains the old records of the database.

16. Most common kind of queries in a data warehouse

- (a) Inside-out queries**
- (b) Outside-in queries
- (c) Browse queries
- (d) Range queries
- (e) All (a), (b), (c) and (d) above.

17. Concept description is the basic form of the

- (a) Predictive data mining
- (b) Descriptive data mining**
- (c) Data warehouse
- (d) Relational data base
- (e) Proactive data mining.

18. The apriori property means

- (a) If a set cannot pass a test, all of its supersets will fail the same test as well
- (b) To improve the efficiency the level-wise generation of frequent item sets**
- (c) If a set can pass a test, all of its supersets will fail the same test as well
- (d) To decrease the efficiency the level-wise generation of frequent item sets
- (e) All (a), (b), (c) and (d) above.

DMW MCQ With Answers

19. Which of following form the set of data created to support a specific short lived business situation?

- (a) Personal data marts
- (b) Application models
- (c) Downstream systems
- (d) Disposable data marts**
- (e) Data mining models.

20. What is/are the different types of Meta data?

- I. Administrative.
- II. Business.
- III. Operational.
- (a) Only (I) above
- (b) Both (II) and (III) above
- (c) Both (I) and (II) above
- (d) Both (I) and (III) above
- (e) All (I), (II) and (III) above.**

21. Multiple Regression means

- (a) Data are modeled using a straight line
- (b) Data are modeled using a curve line
- (c) Extension of linear regression involving only one predictor value
- (d) Extension of linear regression involving more than one predictor value**
- (e) All (a), (b), (c) and (d) above.

22. Which of the following should not be considered for each dimension attribute?

- (a) Attribute name
- (b) Rapid changing dimension policy**
- (c) Attribute definition
- (d) Sample data
- (e) Cardinality.

23. A Business Intelligence system requires data from:

- (a) Data warehouse**
- (b) Operational systems
- (c) All possible sources within the organization and possibly from external sources
- (d) Web servers
- (e) Database servers.

DMW MCQ With Answers

24. Data mining application domains are

- (a) Biomedical
- (b) DNA data analysis
- (c) Financial data analysis
- (d) Retail industry and telecommunication industry
- (e) All (a), (b), (c) and (d) above.

25. The generalization of multidimensional attributes of a complex object class can be performed by examining each attribute, generalizing each attribute to simple-value data and constructing a multidimensional data cube is called as

- (a) Object cube
- (b) Relational cube
- (c) Transactional cube
- (d) Tuple
- (e) Attribute.

26. Which of the following project is a building a data mart for a business process/department that is very critical for your organization?

- (a) High risk high reward
- (b) High risk low reward
- (c) Low risk low reward
- (d) Low risk high reward
- (e) Involves high risks.

27. Which of the following tools a business intelligence system will have?

- (a) OLAP tool
- (b) Data mining tool
- (c) Reporting tool
- (d) Both(a) and (b) above
- (e) (a), (b) and (c) above.

28. Which of the following is/are the Data mining tasks?

- (a) Regression
- (b) Classification
- (c) Clustering
- (d) inference of associative rules
- (e) All (a), (b), (c) and (d) above.

29. In a data warehouse, if D1 and D2 are two conformed dimensions, then

- (a) D1 may be an exact replica of D2
- (b) D1 may be at a rolled up level of granularity compared to D2

DMW MCQ With Answers

- (c) Columns of D1 may be a subset of D2 and vice versa
- (d) Rows of D1 may be a subset of D2 and vice versa
- (e) All (a), (b), (c) and (d) above.

30. Which of the following is not an ETL tool?

- (a) Informatica
- (b) Oracle warehouse builder
- (c) Datastage
- (d) Visual studio
- (e) DT/studio.

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. The schema is collection of stars. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 2. The Synonym for data mining is

- A : Data warehouse
- B : Knowledge discovery in database
- C : ETL
- D : Business Intelligence

Q.no 3. Each dimension is represented by only one table. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 4. What technique can be used to improve the efficiency of apriori algorithm?

A : Hash-based techniques

B : Transaction Reduction

C : Candidate generation

D : Both (a) and (b)

Q.no 5. A data cube is defined by

A : Dimensions

B : Facts

C : Dimensions and Facts

D : Dimensions or Facts

Q.no 6. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non-supervised

Q.no 7. Which of the following is correct about Proximity measures?

A : Similarity

B : Dissimilarity

C : Similarity as well as Dissimilarity

D : Neither similarity nor dissimilarity

Q.no 8. Data mining is best described as the process of

A : identifying patterns in data

B : deducing relationships in data

C : representing data

D : simulating trends in data

Q.no 9. to evaluate a classifier's quality we use

- A : confusion matrix
- B : error detection code
- C : error correction code
- D : classifier

Q.no 10. A multidimensional data model is typically organized around a central theme which is represented by

- A : Dimension table
- B : Fact table
- C : Dimension table and Fact table
- D : Dimension table or Fact table

Q.no 11. The most widely used metrics and tools to assess a classification model are:

- A : Conusion Matrix
- B : Support
- C : Entropy
- D : Probability

Q.no 12. For Apriori algorithm, what is the second phase?

- A : Pruning
- B : Partitioning
- C : Candidate generation
- D : Itemset generation

Q.no 13. Constraint-based mining provides

- A : User flexibilty
- B : System optimization
- C : Both (a) dnd (b)
- D : High computation

Q.no 14. What do you mean by dissimilarity measure of two objects?

- A : Is a numerical measure of how alike two data objects are.
- B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 15. How can one represent document to calculate cosine similarity?

A : Vector

B : Matirx

C : List

D : Term frequency vector

Q.no 16. Multi-class classification makes the assumption that each sample is assigned to

A : one and only one label

B : many labels

C : one or many labels

D : no label

Q.no 17. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 18. Entropy is a measure of

A : impurity of an attribute

B : Purity of an attribute

C : Weight of an attribute

D : Class of an attribute

Q.no 19. A person trained to interact with a human expert in order to capture their knowledge.

A : knowledge programmer

B : knowledge developer

C : knowledge engineer

D : knowledge extractor

Q.no 20. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 21. What is another name of data matrix?

A : Single mode

B : Two mode

C : Multi mode

D : Large mode

Q.no 22. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

A : Imbalanced problems should not be measured using Accuracy metric.

B : Accuracy metric is not a good idea for imbalanced class problems.

C : Precision and recall metrics aren't good for imbalanced class problems.

D : Precision and recall metrics are good for imbalanced class problems.

Q.no 23. Multilevel association rule mining is

A : Association rules generated from candidate-generation method

B : Association rules generated from without candidate-generation method

C : Association rules generated from mining data at multiple abstraction level

D : Association rules generated from frequent itemsets

Q.no 24. For mining frequent itemsets, the Data format used by Apriori and FP-Growth algorithms are

A : Apriori uses horizontal and FP-Growth uses vertical data format

B : Apriori uses vertical and FP-Growth uses horizontal data format

C : Apriori and FP-Growth both uses vertical data format

D : Apriori and FP-Growth both uses horizontal data format

Q.no 25. What do you mean by support(A)?

A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 26. Identify the example of sequence data

A : weather forecast

B : data matrix

C : market basket data

D : genomic data

Q.no 27. What is uniform support in multilevel association rule minig?

A : Use of minimum support

B : Use of minimum support and confidence

C : Use of same minimum threshold at each abstraction level

D : Use of minimum support and support count

Q.no 28. Which of these distributions is used for a testing hypothesis?

A : Normal Distribution

B : Chi-Squared Distribution

C : Gamma Distribution

D : Poisson Distribution

Q.no 29. What type of data do you need for a chi-square test?

A : Categorical

B : Ordinal

C : Interval

D : Scales

Q.no 30. Which of the following is measure of document similarity?

A : Cosine dissimilarity

B : Sine similarity

C : Sine dissimilarity

D : Cosine similarity

Q.no 31. Where does the bayes rule used?

A : Solving queries

B : Increasing complexity

C : Decreasing complexity

D : Answering probabilistic query

Q.no 32. Joins will be needed to execute the query. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 33. Lazy learner classification approach is

A : learner waits until the last minute before constructing model to classify

B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 34. Sensitivity is also referred to as

A : misclassification rate

B : true negative rate

C : True positive rate

D : correctness

Q.no 35. Number of records are comparatively more in

A : OLAP

B : OLTP

C : Same in OLAP and OLTP

D : Can not compare

Q.no 36. Every key structure in the data warehouse contains a time element

- A : records
- B : Explicitly
- C : Implicitly and explicitly
- D : Implicitly or explicitly

Q.no 37. The frequent-item-header-table consists of number fields

- A : Only one
- B : Two
- C : Three
- D : Four

Q.no 38. In asymmetric attribute

- A : No value is considered important over other values
- B : All values are equal
- C : Only non-zero value is important
- D : Range of values is important

Q.no 39. A frequent pattern tree is a tree structure consisting of

- A : A frequent-item-node
- B : An item-prefix-tree
- C : A frequent-item-header table
- D : both B and C

Q.no 40. The rule is considered as interesting if

- A : They satisfy both minimum support and minimum confidence threshold
- B : They satisfy both maximum support and maximum confidence threshold
- C : They satisfy maximum support and minimum confidence threshold
- D : They satisfy minimum support and maximum confidence threshold

Q.no 41. Which of the following operation is required to calculate cosine similarity?

- A : Vector dot product
- B : Exponent
- C : Modulus

D : Percentage

Q.no 42. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 43. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 44. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 45. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 46. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 47. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

- A : Precision = 0.89
- B : Precision = 0.23
- C : Precision = 0.45
- D : Precision = 0.75

Q.no 48. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

- A : Suffix path
- B : FP-tree
- C : Prefix path
- D : Condition pattern base

Q.no 49. Effectiveness of the browsing is highest. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 50. What does a Pearson's product-moment allow you to identify?

- A : Whether there is a relationship between variables
- B : Whether there is a significant effect and interaction of independent variables
- C : Whether there is a significant difference between variables
- D : Whether there is a significant effect and interaction of dependent variables

Q.no 51. The tables are easy to maintain and saves storage space.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 52. Which operation is required to calculate Hamming distance between two objects?

- A : AND

B : OR

C : NOT

D : XOR

Q.no 53. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 54. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 55. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 56. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 57. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 58. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 59. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 60. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Answer for Question No 1. is c

Answer for Question No 2. is b

Answer for Question No 3. is a

Answer for Question No 4. is d

Answer for Question No 5. is c

Answer for Question No 6. is c

Answer for Question No 7. is c

Answer for Question No 8. is a

Answer for Question No 9. is a

Answer for Question No 10. is b

Answer for Question No 11. is a

Answer for Question No 12. is a

Answer for Question No 13. is c

Answer for Question No 14. is b

Answer for Question No 15. is d

Answer for Question No 16. is a

Answer for Question No 17. is c

Answer for Question No 18. is a

Answer for Question No 19. is c

Answer for Question No 20. is a

Answer for Question No 21. is b

Answer for Question No 22. is c

Answer for Question No 23. is c

Answer for Question No 24. is d

Answer for Question No 25. is c

Answer for Question No 26. is d

Answer for Question No 27. is c

Answer for Question No 28. is b

Answer for Question No 29. is a

Answer for Question No 30. is d

Answer for Question No 31. is d

Answer for Question No 32. is b

Answer for Question No 33. is a

Answer for Question No 34. is c

Answer for Question No 35. is b

Answer for Question No 36. is d

Answer for Question No 37. is b

Answer for Question No 38. is c

Answer for Question No 39. is d

Answer for Question No 40. is a

Answer for Question No 41. is a

Answer for Question No 42. is c

Answer for Question No 43. is a

Answer for Question No 44. is c

Answer for Question No 45. is b

Answer for Question No 46. is c

Answer for Question No 47. is d

Answer for Question No 48. is d

Answer for Question No 49. is a

Answer for Question No 50. is a

Answer for Question No 51. is b

Answer for Question No 52. is d

Answer for Question No 53. is d

Answer for Question No 54. is b

Answer for Question No 55. is a

Answer for Question No 56. is b

Answer for Question No 57. is d

Answer for Question No 58. is a

Answer for Question No 59. is a

Answer for Question No 60. is b

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. accuracy is used to measure

- A : classifier's true abilities
- B : classifier's analytic abilities
- C : classifier's decision abilities
- D : classifier's predictive abilities

Q.no 2. The most widely used metrics and tools to assess a classification model are:

- A : Confusion Matrix
- B : Support
- C : Entropy
- D : Probability

Q.no 3. A data matrix in which attributes are of the same type and asymmetric is called

- A : Pattern matrix
- B : Sparse data matrix

C : Document term matrix

D : Normal matrix

Q.no 4. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 5. Each dimension is represented by only one table. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 6. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 7. The fact is also called as

A : Dimension

B : Key

C : Schema

D : Measure

Q.no 8. The example of knowledge type constraints in constraint based mining is

A : Association or Correlation

B : Rule templates

C : Task relevant data

D : Threshold measures

Q.no 9. Postpruning is

A : Removing branches from fully grown tree

B : Stop constructing tree if this would result in the measure falling below a threshold

C : constructing a new tree

D : Flow-Chart

Q.no 10. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 11. Which one of the following is true for decision tree

A : Decision tree is useful in decision making

B : Decision tree is similar to OLTP

C : Decision Tree is similar to cluster analysis

D : Decision tree needs to find probabilities of hypothesis

Q.no 12. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non- supervised

Q.no 13. What are closed itemsets?

A : An itemset for which at least super-itemset has same confidence

B : An itemset whose no proper super-itemset has same support

C : An itemset for which at least one proper super-itemset has same support

D : An itemset whose no proper super-itemset has same confidence

Q.no 14. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 15. Which technique finds the frequent itemsets in just two database scans?

A : Partitioning

B : Sampling

C : Hashing

D : Dynamic itemset counting

Q.no 16. How can one represent document to calculate cosine similarity?

A : Vector

B : Matirx

C : List

D : Term frequency vector

Q.no 17. Multi-class classification makes the assumption that each sample is assigned to

A : one and only one label

B : many labels

C : one or many labels

D : no label

Q.no 18. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 19. the negative tuples that were correctly labeled by the classifier

A : False positives(FP)

B : True positives(TP)

C : True negatives (TN)

D : False negatives(FN)

Q.no 20. Which of the following is correct about Proximity measures?

- A : Similarity
- B : Dissimilarity
- C : Similarity as well as Dissimilarity
- D : Neither similarity nor dissimilarity

Q.no 21. What type of matrix is required to represent binary data for proximity measures?

- A : Normal matrix
- B : Sparse matrix
- C : Dense matrix
- D : Contingency matrix

Q.no 22. This supervised learning technique can process both numeric and categorical input attributes.

- A : linear regression
- B : Bayes classifier
- C : logistic regression
- D : backpropagation learning

Q.no 23. In which step of Knowledge Discovery, multiple data sources are combined?

- A : Data Cleaning
- B : Data Integration
- C : Data Selection
- D : Data Transformation

Q.no 24. How are metarules useful in mining of association rules?

- A : Allow users to specify threshold measures
- B : Allow users to specify task relevant data
- C : Allow users to specify the syntactic forms of rules
- D : Allow users to specify correlation or association

Q.no 25. It is the main technique employed for data selection.

- A : Noise
- B : Sampling

C : Clustering

D : Histogram

Q.no 26. Multilevel association rule mining is

A : Association rules generated from candidate-generation method

B : Association rules generated from without candidate-generation method

C : Association rules generated from mining data at multiple abstraction level

D : Association rules generated from frequent itemsets

Q.no 27. The rule is considered as interesting if

A : They satisfy both minimum support and minimum confidence threshold

B : They satisfy both maximum support and maximum confidence threshold

C : They satisfy maximum support and minimum confidence threshold

D : They satisfy minimum support and maximum confidence threshold

Q.no 28. What is the approach of basic algorithm for decision tree induction?

A : Greedy

B : Top Down

C : Procedural

D : Step by Step

Q.no 29. Cross validation involves

A : testing the machine on all possible ways by substituting the original sample into training set

B : testing the machine on all possible ways by dividing the original sample into training and validation sets.

C : testing the machine with only validation sets

D : testing the machine on only testing datasets.

Q.no 30. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) and (b)

Q.no 31. Which of the following probabilities are used in the Bayes theorem.

A : $P(C_i|X)$

B : $P(C_i)$

C : $P(X|C_i)$

D : $P(X)$

Q.no 32. In asymmetric attribute

A : No value is considered important over other values

B : All values are equal

C : Only non-zero value is important

D : Range of values is important

Q.no 33. Lazy learner classification approach is

A : learner waits until the last minute before constructing model to classify

B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 34. What is uniform support in multilevel association rule mining?

A : Use of minimum support

B : Use of minimum support and confidence

C : Use of same minimum threshold at each abstraction level

D : Use of minimum support and support count

Q.no 35. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

A : Zero

B : Infinity

C : Two

D : One

Q.no 36. The property of Apriori algorithm is

A : All nonempty subsets of a frequent itemsets must also be frequent

B : All empty subsets of a frequent itemsets must also be frequent

C : All nonempty subsets of a frequent itemsets must be not frequent

D : All nonempty subsets of a frequent itemsets can frequent or not frequent

Q.no 37. Some company wants to divide their customers into distinct groups to send offers this is an example of

A : Data Extraction

B : Data Classification

C : Data Discrimination

D : Data Selection

Q.no 38. The ultimate purpose of Frequent itemset mining is

A : For business decision-making process

B : For generation of association rules

C : For generation of candidate set

D : For generation of interesting patterns

Q.no 39. The Galaxy Schema is also called as

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 40. Identify the example of sequence data

A : weather forecast

B : data matrix

C : market basket data

D : genomic data

Q.no 41. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 42. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 43. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 44. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 45. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 46. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 47. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 48. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 49. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Forty Five

Q.no 50. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

A : 7

B : 9

C : 10

D : 11

Q.no 51. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 52. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 53. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 54. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 55. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 56. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 57. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 58. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Q.no 59. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 60. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Answer for Question No 1. is d

Answer for Question No 2. is a

Answer for Question No 3. is b

Answer for Question No 4. is d

Answer for Question No 5. is a

Answer for Question No 6. is b

Answer for Question No 7. is d

Answer for Question No 8. is a

Answer for Question No 9. is a

Answer for Question No 10. is a

Answer for Question No 11. is a

Answer for Question No 12. is c

Answer for Question No 13. is b

Answer for Question No 14. is c

Answer for Question No 15. is a

Answer for Question No 16. is d

Answer for Question No 17. is a

Answer for Question No 18. is a

Answer for Question No 19. is c

Answer for Question No 20. is c

Answer for Question No 21. is d

Answer for Question No 22. is b

Answer for Question No 23. is b

Answer for Question No 24. is c

Answer for Question No 25. is b

Answer for Question No 26. is c

Answer for Question No 27. is a

Answer for Question No 28. is a

Answer for Question No 29. is c

Answer for Question No 30. is d

Answer for Question No 31. is a

Answer for Question No 32. is c

Answer for Question No 33. is a

Answer for Question No 34. is c

Answer for Question No 35. is a

Answer for Question No 36. is a

Answer for Question No 37. is b

Answer for Question No 38. is a

Answer for Question No 39. is c

Answer for Question No 40. is d

Answer for Question No 41. is d

Answer for Question No 42. is a

Answer for Question No 43. is a

Answer for Question No 44. is a

Answer for Question No 45. is c

Answer for Question No 46. is c

Answer for Question No 47. is a

Answer for Question No 48. is b

Answer for Question No 49. is b

Answer for Question No 50. is b

Answer for Question No 51. is d

Answer for Question No 52. is c

Answer for Question No 53. is c

Answer for Question No 54. is d

Answer for Question No 55. is b

Answer for Question No 56. is a

Answer for Question No 57. is c

Answer for Question No 58. is b

Answer for Question No 59. is a

Answer for Question No 60. is d

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. The Synonym for data mining is

- A : Data warehouse
- B : Knowledge discovery in database
- C : ETL
- D : Business Intelligence

Q.no 2. In Data Characterization, class under study is called as?

- A : Study Class
- B : Intial Class
- C : Target Class
- D : Final Class

Q.no 3. The schema is collection of stars. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 4. What are closed frequent itemsets?

A : A closed itemset

B : A frequent itemset

C : An itemset which is both closed and frequent

D : Not frequent itemset

Q.no 5. Which of the following is correct about Proximity measures?

A : Similarity

B : Dissimilarity

C : Similarity as well as Dissimilarity

D : Neither similarity nor dissimilarity

Q.no 6. What is C4.5 is used to build

A : Decision tree

B : Regression Analysis

C : Induction

D : Association Rules

Q.no 7. What does the leaf node in decision tree indicates

A : sub tree

B : class label

C : testing node

D : condition

Q.no 8. The task of building decision model from labeled training data is called as

A : Supervised Learning

B : Unsupervised Learning

C : Reinforcement Learning

D : Structure Learning

Q.no 9. Constraint-based mining provides

- A : User flexibility
- B : System optimization
- C : Both (a) and (b)
- D : High computation

Q.no 10. An ROC curve for a given model shows the trade-off between

- A : random sampling
- B : test data and train data
- C : cross validation
- D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 11. An automatic car driver and business intelligent systems are examples of

- A : Regression
- B : Classification
- C : Machine Learning
- D : Reinforcement learning

Q.no 12. A data matrix in which attributes are of the same type and asymmetric is called

- A : Pattern matrix
- B : Sparse data matrix
- C : Document term matrix
- D : Normal matrix

Q.no 13. What technique can be used to improve the efficiency of apriori algorithm?

- A : Hash-based techniques
- B : Transaction Reduction
- C : Candidate generation
- D : Both (a) and (b)

Q.no 14. Self-training is the simplest form of

- A : supervised classification
- B : semi-supervised classification

C : unsupervised classification

D : regression

Q.no 15. For Apriori algorithm, what is the first phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 16. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 17. The problem of agents to learn from the environment by their interactions with dynamic environment is done in

A : Reinforcement learning

B : Multi-label classification

C : Binary Classification

D : Multiclassification

Q.no 18. Which of the following are methods for supervised classification?

A : Decision tree

B : K-Means

C : Hierarchical

D : Apriori

Q.no 19. A multidimensional data model is typically organized around a central theme which is represented by

A : Dimension table

B : Fact table

C : Dimension table and Fact table

D : Dimension table or Fact table

Q.no 20. How can one represent document to calculate cosine similarity?

- A : Vector
- B : Matirx
- C : List
- D : Term frequency vector

Q.no 21. Cross validation involves

- A : testing the machine on all possible ways by substituting the original sample into training set
- B : testing the machine on all possible ways by dividing the original sample into training and validation sets.
- C : testing the machine with only validation sets
- D : testing the machine on only testing datasets.

Q.no 22. Which of the following is not correct use of cross validation?

- A : Selecting variables to include in a model
- B : Comparing predictors
- C : Selecting parameters in prediction function
- D : classification

Q.no 23. What is the limitation behind rule generation in Apriori algorithm?

- A : Need to generate a huge number of candidate sets
- B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching
- C : Dropping itemsets with valued information
- D : Both (a) dnd (b)

Q.no 24. How will you counter over-fitting in decision tree?

- A : By creating new rules
- B : By pruning the longer rules
- C : Both By pruning the longer rules' and ' By creating new rules'
- D : BY creating new tree

Q.no 25. The fact table contains

- A : The names of the facts

B : Keys to each of the related dimension tables

C : Facts and keys

D : Facts or keys

Q.no 26. The property of Apriori algorithm is

A : All nonempty subsets of a frequent itemsets must also be frequent

B : All empty subsets of a frequent itemsets must also be frequent

C : All nonempty subsets of a frequent itemsets must be not frequent

D : All nonempty subsets of a frequent itemsets can frequent or not frequent

Q.no 27. Which statement is true about the decision tree attribute selection process

A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 28. Holdout and random subsampling are common techniques for assessing

A : K-Fold validation

B : cross validation

C : accuracy

D : sampling

Q.no 29. Lazy learner classification approach is

A : learner waits until the last minute before constructing model to classify

B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 30. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

A : Zero

B : Infinity

C : Two

D : One

Q.no 31. What is the approach of basic algorithm for decision tree induction?

A : Greedy

B : Top Down

C : Procedural

D : Step by Step

Q.no 32. Which of the following operations are used to calculate proximity measures for ordinal attribute?

A : Replacement and discretization

B : Replacement and characterization

C : Replacement and normalization

D : Normalization and discretization

Q.no 33. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 34. In Apriori algorithm, for generating e. g. 5 itemsets, we use

A : Frequent 5 itemsets

B : Frequent 3 itemsets

C : Frequent 4 itemsets

D : Frequent 6 itemsets

Q.no 35. In asymmetric attribute

A : No value is considered important over other values

B : All values are equal

C : Only non-zero value is important

D : Range of values is important

Q.no 36. The frequent-item-header-table consists of number fields

- A : Only one
- B : Two
- C : Three
- D : Four

Q.no 37. Number of records are comparatively more in

- A : OLAP
- B : OLTP
- C : Same in OLAP and OLTP
- D : Can not compare

Q.no 38. It is the main technique employed for data selection.

- A : Noise
- B : Sampling
- C : Clustering
- D : Histogram

Q.no 39. Which of the following is necessary operation to calculate dissimilarity between ordinal attributes?

- A : Replacement of ordinal categories
- B : Correlation coefficient
- C : Discretization
- D : Randomization

Q.no 40. A lattice of cuboids is called as

- A : Data cube
- B : Dimesnion lattice
- C : Master lattice
- D : Fact table

Q.no 41. What is the another name of Supremum distance?

- A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 42. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 43. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 44. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 45. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 46. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 47. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 48. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 49. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 50. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 51. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 52. Which of the following sentence is FALSE regarding regression?

- A : It relates inputs to outputs.
- B : It is used for prediction.
- C : It may be used for interpretation.
- D : It discovers causal relationships.

Q.no 53. Which operation data warehouse requires ?

- A : Initial loading of data
- B : Transaction processing
- C : Recovery
- D : Concurrency control mechanisms

Q.no 54. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

- A : Recall=0.9
- B : Recall=0.39
- C : Recall=0.65
- D : Recall=5.0

Q.no 55. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

- A : Precision = 0.88, Recall=0.64
- B : Precision = 0.44, Recall=0.78
- C : Precision = 0.88, Recall=0.22
- D : Precision = 0.77, Recall=0.55

Q.no 56. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

- A : Precision = 0.89
- B : Precision = 0.23
- C : Precision = 0.45
- D : Precision = 0.75

Q.no 57. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 58. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 59. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 60. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Answer for Question No 1. is b

Answer for Question No 2. is c

Answer for Question No 3. is c

Answer for Question No 4. is c

Answer for Question No 5. is c

Answer for Question No 6. is a

Answer for Question No 7. is b

Answer for Question No 8. is a

Answer for Question No 9. is c

Answer for Question No 10. is d

Answer for Question No 11. is d

Answer for Question No 12. is b

Answer for Question No 13. is d

Answer for Question No 14. is b

Answer for Question No 15. is c

Answer for Question No 16. is b

Answer for Question No 17. is a

Answer for Question No 18. is a

Answer for Question No 19. is b

Answer for Question No 20. is d

Answer for Question No 21. is c

Answer for Question No 22. is d

Answer for Question No 23. is d

Answer for Question No 24. is b

Answer for Question No 25. is c

Answer for Question No 26. is a

Answer for Question No 27. is b

Answer for Question No 28. is c

Answer for Question No 29. is a

Answer for Question No 30. is a

Answer for Question No 31. is a

Answer for Question No 32. is c

Answer for Question No 33. is c

Answer for Question No 34. is c

Answer for Question No 35. is c

Answer for Question No 36. is b

Answer for Question No 37. is b

Answer for Question No 38. is b

Answer for Question No 39. is a

Answer for Question No 40. is a

Answer for Question No 41. is c

Answer for Question No 42. is c

Answer for Question No 43. is a

Answer for Question No 44. is a

Answer for Question No 45. is b

Answer for Question No 46. is b

Answer for Question No 47. is d

Answer for Question No 48. is a

Answer for Question No 49. is b

Answer for Question No 50. is b

Answer for Question No 51. is d

Answer for Question No 52. is d

Answer for Question No 53. is a

Answer for Question No 54. is a

Answer for Question No 55. is a

Answer for Question No 56. is d

Answer for Question No 57. is b

Answer for Question No 58. is a

Answer for Question No 59. is d

Answer for Question No 60. is b

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. For Apriori algorithm, what is the first phase?

- A : Pruning
- B : Partitioning
- C : Candidate generation
- D : Itemset generation

Q.no 2. What is an alternative form of Euclidean distance?

- A : L1 norm
- B : L2 norm
- C : Lmax norm
- D : L norm

Q.no 3. A multidimensional data model is typically organized around a central theme which is represented by

- A : Dimension table
- B : Fact table

C : Dimension table and Fact table

D : Dimension table or Fact table

Q.no 4. The Synonym for data mining is

A : Data warehouse

B : Knowledge discovery in database

C : ETL

D : Business Intelligence

Q.no 5. Cotraining is one form of

A : sampling

B : Reinforcement learning

C : unsupervised classification

D : semi-supervised classification

Q.no 6. Which angle is used to measure document similarity?

A : Sin

B : Tan

C : Cos

D : Sec

Q.no 7. OLAP database design is

A : Application-oriented

B : Object-oriented

C : Goal-oriented

D : Subject-oriented

Q.no 8. the positive tuples that were correctly labeled by the classifier are

A : True negatives (TN)

B : False negatives(FN)

C : False positives(FP)

D : True positives(TP)

Q.no 9. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 10. Postpruning is

A : Removing branches from fully grown tree

B : Stop constructing tree if this would result in the measure falling below a threshold

C : construting a new tree

D : Flow-Chart

Q.no 11. accuracy is used to measure

A : classifier's true abilities

B : classifier's analytic abilities

C : classifier's decision abilities

D : classifier's predictive abilities

Q.no 12. Hidden knowledge referred to

A : A set of databases from different vendors, possibly using different database paradigms

B : An approach to a problem that is not guaranteed to work but performs well in most cases

C : Information that is hidden in a database and that cannot be recovered by a simple SQL query

D : None of these

Q.no 13. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 14. In Data Characterization, class under study is called as?

A : Study Class

B : Intial Class

C : Target Class

D : Final Class

Q.no 15. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 16. Which is the keyword that distinguishes data warehouses from other data repository systems ?

A : Subject-oriented

B : Object-oriented

C : Client server

D : Time-invariant

Q.no 17. Color is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : numeric

Q.no 18. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 19. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 20. This is a visualization operation that rotates the data axes in view to provide an alternative data presentation

- A : Pivot
- B : Roll up
- C : Drill down
- D : Slice

Q.no 21. The confusion matrix is a useful tool for analyzing

- A : Regression
- B : Classification
- C : Sampling
- D : Cross validation

Q.no 22. To improve the accuracy of multiclass classification we can use

- A : cross validation
- B : sampling
- C : Error-detecting codes
- D : Error-correcting codes

Q.no 23. It is the main technique employed for data selection.

- A : Noise
- B : Sampling
- C : Clustering
- D : Histogram

Q.no 24. one-versus-one(OVO) and one-versus-all (OVA) classification involves

- A : more than two classes
- B : Only two classes
- C : Only one class
- D : No class

Q.no 25. A nearest neighbor approach is best used

- A : with large-sized datasets.

B : when irrelevant attributes have been removed from the data.

C : when a generalized model of the data is desirable.

D : when an explanation of what has been found is of primary importance.

Q.no 26. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

A : Multiclassification

B : Multi-label classification

C : Imbalanced classification

D : Binary Classification

Q.no 27. Which of the following is necessary operation to calculate dissimilarity between ordinal attributes?

A : Replacement of ordinal categories

B : Correlation coefficient

C : Discretization

D : Randomization

Q.no 28. Which of the following property typically does not hold for similarity measures between two objects ?

A : Symmetry

B : Definiteness

C : Triangle inequality

D : Transitive

Q.no 29. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) and (b)

Q.no 30. Lazy learner classification approach is

A : learner waits until the last minute before constructing model to classify

B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 31. Which of these distributions is used for a testing hypothesis?

A : Normal Distribution

B : Chi-Squared Distribution

C : Gamma Distribution

D : Poisson Distribution

Q.no 32. Which of the following operations are used to calculate proximity measures for ordinal attribute?

A : Replacement and discretization

B : Replacement and characterizarion

C : Replacement and normalization

D : Normalization and discretization

Q.no 33. Number of records are comparatively more in

A : OLAP

B : OLTP

C : Same in OLAP and OLTP

D : Can not compare

Q.no 34. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 35. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 36. Which is the wrong combination.

- A : True negative=correctly indentified
- B : False negative=incorrectly identified
- C : False positive=correctly identified
- D : True positive=correctly identified

Q.no 37. When you use cross validation in machine learning, it means

- A : you verify how accurate your model is on multiple and different subsets of data.
- B : you verify how accurate your model is on same dataset.
- C : you verify how accurate your model is on new dataset.
- D : you verify how accurate your model on unknown dataset

Q.no 38. A frequent pattern tree is a tree structure consisting of

- A : A frequent-item-node
- B : An item-prefix-tree
- C : A frequent-item-header table
- D : both B and C

Q.no 39. Frequent patterns generated from association can be used for classification is called

- A : Naïve Bays
- B : Associative Classification
- C : Preditctive Mining
- D : Decision Tree

Q.no 40. Some company wants to divide their customers into distinct groups to send offers this is an example of

- A : Data Extraction
- B : Data Classification
- C : Data Discrimination
- D : Data Selection

Q.no 41. The problem of finding hidden structure from unlabeled data is called as

- A : Supervised learning

- B : Unsupervised learning
- C : Reinforcement Learning
- D : Semisupervised learning

Q.no 42. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

- A : Precision = 0.89
- B : Precision = 0.23
- C : Precision = 0.45
- D : Precision = 0.75

Q.no 43. When do we use Manhattan distance in data mining?

- A : Dimension of the data decreases
- B : Dimension of the data increases
- C : Underfitting
- D : Moderate size of the dimensions

Q.no 44. precision of model is 0.75 and recall is 0.43 then F-Score is

- A : F-Score= 0.99
- B : F-Score= 0.84
- C : F-Score= 0.55
- D : F-Score= 0.49

Q.no 45. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

- A : min-max normalization
- B : z-score normalization
- C : decimal scaling
- D : decimal smoothing

Q.no 46. Which of the following sentence is FALSE regarding regression?

- A : It relates inputs to outputs.
- B : It is used for prediction.
- C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 47. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 48. Ordinal attribute has three distinct values such as Fair, Good, and Excellent.

If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 49. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 50. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 51. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 52. The cuboid that holds the lowest level of summarization is called as

- A : 0-D cuboid
- B : 1-D cuboid
- C : Base cuboid
- D : 2-D cuboid

Q.no 53. Which is the most well known association rule algorithm and is used in most commercial products.

- A : Apriori algorithm
- B : Pincer-search algorithm
- C : Distributed algorithm
- D : Partition algorithm

Q.no 54. Correlation analysis is used for

- A : handling missing values
- B : identifying redundant attributes
- C : handling different data formats
- D : eliminating noise

Q.no 55. Which of the following operation is required to calculate cosine similarity?

- A : Vector dot product
- B : Exponent
- C : Modulus
- D : Percentage

Q.no 56. What is the range of the angle between two term frequency vectors?

- A : Zero to Thirty
- B : Zero to Ninety
- C : Zero to One Eighty
- D : Zero to Forty Five

Q.no 57. How the bayesian network can be used to answer any query?

- A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 58. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 59. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 60. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Answer for Question No 1. is c

Answer for Question No 2. is b

Answer for Question No 3. is b

Answer for Question No 4. is b

Answer for Question No 5. is d

Answer for Question No 6. is c

Answer for Question No 7. is d

Answer for Question No 8. is d

Answer for Question No 9. is a

Answer for Question No 10. is a

Answer for Question No 11. is d

Answer for Question No 12. is c

Answer for Question No 13. is d

Answer for Question No 14. is c

Answer for Question No 15. is c

Answer for Question No 16. is a

Answer for Question No 17. is a

Answer for Question No 18. is b

Answer for Question No 19. is b

Answer for Question No 20. is a

Answer for Question No 21. is b

Answer for Question No 22. is d

Answer for Question No 23. is b

Answer for Question No 24. is a

Answer for Question No 25. is b

Answer for Question No 26. is a

Answer for Question No 27. is a

Answer for Question No 28. is c

Answer for Question No 29. is d

Answer for Question No 30. is a

Answer for Question No 31. is b

Answer for Question No 32. is c

Answer for Question No 33. is b

Answer for Question No 34. is c

Answer for Question No 35. is d

Answer for Question No 36. is c

Answer for Question No 37. is a

Answer for Question No 38. is d

Answer for Question No 39. is b

Answer for Question No 40. is b

Answer for Question No 41. is b

Answer for Question No 42. is d

Answer for Question No 43. is b

Answer for Question No 44. is c

Answer for Question No 45. is c

Answer for Question No 46. is d

Answer for Question No 47. is b

Answer for Question No 48. is c

Answer for Question No 49. is b

Answer for Question No 50. is a

Answer for Question No 51. is d

Answer for Question No 52. is c

Answer for Question No 53. is a

Answer for Question No 54. is b

Answer for Question No 55. is a

Answer for Question No 56. is b

Answer for Question No 57. is b

Answer for Question No 58. is a

Answer for Question No 59. is b

Answer for Question No 60. is d

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 2. accuracy is used to measure

A : classifier's true abilities

B : classifier's analytic abilities

C : classifier's decision abilities

D : classifier's predictive abilities

Q.no 3. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 4. The schema is collection of stars. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 5. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 6. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non- supervised

Q.no 7. The task of building decision model from labeled training data is called as

A : Supervised Learning

B : Unsupervised Learning

C : Reinforcement Learning

D : Structure Learning

Q.no 8. Postpruning is

A : Removing branches from fully grown tree

B : Stop constructing tree if this would result in the measure falling below a threshold

C : constructing a new tree

D : Flow-Chart

Q.no 9. What are two steps of tree pruning work?

- A : Pessimistic pruning and Optimistic pruning
- B : Postpruning and Prepruning
- C : Cost complexity pruning and time complexity pruning
- D : None of the options

Q.no 10. Which of the following is direct application of frequent itemset mining?

- A : Social Network Analysis
- B : Market Basket Analysis
- C : Outlier Detection
- D : Intrusion Detection

Q.no 11. What technique can be used to improve the efficiency of apriori algorithm?

- A : Hash-based techniques
- B : Transaction Reduction
- C : Candidate generation
- D : Both (a) and (b)

Q.no 12. sensitivity is also known as

- A : false rate
- B : recall
- C : negative rate
- D : recognition rate

Q.no 13. Which of these is not a frequent pattern mining algorithm?

- A : Decision trees
- B : Eclat
- C : FP growth
- D : Apriori

Q.no 14. Bayesian classification is based on

- A : probability for the hypothesis
- B : Support
- C : tree induction

D : Trees

Q.no 15. to evaluate a classifier's quality we use

A : confusion matrix

B : error detection code

C : error correction code

D : classifier

Q.no 16. In Data Characterization, class under study is called as?

A : Study Class

B : Intial Class

C : Target Class

D : Final Class

Q.no 17. Data matrix is also called as

A : Object by object structure

B : Object by attribute structure

C : Attribute by attribute structure

D : Attribute by object structure

Q.no 18. Multilevel association rules can be mined efficiently using

A : Support

B : Confidence

C : Support count

D : Concept Hierarchies under support-confidence framework

Q.no 19. Which is the keyword that distinguishes data warehouses from other data repository systems ?

A : Subject-oriented

B : Object-oriented

C : Client server

D : Time-invariant

Q.no 20. A person trained to interact with a human expert in order to capture their knowledge.

A : knowledge programmer

B : knowledge developer

C : knowledge engineer

D : knowledge extractor

Q.no 21. The Galaxy Schema is also called as

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 22. Which of these distributions is used for a testing hypothesis?

A : Normal Distribution

B : Chi-Squared Distribution

C : Gamma Distribution

D : Poisson Distribution

Q.no 23. How will you counter over-fitting in decision tree?

A : By creating new rules

B : By pruning the longer rules

C : Both By pruning the longer rules' and ' By creating new rules'

D : BY creating new tree

Q.no 24. Some company wants to divide their customers into distinct groups to send offers this is an example of

A : Data Extraction

B : Data Classification

C : Data Discrimination

D : Data Selection

Q.no 25. In multilevel association rules, which strategy is employed

A : Top-down

B : Recursive

C : Bottom-up

D : Divide and conquer

Q.no 26. Which of the following activities is a data mining task?

A : Monitoring the heart rate of a patient for abnormalities

B : Extracting the frequencies of a sound wave

C : Predicting the outcomes of tossing a (fair) pair of dice

D : Dividing the customers of a company according to their profitability

Q.no 27. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) and (b)

Q.no 28. Which of the following probabilities are used in the Bayes theorem.

A : $P(C_i|X)$

B : $P(C_i)$

C : $P(X|C_i)$

D : $P(X)$

Q.no 29. One of the most well known software used for classification is

A : Java

B : C4.5

C : Oracle

D : C++

Q.no 30. Which of the following property typically does not hold for similarity measures between two objects ?

A : Symmetry

B : Definiteness

C : Triangle inequality

D : Transitive

Q.no 31. K-fold Cross Validation envisages

- A : partitioning of the original sample into one sample.
- B : partitioning of the original sample into 'k' equal sized sub-samples.
- C : partitioning of the original sample into 'k' unequal sized sub-samples.
- D : partitioning of the original sample into 'k' random samples.

Q.no 32. What is another name of data matrix?

- A : Single mode
- B : Two mode
- C : Multi mode
- D : Large mode

Q.no 33. The fact table contains

- A : The names of the facts
- B : Keys to each of the related dimension tables
- C : Facts and keys
- D : Facts or keys

Q.no 34. Which of the following is a predictive model?

- A : Clustering
- B : Regression
- C : Summarization
- D : Association rules

Q.no 35. A lattice of cuboids is called as

- A : Data cube
- B : Dimesnion lattice
- C : Master lattice
- D : Fact table

Q.no 36. The confusion matrix is a useful tool for analyzing

- A : Regression
- B : Classification

C : Sampling

D : Cross validation

Q.no 37. OLAP Summarization means

A : Consolidated

B : Primitive

C : Highly detailed

D : Recent data

Q.no 38. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 39. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

A : Replacement discretization and distance measure

B : Replacement characterization and distance measure

C : Normalization discretization and distance measure

D : Replacement normalization and distance measure

Q.no 40. The data cubes are generally

A : 1 Dimensional

B : 2 Dimensional

C : 3 Dimensional

D : n-Dimensional

Q.no 41. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 42. What is the range of the angle between two term frequency vectors?

- A : Zero to Thirty
- B : Zero to Ninety
- C : Zero to One Eighty
- D : Zero to Fourty Five

Q.no 43. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

- A : Precision
- B : Classifier performance
- C : Recall
- D : F-measure

Q.no 44. A concept hierarchy that is a total or partial order among attributes in a database schema is called

- A : Mixed hierarchy
- B : Total hierarchy
- C : Schema hierarchy
- D : Concept generalization

Q.no 45. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

- A : smooth by bin boundaries
- B : smooth by bin median
- C : smooth by bin means
- D : smooth by bin values

Q.no 46. These server performs the faster computation

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 47. The problem of finding hidden structure from unlabeled data is called as

- A : Supervised learning

- B : Unsupervised learning
- C : Reinforcement Learning
- D : Semisupervised learning

Q.no 48. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

- A : Primary
- B : Secondary
- C : Superkey
- D : Candidate

Q.no 49. What does a Pearson's product-moment allow you to identify?

- A : Whether there is a relationship between variables
- B : Whether there is a significant effect and interaction of independent variables
- C : Whether there is a significant difference between variables
- D : Whether there is a significant effect and interaction of dependent variables

Q.no 50. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

- A : support($V1$) is greater than support ($V2$)
- B : support($V3$) is greater than support ($V2$)
- C : support($V1$) is greater than support($V3$)
- D : support($V2$) is greater than support($V3$)

Q.no 51. precision of model is 0.75 and recall is 0.43 then F-Score is

- A : F-Score= 0.99
- B : F-Score= 0.84
- C : F-Score= 0.55
- D : F-Score= 0.49

Q.no 52. Cost complexity pruning algorithm is used in?

- A : CART
- B : C4.5
- C : ID3

D : ALL

Q.no 53. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 54. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 55. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 56. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 57. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 58. This technique uses mean and standard deviation scores to transform real-valued attributes.

- A : decimal scaling
- B : min-max normalization
- C : z-score normalization
- D : logarithmic normalization

Q.no 59. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

- A : Suffix path
- B : FP-tree
- C : Prefix path
- D : Condition pattern base

Q.no 60. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

- A : 25
- B : 210
- C : 62
- D : 30

Answer for Question No 1. is a

Answer for Question No 2. is d

Answer for Question No 3. is d

Answer for Question No 4. is c

Answer for Question No 5. is a

Answer for Question No 6. is c

Answer for Question No 7. is a

Answer for Question No 8. is a

Answer for Question No 9. is b

Answer for Question No 10. is b

Answer for Question No 11. is d

Answer for Question No 12. is b

Answer for Question No 13. is a

Answer for Question No 14. is a

Answer for Question No 15. is a

Answer for Question No 16. is c

Answer for Question No 17. is b

Answer for Question No 18. is d

Answer for Question No 19. is a

Answer for Question No 20. is c

Answer for Question No 21. is c

Answer for Question No 22. is b

Answer for Question No 23. is b

Answer for Question No 24. is b

Answer for Question No 25. is a

Answer for Question No 26. is a

Answer for Question No 27. is d

Answer for Question No 28. is a

Answer for Question No 29. is b

Answer for Question No 30. is c

Answer for Question No 31. is d

Answer for Question No 32. is b

Answer for Question No 33. is c

Answer for Question No 34. is b

Answer for Question No 35. is a

Answer for Question No 36. is b

Answer for Question No 37. is a

Answer for Question No 38. is d

Answer for Question No 39. is d

Answer for Question No 40. is d

Answer for Question No 41. is a

Answer for Question No 42. is b

Answer for Question No 43. is b

Answer for Question No 44. is c

Answer for Question No 45. is d

Answer for Question No 46. is b

Answer for Question No 47. is b

Answer for Question No 48. is d

Answer for Question No 49. is a

Answer for Question No 50. is b

Answer for Question No 51. is c

Answer for Question No 52. is a

Answer for Question No 53. is a

Answer for Question No 54. is d

Answer for Question No 55. is b

Answer for Question No 56. is a

Answer for Question No 57. is b

Answer for Question No 58. is c

Answer for Question No 59. is d

Answer for Question No 60. is d

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Supervised learning and unsupervised clustering both require at least one

A : hidden attribute

B : output attribute

C : input attribute

D : categorical attribute

Q.no 2. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 3. Cotraining is one form of

A : sampling

B : Reinforcement learning

C : unsupervised classification

D : semi-supervised classification

Q.no 4. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 5. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 6. For Apriori algorithm, what is the first phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 7. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 8. The Synonym for data mining is

A : Data warehouse

B : Knowledge discovery in database

C : ETL

D : Business Intelligence

Q.no 9. A data cube is defined by

A : Dimensions

B : Facts

C : Dimensions and Facts

D : Dimensions or Facts

Q.no 10. Constraint-based mining provides

A : User flexibility

B : System optimization

C : Both (a) and (b)

D : High computation

Q.no 11. Self-training is the simplest form of

A : supervised classification

B : semi-supervised classification

C : unsupervised classification

D : regression

Q.no 12. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 13. The schema is collection of stars. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 14. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 15. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 16. Which of the following are methods for supervised classification?

A : Decision tree

B : K-Means

C : Hierarchical

D : Apriori

Q.no 17. Postpruning is

A : Removing branches from fully grown tree

B : Stop constructing tree if this would result in the measure falling below a threshold

C : constructing a new tree

D : Flow-Chart

Q.no 18. This is a visualization operation that rotates the data axes in view to provide an alternative data presentation

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 19. The example of knowledge type constraints in constraint based mining is

A : Association or Correlation

B : Rule templates

C : Task relevant data

D : Threshold measures

Q.no 20. The distance between two points calculated using Pythagoras theorem is

- A : Supremum distance
- B : Euclidean distance
- C : Linear distance
- D : Manhattan Distance

Q.no 21. K-fold Cross Validation envisages

- A : partitioning of the original sample into one sample.
- B : partitioning of the original sample into 'k' equal sized sub-samples.
- C : partitioning of the original sample into 'k' unequal sized sub-samples.
- D : partitioning of the original sample into 'k' random samples.

Q.no 22. Which of the following is a predictive model?

- A : Clustering
- B : Regression
- C : Summarization
- D : Association rules

Q.no 23. The ultimate purpose of Frequent itemset mining is

- A : For business decision-making process
- B : For generation of association rules
- C : For generation of candidate set
- D : For generation of interesting patterns

Q.no 24. The Microsoft SQL Server 2000 is the example of

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 25. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

- A : Multiclassification

B : Multi-label classification

C : Imbalanced classification

D : Binary Classification

Q.no 26. A lattice of cuboids is called as

A : Data cube

B : Dimesnion lattice

C : Master lattice

D : Fact table

Q.no 27. Specificity is also referred to as

A : true negative rate

B : correctness

C : misclassification rate

D : True positive rate

Q.no 28. Which of the following property typically does not hold for similarity measures between two objects ?

A : Symmetry

B : Definiteness

C : Triangle inequality

D : Transitive

Q.no 29. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 30. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 31. The data cubes are generally

A : 1 Dimensional

B : 2 Dimensional

C : 3 Dimensional

D : n-Dimensional

Q.no 32. The confusion matrix is a useful tool for analyzing

A : Regression

B : Classification

C : Sampling

D : Cross validation

Q.no 33. Which of these distributions is used for a testing hypothesis?

A : Normal Distribution

B : Chi-Squared Distribution

C : Gamma Distribution

D : Poisson Distribution

Q.no 34. Which of the following operations are used to calculate proximity measures for ordinal attribute?

A : Replacement and discretization

B : Replacement and characterization

C : Replacement and normalization

D : Normalization and discretization

Q.no 35. Multilevel association rule mining is

A : Association rules generated from candidate-generation method

B : Association rules generated from without candidate-generation method

C : Association rules generated from mining data at multiple abstraction level

D : Association rules generated from frequent itemsets

Q.no 36. If A, B are two sets of items, and A is a subset of B. Which of the following statement is always true?

A : Support(A) is less than or equal to Support(B)

B : Support(A) is greater than or equal to Support(B)

C : Support(A) is equal to Support(B)

D : Support(A) is not equal to Support(B)

Q.no 37. What do you mean by support(A)?

A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 38. What type of data do you need for a chi-square test?

A : Categorical

B : Ordinal

C : Interval

D : Scales

Q.no 39. In multilevel association rules, which strategy is employed

A : Top-down

B : Recursive

C : Bottom-up

D : Divide and conquer

Q.no 40. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

A : Imbalanced problems should not be measured using Accuracy metric.

B : Accuracy metric is not a good idea for imbalanced class problems.

C : Precision and recall metrics aren't good for imbalanced class problems.

D : Precision and recall metrics are good for imbalanced class problems.

Q.no 41. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 42. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 43. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 44. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 45. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Fourty Five

Q.no 46. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 47. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 48. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 49. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 50. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 51. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 52. The cuboid that holds the lowest level of summarization is called as

- A : 0-D cuboid
- B : 1-D cuboid
- C : Base cuboid
- D : 2-D cuboid

Q.no 53. Correlation analysis is used for

- A : handling missing values
- B : identifying redundant attributes
- C : handling different data formats
- D : eliminating noise

Q.no 54. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

- A : Suffix path
- B : FP-tree
- C : Prefix path
- D : Condition pattern base

Q.no 55. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

- A : Precision
- B : Classifier performance
- C : Recall
- D : F-measure

Q.no 56. Transforming a 3-D cube into a series of 2-D planes is the example of

- A : Pivot
- B : Roll up
- C : Drill down
- D : Slice

Q.no 57. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

- A : support($V1$) is greater than support ($V2$)

B : support(V3) is greater than support (V2)

C : support(V1) is greater than support(V3)

D : support(V2) is greater than support(V3)

Q.no 58. Which operation is required to calculate Hamming distance between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 59. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 60. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Answer for Question No 1. is c

Answer for Question No 2. is a

Answer for Question No 3. is d

Answer for Question No 4. is c

Answer for Question No 5. is b

Answer for Question No 6. is c

Answer for Question No 7. is b

Answer for Question No 8. is b

Answer for Question No 9. is c

Answer for Question No 10. is c

Answer for Question No 11. is b

Answer for Question No 12. is d

Answer for Question No 13. is c

Answer for Question No 14. is d

Answer for Question No 15. is c

Answer for Question No 16. is a

Answer for Question No 17. is a

Answer for Question No 18. is a

Answer for Question No 19. is a

Answer for Question No 20. is b

Answer for Question No 21. is d

Answer for Question No 22. is b

Answer for Question No 23. is a

Answer for Question No 24. is c

Answer for Question No 25. is a

Answer for Question No 26. is a

Answer for Question No 27. is a

Answer for Question No 28. is c

Answer for Question No 29. is d

Answer for Question No 30. is c

Answer for Question No 31. is d

Answer for Question No 32. is b

Answer for Question No 33. is b

Answer for Question No 34. is c

Answer for Question No 35. is c

Answer for Question No 36. is b

Answer for Question No 37. is c

Answer for Question No 38. is a

Answer for Question No 39. is a

Answer for Question No 40. is c

Answer for Question No 41. is a

Answer for Question No 42. is d

Answer for Question No 43. is a

Answer for Question No 44. is d

Answer for Question No 45. is b

Answer for Question No 46. is d

Answer for Question No 47. is a

Answer for Question No 48. is b

Answer for Question No 49. is a

Answer for Question No 50. is b

Answer for Question No 51. is a

Answer for Question No 52. is c

Answer for Question No 53. is b

Answer for Question No 54. is d

Answer for Question No 55. is b

Answer for Question No 56. is a

Answer for Question No 57. is b

Answer for Question No 58. is d

Answer for Question No 59. is c

Answer for Question No 60. is a

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. A data matrix in which attributes are of the same type and asymmetric is called

- A : Pattern matrix
- B : Sparse data matrix
- C : Document term matrix
- D : Normal matrix

Q.no 2. Which of the following is direct application of frequent itemset mining?

- A : Social Network Analysis
- B : Market Basket Analysis
- C : Outlier Detection
- D : Intrusion Detection

Q.no 3. CART stands for

- A : Regression
- B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 4. What are two steps of tree pruning work?

A : Pessimistic pruning and Optimistic pruning

B : Postpruning and Prepruning

C : Cost complexity pruning and time complexity pruning

D : None of the options

Q.no 5. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 6. What is an alternative form of Euclidean distance?

A : L1 norm

B : L2 norm

C : Lmax norm

D : L norm

Q.no 7. Which of the following are methods for supervised classification?

A : Decision tree

B : K-Means

C : Hierarchical

D : Apriori

Q.no 8. A decision tree is also known as

A : general tree

B : binary tree

C : prediction tree

D : None of the options

Q.no 9. What technique can be used to improve the efficiency of apriori algorithm?

- A : Hash-based techniques
- B : Transaction Reduction
- C : Candidate generation
- D : Both (a) and (b)

Q.no 10. Which is the keyword that distinguishes data warehouses from other data repository systems ?

- A : Subject-oriented
- B : Object-oriented
- C : Client server
- D : Time-invariant

Q.no 11. The problem of agents to learn from the environment by their interactions with dynamic environment is done in

- A : Reinforcement learning
- B : Multi-label classification
- C : Binary Classification
- D : Multiclassification

Q.no 12. A data cube is defined by

- A : Dimensions
- B : Facts
- C : Dimensions and Facts
- D : Dimensions or Facts

Q.no 13. Which angle is used to measure document similarity?

- A : Sin
- B : Tan
- C : Cos
- D : Sec

Q.no 14. Data matrix is also called as

- A : Object by object structure
- B : Object by attribute structure

C : Attribute by attribute structure

D : Attribute by object structure

Q.no 15. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 16. Which of the following is not frequent pattern?

A : Itemsets

B : Subsequences

C : Substructures

D : Associations

Q.no 17. Which of these is not a frequent pattern mining algorithm?

A : Decision trees

B : Eclat

C : FP growth

D : Apriori

Q.no 18. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 19. The fact is also called as

A : Dimension

B : Key

C : Schema

D : Measure

Q.no 20. Training process that generates tree is called as

- A : Pruning
- B : Rule generation
- C : Induction
- D : splitting

Q.no 21. The Microsoft SQL Server 2000 is the example of

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 22. The Galaxy Schema is also called as

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 23. If A, B are two sets of items, and A is a subset of B. Which of the following statement is always true?

- A : Support(A) is less than or equal to Support(B)
- B : Support(A) is greater than or equal to Support(B)
- C : Support(A) is equal to Support(B)
- D : Support(A) is not equal to Support(B)

Q.no 24. What type of data do you need for a chi-square test?

- A : Categorical
- B : Ordinal
- C : Interval
- D : Scales

Q.no 25. K-fold Cross Validation envisages

- A : partitioning of the original sample into one sample.
- B : partitioning of the original sample into 'k' equal sized sub-samples.

C : partitioning of the original sample into 'k' unequal sized sub-samples.

D : partitioning of the original sample into 'k' random samples.

Q.no 26. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 27. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 28. Lazy learner classification approach is

A : learner waits until the last minute before constructing model to classify

B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 29. Joins will be needed to execute the query. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 30. What is uniform support in multilevel association rule mining?

A : Use of minimum support

B : Use of minimum support and confidence

C : Use of same minimum threshold at each abstraction level

D : Use of minimum support and support count

Q.no 31. How will you counter over-fitting in decision tree?

- A : By creating new rules
- B : By pruning the longer rules
- C : Both By pruning the longer rules' and ' By creating new rules'
- D : BY creating new tree

Q.no 32. Which of these distributions is used for a testing hypothesis?

- A : Normal Distribution
- B : Chi-Squared Distribution
- C : Gamma Distribution
- D : Poisson Distribution

Q.no 33. Sensitivity is also referred to as

- A : misclassification rate
- B : true negative rate
- C : True positive rate
- D : correctness

Q.no 34. Which statement is true about the KNN algorithm?

- A : All attribute values must be categorical
- B : The output attribute must be cateogrical.
- C : Attribute values may be either categorical or numeric.
- D : All attributes must be numeric.

Q.no 35. Every key structure in the data warehouse contains a time element

- A : records
- B : Explicitly
- C : Implicitly and explicitly
- D : Implicitly or explicitly

Q.no 36. Which of the following is necessary operation to calculate dissimilarity between ordinal attributes?

- A : Replacement of ordinal categories
- B : Correlation coefficient

C : Discretization

D : Randomization

Q.no 37. The frequent-item-header-table consists of number fields

A : Only one

B : Two

C : Three

D : Four

Q.no 38. Which of the following is a predictive model?

A : Clustering

B : Regression

C : Summarization

D : Association rules

Q.no 39. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 40. The confusion matrix is a useful tool for analyzing

A : Regression

B : Classification

C : Sampling

D : Cross validation

Q.no 41. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 42. Which operation is required to calculate Hamming distance between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 43. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 44. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 45. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 46. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 47. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Traingle inequality

Q.no 48. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 49. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 50. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 51. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 52. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 53. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 54. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 55. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 56. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 57. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Forty Five

Q.no 58. Ordinal attribute has three distinct values such as Fair, Good, and Excellent.

If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 59. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 60. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Answer for Question No 1. is b

Answer for Question No 2. is b

Answer for Question No 3. is c

Answer for Question No 4. is b

Answer for Question No 5. is b

Answer for Question No 6. is b

Answer for Question No 7. is a

Answer for Question No 8. is c

Answer for Question No 9. is d

Answer for Question No 10. is a

Answer for Question No 11. is a

Answer for Question No 12. is c

Answer for Question No 13. is c

Answer for Question No 14. is b

Answer for Question No 15. is a

Answer for Question No 16. is d

Answer for Question No 17. is a

Answer for Question No 18. is c

Answer for Question No 19. is d

Answer for Question No 20. is c

Answer for Question No 21. is c

Answer for Question No 22. is c

Answer for Question No 23. is b

Answer for Question No 24. is a

Answer for Question No 25. is d

Answer for Question No 26. is d

Answer for Question No 27. is c

Answer for Question No 28. is a

Answer for Question No 29. is b

Answer for Question No 30. is c

Answer for Question No 31. is b

Answer for Question No 32. is b

Answer for Question No 33. is c

Answer for Question No 34. is d

Answer for Question No 35. is d

Answer for Question No 36. is a

Answer for Question No 37. is b

Answer for Question No 38. is b

Answer for Question No 39. is b

Answer for Question No 40. is b

Answer for Question No 41. is b

Answer for Question No 42. is d

Answer for Question No 43. is d

Answer for Question No 44. is b

Answer for Question No 45. is d

Answer for Question No 46. is b

Answer for Question No 47. is a

Answer for Question No 48. is d

Answer for Question No 49. is c

Answer for Question No 50. is c

Answer for Question No 51. is a

Answer for Question No 52. is a

Answer for Question No 53. is a

Answer for Question No 54. is a

Answer for Question No 55. is a

Answer for Question No 56. is b

Answer for Question No 57. is b

Answer for Question No 58. is c

Answer for Question No 59. is b

Answer for Question No 60. is d

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. What is gini index?

- A : It is a type of index structure
- B : It is a measure of purity
- C : Both options except none
- D : None of the options

Q.no 2. This is a visualization operation that rotates the data axes in view to provide an alternative data presentation

- A : Pivot
- B : Roll up
- C : Drill down
- D : Slice

Q.no 3. Bayesian classification is based on

- A : probability for the hypothesis
- B : Support

C : tree induction

D : Trees

Q.no 4. accuracy is used to measure

A : classifier's true abilities

B : classifier's analytic abilities

C : classifier's decision abilities

D : classifier's predictive abilities

Q.no 5. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 6. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 7. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 8. Supervised learning and unsupervised clustering both require at least one

A : hidden attribute

B : output attribute

C : input attribute

D : categorical attribute

Q.no 9. Entropy is a measure of

A : impurity of an attribute

B : Purity of an attribute

C : Weight of an attribute

D : Class of an attribute

Q.no 10. For Apriori algorithm, what is the first phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 11. What are closed itemsets?

A : An itemset for which at least super-itemset has same confidence

B : An itemset whose no proper super-itemset has same support

C : An itemset for which at least one proper super-itemset has same support

D : An itemset whose no proper super-itemset has same confidence

Q.no 12. Which of the following are methods for supervised classification?

A : Decision tree

B : K-Means

C : Hierarchical

D : Apriori

Q.no 13. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 14. the negative tuples that were correctly labeled by the classifier

A : False positives(FP)

B : True positives(TP)

C : True negatives (TN)

D : False negatives(FN)

Q.no 15. Which is the keyword that distinguishes data warehouses from other data repository systems ?

A : Subject-oriented

B : Object-oriented

C : Client server

D : Time-invariant

Q.no 16. Which of the following is correct about Proximity measures?

A : Similarity

B : Dissimilarity

C : Similarity as well as Dissimilarity

D : Neither similarity nor dissimilarity

Q.no 17. Training process that generates tree is called as

A : Pruning

B : Rule generation

C : Induction

D : splitting

Q.no 18. Color is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : numeric

Q.no 19. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 20. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 21. Which statement is true about the KNN algorithm?

A : All attribute values must be categorical

B : The output attribute must be categorical.

C : Attribute values may be either categorical or numeric.

D : All attributes must be numeric.

Q.no 22. In which step of Knowledge Discovery, multiple data sources are combined?

A : Data Cleaning

B : Data Integration

C : Data Selection

D : Data Transformation

Q.no 23. Which is the wrong combination.

A : True negative=correctly identified

B : False negative=incorrectly identified

C : False positive=correctly identified

D : True positive=correctly identified

Q.no 24. Frequent patterns generated from association can be used for classification is called

A : Naïve Bays

B : Associative Classification

C : Predictive Mining

D : Decision Tree

Q.no 25. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

- A : Imbalanced problems should not be measured using Accuracy metric.
- B : Accuracy metric is not a good idea for imbalanced class problems.
- C : Precision and recall metrics aren't good for imbalanced class problems.
- D : Precision and recall metrics are good for imbalanced class problems.

Q.no 26. What is the approach of basic algorithm for decision tree induction?

- A : Greedy
- B : Top Down
- C : Procedural
- D : Step by Step

Q.no 27. Which of the following operations are used to calculate proximity measures for ordinal attribute?

- A : Replacement and discretization
- B : Replacement and characterization
- C : Replacement and normalization
- D : Normalization and discretization

Q.no 28. A nearest neighbor approach is best used

- A : with large-sized datasets.
- B : when irrelevant attributes have been removed from the data.
- C : when a generalized model of the data is desirable.
- D : when an explanation of what has been found is of primary importance.

Q.no 29. Which of the following is a predictive model?

- A : Clustering
- B : Regression
- C : Summarization
- D : Association rules

Q.no 30. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 31. Which statement is true about the decision tree attribute selection process

A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 32. The fact table contains

A : The names of the facts

B : Keys to each of the related dimension tables

C : Facts and keys

D : Facts or keys

Q.no 33. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

A : Replacement discretization and distance measure

B : Replacement characterization and distance measure

C : Normalization discretization and distance measure

D : Replacement normalization and distance measure

Q.no 34. K-fold Cross Validation envisages

A : partitioning of the original sample into one sample.

B : partitioning of the original sample into 'k' equal sized sub-samples.

C : partitioning of the original sample into 'k' unequal sized sub-samples.

D : partitioning of the original sample into 'k' random samples.

Q.no 35. Learning with a complete system in mind with reference to interactions among the systems and subsystems with proper understanding of systemic boundaries is

A : Multi-label classification

B : Reinforcement learning

C : Systemic learning

D : Machine Learning

Q.no 36. Cross validation involves

A : testing the machine on all possible ways by substituting the original sample into training set

B : testing the machine on all possible ways by dividing the original sample into training and validation sets.

C : testing the machine with only validation sets

D : testing the machine on only testing datasets.

Q.no 37. The confusion matrix is a useful tool for analyzing

A : Regression

B : Classification

C : Sampling

D : Cross validation

Q.no 38. In Apriori algorithm, for generating e. g. 5 itemsets, we use

A : Frequent 5 itemsets

B : Frequent 3 itemsets

C : Frequent 4 itemsets

D : Frequent 6 itemsets

Q.no 39. In a decision tree each leaf node represents

A : Test conditions

B : Class labels

C : Attribute values

D : Decision

Q.no 40. What is another name of data matrix?

A : Single mode

B : Two mode

C : Multi mode

D : Large mode

Q.no 41. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 42. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 43. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 44. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 45. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 46. The tables are easy to maintain and saves storage space.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 47. Which of the following operation is required to calculate cosine similarity?

- A : Vector dot product
- B : Exponent
- C : Modulus
- D : Percentage

Q.no 48. How the bayesian network can be used to answer any query?

- A : Full distribution
- B : Joint distribution
- C : Partial distribution
- D : All of the mentioned

Q.no 49. Transforming a 3-D cube into a series of 2-D planes is the example of

- A : Pivot
- B : Roll up
- C : Drill down
- D : Slice

Q.no 50. Which of the following sentence is FALSE regarding regression?

- A : It relates inputs to outputs.
- B : It is used for prediction.
- C : It may be used for interpretation.
- D : It discovers causal relationships.

Q.no 51. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

- A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 52. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 53. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Q.no 54. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 55. Which operation is required to calculate Hamming distacne between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 56. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 57. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 58. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 59. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 60. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Answer for Question No 1. is b

Answer for Question No 2. is a

Answer for Question No 3. is a

Answer for Question No 4. is d

Answer for Question No 5. is d

Answer for Question No 6. is a

Answer for Question No 7. is c

Answer for Question No 8. is c

Answer for Question No 9. is a

Answer for Question No 10. is c

Answer for Question No 11. is b

Answer for Question No 12. is a

Answer for Question No 13. is b

Answer for Question No 14. is c

Answer for Question No 15. is a

Answer for Question No 16. is c

Answer for Question No 17. is c

Answer for Question No 18. is a

Answer for Question No 19. is b

Answer for Question No 20. is b

Answer for Question No 21. is d

Answer for Question No 22. is b

Answer for Question No 23. is c

Answer for Question No 24. is b

Answer for Question No 25. is c

Answer for Question No 26. is a

Answer for Question No 27. is c

Answer for Question No 28. is b

Answer for Question No 29. is b

Answer for Question No 30. is b

Answer for Question No 31. is b

Answer for Question No 32. is c

Answer for Question No 33. is d

Answer for Question No 34. is d

Answer for Question No 35. is c

Answer for Question No 36. is c

Answer for Question No 37. is b

Answer for Question No 38. is c

Answer for Question No 39. is b

Answer for Question No 40. is b

Answer for Question No 41. is a

Answer for Question No 42. is b

Answer for Question No 43. is d

Answer for Question No 44. is a

Answer for Question No 45. is c

Answer for Question No 46. is b

Answer for Question No 47. is a

Answer for Question No 48. is b

Answer for Question No 49. is a

Answer for Question No 50. is d

Answer for Question No 51. is d

Answer for Question No 52. is d

Answer for Question No 53. is b

Answer for Question No 54. is d

Answer for Question No 55. is d

Answer for Question No 56. is a

Answer for Question No 57. is a

Answer for Question No 58. is d

Answer for Question No 59. is a

Answer for Question No 60. is c

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. The Synonym for data mining is

- A : Data warehouse
- B : Knowledge discovery in database
- C : ETL
- D : Business Intelligence

Q.no 2. Self-training is the simplest form of

- A : supervised classification
- B : semi-supervised classification
- C : unsupervised classification
- D : regression

Q.no 3. Which one of the following is true for decision tree

- A : Decision tree is useful in decision making
- B : Decision tree is similar to OLTP

C : Decision Tree is similar to cluster analysis

D : Decision tree needs to find probabilities of hypothesis

Q.no 4. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 5. The problem of agents to learn from the environment by their interactions with dynamic environment is done in

A : Reinforcement learning

B : Multi-label classification

C : Binary Classification

D : Multiclassification

Q.no 6. Supervised learning and unsupervised clustering both require at least one

A : hidden attribute

B : output attribute

C : input attribute

D : categorical attribute

Q.no 7. Color is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : numeric

Q.no 8. Constraint-based mining provides

A : User flexibility

B : System optimization

C : Both (a) and (b)

D : High computation

Q.no 9. Each dimension is represented by only one table. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 10. What does the leaf node in decision tree indicates

- A : sub tree
- B : class label
- C : testing node
- D : condition

Q.no 11. Height is an example of which type of attribute

- A : Nominal
- B : Binary
- C : Ordinal
- D : Numeric

Q.no 12. What are closed frequent itemsets?

- A : A closed itemset
- B : A frequent itemset
- C : An itemset which is both closed and frequent
- D : Not frequent itemset

Q.no 13. For Apriori algorithm, what is the second phase?

- A : Pruning
- B : Partitioning
- C : Candidate generation
- D : Itemset generation

Q.no 14. Multilevel association rules can be mined efficiently using

- A : Support
- B : Confidence

C : Support count

D : Concept Hierarchies under support-confidence framework

Q.no 15. What are two steps of tree pruning work?

A : Pessimistic pruning and Optimistic pruning

B : Postpruning and Prepruning

C : Cost complexity pruning and time complexity pruning

D : None of the options

Q.no 16. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 17. What are closed itemsets?

A : An itemset for which at least super-itemset has same confidence

B : An itemset whose no proper super-itemset has same support

C : An itemset for which at least one proper super-itemset has same support

D : An itemset whose no proper super-itemset has same confidence

Q.no 18. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 19. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 20. Choose the correct concept hierarchy.

- A : city < street < state < country
- B : street < city < state < country
- C : street > city > state > country
- D : street > city > country > state

Q.no 21. How will you counter over-fitting in decision tree?

- A : By creating new rules
- B : By pruning the longer rules
- C : Both By pruning the longer rules' and ' By creating new rules'
- D : BY creating new tree

Q.no 22. A frequent pattern tree is a tree structure consisting of

- A : A frequent-item-node
- B : An item-prefix-tree
- C : A frequent-item-header table
- D : both B and C

Q.no 23. A nearest neighbor approach is best used

- A : with large-sized datasets.
- B : when irrelevant attributes have been removed from the data.
- C : when a generalized model of the data is desireable.
- D : when an explanation of what has been found is of primary importance.

Q.no 24. Which of the following activities is a data mining task?

- A : Monitoring the heart rate of a patient for abnormalities
- B : Extracting the frequencies of a sound wave
- C : Predicting the outcomes of tossing a (fair) pair of dice
- D : Dividing the customers of a company according to their profitability

Q.no 25. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

- A : Replacement discretization and distance measure

B : Replacement characterizarion and distance measure

C : Normalization discretization and distance measure

D : Replacement normalization and distance measure

Q.no 26. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 27. What is uniform support in multilevel association rule minig?

A : Use of minimum support

B : Use of minimum support and confidence

C : Use of same minimum threshold at each abstraction level

D : Use of minimum support and support count

Q.no 28. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

A : Imbalanced problems should not be measured using Accuracy metric.

B : Accuracy metric is not a good idea for imbalanced class problems.

C : Precision and recall metrics aren't good for imbalanced class problems.

D : Precision and recall metrics are good for imbalanced class problems.

Q.no 29. OLAP Summarization means

A : Consolidated

B : Primitive

C : Highly detailed

D : Recent data

Q.no 30. The Microsoft SQL Server 2000 is the example of

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 31. Holdout and random subsampling are common techniques for assessing

A : K-Fold validation

B : cross validation

C : accuracy

D : sampling

Q.no 32. Which of the following probabilities are used in the Bayes theorem.

A : $P(C_i|X)$

B : $P(C_i)$

C : $P(X|C_i)$

D : $P(X)$

Q.no 33. Multilevel association rule mining is

A : Association rules generated from candidate-generation method

B : Association rules generated from without candidate-generation method

C : Association rules generated from mining data at multiple abstraction level

D : Association rules generated from frequent itemsets

Q.no 34. Which of these distributions is used for a testing hypothesis?

A : Normal Distribution

B : Chi-Squared Distribution

C : Gamma Distribution

D : Poisson Distribution

Q.no 35. The confusion matrix is a useful tool for analyzing

A : Regression

B : Classification

C : Sampling

D : Cross validation

Q.no 36. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 37. In asymmetric attribute

A : No value is considered important over other values

B : All values are equal

C : Only non-zero value is important

D : Range of values is important

Q.no 38. When you use cross validation in machine learning, it means

A : you verify how accurate your model is on multiple and different subsets of data.

B : you verify how accurate your model is on same dataset.

C : you verify how accurate your model is on new dataset.

D : you verify how accurate your model on unknown dataset

Q.no 39. Joins will be needed to execute the query. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 40. The probability of a hypothesis before the presentation of evidence is called as

A : Apriori probability

B : subjective probability

C : posterior probability

D : conditional probability

Q.no 41. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 42. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 43. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Fourty Five

Q.no 44. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 45. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 46. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 47. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 48. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 49. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 50. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 51. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 52. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Triangle inequality

Q.no 53. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 54. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 55. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 56. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 57. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 58. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 59. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset {Tea, milk} is antecedent and {sugar} is consequent

Q.no 60. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Answer for Question No 1. is b

Answer for Question No 2. is b

Answer for Question No 3. is a

Answer for Question No 4. is c

Answer for Question No 5. is a

Answer for Question No 6. is c

Answer for Question No 7. is a

Answer for Question No 8. is c

Answer for Question No 9. is a

Answer for Question No 10. is b

Answer for Question No 11. is d

Answer for Question No 12. is c

Answer for Question No 13. is a

Answer for Question No 14. is d

Answer for Question No 15. is b

Answer for Question No 16. is d

Answer for Question No 17. is b

Answer for Question No 18. is a

Answer for Question No 19. is b

Answer for Question No 20. is b

Answer for Question No 21. is b

Answer for Question No 22. is d

Answer for Question No 23. is b

Answer for Question No 24. is a

Answer for Question No 25. is d

Answer for Question No 26. is b

Answer for Question No 27. is c

Answer for Question No 28. is c

Answer for Question No 29. is a

Answer for Question No 30. is c

Answer for Question No 31. is c

Answer for Question No 32. is a

Answer for Question No 33. is c

Answer for Question No 34. is b

Answer for Question No 35. is b

Answer for Question No 36. is d

Answer for Question No 37. is c

Answer for Question No 38. is a

Answer for Question No 39. is b

Answer for Question No 40. is a

Answer for Question No 41. is b

Answer for Question No 42. is b

Answer for Question No 43. is b

Answer for Question No 44. is a

Answer for Question No 45. is a

Answer for Question No 46. is c

Answer for Question No 47. is c

Answer for Question No 48. is b

Answer for Question No 49. is c

Answer for Question No 50. is a

Answer for Question No 51. is b

Answer for Question No 52. is a

Answer for Question No 53. is a

Answer for Question No 54. is b

Answer for Question No 55. is a

Answer for Question No 56. is c

Answer for Question No 57. is d

Answer for Question No 58. is d

Answer for Question No 59. is d

Answer for Question No 60. is a

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Which of the following is not a type of constraints?

- A : Data constraints
- B : Rule constraints
- C : Knowledge type constraints
- D : Time constraints

Q.no 2. to evaluate a classifier's quality we use

- A : confusion matrix
- B : error detection code
- C : error correction code
- D : classifier

Q.no 3. The problem of agents to learn from the environment by their interactions with dynamic environment is done in

- A : Reinforcement learning
- B : Multi-label classification

C : Binary Classification

D : Multiclassification

Q.no 4. For Apriori algorithm, what is the first phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 5. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 6. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 7. Choose the correct concept hierarchy.

A : city < street < state < country

B : street < city < state < country

C : street > city > state > country

D : street > city > country > state

Q.no 8. Each dimension is represented by only one table. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 9. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 10. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non- supervised

Q.no 11. Postpruning is

A : Removing branches from fully grown tree

B : Stop constructing tree if this would result in the measure falling below a threshold

C : construting a new tree

D : Flow-Chart

Q.no 12. Baysian classification in based on

A : probability for the hypothesis

B : Support

C : tree induction

D : Trees

Q.no 13. Training process that generates tree is called as

A : Pruning

B : Rule generation

C : Induction

D : spliiting

Q.no 14. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 15. A multidimensional data model is typically organized around a central theme which is represented by

A : Dimension table

B : Fact table

C : Dimension table and Fact table

D : Dimension table or Fact table

Q.no 16. Removing duplicate records is a process called

A : recovery

B : data cleaning

C : data cleansing

D : data pruning

Q.no 17. Which of the following is correct about Proximity measures?

A : Similarity

B : Dissimilarity

C : Similarity as well as Dissimilarity

D : Neither similarity nor dissimilarity

Q.no 18. What is an alternative form of Euclidean distance?

A : L1 norm

B : L2 norm

C : Lmax norm

D : L norm

Q.no 19. The fact is also called as

A : Dimension

B : Key

C : Schema

D : Measure

Q.no 20. Which technique finds the frequent itemsets in just two database scans?

A : Partitioning

B : Sampling

C : Hashing

D : Dynamic itemset counting

Q.no 21. The Galaxy Schema is also called as

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 22. Data independence means

A : Data is defined separately and not included in programs

B : Programs are not dependent on the physical attributes of the data

C : Programs are not dependent on the logical attributes of the data

D : Programs are not dependent on the physical attributes as well as logical attributes of the data

Q.no 23. Which is the wrong combination.

A : True negative=correctly identified

B : False negative=incorrectly identified

C : False positive=correctly identified

D : True positive=correctly identified

Q.no 24. Where does the bayes rule used?

A : Solving queries

B : Increasing complexity

C : Decreasing complexity

D : Answering probabilistic query

Q.no 25. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 26. In multilevel association rules, which strategy is employed

A : Top-down

B : Recursive

C : Bottom-up

D : Divide and conquer

Q.no 27. When do you consider an association rule interesting?

A : If it only satisfies minimum support

B : If it only satisfies minimum confidence

C : If it satisfies both minimum support and minimum confidence

D : There are other measures to check interesting rules

Q.no 28. The ultimate purpose of Frequent itemset mining is

A : For business decision-making process

B : For generation of association rules

C : For generation of candidate set

D : For generation of interesting patterns

Q.no 29. The data cubes are generally

A : 1 Dimensional

B : 2 Dimensional

C : 3 Dimensional

D : n-Dimensional

Q.no 30. K-fold Cross Validation envisages

A : partitioning of the original sample into one sample.

B : partitioning of the original sample into 'k' equal sized sub-samples.

C : partitioning of the original sample into 'k' unequal sized sub-samples.

D : partitioning of the original sample into 'k' random samples.

Q.no 31. Which of the following property typically does not hold for similarity measures between two objects ?

- A : Symmetry
- B : Definiteness
- C : Triangle inequality
- D : Transitive

Q.no 32. A frequent pattern tree is a tree structure consisting of

- A : A frequent-item-node
- B : An item-prefix-tree
- C : A frequent-item-header table
- D : both B and C

Q.no 33. Learning with a complete system in mind with reference to interactions among the systems and subsystems with proper understanding of systemic boundaries is

- A : Multi-label classification
- B : Reinforcement learning
- C : Systemic learning
- D : Machine Learning

Q.no 34. What is the limitation behind rule generation in Apriori algorithm?

- A : Need to generate a huge number of candidate sets
- B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching
- C : Dropping itemsets with valued information
- D : Both (a) and (b)

Q.no 35. Identify the example of sequence data

- A : weather forecast
- B : data matrix
- C : market basket data
- D : genomic data

Q.no 36. This supervised learning technique can process both numeric and categorical input attributes.

- A : linear regression
- B : Bayes classifier
- C : logistic regression
- D : backpropagation learning

Q.no 37. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

- A : Multiclassification
- B : Multi-label classification
- C : Imbalanced classification
- D : Binary Classification

Q.no 38. The Microsoft SQL Server 2000 is the example of

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 39. Which of the following probabilities are used in the Bayes theorem.

- A : $P(C_i|X)$
- B : $P(C_i)$
- C : $P(X|C_i)$
- D : $P(X)$

Q.no 40. Which statement is true about the decision tree attribute selection process

- A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.
- B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.
- C : Both numeric and categorical attributes may appear in several tree nodes.
- D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 41. Rotating the axes in a 3-D cube is the examplele of

- A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 42. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 43. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 44. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 45. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 46. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 47. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 48. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 49. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 50. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 51. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 52. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 53. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 54. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 55. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 56. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 57. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 58. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 59. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 60. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Answer for Question No 1. is d

Answer for Question No 2. is a

Answer for Question No 3. is a

Answer for Question No 4. is c

Answer for Question No 5. is d

Answer for Question No 6. is a

Answer for Question No 7. is b

Answer for Question No 8. is a

Answer for Question No 9. is a

Answer for Question No 10. is c

Answer for Question No 11. is a

Answer for Question No 12. is a

Answer for Question No 13. is c

Answer for Question No 14. is b

Answer for Question No 15. is b

Answer for Question No 16. is b

Answer for Question No 17. is c

Answer for Question No 18. is b

Answer for Question No 19. is d

Answer for Question No 20. is a

Answer for Question No 21. is c

Answer for Question No 22. is d

Answer for Question No 23. is c

Answer for Question No 24. is d

Answer for Question No 25. is d

Answer for Question No 26. is a

Answer for Question No 27. is c

Answer for Question No 28. is a

Answer for Question No 29. is d

Answer for Question No 30. is d

Answer for Question No 31. is c

Answer for Question No 32. is d

Answer for Question No 33. is c

Answer for Question No 34. is d

Answer for Question No 35. is d

Answer for Question No 36. is b

Answer for Question No 37. is a

Answer for Question No 38. is c

Answer for Question No 39. is a

Answer for Question No 40. is b

Answer for Question No 41. is a

Answer for Question No 42. is c

Answer for Question No 43. is a

Answer for Question No 44. is a

Answer for Question No 45. is b

Answer for Question No 46. is a

Answer for Question No 47. is a

Answer for Question No 48. is a

Answer for Question No 49. is c

Answer for Question No 50. is c

Answer for Question No 51. is d

Answer for Question No 52. is a

Answer for Question No 53. is d

Answer for Question No 54. is c

Answer for Question No 55. is c

Answer for Question No 56. is b

Answer for Question No 57. is a

Answer for Question No 58. is b

Answer for Question No 59. is a

Answer for Question No 60. is d

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. The most widely used metrics and tools to assess a classification model are:

- A : Confusion Matrix
- B : Support
- C : Entropy
- D : Probability

Q.no 2. cross-validation and bootstrap methods are common techniques for assessing

- A : accuracy
- B : Precision
- C : recall
- D : performance

Q.no 3. Which of the following is not a type of constraints?

- A : Data constraints
- B : Rule constraints

C : Knowledge type constraints

D : Time constraints

Q.no 4. Each dimension is represented by only one table. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 5. Which of these is not a frequent pattern mining algorithm?

A : Decision trees

B : Eclat

C : FP growth

D : Apriori

Q.no 6. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 7. Data used to build a data mining model.

A : Validation Data

B : Training Data

C : Testing Data

D : Hidden Data

Q.no 8. Which angle is used to measure document similarity?

A : Sin

B : Tan

C : Cos

D : Sec

Q.no 9. What is an alternative form of Euclidean distance?

- A : L1 norm
- B : L2 norm
- C : Lmax norm
- D : L norm

Q.no 10. The task of building decision model from labeled training data is called as

- A : Supervised Learning
- B : Unsupervised Learning
- C : Reinforcement Learning
- D : Structure Learning

Q.no 11. Which is the keyword that distinguishes data warehouses from other data repository systems ?

- A : Subject-oriented
- B : Object-oriented
- C : Client server
- D : Time-invariant

Q.no 12. The fact is also called as

- A : Dimension
- B : Key
- C : Schema
- D : Measure

Q.no 13. In Data Characterization, class under study is called as?

- A : Study Class
- B : Initial Class
- C : Target Class
- D : Final Class

Q.no 14. Postpruning is

- A : Removing branches from fully grown tree
- B : Stop constructing tree if this would result in the measure falling below a threshold

C : construting a new tree

D : Flow-Chart

Q.no 15. What does the leaf node in decision tree indicates

A : sub tree

B : class label

C : testing node

D : condition

Q.no 16. Data mining is best described as the process of

A : identifying patterns in data

B : deducing relationships in data

C : representing data

D : simulating trends in data

Q.no 17. Multilevel association rules can be mined efficiently using

A : Support

B : Confidence

C : Support count

D : Concept Hierarchies under support-confidence framework

Q.no 18. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 19. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 20. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 21. Which of the following is measure of document similarity?

A : Cosine dissimilarity

B : Sine similarity

C : Sine dissimilarity

D : Cosine similarity

Q.no 22. The Microsoft SQL Server 2000 is the example of

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 23. To improve the accuracy of multiclass classification we can use

A : cross validation

B : sampling

C : Error-detecting codes

D : Error-correcting codes

Q.no 24. Which statement is true about the decision tree attribute selection process

A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 25. How will you counter over-fitting in decision tree?

- A : By creating new rules
- B : By pruning the longer rules
- C : Both By pruning the longer rules' and ' By creating new rules'
- D : BY creating new tree

Q.no 26. Multilevel association rule mining is

- A : Association rules generated from candidate-generation method
- B : Association rules generated from without candidate-generation method
- C : Association rules generated from mining data at multiple abstraction level
- D : Association rules generated from frequent itemsets

Q.no 27. In which step of Knowledge Discovery, multiple data sources are combined?

- A : Data Cleaning
- B : Data Integration
- C : Data Selection
- D : Data Transformation

Q.no 28. Which of the following activities is a data mining task?

- A : Monitoring the heart rate of a patient for abnormalities
- B : Extracting the frequencies of a sound wave
- C : Predicting the outcomes of tossing a (fair) pair of dice
- D : Dividing the customers of a company according to their profitability

Q.no 29. Which of the following is necessary operation to calculate dissimilarity between ordinal attributes?

- A : Replacement of ordinal categories
- B : Correlation coefficient
- C : Discretization
- D : Randomization

Q.no 30. A nearest neighbor approach is best used

- A : with large-sized datasets.

B : when irrelevant attributes have been removed from the data.

C : when a generalized model of the data is desirable.

D : when an explanation of what has been found is of primary importance.

Q.no 31. Specificity is also referred to as

A : true negative rate

B : correctness

C : misclassification rate

D : True positive rate

Q.no 32. What do you mean by support(A)?

A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 33. When you use cross validation in machine learning, it means

A : you verify how accurate your model is on multiple and different subsets of data.

B : you verify how accurate your model is on same dataset.

C : you verify how accurate your model is on new dataset.

D : you verify how accurate your model on unknown dataset

Q.no 34. Which of the following probabilities are used in the Bayes theorem.

A : $P(C_i|X)$

B : $P(C_i)$

C : $P(X|C_i)$

D : $P(X)$

Q.no 35. What is another name of data matrix?

A : Single mode

B : Two mode

C : Multi mode

D : Large mode

Q.no 36. It is the main technique employed for data selection.

- A : Noise
- B : Sampling
- C : Clustering
- D : Histogram

Q.no 37. The accuracy of a classifier on a given test set is the percentage of

- A : test set tuples that are correctly classified by the classifier
- B : test set tuples that are incorrectly classified by the classifier
- C : test set tuples that are incorrectly misclassified by the classifier
- D : test set tuples that are not classified by the classifier

Q.no 38. Frequent patterns generated from association can be used for classification is called

- A : Naïve Bays
- B : Associative Classification
- C : Predictive Mining
- D : Decision Tree

Q.no 39. The data cubes are generally

- A : 1 Dimensional
- B : 2 Dimensional
- C : 3 Dimensional
- D : n-Dimensional

Q.no 40. How are metarules useful in mining of association rules?

- A : Allow users to specify threshold measures
- B : Allow users to specify task relevant data
- C : Allow users to specify the syntactic forms of rules
- D : Allow users to specify correlation or association

Q.no 41. What is the another name of Supremum distance?

- A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 42. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 43. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 44. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 45. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 46. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 47. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 48. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 49. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 50. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 51. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 52. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

- A : support($V1$) is greater than support ($V2$)
- B : support($V3$) is greater than support ($V2$)
- C : support($V1$) is greater than support($V3$)
- D : support($V2$) is greater than support($V3$)

Q.no 53. The cuboid that holds the lowest level of summarization is called as

- A : 0-D cuboid
- B : 1-D cuboid
- C : Base cuboid
- D : 2-D cuboid

Q.no 54. These server performs the faster computation

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 55. This technique uses mean and standard deviation scores to transform real-valued attributes.

- A : decimal scaling
- B : min-max normalization
- C : z-score normalization
- D : logarithmic normalization

Q.no 56. Which is the most well known association rule algorithm and is used in most commercial products.

- A : Apriori algorithm
- B : Pincer-search algorithm
- C : Distributed algorithm
- D : Partition algorithm

Q.no 57. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further , of the given 4 transactions, 3 transactions include cheese. Find the support

percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 58. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 59. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 60. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Answer for Question No 1. is a

Answer for Question No 2. is a

Answer for Question No 3. is d

Answer for Question No 4. is a

Answer for Question No 5. is a

Answer for Question No 6. is c

Answer for Question No 7. is b

Answer for Question No 8. is c

Answer for Question No 9. is b

Answer for Question No 10. is a

Answer for Question No 11. is a

Answer for Question No 12. is d

Answer for Question No 13. is c

Answer for Question No 14. is a

Answer for Question No 15. is b

Answer for Question No 16. is a

Answer for Question No 17. is d

Answer for Question No 18. is a

Answer for Question No 19. is d

Answer for Question No 20. is b

Answer for Question No 21. is d

Answer for Question No 22. is c

Answer for Question No 23. is d

Answer for Question No 24. is b

Answer for Question No 25. is b

Answer for Question No 26. is c

Answer for Question No 27. is b

Answer for Question No 28. is a

Answer for Question No 29. is a

Answer for Question No 30. is b

Answer for Question No 31. is a

Answer for Question No 32. is c

Answer for Question No 33. is a

Answer for Question No 34. is a

Answer for Question No 35. is b

Answer for Question No 36. is b

Answer for Question No 37. is a

Answer for Question No 38. is b

Answer for Question No 39. is d

Answer for Question No 40. is c

Answer for Question No 41. is c

Answer for Question No 42. is a

Answer for Question No 43. is d

Answer for Question No 44. is d

Answer for Question No 45. is d

Answer for Question No 46. is b

Answer for Question No 47. is b

Answer for Question No 48. is a

Answer for Question No 49. is a

Answer for Question No 50. is a

Answer for Question No 51. is d

Answer for Question No 52. is b

Answer for Question No 53. is c

Answer for Question No 54. is b

Answer for Question No 55. is c

Answer for Question No 56. is a

Answer for Question No 57. is a

Answer for Question No 58. is b

Answer for Question No 59. is c

Answer for Question No 60. is c

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. to evaluate a classifier's quality we use

- A : confusion matrix
- B : error detection code
- C : error correction code
- D : classifier

Q.no 2. For Apriori algorithm, what is the first phase?

- A : Pruning
- B : Partitioning
- C : Candidate generation
- D : Itemset generation

Q.no 3. What do you mean by dissimilarity measure of two objects?

- A : Is a numerical measure of how alike two data objects are.
- B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 4. Multilevel association rules can be mined efficiently using

A : Support

B : Confidence

C : Support count

D : Concept Hierarchies under support-confidence framework

Q.no 5. What is an alternative form of Euclidean distance?

A : L1 norm

B : L2 norm

C : Lmax norm

D : L norm

Q.no 6. Training process that generates tree is called as

A : Pruning

B : Rule generation

C : Induction

D : splitting

Q.no 7. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 8. How can one represent document to calculate cosine similarity?

A : Vector

B : Matirx

C : List

D : Term frequency vector

Q.no 9. the negative tuples that were correctly labeled by the classifier

- A : False positives(FP)
- B : True positives(TP)
- C : True negatives (TN)
- D : False negatives(FN)

Q.no 10. Which one of the following is true for decision tree

- A : Decision tree is useful in decision making
- B : Decision tree is similar to OLTP
- C : Decision Tree is similar to cluster analysis
- D : Decision tree needs to find probabilities of hypothesis

Q.no 11. In Data Characterization, class under study is called as?

- A : Study Class
- B : Intial Class
- C : Target Class
- D : Final Class

Q.no 12. Multi-class classification makes the assumption that each sample is assigned to

- A : one and only one label
- B : many labels
- C : one or many labels
- D : no label

Q.no 13. Bayesian classification in based on

- A : probability for the hypothesis
- B : Support
- C : tree induction
- D : Trees

Q.no 14. Which technique finds the frequent itemsets in just two database scans?

- A : Partitioning

B : Sampling

C : Hashing

D : Dynamic itemset counting

Q.no 15. the positive tuples that were correctly labeled by the classifier are

A : True negatives (TN)

B : False negatives(FN)

C : False positives(FP)

D : True positives(TP)

Q.no 16. Which of these is not a frequent pattern mining algorithm?

A : Decision trees

B : Eclat

C : FP growth

D : Apriori

Q.no 17. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 18. accuracy is used to measure

A : classifier's true abilities

B : classifier's analytic abilities

C : classifier's decision abilities

D : classifier's predictive abilities

Q.no 19. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 20. Constraint-based mining provides

A : User flexibility

B : System optimization

C : Both (a) and (b)

D : High computation

Q.no 21. In multilevel association rules, which strategy is employed

A : Top-down

B : Recursive

C : Bottom-up

D : Divide and conquer

Q.no 22. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 23. What do you mean by support(A)?

A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 24. The confusion matrix is a useful tool for analyzing

A : Regression

B : Classification

C : Sampling

D : Cross validation

Q.no 25. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

- B : Comparing predictors
- C : Selecting parameters in prediction function
- D : classification

Q.no 26. For mining frequent itemsets, the Data format used by Apriori and FP-Growth algorithms are

- A : Apriori uses horizontal and FP-Growth uses vertical data format
- B : Apriori uses vertical and FP-Growth uses horizontal data format
- C : Apriori and FP-Growth both uses vertical data format
- D : Apriori and FP-Growth both uses horizontal data format

Q.no 27. The correlation coefficient is used to determine:

- A : A specific value of the y-variable given a specific value of the x-variable
- B : A specific value of the x-variable given a specific value of the y-variable
- C : The strength of the relationship between the x and y variables
- D : None of these

Q.no 28. Holdout and random subsampling are common techniques for assessing

- A : K-Fold validation
- B : cross validation
- C : accuracy
- D : sampling

Q.no 29. Which of the following is necessary operation to calculate dissimilarity between ordinal attributes?

- A : Replacement of ordinal categories
- B : Correlation coefficient
- C : Discretization
- D : Randomization

Q.no 30. OLAP Summarization means

- A : Consolidated
- B : Primitive
- C : Highly detailed

D : Recent data

Q.no 31. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 32. Number of records are comparatively more in

A : OLAP

B : OLTP

C : Same in OLAP and OLTP

D : Can not compare

Q.no 33. Which of the following property typically does not hold for similarity measures between two objects ?

A : Symmetry

B : Definiteness

C : Triangle inequality

D : Transitive

Q.no 34. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

A : Multiclassification

B : Multi-label classification

C : Imbalanced classification

D : Binary Classification

Q.no 35. In asymmetric attribute

A : No value is considered important over other values

B : All values are equal

C : Only non-zero value is important

D : Range of values is important

Q.no 36. Which of these distributions is used for a testing hypothesis?

A : Normal Distribution

B : Chi-Squared Distribution

C : Gamma Distribution

D : Poisson Distribution

Q.no 37. In Apriori algorithm, for generating e. g. 5 itemsets, we use

A : Frequent 5 itemsets

B : Frequent 3 itemsets

C : Frequent 4 itemsets

D : Frequent 6 itemsets

Q.no 38. Which of the following probabilities are used in the Bayes theorem.

A : $P(C_i|X)$

B : $P(C_i)$

C : $P(X|C_i)$

D : $P(X)$

Q.no 39. Learning with a complete system in mind with reference to interactions among the systems and subsystems with proper understanding of systemic boundaries is

A : Multi-label classification

B : Reinforcement learning

C : Systemic learning

D : Machine Learning

Q.no 40. Cross validation involves

A : testing the machine on all possible ways by substituting the original sample into training set

B : testing the machine on all possible ways by dividing the original sample into training and validation sets.

C : testing the machine with only validation sets

D : testing the machine on only testing datasets.

Q.no 41. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 42. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 43. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 44. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 45. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 46. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 47. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 48. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 49. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 50. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 51. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 52. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

- A : {Tea} is antecedent and {sugar} is consequent
- B : {Tea} is antecedent and the itemset {milk, sugar} is consequent
- C : The itemset {Tea, milk} is consequent and {sugar} is antecedent
- D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 53. Which operation is required to calculate Hamming distacne between two objects?

- A : AND
- B : OR
- C : NOT
- D : XOR

Q.no 54. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

- A : support($V1$) is greater than support ($V2$)
- B : support($V3$) is greater than support ($V2$)
- C : support($V1$) is greater than support($V3$)
- D : support($V2$) is greater than support($V3$)

Q.no 55. These server performs the faster computation

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 56. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

- A : Precision= 0.90
- B : Precision= 0.79
- C : Precision= 0.45
- D : Precision= 0.68

Q.no 57. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 58. Ordinal attribute has three distinct values such as Fair, Good, and Excellent.

If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 59. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 60. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Answer for Question No 1. is a

Answer for Question No 2. is c

Answer for Question No 3. is b

Answer for Question No 4. is d

Answer for Question No 5. is b

Answer for Question No 6. is c

Answer for Question No 7. is d

Answer for Question No 8. is d

Answer for Question No 9. is c

Answer for Question No 10. is a

Answer for Question No 11. is c

Answer for Question No 12. is a

Answer for Question No 13. is a

Answer for Question No 14. is a

Answer for Question No 15. is d

Answer for Question No 16. is a

Answer for Question No 17. is d

Answer for Question No 18. is d

Answer for Question No 19. is b

Answer for Question No 20. is c

Answer for Question No 21. is a

Answer for Question No 22. is d

Answer for Question No 23. is c

Answer for Question No 24. is b

Answer for Question No 25. is d

Answer for Question No 26. is d

Answer for Question No 27. is c

Answer for Question No 28. is c

Answer for Question No 29. is a

Answer for Question No 30. is a

Answer for Question No 31. is c

Answer for Question No 32. is b

Answer for Question No 33. is c

Answer for Question No 34. is a

Answer for Question No 35. is c

Answer for Question No 36. is b

Answer for Question No 37. is c

Answer for Question No 38. is a

Answer for Question No 39. is c

Answer for Question No 40. is c

Answer for Question No 41. is d

Answer for Question No 42. is d

Answer for Question No 43. is a

Answer for Question No 44. is a

Answer for Question No 45. is c

Answer for Question No 46. is d

Answer for Question No 47. is a

Answer for Question No 48. is b

Answer for Question No 49. is c

Answer for Question No 50. is c

Answer for Question No 51. is a

Answer for Question No 52. is d

Answer for Question No 53. is d

Answer for Question No 54. is b

Answer for Question No 55. is b

Answer for Question No 56. is a

Answer for Question No 57. is b

Answer for Question No 58. is c

Answer for Question No 59. is b

Answer for Question No 60. is a

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Multilevel association rules can be mined efficiently using

- A : Support
- B : Confidence
- C : Support count
- D : Concept Hierarchies under support-confidence framework

Q.no 2. What is C4.5 is used to build

- A : Decision tree
- B : Regression Analysis
- C : Induction
- D : Association Rules

Q.no 3. What are closed itemsets?

- A : An itemset for which at least super-itemset has same confidence
- B : An itemset whose no proper super-itemset has same support

C : An itemset for which at least one proper super-itemset has same support

D : An itemset whose no proper super-itemset has same confidence

Q.no 4. cross-validation and bootstrap methods are common techniques for assessing

A : accuracy

B : Precision

C : recall

D : performance

Q.no 5. Multi-class classification makes the assumption that each sample is assigned to

A : one and only one label

B : many labels

C : one or many labels

D : no label

Q.no 6. The Synonym for data mining is

A : Data warehouse

B : Knowledge discovery in database

C : ETL

D : Business Intelligemce

Q.no 7. Supervised learning and unsupervised clustering both require at least one

A : hidden attribute

B : output attribute

C : input attribute

D : categorical attribute

Q.no 8. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 9. The example of knowledge type constraints in constraint based mining is

A : Association or Correlation

B : Rule templates

C : Task relevant data

D : Threshold measures

Q.no 10. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 11. A data matrix in which attributes are of the same type and asymmetric is called

A : Pattern matrix

B : Sparse data matrix

C : Document term matrix

D : Normal matrix

Q.no 12. The task of building decision model from labeled training data is called as

A : Supervised Learning

B : Unsupervised Learning

C : Reinforcement Learning

D : Structure Learning

Q.no 13. The most widely used metrics and tools to assess a classification model are:

A : Confusion Matrix

B : Support

C : Entropy

D : Probability

Q.no 14. Bayesian classification is based on

A : probability for the hypothesis

B : Support

C : tree induction

D : Trees

Q.no 15. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 16. A decision tree is also known as

A : general tree

B : binary tree

C : prediction tree

D : None of the options

Q.no 17. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 18. The fact is also called as

A : Dimension

B : Key

C : Schema

D : Measure

Q.no 19. Color is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : numeric

Q.no 20. Entropy is a measure of

A : impurity of an attribute

B : Purity of an attribute

C : Weight of an attribute

D : Class of an attribute

Q.no 21. The ultimate purpose of Frequent itemset mining is

A : For business decision-making process

B : For generation of association rules

C : For generation of candidate set

D : For generation of interesting patterns

Q.no 22. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 23. Which statement is true about the KNN algorithm?

A : All attribute values must be categorical

B : The output attribute must be categorical.

C : Attribute values may be either categorical or numeric.

D : All attributes must be numeric.

Q.no 24. Which of these distributions is used for a testing hypothesis?

A : Normal Distribution

B : Chi-Squared Distribution

C : Gamma Distribution

D : Poisson Distribution

Q.no 25. Which of the following operations are used to calculate proximity measures for ordinal attribute?

A : Replacement and discretization

B : Replacement and characterization

C : Replacement and normalization

D : Normalization and discretization

Q.no 26. This supervised learning technique can process both numeric and categorical input attributes.

A : linear regression

B : Bayes classifier

C : logistic regression

D : backpropagation learning

Q.no 27. Specificity is also referred to as

A : true negative rate

B : correctness

C : misclassification rate

D : True positive rate

Q.no 28. It is the main technique employed for data selection.

A : Noise

B : Sampling

C : Clustering

D : Histogram

Q.no 29. Where does the bayes rule used?

A : Solving queries

B : Increasing complexity

C : Decreasing complexity

D : Answering probabilistic query

Q.no 30. Number of records are comparatively more in

A : OLAP

B : OLTP

C : Same in OLAP and OLTP

D : Can not compare

Q.no 31. Holdout and random subsampling are common techniques for assessing

- A : K-Fold validation
- B : cross validation
- C : accuracy
- D : sampling

Q.no 32. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

- A : Zero
- B : Infinity
- C : Two
- D : One

Q.no 33. What is uniform support in multilevel association rule mining?

- A : Use of minimum support
- B : Use of minimum support and confidence
- C : Use of same minimum threshold at each abstraction level
- D : Use of minimum support and support count

Q.no 34. The confusion matrix is a useful tool for analyzing

- A : Regression
- B : Classification
- C : Sampling
- D : Cross validation

Q.no 35. The frequent-item-header-table consists of number fields

- A : Only one
- B : Two
- C : Three
- D : Four

Q.no 36. The fact table contains

- A : The names of the facts

B : Keys to each of the related dimension tables

C : Facts and keys

D : Facts or keys

Q.no 37. Which of the following operation is correct about supremum distance?

A : It gives maximum difference between any attribute of the objects

B : It gives minimum difference between any attribute of the objects

C : It gives maximum difference between first attribute of the objects

D : It gives minimum difference between first attribute of the objects

Q.no 38. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 39. The Galaxy Schema is also called as

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 40. Which statement is true about the decision tree attribute selection process

A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 41. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 42. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 43. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Q.no 44. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 45. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 46. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 47. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

- A : {Tea} is antecedent and {sugar} is consequent
- B : {Tea} is antecedent and the itemset {milk, sugar} is consequent
- C : The itemset {Tea, milk} is consequent and {sugar} is antecedent
- D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 48. Which operation is required to calculate Hamming distacne between two objects?

- A : AND
- B : OR
- C : NOT
- D : XOR

Q.no 49. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

- A : 1
- B : 0
- C : 0.5
- D : 0.75

Q.no 50. The tables are easy to maintain and saves storage space.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 51. A database has 4 transactions.Of these, 4 transactions include milk and bread. Further , of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

- A : 0.6
- B : 0.75
- C : 0.8

D : 0.7

Q.no 52. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 53. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 54. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 55. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Forty Five

Q.no 56. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 57. Correlation analysis is used for

- A : handling missing values
- B : identifying redundant attributes
- C : handling different data formats
- D : eliminating noise

Q.no 58. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

- A : min-max normalization
- B : z-score normalization
- C : decimal scaling
- D : decimal smoothing

Q.no 59. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

- A : Recall=0.9
- B : Recall=0.39
- C : Recall=0.65
- D : Recall=5.0

Q.no 60. These server performs the faster computation

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Answer for Question No 1. is d

Answer for Question No 2. is a

Answer for Question No 3. is b

Answer for Question No 4. is a

Answer for Question No 5. is a

Answer for Question No 6. is b

Answer for Question No 7. is c

Answer for Question No 8. is d

Answer for Question No 9. is a

Answer for Question No 10. is a

Answer for Question No 11. is b

Answer for Question No 12. is a

Answer for Question No 13. is a

Answer for Question No 14. is a

Answer for Question No 15. is b

Answer for Question No 16. is c

Answer for Question No 17. is d

Answer for Question No 18. is d

Answer for Question No 19. is a

Answer for Question No 20. is a

Answer for Question No 21. is a

Answer for Question No 22. is b

Answer for Question No 23. is d

Answer for Question No 24. is b

Answer for Question No 25. is c

Answer for Question No 26. is b

Answer for Question No 27. is a

Answer for Question No 28. is b

Answer for Question No 29. is d

Answer for Question No 30. is b

Answer for Question No 31. is c

Answer for Question No 32. is a

Answer for Question No 33. is c

Answer for Question No 34. is b

Answer for Question No 35. is b

Answer for Question No 36. is c

Answer for Question No 37. is a

Answer for Question No 38. is d

Answer for Question No 39. is c

Answer for Question No 40. is b

Answer for Question No 41. is c

Answer for Question No 42. is a

Answer for Question No 43. is b

Answer for Question No 44. is a

Answer for Question No 45. is a

Answer for Question No 46. is c

Answer for Question No 47. is d

Answer for Question No 48. is d

Answer for Question No 49. is c

Answer for Question No 50. is b

Answer for Question No 51. is a

Answer for Question No 52. is a

Answer for Question No 53. is a

Answer for Question No 54. is a

Answer for Question No 55. is b

Answer for Question No 56. is c

Answer for Question No 57. is b

Answer for Question No 58. is c

Answer for Question No 59. is a

Answer for Question No 60. is b

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Data used to build a data mining model.

- A : Validation Data
- B : Training Data
- C : Testing Data
- D : Hidden Data

Q.no 2. What is the range of the cosine similarity of the two documents?

- A : Zero to One
- B : Zero to infinity
- C : Infinity to infinity
- D : Zero to Zero

Q.no 3. What are two steps of tree pruning work?

- A : Pessimistic pruning and Optimistic pruning
- B : Postpruning and Prepruning

C : Cost complexity pruning and time complexity pruning

D : None of the options

Q.no 4. Cotraining is one form of

A : sampling

B : Reinforcement learning

C : unsupervised classification

D : semi-supervised classification

Q.no 5. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non- supervised

Q.no 6. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 7. What are closed frequent itemsets?

A : A closed itemset

B : A frequent itemset

C : An itemset which is both closed and frequent

D : Not frequent itemset

Q.no 8. the positive tuples that were correctly labeled by the classifier are

A : True negatives (TN)

B : False negatives(FN)

C : False positives(FP)

D : True positives(TP)

Q.no 9. A data cube is defined by

A : Dimensions

B : Facts

C : Dimensions and Facts

D : Dimensions or Facts

Q.no 10. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 11. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 12. The schema is collection of stars. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 13. Which technique finds the frequent itemsets in just two database scans?

A : Partitioning

B : Sampling

C : Hashing

D : Dynamic itemset counting

Q.no 14. Removing duplicate records is a process called

A : recovery

B : data cleaning

C : data cleansing

D : data pruning

Q.no 15. Which of these is not a frequent pattern mining algorithm?

A : Decision trees

B : Eclat

C : FP growth

D : Apriori

Q.no 16. The most widely used metrics and tools to assess a classification model are:

A : Confusion Matrix

B : Support

C : Entropy

D : Probability

Q.no 17. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 18. This is a visualization operation that rotates the data axes in view to provide an alternative data presentation

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 19. Which of the following is the data mining tool?

A : Borland C

B : Weka

C : Borland C++

D : Visual C

Q.no 20. to evaluate a classifier's quality we use

- A : confusion matrix
- B : error detection code
- C : error correction code
- D : classifier

Q.no 21. Holdout and random subsampling are common techniques for assessing

- A : K-Fold validation
- B : cross validation
- C : accuracy
- D : sampling

Q.no 22. Data independence means

- A : Data is defined separately and not included in programs
- B : Programs are not dependent on the physical attributes of the data
- C : Programs are not dependent on the logical attributes of the data
- D : Programs are not dependent on the physical attributes as well as logical attributes of the data

Q.no 23. In multilevel association rules, which strategy is employed

- A : Top-down
- B : Recursive
- C : Bottom-up
- D : Divide and conquer

Q.no 24. In Apriori algorithm, for generating e. g. 5 itemsets, we use

- A : Frequent 5 itemsets
- B : Frequent 3 itemsets
- C : Frequent 4 itemsets
- D : Frequent 6 itemsets

Q.no 25. What is uniform support in multilevel association rule mining?

- A : Use of minimum support
- B : Use of minimum support and confidence
- C : Use of same minimum threshold at each abstraction level

D : Use of minimum support and support count

Q.no 26. Which of the following activities is a data mining task?

A : Monitoring the heart rate of a patient for abnormalities

B : Extracting the frequencies of a sound wave

C : Predicting the outcomes of tossing a (fair) pair of dice

D : Dividing the customers of a company according to their profitability

Q.no 27. Where does the bayes rule used?

A : Solving queries

B : Increasing complexity

C : Decreasing complexity

D : Answering probabilistic query

Q.no 28. The accuracy of a classifier on a given test set is the percentage of

A : test set tuples that are correctly classified by the classifier

B : test set tuples that are incorrectly classified by the classifier

C : test set tuples that are incorrectly misclassified by the classifier

D : test set tuples that are not classified by the classifier

Q.no 29. The frequent-item-header-table consists of number fields

A : Only one

B : Two

C : Three

D : Four

Q.no 30. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 31. The property of Apriori algorithm is

A : All nonempty subsets of a frequent itemsets must also be frequent

B : All empty subsets of a frequent itemsets must also be frequent

C : All nonempty subsets of a frequent itemsets must be not frequent

D : All nonempty subsets of a frequent itemsets can frequent or not frequent

Q.no 32. Specificity is also referred to as

A : true negative rate

B : correctness

C : misclassification rate

D : True positive rate

Q.no 33. The probability of a hypothesis before the presentation of evidence is called as

A : Apriori probability

B : subjective probability

C : posterior probability

D : conditional probability

Q.no 34. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 35. For mining frequent itemsets, the Data format used by Apriori and FP-Growth algorithms are

A : Apriori uses horizontal and FP-Growth uses vertical data format

B : Apriori uses vertical and FP-Growth uses horizontal data format

C : Apriori and FP-Growth both uses vertical data format

D : Apriori and FP-Growth both uses horizontal data format

Q.no 36. What is the approach of basic algorithm for decision tree induction?

A : Greedy

B : Top Down

C : Procedural

D : Step by Step

Q.no 37. Which is the wrong combination.

A : True negative=correctly identified

B : False negative=incorrectly identified

C : False positive=correctly identified

D : True positive=correctly identified

Q.no 38. What do you mean by support(A)?

A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 39. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 40. Which of the following is measure of document similarity?

A : Cosine dissimilarity

B : Sine similarity

C : Sine dissimilarity

D : Cosine similarity

Q.no 41. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 42. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 43. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Q.no 44. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 45. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 46. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 47. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 48. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 49. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 50. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 51. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 52. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 53. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 54. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 55. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 56. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 57. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 58. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Triangle inequality

Q.no 59. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

A : 7

B : 9

C : 10

D : 11

Q.no 60. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Things I do for LCU

Answer for Question No 1. is b

Answer for Question No 2. is a

Answer for Question No 3. is b

Answer for Question No 4. is d

Answer for Question No 5. is c

Answer for Question No 6. is c

Answer for Question No 7. is c

Answer for Question No 8. is d

Answer for Question No 9. is c

Answer for Question No 10. is d

Answer for Question No 11. is b

Answer for Question No 12. is c

Answer for Question No 13. is a

Answer for Question No 14. is b

Answer for Question No 15. is a

Answer for Question No 16. is a

Answer for Question No 17. is d

Answer for Question No 18. is a

Answer for Question No 19. is b

Answer for Question No 20. is a

Answer for Question No 21. is c

Answer for Question No 22. is d

Answer for Question No 23. is a

Answer for Question No 24. is c

Answer for Question No 25. is c

Answer for Question No 26. is a

Answer for Question No 27. is d

Answer for Question No 28. is a

Answer for Question No 29. is b

Answer for Question No 30. is d

Answer for Question No 31. is a

Answer for Question No 32. is a

Answer for Question No 33. is a

Answer for Question No 34. is c

Answer for Question No 35. is d

Answer for Question No 36. is a

Answer for Question No 37. is c

Answer for Question No 38. is c

Answer for Question No 39. is c

Answer for Question No 40. is d

Answer for Question No 41. is c

Answer for Question No 42. is d

Answer for Question No 43. is b

Answer for Question No 44. is a

Answer for Question No 45. is a

Answer for Question No 46. is b

Answer for Question No 47. is a

Answer for Question No 48. is d

Answer for Question No 49. is a

Answer for Question No 50. is a

Answer for Question No 51. is a

Answer for Question No 52. is b

Answer for Question No 53. is b

Answer for Question No 54. is d

Answer for Question No 55. is a

Answer for Question No 56. is d

Answer for Question No 57. is d

Answer for Question No 58. is a

Answer for Question No 59. is b

Answer for Question No 60. is c

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Which one of the following is true for decision tree

- A : Decision tree is useful in decision making
- B : Decision tree is similar to OLTP
- C : Decision Tree is similar to cluster analysis
- D : Decision tree needs to find probabilities of hypothesis

Q.no 2. The schema is collection of stars. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 3. What technique can be used to improve the efficiency of apriori algorithm?

- A : Hash-based techniques
- B : Transaction Reduction

C : Candidate generation

D : Both (a) and (b)

Q.no 4. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 5. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non- supervised

Q.no 6. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 7. What are closed frequent itemsets?

A : A closed itemset

B : A frequent itemset

C : An itemset which is both closed and frequent

D : Not frequent itemset

Q.no 8. the negative tuples that were correctly labeled by the classifier

A : False positives (FP)

B : True positives (TP)

C : True negatives (TN)

D : False negatives(FN)

Q.no 9. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 10. The most widely used metrics and tools to assess a classification model are:

A : Confusion Matrix

B : Support

C : Entropy

D : Probability

Q.no 11. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 12. the positive tuples that were correctly labeled by the classifier are

A : True negatives (TN)

B : False negatives(FN)

C : False positives(FP)

D : True positives(TP)

Q.no 13. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 14. Which is the keyword that distinguishes data warehouses from other data repository systems ?

A : Subject-oriented

B : Object-oriented

C : Client server

D : Time-invariant

Q.no 15. Training process that generates tree is called as

A : Pruning

B : Rule generation

C : Induction

D : splitting

Q.no 16. A multidimensional data model is typically organized around a central theme which is represented by

A : Dimension table

B : Fact table

C : Dimension table and Fact table

D : Dimension table or Fact table

Q.no 17. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 18. Which of the following is not frequent pattern?

A : Itemsets

B : Subsequences

C : Substructures

D : Associations

Q.no 19. Cotraining is one form of

A : sampling

B : Reinforcement learning

C : unsupervised classification

D : semi-supervised classification

Q.no 20. Choose the correct concept hierarchy.

A : city < street < state < country

B : street < city < state < country

C : street > city > state > country

D : street > city > country > state

Q.no 21. It is the main technique employed for data selection.

A : Noise

B : Sampling

C : Clustering

D : Histogram

Q.no 22. Cross validation involves

A : testing the machine on all possible ways by substituting the original sample into training set

B : testing the machine on all possible ways by dividing the original sample into training and validation sets.

C : testing the machine with only validation sets

D : testing the machine on only testing datasets.

Q.no 23. What is uniform support in multilevel association rule mining?

A : Use of minimum support

B : Use of minimum support and confidence

C : Use of same minimum threshold at each abstraction level

D : Use of minimum support and support count

Q.no 24. The rule is considered as interesting if

A : They satisfy both minimum support and minimum confidence threshold

B : They satisfy both maximum support and maximum confidence threshold

C : They satisfy maximum support and minimum confidence threshold

D : They satisfy minimum support and maximum confidence threshold

Q.no 25. In multilevel association rules, which strategy is employed

- A : Top-down
- B : Recursive
- C : Bottom-up
- D : Divide and conquer

Q.no 26. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

- A : Zero
- B : Infinity
- C : Two
- D : One

Q.no 27. The fact table contains

- A : The names of the facts
- B : Keys to each of the related dimension tables
- C : Facts and keys
- D : Facts or keys

Q.no 28. The Microsoft SQL Server 2000 is the example of

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 29. If A, B are two sets of items, and A is a subset of B. Which of the following statement is always true?

- A : Support(A) is less than or equal to Support(B)
- B : Support(A) is greater than or equal to Support(B)
- C : Support(A) is equal to Support(B)
- D : Support(A) is not equal to Support(B)

Q.no 30. What do you mean by support(A)?

- A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 31. Identify the example of sequence data

A : weather forecast

B : data matrix

C : market basket data

D : genomic data

Q.no 32. A frequent pattern tree is a tree structure consisting of

A : A frequent-item-node

B : An item-prefix-tree

C : A frequent-item-header table

D : both B and C

Q.no 33. Joins will be needed to execute the query. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 34. In asymmetric attribute

A : No value is considered important over other values

B : All values are equal

C : Only non-zero value is important

D : Range of values is important

Q.no 35. A nearest neighbor approach is best used

A : with large-sized datasets.

B : when irrelevant attributes have been removed from the data.

C : when a generalized model of the data is desirable.

D : when an explanation of what has been found is of primary importance.

Q.no 36. Which of the following is not correct use of cross validation?

- A : Selecting variables to include in a model
- B : Comparing predictors
- C : Selecting parameters in prediction function
- D : classification

Q.no 37. One of the most well known software used for classification is

- A : Java
- B : C4.5
- C : Oracle
- D : C++

Q.no 38. Which of the following is a predictive model?

- A : Clustering
- B : Regression
- C : Summarization
- D : Association rules

Q.no 39. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

- A : Multiclassification
- B : Multi-label classification
- C : Imbalanced classification
- D : Binary Classification

Q.no 40. The property of Apriori algorithm is

- A : All nonempty subsets of a frequent itemsets must also be frequent
- B : All empty subsets of a frequent itemsets must also be frequent
- C : All nonempty subsets of a frequent itemsets must be not frequent
- D : All nonempty subsets of a frequent itemsets can frequent or not frequent

Q.no 41. Which operation is required to calculate Hamming distacne between two objects?

- A : AND

B : OR

C : NOT

D : XOR

Q.no 42. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 43. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 44. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support(V1) is greater than support (V2)

B : support(V3) is greater than support (V2)

C : support(V1) is greater than support(V3)

D : support(V2) is greater than support(V3)

Q.no 45. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

A : 7

B : 9

C : 10

D : 11

Q.no 46. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

- A : {Tea} is antecedent and {sugar} is consequent
- B : {Tea} is antecedent and the itemset {milk, sugar} is consequent
- C : The itemset {Tea, milk} is consequent and {sugar} is antecedent
- D : The itemset {Tea, milk} is antecedent and {sugar} is consequent

Q.no 47. When do we use Manhattan distance in data mining?

- A : Dimension of the data decreases
- B : Dimension of the data increases
- C : Underfitting
- D : Moderate size of the dimensions

Q.no 48. A concept hierarchy that is a total or partial order among attributes in a database schema is called

- A : Mixed hierarchy
- B : Total hierarchy
- C : Schema hierarchy
- D : Concept generalization

Q.no 49. Which of the following operation is required to calculate cosine similarity?

- A : Vector dot product
- B : Exponent
- C : Modulus
- D : Percentage

Q.no 50. Name the property of objects for which distance from first object to second and vice-versa is same.

- A : Symmetry
- B : Transitive
- C : Positive definiteness
- D : Triangle inequality

Q.no 51. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

- A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 52. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 53. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 54. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 55. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 56. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 57. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 58. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 59. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 60. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Answer for Question No 1. is a

Answer for Question No 2. is c

Answer for Question No 3. is d

Answer for Question No 4. is d

Answer for Question No 5. is c

Answer for Question No 6. is a

Answer for Question No 7. is c

Answer for Question No 8. is c

Answer for Question No 9. is b

Answer for Question No 10. is a

Answer for Question No 11. is a

Answer for Question No 12. is d

Answer for Question No 13. is a

Answer for Question No 14. is a

Answer for Question No 15. is c

Answer for Question No 16. is b

Answer for Question No 17. is b

Answer for Question No 18. is d

Answer for Question No 19. is d

Answer for Question No 20. is b

Answer for Question No 21. is b

Answer for Question No 22. is c

Answer for Question No 23. is c

Answer for Question No 24. is a

Answer for Question No 25. is a

Answer for Question No 26. is a

Answer for Question No 27. is c

Answer for Question No 28. is c

Answer for Question No 29. is b

Answer for Question No 30. is c

Answer for Question No 31. is d

Answer for Question No 32. is d

Answer for Question No 33. is b

Answer for Question No 34. is c

Answer for Question No 35. is b

Answer for Question No 36. is d

Answer for Question No 37. is b

Answer for Question No 38. is b

Answer for Question No 39. is a

Answer for Question No 40. is a

Answer for Question No 41. is d

Answer for Question No 42. is c

Answer for Question No 43. is d

Answer for Question No 44. is b

Answer for Question No 45. is b

Answer for Question No 46. is d

Answer for Question No 47. is b

Answer for Question No 48. is c

Answer for Question No 49. is a

Answer for Question No 50. is a

Answer for Question No 51. is d

Answer for Question No 52. is c

Answer for Question No 53. is a

Answer for Question No 54. is c

Answer for Question No 55. is b

Answer for Question No 56. is a

Answer for Question No 57. is a

Answer for Question No 58. is b

Answer for Question No 59. is a

Answer for Question No 60. is c

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. What are closed itemsets?

- A : An itemset for which at least super-itemset has same confidence
- B : An itemset whose no proper super-itemset has same support
- C : An itemset for which at least one proper super-itemset has same support
- D : An itemset whose no proper super-itemset has same confidence

Q.no 2. Data matrix is also called as

- A : Object by object structure
- B : Object by attribute structure
- C : Attribute by attribute structure
- D : Attribute by object structure

Q.no 3. An automatic car driver and business intelligent systems are examples of

- A : Regression
- B : Classification

C : Machine Learning

D : Reinforcement learning

Q.no 4. Color is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : numeric

Q.no 5. Choose the correct concept hierarchy.

A : city < street < state < country

B : street < city < state < country

C : street > city > state > country

D : street > city > country > state

Q.no 6. In Data Characterization, class under study is called as?

A : Study Class

B : Intial Class

C : Target Class

D : Final Class

Q.no 7. the negative tuples that were correctly labeled by the classifier

A : False positives(FP)

B : True positives(TP)

C : True negatives (TN)

D : False negatives(FN)

Q.no 8. the positive tuples that were correctly labeled by the classifier are

A : True negatives (TN)

B : False negatives(FN)

C : False positives(FP)

D : True positives(TP)

Q.no 9. The first steps involved in the knowledge discovery is?

- A : Data Integration
- B : Data Selection
- C : Data Transformation
- D : Data Cleaning

Q.no 10. Which angle is used to measure document similarity?

- A : Sin
- B : Tan
- C : Cos
- D : Sec

Q.no 11. The problem of agents to learn from the environment by their interactions with dynamic environment is done in

- A : Reinforcement learning
- B : Multi-label classification
- C : Binary Classification
- D : Multiclassification

Q.no 12. What is gini index?

- A : It is a type of index structure
- B : It is a measure of purity
- C : Both options except none
- D : None of the options

Q.no 13. Which one of the following is true for decision tree

- A : Decision tree is useful in decision making
- B : Decision tree is similar to OLTP
- C : Decision Tree is similar to cluster analysis
- D : Decision tree needs to find probabilities of hypothesis

Q.no 14. Which of the following is direct application of frequent itemset mining?

- A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 15. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 16. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 17. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 18. How can one represent document to calculate cosine similarity?

A : Vector

B : Matirx

C : List

D : Term frequency vector

Q.no 19. Which of the following is not frequent pattern?

A : Itemsets

B : Subsequences

C : Substructures

D : Associations

Q.no 20. The schema is collection of stars. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 21. Which statement is true about the decision tree attribute selection process

A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 22. Holdout and random subsampling are common techniques for assessing

A : K-Fold validation

B : cross validation

C : accuracy

D : sampling

Q.no 23. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 24. What is the approach of basic algorithm for decision tree induction?

A : Greedy

B : Top Down

C : Procedural

D : Step by Step

Q.no 25. Which of the following is a predictive model?

A : Clustering

B : Regression

C : Summarization

D : Association rules

Q.no 26. It is the main technique employed for data selection.

A : Noise

B : Sampling

C : Clustering

D : Histogram

Q.no 27. OLAP Summarization means

A : Consolidated

B : Primitive

C : Highly detailed

D : Recent data

Q.no 28. Number of records are comparatively more in

A : OLAP

B : OLTP

C : Same in OLAP and OLTP

D : Can not compare

Q.no 29. To improve the accuracy of multiclass classification we can use

A : cross validation

B : sampling

C : Error-detecting codes

D : Error-correcting codes

Q.no 30. Specificity is also referred to as

A : true negative rate

B : correctness

C : misclassification rate

D : True positive rate

Q.no 31. The data cubes are generally

A : 1 Dimensional

B : 2 Dimensional

C : 3 Dimensional

D : n-Dimensional

Q.no 32. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 33. A frequent pattern tree is a tree structure consisting of

A : A frequent-item-node

B : An item-prefix-tree

C : A frequent-item-header table

D : both B and C

Q.no 34. This supervised learning technique can process both numeric and categorical input attributes.

A : linear regression

B : Bayes classifier

C : logistic regression

D : backpropagation learning

Q.no 35. Data independence means

A : Data is defined separately and not included in programs

B : Programs are not dependent on the physical attributes of the data

C : Programs are not dependent on the logical attributes of the data

D : Programs are not dependent on the physical attributes as well as logical attributes of the data

Q.no 36. Cross validation involves

A : testing the machine on all possible ways by substituting the original sample into training set

B : testing the machine on all possible ways by dividing the original sample into training and validation sets.

C : testing the machine with only validation sets

D : testing the machine on only testing datasets.

Q.no 37. How will you counter over-fitting in decision tree?

A : By creating new rules

B : By pruning the longer rules

C : Both By pruning the longer rules' and ' By creating new rules'

D : BY creating new tree

Q.no 38. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 39. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

A : Multiclassification

B : Multi-label classification

C : Imbalanced classification

D : Binary Classification

Q.no 40. Identify the example of sequence data

A : weather forecast

B : data matrix

C : market basket data

D : genomic data

Q.no 41. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Fourty Five

Q.no 42. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 43. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 44. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 45. Rotating the axes in a 3-D cube is the examplele of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 46. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 47. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 48. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 49. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 50. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 51. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 52. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 53. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 54. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 55. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Q.no 56. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 57. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Triangle inequality

Q.no 58. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 59. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 60. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Answer for Question No 1. is b

Answer for Question No 2. is b

Answer for Question No 3. is d

Answer for Question No 4. is a

Answer for Question No 5. is b

Answer for Question No 6. is c

Answer for Question No 7. is c

Answer for Question No 8. is d

Answer for Question No 9. is d

Answer for Question No 10. is c

Answer for Question No 11. is a

Answer for Question No 12. is b

Answer for Question No 13. is a

Answer for Question No 14. is b

Answer for Question No 15. is a

Answer for Question No 16. is b

Answer for Question No 17. is a

Answer for Question No 18. is d

Answer for Question No 19. is d

Answer for Question No 20. is c

Answer for Question No 21. is b

Answer for Question No 22. is c

Answer for Question No 23. is c

Answer for Question No 24. is a

Answer for Question No 25. is b

Answer for Question No 26. is b

Answer for Question No 27. is a

Answer for Question No 28. is b

Answer for Question No 29. is d

Answer for Question No 30. is a

Answer for Question No 31. is d

Answer for Question No 32. is c

Answer for Question No 33. is d

Answer for Question No 34. is b

Answer for Question No 35. is d

Answer for Question No 36. is c

Answer for Question No 37. is b

Answer for Question No 38. is d

Answer for Question No 39. is a

Answer for Question No 40. is d

Answer for Question No 41. is b

Answer for Question No 42. is b

Answer for Question No 43. is a

Answer for Question No 44. is a

Answer for Question No 45. is a

Answer for Question No 46. is c

Answer for Question No 47. is b

Answer for Question No 48. is a

Answer for Question No 49. is a

Answer for Question No 50. is d

Answer for Question No 51. is b

Answer for Question No 52. is c

Answer for Question No 53. is b

Answer for Question No 54. is a

Answer for Question No 55. is b

Answer for Question No 56. is c

Answer for Question No 57. is a

Answer for Question No 58. is a

Answer for Question No 59. is c

Answer for Question No 60. is b

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. A decision tree is also known as

- A : general tree
- B : binary tree
- C : prediction tree
- D : None of the options

Q.no 2. Learning algorithm which trains with combination of labeled and unlabeled data.

- A : Supervised
- B : Unsupervised
- C : Semi supervised
- D : Non- supervised

Q.no 3. What is the method to interpret the results after rule generation?

- A : Absolute Mean
- B : Lift ratio

C : Gini Index

D : Apriori

Q.no 4. The Synonym for data mining is

A : Data warehouse

B : Knowledge discovery in database

C : ETL

D : Business Intelligence

Q.no 5. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 6. A data cube is defined by

A : Dimensions

B : Facts

C : Dimensions and Facts

D : Dimensions or Facts

Q.no 7. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 8. Which angle is used to measure document similarity?

A : Sin

B : Tan

C : Cos

D : Sec

Q.no 9. Which of these is not a frequent pattern mining algorithm?

- A : Decision trees
- B : Eclat
- C : FP growth
- D : Apriori

Q.no 10. What does the leaf node in decision tree indicates

- A : sub tree
- B : class label
- C : testing node
- D : condition

Q.no 11. Each dimension is represented by only one table. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 12. Self-training is the simplest form of

- A : supervised classification
- B : semi-supervised classification
- C : unsupervised classification
- D : regression

Q.no 13. What is C4.5 is used to build

- A : Decision tree
- B : Regression Analysis
- C : Induction
- D : Association Rules

Q.no 14. A data matrix in which attributes are of the same type and asymmetric is called

- A : Pattern matrix
- B : Sparse data matrix

C : Document term matrix

D : Normal matrix

Q.no 15. Which one of the following is true for decision tree

A : Decision tree is useful in decision making

B : Decision tree is similar to OLTP

C : Decision Tree is similar to cluster analysis

D : Decision tree needs to find probabilities of hypothesis

Q.no 16. A multidimensional data model is typically organized around a central theme which is represented by

A : Dimension table

B : Fact table

C : Dimension table and Fact table

D : Dimension table or Fact table

Q.no 17. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 18. Data mining is best described as the process of

A : identifying patterns in data

B : deducing relationships in data

C : representing data

D : simulating trends in data

Q.no 19. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 20. Which technique finds the frequent itemsets in just two database scans?

- A : Partitioning
- B : Sampling
- C : Hashing
- D : Dynamic itemset counting

Q.no 21. In multilevel association rules, which strategy is employed

- A : Top-down
- B : Recursive
- C : Bottom-up
- D : Divide and conquer

Q.no 22. Lazy learner classification approach is

- A : learner waits until the last minute before constructing model to classify
- B : a given training data constructs a model first and then uses it to classify
- C : the network is constructed by human experts
- D : None of the options

Q.no 23. Multilevel association rule mining is

- A : Association rules generated from candidate-generation method
- B : Association rules generated from without candidate-generation method
- C : Association rules generated from mining data at multiple abstraction level
- D : Association rules generated from frequent itemsets

Q.no 24. The property of Apriori algorithm is

- A : All nonempty subsets of a frequent itemsets must also be frequent
- B : All empty subsets of a frequent itemsets must also be frequent
- C : All nonempty subsets of a frequent itemsets must be not frequent
- D : All nonempty subsets of a frequent itemsets can frequent or not frequent

Q.no 25. Which of the following is not correct use of cross validation?

- A : Selecting variables to include in a model
- B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 26. One of the most well known software used for classification is

A : Java

B : C4.5

C : Oracle

D : C++

Q.no 27. What do you mean by support(A)?

A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 28. The confusion matrix is a useful tool for analyzing

A : Regression

B : Classification

C : Sampling

D : Cross validation

Q.no 29. In which step of Knowledge Discovery, multiple data sources are combined?

A : Data Cleaning

B : Data Integration

C : Data Selection

D : Data Transformation

Q.no 30. Some company wants to divide their customers into distinct groups to send offers this is an example of

A : Data Extraction

B : Data Classification

C : Data Discrimination

D : Data Selection

Q.no 31. The fact table contains

- A : The names of the facts
- B : Keys to each of the related dimension tables
- C : Facts and keys
- D : Facts or keys

Q.no 32. What is the approach of basic algorithm for decision tree induction?

- A : Greedy
- B : Top Down
- C : Procedural
- D : Step by Step

Q.no 33. Frequent patterns generated from association can be used for classification is called

- A : Naïve Bays
- B : Associative Classification
- C : Predictive Mining
- D : Decision Tree

Q.no 34. What is uniform support in multilevel association rule mining?

- A : Use of minimum support
- B : Use of minimum support and confidence
- C : Use of same minimum threshold at each abstraction level
- D : Use of minimum support and support count

Q.no 35. It is the main technique employed for data selection.

- A : Noise
- B : Sampling
- C : Clustering
- D : Histogram

Q.no 36. Number of records are comparatively more in

- A : OLAP
- B : OLTP

C : Same in OLAP and OLTP

D : Can not compare

Q.no 37. The Microsoft SQL Server 2000 is the example of

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 38. OLAP Summarization means

A : Consolidated

B : Primitive

C : Highly detailed

D : Recent data

Q.no 39. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 40. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

A : Zero

B : Infinity

C : Two

D : One

Q.no 41. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 42. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

- A : 1
- B : 0
- C : 0.5
- D : 0.75

Q.no 43. Name the property of objects for which distance from first object to second and vice-versa is same.

- A : Symmetry
- B : Transitive
- C : Positive definiteness
- D : Traingle inequality

Q.no 44. Rotating the axes in a 3-D cube is the example of

- A : Pivot
- B : Roll up
- C : Drill down
- D : Slice

Q.no 45. Which one of these is a tree based learner?

- A : Rule based
- B : Bayesian Belief Network
- C : Bayesian classifier
- D : Random Forest

Q.no 46. A concept hierarchy that is a total or partial order among attributes in a database schema is called

- A : Mixed hierarchy
- B : Total hierarchy
- C : Schema hierarchy
- D : Concept generalization

Q.no 47. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 48. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 49. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

A : 7

B : 9

C : 10

D : 11

Q.no 50. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 51. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 52. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

- A : {Tea} is antecedent and {sugar} is consequent
- B : {Tea} is antecedent and the itemset {milk, sugar} is consequent
- C : The itemset {Tea, milk} is consequent and {sugar} is antecedent
- D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 53. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

- A : smooth by bin boundaries
- B : smooth by bin median
- C : smooth by bin means
- D : smooth by bin values

Q.no 54. Which operation is required to calculate Hamming distacne between two objects?

- A : AND
- B : OR
- C : NOT
- D : XOR

Q.no 55. What is the range of the angle between two term frequency vectors?

- A : Zero to Thirty
- B : Zero to Ninety
- C : Zero to One Eighty
- D : Zero to Fourty Five

Q.no 56. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly.Recall of model is

- A : Recall=0.9
- B : Recall=0.39
- C : Recall=0.65
- D : Recall=5.0

Q.no 57. This technique uses mean and standard deviation scores to transform real-valued attributes.

- A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 58. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 59. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Q.no 60. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Answer for Question No 1. is c

Answer for Question No 2. is c

Answer for Question No 3. is b

Answer for Question No 4. is b

Answer for Question No 5. is b

Answer for Question No 6. is c

Answer for Question No 7. is a

Answer for Question No 8. is c

Answer for Question No 9. is a

Answer for Question No 10. is b

Answer for Question No 11. is a

Answer for Question No 12. is b

Answer for Question No 13. is a

Answer for Question No 14. is b

Answer for Question No 15. is a

Answer for Question No 16. is b

Answer for Question No 17. is d

Answer for Question No 18. is a

Answer for Question No 19. is d

Answer for Question No 20. is a

Answer for Question No 21. is a

Answer for Question No 22. is a

Answer for Question No 23. is c

Answer for Question No 24. is a

Answer for Question No 25. is d

Answer for Question No 26. is b

Answer for Question No 27. is c

Answer for Question No 28. is b

Answer for Question No 29. is b

Answer for Question No 30. is b

Answer for Question No 31. is c

Answer for Question No 32. is a

Answer for Question No 33. is b

Answer for Question No 34. is c

Answer for Question No 35. is b

Answer for Question No 36. is b

Answer for Question No 37. is c

Answer for Question No 38. is a

Answer for Question No 39. is b

Answer for Question No 40. is a

Answer for Question No 41. is b

Answer for Question No 42. is c

Answer for Question No 43. is a

Answer for Question No 44. is a

Answer for Question No 45. is d

Answer for Question No 46. is c

Answer for Question No 47. is c

Answer for Question No 48. is b

Answer for Question No 49. is b

Answer for Question No 50. is d

Answer for Question No 51. is d

Answer for Question No 52. is d

Answer for Question No 53. is d

Answer for Question No 54. is d

Answer for Question No 55. is b

Answer for Question No 56. is a

Answer for Question No 57. is c

Answer for Question No 58. is c

Answer for Question No 59. is b

Answer for Question No 60. is a

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 2. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 3. Which technique finds the frequent itemsets in just two database scans?

A : Partitioning

B : Sampling

C : Hashing

D : Dynamic itemset counting

Q.no 4. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 5. Which of the following are methods for supervised classification?

A : Decision tree

B : K-Means

C : Hierarchical

D : Apriori

Q.no 6. Removing duplicate records is a process called

A : recovery

B : data cleaning

C : data cleansing

D : data pruning

Q.no 7. The example of knowledge type constraints in constraint based mining is

A : Association or Correlation

B : Rule templates

C : Task relevant data

D : Threshold measures

Q.no 8. Data used to build a data mining model.

A : Validation Data

B : Training Data

C : Testing Data

D : Hidden Data

Q.no 9. For Apriori algorithm, what is the first phase?

- A : Pruning
- B : Partitioning
- C : Candidate generation
- D : Itemset generation

Q.no 10. The fact is also called as

- A : Dimension
- B : Key
- C : Schema
- D : Measure

Q.no 11. What is association rule mining?

- A : Using association to find correlation rules
- B : Same as frequent itemset mining
- C : Finding of strong association rules using frequent itemsets
- D : Finding of frequent itemset from large database

Q.no 12. What are two steps of tree pruning work?

- A : Pessimistic pruning and Optimistic pruning
- B : Postpruning and Prepruning
- C : Cost complexity pruning and time complexity pruning
- D : None of the options

Q.no 13. An automatic car driver and business intelligent systems are examples of

- A : Regression
- B : Classification
- C : Machine Learning
- D : Reinforcement learning

Q.no 14. Data mining is best described as the process of

- A : identifying patterns in data
- B : deducing relationships in data

C : representing data

D : simulating trends in data

Q.no 15. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 16. Constraint-based mining provides

A : User flexibility

B : System optimization

C : Both (a) and (b)

D : High computation

Q.no 17. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 18. What is C4.5 is used to build

A : Decision tree

B : Regression Analysis

C : Induction

D : Association Rules

Q.no 19. A data matrix in which attributes are of the same type and asymmetric is called

A : Pattern matrix

B : Sparse data matrix

C : Document term matrix

D : Normal matrix

Q.no 20. Bayesian classification is based on

- A : probability for the hypothesis
- B : Support
- C : tree induction
- D : Trees

Q.no 21. Which of the following is necessary operation to calculate dissimilarity between ordinal attributes?

- A : Replacement of ordinal categories
- B : Correlation coefficient
- C : Discretization
- D : Randomization

Q.no 22. Which of the following probabilities are used in the Bayes theorem.

- A : $P(C_i|X)$
- B : $P(C_i)$
- C : $P(X|C_i)$
- D : $P(X)$

Q.no 23. When you use cross validation in machine learning, it means

- A : you verify how accurate your model is on multiple and different subsets of data.
- B : you verify how accurate your model is on same dataset.
- C : you verify how accurate your model is on new dataset.
- D : you verify how accurate your model on unknown dataset

Q.no 24. Which of the following property typically does not hold for similarity measures between two objects ?

- A : Symmetry
- B : Definiteness
- C : Triangle inequality
- D : Transitive

Q.no 25. Data independence means

- A : Data is defined separately and not included in programs

B : Programs are not dependent on the physical attributes of the data

C : Programs are not dependent on the logical attributes of the data

D : Programs are not dependent on the physical attributes as well as logical attributes of the data

Q.no 26. K-fold Cross Validation envisages

A : partitioning of the original sample into one sample.

B : partitioning of the original sample into 'k' equal sized sub-samples.

C : partitioning of the original sample into 'k' unequal sized sub-samples.

D : partitioning of the original sample into 'k' random samples.

Q.no 27. To improve the accuracy of multiclass classification we can use

A : cross validation

B : sampling

C : Error-detecting codes

D : Error-correcting codes

Q.no 28. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 29. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

A : Replacement discretization and distance measure

B : Replacement characterization and distance measure

C : Normalization discretization and distance measure

D : Replacement normalization and distance measure

Q.no 30. When do you consider an association rule interesting?

A : If it only satisfies minimum support

B : If it only satisfies minimum confidence

C : If it satisfies both minimum support and minimum confidence

D : There are other measures to check interesting rules

Q.no 31. OLAP Summarization means

A : Consolidated

B : Primitive

C : Highly detailed

D : Recent data

Q.no 32. A nearest neighbor approach is best used

A : with large-sized datasets.

B : when irrelevant attributes have been removed from the data.

C : when a generalized model of the data is desirable.

D : when an explanation of what has been found is of primary importance.

Q.no 33. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) and (b)

Q.no 34. Which of the following is measure of document similarity?

A : Cosine dissimilarity

B : Sine similarity

C : Sine dissimilarity

D : Cosine similarity

Q.no 35. The ultimate purpose of Frequent itemset mining is

A : For business decision-making process

B : For generation of association rules

C : For generation of candidate set

D : For generation of interesting patterns

Q.no 36. Which is the wrong combination.

A : True negative=correctly identified

B : False negative=incorrectly identified

C : False positive=correctly identified

D : True positive=correctly identified

Q.no 37. The Microsoft SQL Server 2000 is the example of

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 38. Holdout and random subsampling are common techniques for assessing

A : K-Fold validation

B : cross validation

C : accuracy

D : sampling

Q.no 39. Multilevel association rule mining is

A : Association rules generated from candidate-generation method

B : Association rules generated from without candidate-generation method

C : Association rules generated from mining data at multiple abstraction level

D : Association rules generated from frequent itemsets

Q.no 40. What is another name of data matrix?

A : Single mode

B : Two mode

C : Multi mode

D : Large mode

Q.no 41. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 42. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 43. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 44. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 45. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 46. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 47. Rotating the axes in a 3-D cube is the examplele of

- A : Pivot
- B : Roll up
- C : Drill down
- D : Slice

Q.no 48. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

- A : Precision
- B : Classifier performance
- C : Recall
- D : F-measure

Q.no 49. What is the range of the angle between two term frequency vectors?

- A : Zero to Thirty
- B : Zero to Ninety
- C : Zero to One Eighty
- D : Zero to Fourty Five

Q.no 50. High entropy means that the partitions in classification are

- A : pure
- B : Not pure
- C : Useful
- D : Not useful

Q.no 51. Transforming a 3-D cube into a series of 2-D planes is the examplele of

- A : Pivot
- B : Roll up
- C : Drill down
- D : Slice

Q.no 52. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

- A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 53. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 54. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 55. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 56. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 57. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 58. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Traingle inequality

Q.no 59. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 60. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Answer for Question No 1. is a

Answer for Question No 2. is d

Answer for Question No 3. is a

Answer for Question No 4. is b

Answer for Question No 5. is a

Answer for Question No 6. is b

Answer for Question No 7. is a

Answer for Question No 8. is b

Answer for Question No 9. is c

Answer for Question No 10. is d

Answer for Question No 11. is c

Answer for Question No 12. is b

Answer for Question No 13. is d

Answer for Question No 14. is a

Answer for Question No 15. is c

Answer for Question No 16. is c

Answer for Question No 17. is d

Answer for Question No 18. is a

Answer for Question No 19. is b

Answer for Question No 20. is a

Answer for Question No 21. is a

Answer for Question No 22. is a

Answer for Question No 23. is a

Answer for Question No 24. is c

Answer for Question No 25. is d

Answer for Question No 26. is d

Answer for Question No 27. is d

Answer for Question No 28. is c

Answer for Question No 29. is d

Answer for Question No 30. is c

Answer for Question No 31. is a

Answer for Question No 32. is b

Answer for Question No 33. is d

Answer for Question No 34. is d

Answer for Question No 35. is a

Answer for Question No 36. is c

Answer for Question No 37. is c

Answer for Question No 38. is c

Answer for Question No 39. is c

Answer for Question No 40. is b

Answer for Question No 41. is d

Answer for Question No 42. is a

Answer for Question No 43. is c

Answer for Question No 44. is a

Answer for Question No 45. is c

Answer for Question No 46. is a

Answer for Question No 47. is a

Answer for Question No 48. is b

Answer for Question No 49. is b

Answer for Question No 50. is b

Answer for Question No 51. is a

Answer for Question No 52. is c

Answer for Question No 53. is a

Answer for Question No 54. is c

Answer for Question No 55. is b

Answer for Question No 56. is c

Answer for Question No 57. is a

Answer for Question No 58. is a

Answer for Question No 59. is b

Answer for Question No 60. is b

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. What are closed itemsets?

- A : An itemset for which at least super-itemset has same confidence
- B : An itemset whose no proper super-itemset has same support
- C : An itemset for which at least one proper super-itemset has same support
- D : An itemset whose no proper super-itemset has same confidence

Q.no 2. Which of the following is not frequent pattern?

- A : Itemsets
- B : Subsequences
- C : Substructures
- D : Associations

Q.no 3. In Data Characterization, class under study is called as?

- A : Study Class
- B : Intial Class

C : Target Class

D : Final Class

Q.no 4. What is an alternative form of Euclidean distance?

A : L1 norm

B : L2 norm

C : Lmax norm

D : L norm

Q.no 5. A person trained to interact with a human expert in order to capture their knowledge.

A : knowledge programmer

B : knowledge developer

C : knowledge engineer

D : knowledge extractor

Q.no 6. Data used to build a data mining model.

A : Validation Data

B : Training Data

C : Testing Data

D : Hidden Data

Q.no 7. Multilevel association rules can be mined efficiently using

A : Support

B : Confidence

C : Support count

D : Concept Hierarchies under support-confidence framework

Q.no 8. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 9. What are closed frequent itemsets?

A : A closed itemset

B : A frequent itemset

C : An itemset which is both closed and frequent

D : Not frequent itemset

Q.no 10. A data matrix in which attributes are of the same type and asymmetric is called

A : Pattern matrix

B : Sparse data matrix

C : Document term matrix

D : Normal matrix

Q.no 11. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 12. Bayesian classification is based on

A : probability for the hypothesis

B : Support

C : tree induction

D : Trees

Q.no 13. A decision tree is also known as

A : general tree

B : binary tree

C : prediction tree

D : None of the options

Q.no 14. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 15. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 16. cross-validation and bootstrap methods are common techniques for assessing

A : accuracy

B : Precision

C : recall

D : performance

Q.no 17. Multi-class classification makes the assumption that each sample is assigned to

A : one and only one label

B : many labels

C : one or many labels

D : no label

Q.no 18. What does the leaf node in decision tree indicates

A : sub tree

B : class label

C : testing node

D : condition

Q.no 19. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 20. accuracy is used to measure

- A : classifier's true abilities
- B : classifier's analytic abilities
- C : classifier's decision abilities
- D : classifier's predictive abilities

Q.no 21. Sensitivity is also referred to as

- A : misclassification rate
- B : true negative rate
- C : True positive rate
- D : correctness

Q.no 22. Specificity is also referred to as

- A : true negative rate
- B : correctness
- C : misclassification rate
- D : True positive rate

Q.no 23. In a decision tree each leaf node represents

- A : Test conditions
- B : Class labels
- C : Attribute values
- D : Decision

Q.no 24. It is the main technique employed for data selection.

- A : Noise
- B : Sampling
- C : Clustering
- D : Histogram

Q.no 25. OLAP Summarization means

- A : Consolidated
- B : Primitive

C : Highly detailed

D : Recent data

Q.no 26. In asymmetric attribute

A : No value is considered important over other values

B : All values are equal

C : Only non-zero value is important

D : Range of values is important

Q.no 27. Frequent patterns generated from association can be used for classification is called

A : Naïve Bays

B : Associative Classification

C : Predictive Mining

D : Decision Tree

Q.no 28. Which of the following operation is correct about supremum distance?

A : It gives maximum difference between any attribute of the objects

B : It gives minimum difference between any attribute of the objects

C : It gives maximum difference between first attribute of the objects

D : It gives minimum difference between first attribute of the objects

Q.no 29. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 30. The probability of a hypothesis before the presentation of evidence is called as

A : Apriori probability

B : subjective probability

C : posterior probability

D : conditional probability

Q.no 31. Which statement is true about the decision tree attribute selection process

A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 32. Which is the wrong combination.

A : True negative=correctly identified

B : False negative=incorrectly identified

C : False positive=correctly identified

D : True positive=correctly identified

Q.no 33. The Microsoft SQL Server 2000 is the example of

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 34. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 35. How will you counter over-fitting in decision tree?

A : By creating new rules

B : By pruning the longer rules

C : Both By pruning the longer rules' and ' By creating new rules'

D : BY creating new tree

Q.no 36. Joins will be needed to execute the query. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 37. K-fold Cross Validation envisages

A : partitioning of the original sample into one sample.

B : partitioning of the original sample into 'k' equal sized sub-samples.

C : partitioning of the original sample into 'k' unequal sized sub-samples.

D : partitioning of the original sample into 'k' random samples.

Q.no 38. In Apriori algorithm, for generating e. g. 5 itemsets, we use

A : Frequent 5 itemsets

B : Frequent 3 itemsets

C : Frequent 4 itemsets

D : Frequent 6 itemsets

Q.no 39. If first object X and Y coordinates are 3 and 5 respectively and second object X and Y coordinates are 10 and 3 respectively, then what is Manhattan distance between these two objects?

A : 8

B : 13

C : 9

D : 10

Q.no 40. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) and (b)

Q.no 41. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 42. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 43. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 44. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 45. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 46. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 47. Which is the most well known association rule algorithm and is used in most commercial products.

- A : Apriori algorithm
- B : Pincer-search algorithm
- C : Distributed algorithm
- D : Partition algorithm

Q.no 48. The cuboid that holds the lowest level of summarization is called as

- A : 0-D cuboid
- B : 1-D cuboid
- C : Base cuboid
- D : 2-D cuboid

Q.no 49. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

- A : 25
- B : 210
- C : 62
- D : 30

Q.no 50. Which of the following sentence is FALSE regarding regression?

- A : It relates inputs to outputs.
- B : It is used for prediction.
- C : It may be used for interpretation.
- D : It discovers causal relationships.

Q.no 51. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

- A : Precision = 0.89
- B : Precision = 0.23
- C : Precision = 0.45
- D : Precision = 0.75

Q.no 52. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Traingle inequality

Q.no 53. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 54. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 55. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 56. Which of the following operation is requird to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 57. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 58. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 59. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 60. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Answer for Question No 1. is b

Answer for Question No 2. is d

Answer for Question No 3. is c

Answer for Question No 4. is b

Answer for Question No 5. is c

Answer for Question No 6. is b

Answer for Question No 7. is d

Answer for Question No 8. is a

Answer for Question No 9. is c

Answer for Question No 10. is b

Answer for Question No 11. is c

Answer for Question No 12. is a

Answer for Question No 13. is c

Answer for Question No 14. is a

Answer for Question No 15. is a

Answer for Question No 16. is a

Answer for Question No 17. is a

Answer for Question No 18. is b

Answer for Question No 19. is d

Answer for Question No 20. is d

Answer for Question No 21. is c

Answer for Question No 22. is a

Answer for Question No 23. is b

Answer for Question No 24. is b

Answer for Question No 25. is a

Answer for Question No 26. is c

Answer for Question No 27. is b

Answer for Question No 28. is a

Answer for Question No 29. is c

Answer for Question No 30. is a

Answer for Question No 31. is b

Answer for Question No 32. is c

Answer for Question No 33. is c

Answer for Question No 34. is d

Answer for Question No 35. is b

Answer for Question No 36. is b

Answer for Question No 37. is d

Answer for Question No 38. is c

Answer for Question No 39. is c

Answer for Question No 40. is d

Answer for Question No 41. is a

Answer for Question No 42. is a

Answer for Question No 43. is c

Answer for Question No 44. is b

Answer for Question No 45. is a

Answer for Question No 46. is c

Answer for Question No 47. is a

Answer for Question No 48. is c

Answer for Question No 49. is d

Answer for Question No 50. is d

Answer for Question No 51. is d

Answer for Question No 52. is a

Answer for Question No 53. is a

Answer for Question No 54. is a

Answer for Question No 55. is b

Answer for Question No 56. is a

Answer for Question No 57. is d

Answer for Question No 58. is c

Answer for Question No 59. is a

Answer for Question No 60. is b

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. OLAP database design is

- A : Application-oriented
- B : Object-oriented
- C : Goal-oriented
- D : Subject-oriented

Q.no 2. cross-validation and bootstrap methods are common techniques for assessing

- A : accuracy
- B : Precision
- C : recall
- D : performance

Q.no 3. What are two steps of tree pruning work?

- A : Pessimistic pruning and Optimistic pruning
- B : Postpruning and Prepruning

C : Cost complexity pruning and time complexity pruning

D : None of the options

Q.no 4. Which of the following are methods for supervised classification?

A : Decision tree

B : K-Means

C : Hierarchical

D : Apriori

Q.no 5. Which of the following is not frequent pattern?

A : Itemsets

B : Subsequences

C : Substructures

D : Associations

Q.no 6. accuracy is used to measure

A : classifier's true abilities

B : classifier's analytic abilities

C : classifier's decision abilities

D : classifier's predictive abilities

Q.no 7. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 8. The Synonym for data mining is

A : Data warehouse

B : Knowledge discovery in database

C : ETL

D : Business Intelligence

Q.no 9. Which of the following is the data mining tool?

- A : Borland C
- B : Weka
- C : Borland C++
- D : Visual C

Q.no 10. Constraint-based mining provides

- A : User flexibility
- B : System optimization
- C : Both (a) and (b)
- D : High computation

Q.no 11. In Data Characterization, class under study is called as?

- A : Study Class
- B : Initial Class
- C : Target Class
- D : Final Class

Q.no 12. Supervised learning and unsupervised clustering both require at least one

- A : hidden attribute
- B : output attribute
- C : input attribute
- D : categorical attribute

Q.no 13. recall is a measure of

- A : completeness of what percentage of positive tuples are labeled
- B : a measure of exactness for misclassification
- C : a measure of exactness of what percentage of tuples are not classified
- D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 14. The most widely used metrics and tools to assess a classification model are:

- A : Confusion Matrix

B : Support

C : Entropy

D : Probability

Q.no 15. For Apriori algorithm, what is the first phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 16. Which of the following is not a type of constraints?

A : Data constraints

B : Rule constraints

C : Knowledge type constraints

D : Time constraints

Q.no 17. Removing duplicate records is a process called

A : recovery

B : data cleaning

C : data cleansing

D : data pruning

Q.no 18. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 19. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 20. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 21. In which step of Knowledge Discovery, multiple data sources are combined?

A : Data Cleaning

B : Data Integration

C : Data Selection

D : Data Transformation

Q.no 22. Which of the following operations are used to calculate proximity measures for ordinal attribute?

A : Replacement and discretization

B : Replacement and characterization

C : Replacement and normalization

D : Normalization and discretization

Q.no 23. It is the main technique employed for data selection.

A : Noise

B : Sampling

C : Clustering

D : Histogram

Q.no 24. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 25. What type of data do you need for a chi-square test?

A : Categorical

B : Ordinal

C : Interval

D : Scales

Q.no 26. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 27. Which of the following is a predictive model?

A : Clustering

B : Regression

C : Summarization

D : Association rules

Q.no 28. To improve the accuracy of multiclass classification we can use

A : cross validation

B : sampling

C : Error-detecting codes

D : Error-correcting codes

Q.no 29. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 30. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 31. OLAP Summarization means

A : Consolidated

B : Primitive

C : Highly detailed

D : Recent data

Q.no 32. The fact table contains

A : The names of the facts

B : Keys to each of the related dimension tables

C : Facts and keys

D : Facts or keys

Q.no 33. Which is the wrong combination.

A : True negative=correctly indentified

B : False negative=incorrectly identified

C : False positive=correctly identified

D : True positive=correctly identified

Q.no 34. Holdout and random subsampling are common techniques for assessing

A : K-Fold validation

B : cross validation

C : accuracy

D : sampling

Q.no 35. In a decision tree each leaf node represents

A : Test conditions

B : Class labels

C : Attribute values

D : Decision

Q.no 36. K-fold Cross Validation envisages

A : partitioning of the original sample into one sample.

B : partitioning of the original sample into 'k' equal sized sub-samples.

C : partitioning of the original sample into 'k' unequal sized sub-samples.

D : partitioning of the original sample into 'k' random samples.

Q.no 37. Lazy learner classification approach is

A : learner waits until the last minute before constructing model to classify

B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 38. The probability of a hypothesis before the presentation of evidence is called as

A : Apriori probability

B : subjective probability

C : posterior probability

D : conditional probability

Q.no 39. What is another name of data matrix?

A : Single mode

B : Two mode

C : Multi mode

D : Large mode

Q.no 40. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

A : Zero

B : Infinity

C : Two

D : One

Q.no 41. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 42. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 43. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 44. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 45. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 46. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 47. A concept hierarchy that is a total or partial order among attributes in a database schema is called

- A : Mixed hierarchy
- B : Total hierarchy
- C : Schema hierarchy
- D : Concept generalization

Q.no 48. precision of model is 0.75 and recall is 0.43 then F-Score is

- A : F-Score= 0.99
- B : F-Score= 0.84
- C : F-Score= 0.55
- D : F-Score= 0.49

Q.no 49. Which operation data warehouse requires ?

- A : Initial loading of data
- B : Transaction processing
- C : Recovery
- D : Concurrency control mechanisms

Q.no 50. Which of the following sentence is FALSE regarding regression?

- A : It relates inputs to outputs.
- B : It is used for prediction.
- C : It may be used for interpretation.
- D : It discovers causal relationships.

Q.no 51. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

- A : 25
- B : 210
- C : 62
- D : 30

Q.no 52. Which is the most well known association rule algorithm and is used in most commercial products.

- A : Apriori algorithm
- B : Pincer-search algorithm
- C : Distributed algorithm
- D : Partition algorithm

Q.no 53. What does a Pearson's product-moment allow you to identify?

- A : Whether there is a relationship between variables
- B : Whether there is a significant effect and interaction of independent variables
- C : Whether there is a significant difference between variables
- D : Whether there is a significant effect and interaction of dependent variables

Q.no 54. The tables are easy to maintain and saves storage space.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 55. Which one of these is a tree based learner?

- A : Rule based
- B : Bayesian Belief Network
- C : Bayesian classifier
- D : Random Forest

Q.no 56. What is the range of the angle between two term frequency vectors?

- A : Zero to Thirty
- B : Zero to Ninety
- C : Zero to One Eighty
- D : Zero to Forty Five

Q.no 57. Rotating the axes in a 3-D cube is the example of

- A : Pivot
- B : Roll up
- C : Drill down

D : Slice

Q.no 58. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 59. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 60. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Answer for Question No 1. is d

Answer for Question No 2. is a

Answer for Question No 3. is b

Answer for Question No 4. is a

Answer for Question No 5. is d

Answer for Question No 6. is d

Answer for Question No 7. is a

Answer for Question No 8. is b

Answer for Question No 9. is b

Answer for Question No 10. is c

Answer for Question No 11. is c

Answer for Question No 12. is c

Answer for Question No 13. is a

Answer for Question No 14. is a

Answer for Question No 15. is c

Answer for Question No 16. is d

Answer for Question No 17. is b

Answer for Question No 18. is b

Answer for Question No 19. is d

Answer for Question No 20. is b

Answer for Question No 21. is b

Answer for Question No 22. is c

Answer for Question No 23. is b

Answer for Question No 24. is d

Answer for Question No 25. is a

Answer for Question No 26. is b

Answer for Question No 27. is b

Answer for Question No 28. is d

Answer for Question No 29. is c

Answer for Question No 30. is c

Answer for Question No 31. is a

Answer for Question No 32. is c

Answer for Question No 33. is c

Answer for Question No 34. is c

Answer for Question No 35. is b

Answer for Question No 36. is d

Answer for Question No 37. is a

Answer for Question No 38. is a

Answer for Question No 39. is b

Answer for Question No 40. is a

Answer for Question No 41. is d

Answer for Question No 42. is d

Answer for Question No 43. is d

Answer for Question No 44. is b

Answer for Question No 45. is a

Answer for Question No 46. is b

Answer for Question No 47. is c

Answer for Question No 48. is c

Answer for Question No 49. is a

Answer for Question No 50. is d

Answer for Question No 51. is d

Answer for Question No 52. is a

Answer for Question No 53. is a

Answer for Question No 54. is b

Answer for Question No 55. is d

Answer for Question No 56. is b

Answer for Question No 57. is a

Answer for Question No 58. is a

Answer for Question No 59. is a

Answer for Question No 60. is a

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. How can one represent document to calculate cosine similarity?

- A : Vector
- B : Matirx
- C : List
- D : Term frequency vector

Q.no 2. Which technique finds the frequent itemsets in just two database scans?

- A : Partitioning
- B : Sampling
- C : Hashing
- D : Dynamic itemset counting

Q.no 3. Supervised learning and unsupervised clustering both require at least one

- A : hidden attribute
- B : output attribute

C : input attribute

D : categorical attribute

Q.no 4. Self-training is the simplest form of

A : supervised classification

B : semi-supervised classification

C : unsupervised classification

D : regression

Q.no 5. cross-validation and bootstrap methods are common techniques for assessing

A : accuracy

B : Precision

C : recall

D : performance

Q.no 6. What are closed itemsets?

A : An itemset for which at least super-itemset has same confidence

B : An itemset whose no proper super-itemset has same support

C : An itemset for which at least one proper super-itemset has same support

D : An itemset whose no proper super-itemset has same confidence

Q.no 7. The Synonym for data mining is

A : Data warehouse

B : Knowledge discovery in database

C : ETL

D : Business Intelligence

Q.no 8. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 9. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 10. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 11. What is an alternative form of Euclidean distance?

A : L1 norm

B : L2 norm

C : Lmax norm

D : L norm

Q.no 12. What does the leaf node in decision tree indicates

A : sub tree

B : class label

C : testing node

D : condition

Q.no 13. For Apriori algorithm, what is the first phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 14. Which is the keyword that distinguishes data warehouses from other data repository systems ?

A : Subject-oriented

B : Object-oriented

C : Client server

D : Time-invariant

Q.no 15. Which of the following is correct about Proximity measures?

A : Similarity

B : Dissimilarity

C : Similarity as well as Dissimilarity

D : Neither similarity nor dissimilarity

Q.no 16. Which angle is used to measure document similarity?

A : Sin

B : Tan

C : Cos

D : Sec

Q.no 17. Entropy is a measure of

A : impurity of an attribute

B : Purity of an attribute

C : Weight of an attribute

D : Class of an attribute

Q.no 18. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 19. Hidden knowledge referred to

A : A set of databases from different vendors, possibly using different database paradigms

B : An approach to a problem that is not guaranteed to work but performs well in most cases

C : Information that is hidden in a database and that cannot be recovered by a simple SQL query

D : None of these

Q.no 20. Constraint-based mining provides

- A : User flexibility
- B : System optimization
- C : Both (a) and (b)
- D : High computation

Q.no 21. It is the main technique employed for data selection.

- A : Noise
- B : Sampling
- C : Clustering
- D : Histogram

Q.no 22. This supervised learning technique can process both numeric and categorical input attributes.

- A : linear regression
- B : Bayes classifier
- C : logistic regression
- D : backpropagation learning

Q.no 23. one-versus-one(OVO) and one-versus-all (OVA) classification involves

- A : more than two classes
- B : Only two classes
- C : Only one class
- D : No class

Q.no 24. If first object X and Y coordinates are 3 and 5 respectively and second object X and Y coordinates are 10 and 3 respectively, then what is Manhattan distance between these two objects?

- A : 8
- B : 13
- C : 9
- D : 10

Q.no 25. Cross validation involves

A : testing the machine on all possible ways by substituting the original sample into training set

B : testing the machine on all possible ways by dividing the original sample into training and validation sets.

C : testing the machine with only validation sets

D : testing the machine on only testing datasets.

Q.no 26. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

A : Imbalanced problems should not be measured using Accuracy metric.

B : Accuracy metric is not a good idea for imbalanced class problems.

C : Precision and recall metrics aren't good for imbalanced class problems.

D : Precision and recall metrics are good for imbalanced class problems.

Q.no 27. The Microsoft SQL Server 2000 is the example of

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 28. Some company wants to divide their customers into distinct groups to send offers this is an example of

A : Data Extraction

B : Data Classification

C : Data Discrimination

D : Data Selection

Q.no 29. In Apriori algorithm, for generating e. g. 5 itemsets, we use

A : Frequent 5 itemsets

B : Frequent 3 itemsets

C : Frequent 4 itemsets

D : Frequent 6 itemsets

Q.no 30. If A, B are two sets of items, and A is a subset of B. Which of the following statement is always true?

A : Support(A) is less than or equal to Support(B)

B : Support(A) is greater than or equal to Support(B)

C : Support(A) is equal to Support(B)

D : Support(A) is not equal to Support(B)

Q.no 31. Which statement is true about the decision tree attribute selection process

A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 32. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 33. The property of Apriori algorithm is

A : All nonempty subsets of a frequent itemsets must also be frequent

B : All empty subsets of a frequent itemsets must also be frequent

C : All nonempty subsets of a frequent itemsets must be not frequent

D : All nonempty subsets of a frequent itemsets can frequent or not frequent

Q.no 34. Multilevel association rule mining is

A : Association rules generated from candidate-generation method

B : Association rules generated from without candidate-generation method

C : Association rules generated from mining data at multiple abstraction level

D : Association rules generated from frequent itemsets

Q.no 35. How will you counter over-fitting in decision tree?

A : By creating new rules

B : By pruning the longer rules

C : Both By pruning the longer rules' and ' By creating new rules'

D : BY creating new tree

Q.no 36. Number of records are comparatively more in

A : OLAP

B : OLTP

C : Same in OLAP and OLTP

D : Can not compare

Q.no 37. Which of the following property typically does not hold for similarity measures between two objects ?

A : Symmetry

B : Definiteness

C : Triangle inequality

D : Transitive

Q.no 38. K-fold Cross Validation envisages

A : partitioning of the original sample into one sample.

B : partitioning of the original sample into 'k' equal sized sub-samples.

C : partitioning of the original sample into 'k' unequal sized sub-samples.

D : partitioning of the original sample into 'k' random samples.

Q.no 39. Which is the wrong combination.

A : True negative=correctly indentified

B : False negative=incorrectly identified

C : False positive=correctly identified

D : True positive=correctly identified

Q.no 40. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 41. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

- A : smooth by bin boundaries
- B : smooth by bin median
- C : smooth by bin means
- D : smooth by bin values

Q.no 42. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

- A : Precision = 0.88, Recall=0.64
- B : Precision = 0.44, Recall=0.78
- C : Precision = 0.88, Recall=0.22
- D : Precision = 0.77, Recall=0.55

Q.no 43. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

- A : 25
- B : 210
- C : 62
- D : 30

Q.no 44. A concept hierarchy that is a total or partial order among attributes in a database schema is called

- A : Mixed hierarchy
- B : Total hierarchy
- C : Schema hierarchy
- D : Concept generalization

Q.no 45. The cuboid that holds the lowest level of summarization is called as

- A : 0-D cuboid
- B : 1-D cuboid
- C : Base cuboid
- D : 2-D cuboid

Q.no 46. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

- A : support($V1$) is greater than support ($V2$)
- B : support($V3$) is greater than support ($V2$)
- C : support($V1$) is greater than support($V3$)
- D : support($V2$) is greater than support($V3$)

Q.no 47. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

- A : 7
- B : 9
- C : 10
- D : 11

Q.no 48. Which of the following operation is required to calculate cosine similarity?

- A : Vector dot product
- B : Exponent
- C : Modulus
- D : Percentage

Q.no 49. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

- A : Recall=0.9
- B : Recall=0.39
- C : Recall=0.65
- D : Recall=5.0

Q.no 50. precision of model is 0.75 and recall is 0.43 then F-Score is

- A : F-Score= 0.99
- B : F-Score= 0.84
- C : F-Score= 0.55
- D : F-Score= 0.49

Q.no 51. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 52. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 53. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 54. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 55. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Triangle inequality

Q.no 56. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 57. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 58. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset {Tea, milk} is antecedent and {sugar} is consequent

Q.no 59. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 60. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Answer for Question No 1. is d

Answer for Question No 2. is a

Answer for Question No 3. is c

Answer for Question No 4. is b

Answer for Question No 5. is a

Answer for Question No 6. is b

Answer for Question No 7. is b

Answer for Question No 8. is d

Answer for Question No 9. is b

Answer for Question No 10. is d

Answer for Question No 11. is b

Answer for Question No 12. is b

Answer for Question No 13. is c

Answer for Question No 14. is a

Answer for Question No 15. is c

Answer for Question No 16. is c

Answer for Question No 17. is a

Answer for Question No 18. is c

Answer for Question No 19. is c

Answer for Question No 20. is c

Answer for Question No 21. is b

Answer for Question No 22. is b

Answer for Question No 23. is a

Answer for Question No 24. is c

Answer for Question No 25. is c

Answer for Question No 26. is c

Answer for Question No 27. is c

Answer for Question No 28. is b

Answer for Question No 29. is c

Answer for Question No 30. is b

Answer for Question No 31. is b

Answer for Question No 32. is d

Answer for Question No 33. is a

Answer for Question No 34. is c

Answer for Question No 35. is b

Answer for Question No 36. is b

Answer for Question No 37. is c

Answer for Question No 38. is d

Answer for Question No 39. is c

Answer for Question No 40. is d

Answer for Question No 41. is d

Answer for Question No 42. is a

Answer for Question No 43. is d

Answer for Question No 44. is c

Answer for Question No 45. is c

Answer for Question No 46. is b

Answer for Question No 47. is b

Answer for Question No 48. is a

Answer for Question No 49. is a

Answer for Question No 50. is c

Answer for Question No 51. is d

Answer for Question No 52. is a

Answer for Question No 53. is a

Answer for Question No 54. is c

Answer for Question No 55. is a

Answer for Question No 56. is a

Answer for Question No 57. is a

Answer for Question No 58. is d

Answer for Question No 59. is c

Answer for Question No 60. is d

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Removing duplicate records is a process called

- A : recovery
- B : data cleaning
- C : data cleansing
- D : data pruning

Q.no 2. the positive tuples that were correctly labeled by the classifier are

- A : True negatives (TN)
- B : False negatives(FN)
- C : False positives(FP)
- D : True positives(TP)

Q.no 3. This is a visualization operation that rotates the data axes in view to provide an alternative data presentation

- A : Pivot
- B : Roll up

C : Drill down

D : Slice

Q.no 4. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 5. Which of the following is the data mining tool?

A : Borland C

B : Weka

C : Borland C++

D : Visual C

Q.no 6. How can one represent document to calculate cosine similarity?

A : Vector

B : Matirx

C : List

D : Term frequency vector

Q.no 7. Data used to build a data mining model.

A : Validation Data

B : Training Data

C : Testing Data

D : Hidden Data

Q.no 8. Entropy is a measure of

A : impurity of an attribute

B : Purity of an attribute

C : Weight of an attribute

D : Class of an attribute

Q.no 9. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 10. What does the leaf node in decision tree indicates

A : sub tree

B : class label

C : testing node

D : condition

Q.no 11. to evaluate a classifier's quality we use

A : confusion matrix

B : error detection code

C : error correction code

D : classifier

Q.no 12. The Synonym for data mining is

A : Data warehouse

B : Knowledge discovery in database

C : ETL

D : Business Intelligence

Q.no 13. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 14. Multi-class classification makes the assumption that each sample is assigned to

A : one and only one label

B : many labels

C : one or many labels

D : no label

Q.no 15. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 16. The example of knowledge type constraints in constraint based mining is

A : Association or Correlation

B : Rule templates

C : Task relevant data

D : Threshold measures

Q.no 17. A decision tree is also known as

A : general tree

B : binary tree

C : prediction tree

D : None of the options

Q.no 18. For Apriori algorithm, what is the first phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 19. Choose the correct concept hierarchy.

A : city < street < state < country

B : street < city < state < country

C : street > city > state > country

D : street > city > country > state

Q.no 20. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 21. Which of the following operations are used to calculate proximity measures for ordinal attribute?

A : Replacement and discretization

B : Replacement and characterizarion

C : Replacement and normalization

D : Normalization and discretization

Q.no 22. The property of Apriori algorithm is

A : All nonempty subsets of a frequent itemsets must also be frequent

B : All empty subsets of a frequent itemsets must also be frequent

C : All nonempty subsets of a frequent itemsets must be not frequent

D : All nonempty subsets of a frequent itemsets can frequent or not frequent

Q.no 23. Where does the bayes rule used?

A : Solving queries

B : Increasing complexity

C : Decreasing complexity

D : Answering probabilistic query

Q.no 24. The confusion matrix is a useful tool for analyzing

A : Regression

B : Classification

C : Sampling

D : Cross validation

Q.no 25. What is another name of data matrix?

A : Single mode

B : Two mode

C : Multi mode

D : Large mode

Q.no 26. In a decision tree each leaf node represents

A : Test conditions

B : Class labels

C : Attribute values

D : Decision

Q.no 27. Identify the example of sequence data

A : weather forecast

B : data matrix

C : market basket data

D : genomic data

Q.no 28. Which statement is true about the KNN algorithm?

A : All attribute values must be categorical

B : The output attribute must be categorical.

C : Attribute values may be either categorical or numeric.

D : All attributes must be numeric.

Q.no 29. If A, B are two sets of items, and A is a subset of B. Which of the following statement is always true?

A : Support(A) is less than or equal to Support(B)

B : Support(A) is greater than or equal to Support(B)

C : Support(A) is equal to Support(B)

D : Support(A) is not equal to Support(B)

Q.no 30. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

A : Multiclassification

B : Multi-label classification

C : Imbalanced classification

D : Binary Classification

Q.no 31. Learning with a complete system in mind with reference to interactions among the systems and subsystems with proper understanding of systemic boundaries is

- A : Multi-label classification
- B : Reinforcement learning
- C : Systemic learning
- D : Machine Learning

Q.no 32. The probability of a hypothesis before the presentation of evidence is called as

- A : Apriori probability
- B : subjective probability
- C : posterior probability
- D : conditional probability

Q.no 33. The ultimate purpose of Frequent itemset mining is

- A : For business decision-making process
- B : For generation of association rules
- C : For generation of candidate set
- D : For generation of interesting patterns

Q.no 34. Which of the following is a predictive model?

- A : Clustering
- B : Regression
- C : Summarization
- D : Association rules

Q.no 35. The correlation coefficient is used to determine:

- A : A specific value of the y-variable given a specific value of the x-variable
- B : A specific value of the x-variable given a specific value of the y-variable
- C : The strength of the relationship between the x and y variables
- D : None of these

Q.no 36. When you use cross validation in machine learning, it means

- A : you verify how accurate your model is on multiple and different subsets of data.

B : you verify how accurate your model is on same dataset.

C : you verify how accurate your model is on new dataset.

D : you verify how accurate your model on unknown dataset

Q.no 37. It is the main technique employed for data selection.

A : Noise

B : Sampling

C : Clustering

D : Histogram

Q.no 38. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 39. A frequent pattern tree is a tree structure consisting of

A : A frequent-item-node

B : An item-prefix-tree

C : A frequent-item-header table

D : both B and C

Q.no 40. Some company wants to divide their customers into distinct groups to send offers this is an example of

A : Data Extraction

B : Data Classification

C : Data Discrimination

D : Data Selection

Q.no 41. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 42. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block distance

C : Chebyshev distance

D : Euclidean distance

Q.no 43. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 44. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 45. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 46. Which operation is required to calculate Hamming distacne between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 47. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 48. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 49. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 50. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 51. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 52. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 53. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 54. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 55. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 56. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 57. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 58. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 59. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 60. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Answer for Question No 1. is b

Answer for Question No 2. is d

Answer for Question No 3. is a

Answer for Question No 4. is b

Answer for Question No 5. is b

Answer for Question No 6. is d

Answer for Question No 7. is b

Answer for Question No 8. is a

Answer for Question No 9. is b

Answer for Question No 10. is b

Answer for Question No 11. is a

Answer for Question No 12. is b

Answer for Question No 13. is b

Answer for Question No 14. is a

Answer for Question No 15. is c

Answer for Question No 16. is a

Answer for Question No 17. is c

Answer for Question No 18. is c

Answer for Question No 19. is b

Answer for Question No 20. is c

Answer for Question No 21. is c

Answer for Question No 22. is a

Answer for Question No 23. is d

Answer for Question No 24. is b

Answer for Question No 25. is b

Answer for Question No 26. is b

Answer for Question No 27. is d

Answer for Question No 28. is d

Answer for Question No 29. is b

Answer for Question No 30. is a

Answer for Question No 31. is c

Answer for Question No 32. is a

Answer for Question No 33. is a

Answer for Question No 34. is b

Answer for Question No 35. is c

Answer for Question No 36. is a

Answer for Question No 37. is b

Answer for Question No 38. is c

Answer for Question No 39. is d

Answer for Question No 40. is b

Answer for Question No 41. is c

Answer for Question No 42. is c

Answer for Question No 43. is b

Answer for Question No 44. is b

Answer for Question No 45. is b

Answer for Question No 46. is d

Answer for Question No 47. is c

Answer for Question No 48. is a

Answer for Question No 49. is a

Answer for Question No 50. is a

Answer for Question No 51. is b

Answer for Question No 52. is d

Answer for Question No 53. is c

Answer for Question No 54. is b

Answer for Question No 55. is c

Answer for Question No 56. is c

Answer for Question No 57. is a

Answer for Question No 58. is d

Answer for Question No 59. is d

Answer for Question No 60. is d

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. What is association rule mining?

- A : Using association to find correlation rules
- B : Same as frequent itemset mining
- C : Finding of strong association rules using frequent itemsets
- D : Finding of frequent itemset from large database

Q.no 2. In Data Characterization, class under study is called as?

- A : Study Class
- B : Initial Class
- C : Target Class
- D : Final Class

Q.no 3. Which of the following is not frequent pattern?

- A : Itemsets
- B : Subsequences

C : Substructures

D : Associations

Q.no 4. Which angle is used to measure document similarity?

A : Sin

B : Tan

C : Cos

D : Sec

Q.no 5. accuracy is used to measure

A : classifier's true abilities

B : classifier's analytic abilities

C : classifier's decision abilities

D : classifier's predictive abilities

Q.no 6. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 7. Which technique finds the frequent itemsets in just two database scans?

A : Partitioning

B : Sampling

C : Hashing

D : Dynamic itemset counting

Q.no 8. the positive tuples that were correctly labeled by the classifier are

A : True negatives (TN)

B : False negatives(FN)

C : False positives(FP)

D : True positives(TP)

Q.no 9. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 10. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 11. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 12. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 13. Postpruning is

A : Removing branches from fully grown tree

B : Stop constructing tree if this would result in the measure falling below a threshold

C : constructing a new tree

D : Flow-Chart

Q.no 14. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 15. What does the leaf node in decision tree indicates

A : sub tree

B : class label

C : testing node

D : condition

Q.no 16. What is an alternative form of Euclidean distance?

A : L1 norm

B : L2 norm

C : Lmax norm

D : L norm

Q.no 17. the negative tuples that were correctly labeled by the classifier

A : False positives(FP)

B : True positives(TP)

C : True negatives (TN)

D : False negatives(FN)

Q.no 18. The problem of agents to learn from the environment by their interactions with dynamic environment is done in

A : Reinforcement learning

B : Multi-label classification

C : Binary Classification

D : Multiclassification

Q.no 19. Multi-class classification makes the assumption that each sample is assigned to

A : one and only one label

B : many labels

C : one or many labels

D : no label

Q.no 20. An automatic car driver and business intelligent systems are examples of

- A : Regression
- B : Classification
- C : Machine Learning
- D : Reinforcement learning

Q.no 21. Joins will be needed to execute the query. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 22. The frequent-item-header-table consists of number fields

- A : Only one
- B : Two
- C : Three
- D : Four

Q.no 23. Cross validation involves

- A : testing the machine on all possible ways by substituting the original sample into training set
- B : testing the machine on all possible ways by dividing the original sample into training and validation sets.
- C : testing the machine with only validation sets
- D : testing the machine on only testing datasets.

Q.no 24. In which step of Knowledge Discovery, multiple data sources are combined?

- A : Data Cleaning
- B : Data Integration
- C : Data Selection
- D : Data Transformation

Q.no 25. When you use cross validation in machine learning, it means

- A : you verify how accurate your model is on multiple and different subsets of data.

B : you verify how accurate your model is on same dataset.

C : you verify how accurate your model is on new dataset.

D : you verify how accurate your model on unknown dataset

Q.no 26. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 27. Which of the following activities is a data mining task?

A : Monitoring the heart rate of a patient for abnormalities

B : Extracting the frequencies of a sound wave

C : Predicting the outcomes of tossing a (fair) pair of dice

D : Dividing the customers of a company according to their profitability

Q.no 28. Identify the example of sequence data

A : weather forecast

B : data matrix

C : market basket data

D : genomic data

Q.no 29. The rule is considered as interesting if

A : They satisfy both minimum support and minimum confidence threshold

B : They satisfy both maximum support and maximum confidence threshold

C : They satisfy maximum support and minimum confidence threshold

D : They satisfy minimum support and maximum confidence threshold

Q.no 30. The probability of a hypothesis before the presentation of evidence is called as

A : Apriori probability

B : subjective probability

C : posterior probability

D : conditional probability

Q.no 31. OLAP Summarization means

- A : Consolidated
- B : Primitive
- C : Highly detailed
- D : Recent data

Q.no 32. Which of the following is not correct use of cross validation?

- A : Selecting variables to include in a model
- B : Comparing predictors
- C : Selecting parameters in prediction function
- D : classification

Q.no 33. Which of the following probabilities are used in the Bayes theorem.

- A : $P(C_i|X)$
- B : $P(C_i)$
- C : $P(X|C_i)$
- D : $P(X)$

Q.no 34. This supervised learning technique can process both numeric and categorical input attributes.

- A : linear regression
- B : Bayes classifier
- C : logistic regression
- D : backpropagation learning

Q.no 35. For mining frequent itemsets, the Data format used by Apriori and FP-Growth algorithms are

- A : Apriori uses horizontal and FP-Growth uses vertical data format
- B : Apriori uses vertical and FP-Growth uses horizontal data format
- C : Apriori and FP-Growth both uses vertical data format
- D : Apriori and FP-Growth both uses horizontal data format

Q.no 36. Which of the following is measure of document similarity?

- A : Cosine dissimilarity

B : Sine similarity

C : Sine dissimilarity

D : Cosine similarity

Q.no 37. Sensitivity is also referred to as

A : misclassification rate

B : true negative rate

C : True positive rate

D : correctness

Q.no 38. The data cubes are generally

A : 1 Dimensional

B : 2 Dimensional

C : 3 Dimensional

D : n-Dimensional

Q.no 39. Data independence means

A : Data is defined separately and not included in programs

B : Programs are not dependent on the physical attributes of the data

C : Programs are not dependent on the logical attributes of the data

D : Programs are not dependent on the physical attributes as well as logical attributes of the data

Q.no 40. It is the main technique employed for data selection.

A : Noise

B : Sampling

C : Clustering

D : Histogram

Q.no 41. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 42. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

A : 7

B : 9

C : 10

D : 11

Q.no 43. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 44. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 45. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Fourty Five

Q.no 46. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Q.no 47. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

- A : Precision= 0.90
- B : Precision= 0.79
- C : Precision= 0.45
- D : Precision= 0.68

Q.no 48. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

- A : Primary
- B : Secondary
- C : Superkey
- D : Candidate

Q.no 49. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

- A : Precision
- B : Classifier performance
- C : Recall
- D : F-measure

Q.no 50. Correlation analysis is used for

- A : handling missing values
- B : identifying redundant attributes
- C : handling different data formats
- D : eliminating noise

Q.no 51. What does a Pearson's product-moment allow you to identify?

- A : Whether there is a relationship between variables
- B : Whether there is a significant effect and interaction of independent variables
- C : Whether there is a significant difference between variables
- D : Whether there is a significant effect and interaction of dependent variables

Q.no 52. Cost complexity pruning algorithm is used in?

- A : CART

B : C4.5

C : ID3

D : ALL

Q.no 53. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 54. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 55. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 56. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 57. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 58. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 59. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset {Tea, milk} is antecedent and {sugar} is consequent

Q.no 60. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Answer for Question No 1. is c

Answer for Question No 2. is c

Answer for Question No 3. is d

Answer for Question No 4. is c

Answer for Question No 5. is d

Answer for Question No 6. is b

Answer for Question No 7. is a

Answer for Question No 8. is d

Answer for Question No 9. is b

Answer for Question No 10. is b

Answer for Question No 11. is b

Answer for Question No 12. is a

Answer for Question No 13. is a

Answer for Question No 14. is d

Answer for Question No 15. is b

Answer for Question No 16. is b

Answer for Question No 17. is c

Answer for Question No 18. is a

Answer for Question No 19. is a

Answer for Question No 20. is d

Answer for Question No 21. is b

Answer for Question No 22. is b

Answer for Question No 23. is c

Answer for Question No 24. is b

Answer for Question No 25. is a

Answer for Question No 26. is d

Answer for Question No 27. is a

Answer for Question No 28. is d

Answer for Question No 29. is a

Answer for Question No 30. is a

Answer for Question No 31. is a

Answer for Question No 32. is d

Answer for Question No 33. is a

Answer for Question No 34. is b

Answer for Question No 35. is d

Answer for Question No 36. is d

Answer for Question No 37. is c

Answer for Question No 38. is d

Answer for Question No 39. is d

Answer for Question No 40. is b

Answer for Question No 41. is d

Answer for Question No 42. is b

Answer for Question No 43. is c

Answer for Question No 44. is a

Answer for Question No 45. is b

Answer for Question No 46. is b

Answer for Question No 47. is a

Answer for Question No 48. is d

Answer for Question No 49. is b

Answer for Question No 50. is b

Answer for Question No 51. is a

Answer for Question No 52. is a

Answer for Question No 53. is b

Answer for Question No 54. is a

Answer for Question No 55. is c

Answer for Question No 56. is b

Answer for Question No 57. is c

Answer for Question No 58. is a

Answer for Question No 59. is d

Answer for Question No 60. is c

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 2. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 3. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 4. Constraint-based mining provides

A : User flexibility

B : System optimization

C : Both (a) and (b)

D : High computation

Q.no 5. Each dimension is represented by only one table. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 6. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non-supervised

Q.no 7. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 8. Multilevel association rules can be mined efficiently using

A : Support

B : Confidence

C : Support count

D : Concept Hierarchies under support-confidence framework

Q.no 9. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 10. The example of knowledge type constraints in constraint based mining is

A : Association or Correlation

B : Rule templates

C : Task relevant data

D : Threshold measures

Q.no 11. A data cube is defined by

A : Dimensions

B : Facts

C : Dimensions and Facts

D : Dimensions or Facts

Q.no 12. What are closed frequent itemsets?

A : A closed itemset

B : A frequent itemset

C : An itemset which is both closed and frequent

D : Not frequent itemset

Q.no 13. A decision tree is also known as

A : general tree

B : binary tree

C : prediction tree

D : None of the options

Q.no 14. Which is the keyword that distinguishes data warehouses from other data repository systems ?

A : Subject-oriented

B : Object-oriented

C : Client server

D : Time-invariant

Q.no 15. Which of the following are methods for supervised classification?

A : Decision tree

B : K-Means

C : Hierarchical

D : Apriori

Q.no 16. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 17. What is an alternative form of Euclidean distance?

A : L1 norm

B : L2 norm

C : Lmax norm

D : L norm

Q.no 18. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 19. The task of building decision model from labeled training data is called as

A : Supervised Learning

B : Unsupervised Learning

C : Reinforcement Learning

D : Structure Learning

Q.no 20. In Data Characterization, class under study is called as?

A : Study Class

B : Intial Class

C : Target Class

D : Final Class

Q.no 21. How will you counter over-fitting in decision tree?

A : By creating new rules

B : By pruning the longer rules

C : Both By pruning the longer rules' and ' By creating new rules'

D : BY creating new tree

Q.no 22. Which of the following is a predictive model?

A : Clustering

B : Regression

C : Summarization

D : Association rules

Q.no 23. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

A : Replacement discretization and distance measure

B : Replacement characterizarion and distance measure

C : Normalization discretization and distance measure

D : Replacement normalization and distance measure

Q.no 24. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) dnd (b)

Q.no 25. Joins will be needed to execute the query. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 26. A nearest neighbor approach is best used

A : with large-sized datasets.

B : when irrelevant attributes have been removed from the data.

C : when a generalized model of the data is desirable.

D : when an explanation of what has been found is of primary importance.

Q.no 27. What is uniform support in multilevel association rule mining?

A : Use of minimum support

B : Use of minimum support and confidence

C : Use of same minimum threshold at each abstraction level

D : Use of minimum support and support count

Q.no 28. If first object X and Y coordinates are 3 and 5 respectively and second object X and Y coordinates are 10 and 3 respectively, then what is Manhattan distance between these two objects?

A : 8

B : 13

C : 9

D : 10

Q.no 29. Cross validation involves

A : testing the machine on all possible ways by substituting the original sample into training set

B : testing the machine on all possible ways by dividing the original sample into training and validation sets.

C : testing the machine with only validation sets

D : testing the machine on only testing datasets.

Q.no 30. In asymmetric attribute

A : No value is considered important over other values

B : All values are equal

C : Only non-zero value is important

D : Range of values is important

Q.no 31. In multilevel association rules, which strategy is employed

A : Top-down

B : Recursive

C : Bottom-up

D : Divide and conquer

Q.no 32. Which of the following activities is a data mining task?

A : Monitoring the heart rate of a patient for abnormalities

B : Extracting the frequencies of a sound wave

C : Predicting the outcomes of tossing a (fair) pair of dice

D : Dividing the customers of a company according to their profitability

Q.no 33. The rule is considered as interesting if

A : They satisfy both minimum support and minimum confidence threshold

B : They satisfy both maximum support and maximum confidence threshold

C : They satisfy maximum support and minimum confidence threshold

D : They satisfy minimum support and maximum confidence threshold

Q.no 34. A frequent pattern tree is a tree structure consisting of

A : A frequent-item-node

B : An item-prefix-tree

C : A frequent-item-header table

D : both B and C

Q.no 35. Frequent patterns generated from association can be used for classification is called

A : Naïve Bays

B : Associative Classification

C : Predictive Mining

D : Decision Tree

Q.no 36. Sensitivity is also referred to as

A : misclassification rate

B : true negative rate

C : True positive rate

D : correctness

Q.no 37. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 38. The probability of a hypothesis before the presentation of evidence is called as

A : Apriori probability

B : subjective probability

C : posterior probability

D : conditional probability

Q.no 39. Where does the bayes rule used?

A : Solving queries

B : Increasing complexity

C : Decreasing complexity

D : Answering probabilistic query

Q.no 40. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

A : Multiclassification

B : Multi-label classification

C : Imbalanced classification

D : Binary Classification

Q.no 41. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 42. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 43. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 44. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 45. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 46. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 47. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 48. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 49. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Fourty Five

Q.no 50. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 51. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 52. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 53. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 54. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 55. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 56. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 57. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 58. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

- A : Recall=0.9
- B : Recall=0.39
- C : Recall=0.65
- D : Recall=5.0

Q.no 59. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

- A : Precision = 0.88, Recall=0.64
- B : Precision = 0.44, Recall=0.78
- C : Precision = 0.88, Recall=0.22
- D : Precision = 0.77, Recall=0.55

Q.no 60. Rotating the axes in a 3-D cube is the example of

- A : Pivot
- B : Roll up
- C : Drill down
- D : Slice

Answer for Question No 1. is b

Answer for Question No 2. is b

Answer for Question No 3. is b

Answer for Question No 4. is c

Answer for Question No 5. is a

Answer for Question No 6. is c

Answer for Question No 7. is b

Answer for Question No 8. is d

Answer for Question No 9. is c

Answer for Question No 10. is a

Answer for Question No 11. is c

Answer for Question No 12. is c

Answer for Question No 13. is c

Answer for Question No 14. is a

Answer for Question No 15. is a

Answer for Question No 16. is a

Answer for Question No 17. is b

Answer for Question No 18. is b

Answer for Question No 19. is a

Answer for Question No 20. is c

Answer for Question No 21. is b

Answer for Question No 22. is b

Answer for Question No 23. is d

Answer for Question No 24. is d

Answer for Question No 25. is b

Answer for Question No 26. is b

Answer for Question No 27. is c

Answer for Question No 28. is c

Answer for Question No 29. is c

Answer for Question No 30. is c

Answer for Question No 31. is a

Answer for Question No 32. is a

Answer for Question No 33. is a

Answer for Question No 34. is d

Answer for Question No 35. is b

Answer for Question No 36. is c

Answer for Question No 37. is c

Answer for Question No 38. is a

Answer for Question No 39. is d

Answer for Question No 40. is a

Answer for Question No 41. is d

Answer for Question No 42. is a

Answer for Question No 43. is b

Answer for Question No 44. is d

Answer for Question No 45. is a

Answer for Question No 46. is a

Answer for Question No 47. is d

Answer for Question No 48. is a

Answer for Question No 49. is b

Answer for Question No 50. is b

Answer for Question No 51. is c

Answer for Question No 52. is a

Answer for Question No 53. is d

Answer for Question No 54. is d

Answer for Question No 55. is b

Answer for Question No 56. is b

Answer for Question No 57. is c

Answer for Question No 58. is a

Answer for Question No 59. is a

Answer for Question No 60. is a

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Multi-class classification makes the assumption that each sample is assigned to

- A : one and only one label
- B : many labels
- C : one or many labels
- D : no label

Q.no 2. the negative tuples that were correctly labeled by the classifier

- A : False positives(FP)
- B : True positives(TP)
- C : True negatives (TN)
- D : False negatives(FN)

Q.no 3. What is an alternative form of Euclidean distance?

- A : L1 norm
- B : L2 norm

C : Lmax norm

D : L norm

Q.no 4. the positive tuples that were correctly labeled by the classifier are

A : True negatives (TN)

B : False negatives(FN)

C : False positives(FP)

D : True positives(TP)

Q.no 5. Self-training is the simplest form of

A : supervised classification

B : semi-supervised classification

C : unsupervised classification

D : regression

Q.no 6. What are closed itemsets?

A : An itemset for which at least super-itemset has same confidence

B : An itemset whose no proper super-itemset has same support

C : An itemset for which at least one proper super-itemset has same support

D : An itemset whose no proper super-itemset has same confidence

Q.no 7. Which of the following is not a type of constraints?

A : Data constraints

B : Rule constraints

C : Knowledge type constraints

D : Time constraints

Q.no 8. The problem of agents to learn from the environment by their interactions with dynamic environment is done in

A : Reinforcement learning

B : Multi-label classification

C : Binary Classification

D : Multiclassification

Q.no 9. Color is an example of which type of attribute

- A : Nominal
- B : Binary
- C : Ordinal
- D : numeric

Q.no 10. Which technique finds the frequent itemsets in just two database scans?

- A : Partitioning
- B : Sampling
- C : Hashing
- D : Dynamic itemset counting

Q.no 11. The task of building decision model from labeled training data is called as

- A : Supervised Learning
- B : Unsupervised Learning
- C : Reinforcement Learning
- D : Structure Learning

Q.no 12. A data cube is defined by

- A : Dimensions
- B : Facts
- C : Dimensions and Facts
- D : Dimensions or Facts

Q.no 13. accuracy is used to measure

- A : classifier's true abilities
- B : classifier's analytic abilities
- C : classifier's decision abilities
- D : classifier's predictive abilities

Q.no 14. In Data Characterization, class under study is called as?

- A : Study Class
- B : Intial Class

C : Target Class

D : Final Class

Q.no 15. Which of the following are methods for supervised classification?

A : Decision tree

B : K-Means

C : Hierarchical

D : Apriori

Q.no 16. A data matrix in which attributes are of the same type and asymmetric is called

A : Pattern matrix

B : Sparse data matrix

C : Document term matrix

D : Normal matrix

Q.no 17. Which one of the following is true for decision tree

A : Decision tree is useful in decision making

B : Decision tree is similar to OLTP

C : Decision Tree is similar to cluster analysis

D : Decision tree needs to find probabilities of hypothesis

Q.no 18. A person trained to interact with a human expert in order to capture their knowledge.

A : knowledge programmer

B : knowledge developer

C : knowledge engineer

D : knowledge extractor

Q.no 19. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non- supervised

Q.no 20. Data used to build a data mining model.

- A : Validation Data
- B : Training Data
- C : Testing Data
- D : Hidden Data

Q.no 21. Which statement is true about the KNN algorithm?

- A : All attribute values must be categorical
- B : The output attribute must be categorical.
- C : Attribute values may be either categorical or numeric.
- D : All attributes must be numeric.

Q.no 22. Every key structure in the data warehouse contains a time element

- A : records
- B : Explicitly
- C : Implicitly and explicitly
- D : Implicitly or explicitly

Q.no 23. When do you consider an association rule interesting?

- A : If it only satisfies minimum support
- B : If it only satisfies minimum confidence
- C : If it satisfies both minimum support and minimum confidence
- D : There are other measures to check interesting rules

Q.no 24. Frequent patterns generated from association can be used for classification is called

- A : Naïve Bays
- B : Associative Classification
- C : Predictive Mining
- D : Decision Tree

Q.no 25. The Microsoft SQL Server 2000 is the example of

- A : ROLAP
- B : MOLAP

C : HOLAP

D : HaoLap

Q.no 26. The Galaxy Schema is also called as

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 27. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 28. Learning with a complete system in mind with reference to interactions among the systems and subsystems with proper understanding of systemic boundaries is

A : Multi-label classification

B : Reinforcement learning

C : Systemic learning

D : Machine Learning

Q.no 29. The data cubes are generally

A : 1 Dimensional

B : 2 Dimensional

C : 3 Dimensional

D : n-Dimensional

Q.no 30. This supervised learning technique can process both numeric and categorical input attributes.

A : linear regression

B : Bayes classifier

C : logistic regression

D : backpropagation learning

Q.no 31. one-versus-one(OVO) and one-versus-all (OVA) classification involves

- A : more than two classes
- B : Only two classes
- C : Only one class
- D : No class

Q.no 32. In multilevel association rules, which strategy is employed

- A : Top-down
- B : Recursive
- C : Bottom-up
- D : Divide and conquer

Q.no 33. One of the most well known software used for classification is

- A : Java
- B : C4.5
- C : Oracle
- D : C++

Q.no 34. Holdout and random subsampling are common techniques for assessing

- A : K-Fold validation
- B : cross validation
- C : accuracy
- D : sampling

Q.no 35. Which of the following activities is a data mining task?

- A : Monitoring the heart rate of a patient for abnormalities
- B : Extracting the frequencies of a sound wave
- C : Predicting the outcomes of tossing a (fair) pair of dice
- D : Dividing the customers of a company according to their profitability

Q.no 36. Lazy learner classification approach is

- A : learner waits until the last minute before constructing model to classify
- B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 37. Which of the following is measure of document similarity?

A : Cosine dissimilarity

B : Sine similarity

C : Sine dissimilarity

D : Cosine similarity

Q.no 38. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 39. Which of the following property typically does not hold for similarity measures between two objects ?

A : Symmetry

B : Definiteness

C : Triangle inequality

D : Transitive

Q.no 40. How will you counter over-fitting in decision tree?

A : By creating new rules

B : By pruning the longer rules

C : Both By pruning the longer rules' and ' By creating new rules'

D : BY creating new tree

Q.no 41. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 42. Which operation is required to calculate Hamming distance between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 43. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 44. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 45. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 46. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 47. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 48. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 49. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 50. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 51. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Q.no 52. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 53. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 54. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 55. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 56. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 57. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 58. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

- A : Precision
- B : Classifier performance
- C : Recall
- D : F-measure

Q.no 59. Which of the following operation is required to calculate cosine similarity?

- A : Vector dot product
- B : Exponent
- C : Modulus
- D : Percentage

Q.no 60. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

- A : Precision = 0.88, Recall=0.64
- B : Precision = 0.44, Recall=0.78
- C : Precision = 0.88, Recall=0.22
- D : Precision = 0.77, Recall=0.55

Answer for Question No 1. is a

Answer for Question No 2. is c

Answer for Question No 3. is b

Answer for Question No 4. is d

Answer for Question No 5. is b

Answer for Question No 6. is b

Answer for Question No 7. is d

Answer for Question No 8. is a

Answer for Question No 9. is a

Answer for Question No 10. is a

Answer for Question No 11. is a

Answer for Question No 12. is c

Answer for Question No 13. is d

Answer for Question No 14. is c

Answer for Question No 15. is a

Answer for Question No 16. is b

Answer for Question No 17. is a

Answer for Question No 18. is c

Answer for Question No 19. is c

Answer for Question No 20. is b

Answer for Question No 21. is d

Answer for Question No 22. is d

Answer for Question No 23. is c

Answer for Question No 24. is b

Answer for Question No 25. is c

Answer for Question No 26. is c

Answer for Question No 27. is d

Answer for Question No 28. is c

Answer for Question No 29. is d

Answer for Question No 30. is b

Answer for Question No 31. is a

Answer for Question No 32. is a

Answer for Question No 33. is b

Answer for Question No 34. is c

Answer for Question No 35. is a

Answer for Question No 36. is a

Answer for Question No 37. is d

Answer for Question No 38. is c

Answer for Question No 39. is c

Answer for Question No 40. is b

Answer for Question No 41. is a

Answer for Question No 42. is d

Answer for Question No 43. is b

Answer for Question No 44. is d

Answer for Question No 45. is a

Answer for Question No 46. is d

Answer for Question No 47. is d

Answer for Question No 48. is c

Answer for Question No 49. is a

Answer for Question No 50. is a

Answer for Question No 51. is b

Answer for Question No 52. is a

Answer for Question No 53. is a

Answer for Question No 54. is c

Answer for Question No 55. is c

Answer for Question No 56. is c

Answer for Question No 57. is a

Answer for Question No 58. is b

Answer for Question No 59. is a

Answer for Question No 60. is a

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. cross-validation and bootstrap methods are common techniques for assessing

A : accuracy

B : Precision

C : recall

D : performance

Q.no 2. The most widely used metrics and tools to assess a classification model are:

A : Conusion Matrix

B : Support

C : Entropy

D : Probability

Q.no 3. the positive tuples that were correctly labeled by the classifier are

A : True negatives (TN)

B : False negatives(FN)

C : False positives(FP)

D : True positives(TP)

Q.no 4. Self-training is the simplest form of

A : supervised classification

B : semi-supervised classification

C : unsupervised classification

D : regression

Q.no 5. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 6. Training process that generates tree is called as

A : Pruning

B : Rule generation

C : Induction

D : splitting

Q.no 7. Which of the following is the data mining tool?

A : Borland C

B : Weka

C : Borland C++

D : Visual C

Q.no 8. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 9. Color is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : numeric

Q.no 10. the negative tuples that were correctly labeled by the classifier

A : False positives(FP)

B : True positives(TP)

C : True negatives (TN)

D : False negatives(FN)

Q.no 11. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 12. What are two steps of tree pruning work?

A : Pessimistic pruning and Optimistic pruning

B : Postpruning and Prepruning

C : Cost complexity pruning and time complexity pruning

D : None of the options

Q.no 13. An automatic car driver and business intelligent systems are examples of

A : Regression

B : Classification

C : Machine Learning

D : Reinforcement learning

Q.no 14. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 15. For Apriori algorithm, what is the first phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 16. A decision tree is also known as

A : general tree

B : binary tree

C : prediction tree

D : None of the options

Q.no 17. Which is the keyword that distinguishes data warehouses from other data repository systems ?

A : Subject-oriented

B : Object-oriented

C : Client server

D : Time-invariant

Q.no 18. What is gini index?

A : It is a type of index structure

B : It is a measure of purity

C : Both options except none

D : None of the options

Q.no 19. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 20. A data cube is defined by

- A : Dimensions
- B : Facts
- C : Dimensions and Facts
- D : Dimensions or Facts

Q.no 21. If A, B are two sets of items, and A is a subset of B. Which of the following statement is always true?

- A : $\text{Support}(A)$ is less than or equal to $\text{Support}(B)$
- B : $\text{Support}(A)$ is greater than or equal to $\text{Support}(B)$
- C : $\text{Support}(A)$ is equal to $\text{Support}(B)$
- D : $\text{Support}(A)$ is not equal to $\text{Support}(B)$

Q.no 22. When you use cross validation in machine learning, it means

- A : you verify how accurate your model is on multiple and different subsets of data.
- B : you verify how accurate your model is on same dataset.
- C : you verify how accurate your model is on new dataset.
- D : you verify how accurate your model on unknown dataset

Q.no 23. The frequent-item-header-table consists of number fields

- A : Only one
- B : Two
- C : Three
- D : Four

Q.no 24. Which is the wrong combination.

- A : True negative=correctly indentified
- B : False negative=incorrectly identified
- C : False positive=correctly identified
- D : True positive=correctly identified

Q.no 25. Lazy learner classification approach is

- A : learner waits until the last minute before constructing model to classify

B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 26. K-fold Cross Validation envisages

A : partitioning of the original sample into one sample.

B : partitioning of the original sample into 'k' equal sized sub-samples.

C : partitioning of the original sample into 'k' unequal sized sub-samples.

D : partitioning of the original sample into 'k' random samples.

Q.no 27. Which of the following property typically does not hold for similarity measures between two objects ?

A : Symmetry

B : Definiteness

C : Triangle inequality

D : Transitive

Q.no 28. In Apriori algorithm, for generating e. g. 5 itemsets, we use

A : Frequent 5 itemsets

B : Frequent 3 itemsets

C : Frequent 4 itemsets

D : Frequent 6 itemsets

Q.no 29. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) and (b)

Q.no 30. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 31. The confusion matrix is a useful tool for analyzing

A : Regression

B : Classification

C : Sampling

D : Cross validation

Q.no 32. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 33. Which of the following probabilities are used in the Bayes theorem.

A : $P(C_i|X)$

B : $P(C_i)$

C : $P(X|C_i)$

D : $P(X)$

Q.no 34. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

A : Replacement discretization and distance measure

B : Replacement characterization and distance measure

C : Normalization discretization and distance measure

D : Replacement normalization and distance measure

Q.no 35. Which statement is true about the KNN algorithm?

A : All attribute values must be categorical

B : The output attribute must be categorical.

C : Attribute values may be either categorical or numeric.

D : All attributes must be numeric.

Q.no 36. Which of the following is not correct use of cross validation?

- A : Selecting variables to include in a model
- B : Comparing predictors
- C : Selecting parameters in prediction function
- D : classification

Q.no 37. If first object X and Y coordinates are 3 and 5 respectively and second object X and Y coordinates are 10 and 3 respectively, then what is Manhattan distance between these two objects?

- A : 8
- B : 13
- C : 9
- D : 10

Q.no 38. A frequent pattern tree is a tree structure consisting of

- A : A frequent-item-node
- B : An item-prefix-tree
- C : A frequent-item-header table
- D : both B and C

Q.no 39. To improve the accuracy of multiclass classification we can use

- A : cross validation
- B : sampling
- C : Error-detecting codes
- D : Error-correcting codes

Q.no 40. The probability of a hypothesis before the presentation of evidence is called as

- A : Apriori probability
- B : subjective probability
- C : posterior probability
- D : conditional probability

Q.no 41. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

- A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 42. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 43. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 44. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 45. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 46. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 47. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 48. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 49. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 50. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 51. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 52. How the bayesian network can be used to answer any query?

- A : Full distribution
- B : Joint distribution
- C : Partial distribution
- D : All of the mentioned

Q.no 53. High entropy means that the partitions in classification are

- A : pure
- B : Not pure
- C : Useful
- D : Not useful

Q.no 54. Which operation is required to calculate Hamming distance between two objects?

- A : AND
- B : OR
- C : NOT
- D : XOR

Q.no 55. Name the property of objects for which distance from first object to second and vice-versa is same.

- A : Symmetry
- B : Transitive
- C : Positive definiteness
- D : Triangle inequality

Q.no 56. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

- A : Recall=0.9
- B : Recall=0.39
- C : Recall=0.65
- D : Recall=5.0

Q.no 57. precision of model is 0.75 and recall is 0.43 then F-Score is

- A : F-Score= 0.99
- B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 58. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 59. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 60. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Answer for Question No 1. is a

Answer for Question No 2. is a

Answer for Question No 3. is d

Answer for Question No 4. is b

Answer for Question No 5. is c

Answer for Question No 6. is c

Answer for Question No 7. is b

Answer for Question No 8. is a

Answer for Question No 9. is a

Answer for Question No 10. is c

Answer for Question No 11. is b

Answer for Question No 12. is b

Answer for Question No 13. is d

Answer for Question No 14. is b

Answer for Question No 15. is c

Answer for Question No 16. is c

Answer for Question No 17. is a

Answer for Question No 18. is b

Answer for Question No 19. is d

Answer for Question No 20. is c

Answer for Question No 21. is b

Answer for Question No 22. is a

Answer for Question No 23. is b

Answer for Question No 24. is c

Answer for Question No 25. is a

Answer for Question No 26. is d

Answer for Question No 27. is c

Answer for Question No 28. is c

Answer for Question No 29. is d

Answer for Question No 30. is c

Answer for Question No 31. is b

Answer for Question No 32. is c

Answer for Question No 33. is a

Answer for Question No 34. is d

Answer for Question No 35. is d

Answer for Question No 36. is d

Answer for Question No 37. is c

Answer for Question No 38. is d

Answer for Question No 39. is d

Answer for Question No 40. is a

Answer for Question No 41. is d

Answer for Question No 42. is a

Answer for Question No 43. is b

Answer for Question No 44. is b

Answer for Question No 45. is c

Answer for Question No 46. is a

Answer for Question No 47. is a

Answer for Question No 48. is c

Answer for Question No 49. is a

Answer for Question No 50. is d

Answer for Question No 51. is d

Answer for Question No 52. is b

Answer for Question No 53. is b

Answer for Question No 54. is d

Answer for Question No 55. is a

Answer for Question No 56. is a

Answer for Question No 57. is c

Answer for Question No 58. is b

Answer for Question No 59. is c

Answer for Question No 60. is a

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Which of the following is not a type of constraints?

- A : Data constraints
- B : Rule constraints
- C : Knowledge type constraints
- D : Time constraints

Q.no 2. A data cube is defined by

- A : Dimensions
- B : Facts
- C : Dimensions and Facts
- D : Dimensions or Facts

Q.no 3. accuracy is used to measure

- A : classifier's true abilities
- B : classifier's analytic abilities

C : classifier's decision abilities

D : classifier's predictive abilities

Q.no 4. The schema is collection of stars. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 5. Data mining is best described as the process of

A : identifying patterns in data

B : deducing relationships in data

C : representing data

D : simulating trends in data

Q.no 6. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 7. Training process that generates tree is called as

A : Pruning

B : Rule generation

C : Induction

D : splitting

Q.no 8. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 9. Postpruning is

A : Removing branches from fully grown tree

B : Stop constructing tree if this would result in the measure falling below a threshold

C : constructing a new tree

D : Flow-Chart

Q.no 10. to evaluate a classifier's quality we use

A : confusion matrix

B : error detection code

C : error correction code

D : classifier

Q.no 11. Self-training is the simplest form of

A : supervised classification

B : semi-supervised classification

C : unsupervised classification

D : regression

Q.no 12. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 13. This is a visualization operation that rotates the data axes in view to provide an alternative data presentation

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 14. The Synonym for data mining is

A : Data warehouse

B : Knowledge discovery in database

C : ETL

D : Business Intelligence

Q.no 15. Constraint-based mining provides

A : User flexibility

B : System optimization

C : Both (a) and (b)

D : High computation

Q.no 16. In Data Characterization, class under study is called as?

A : Study Class

B : Initial Class

C : Target Class

D : Final Class

Q.no 17. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 18. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 19. A person trained to interact with a human expert in order to capture their knowledge.

A : knowledge programmer

B : knowledge developer

C : knowledge engineer

D : knowledge extractor

Q.no 20. Which of the following is the data mining tool?

- A : Borland C
- B : Weka
- C : Borland C++
- D : Visual C

Q.no 21. Which of the following property typically does not hold for similarity measures between two objects ?

- A : Symmetry
- B : Definiteness
- C : Triangle inequality
- D : Transitive

Q.no 22. Which is the wrong combination.

- A : True negative=correctly identified
- B : False negative=incorrectly identified
- C : False positive=correctly identified
- D : True positive=correctly identified

Q.no 23. Which of the following operations are used to calculate proximity measures for ordinal attribute?

- A : Replacement and discretization
- B : Replacement and characterization
- C : Replacement and normalization
- D : Normalization and discretization

Q.no 24. The probability of a hypothesis before the presentation of evidence is called as

- A : Apriori probability
- B : subjective probability
- C : posterior probability
- D : conditional probability

Q.no 25. What is uniform support in multilevel association rule mining?

- A : Use of minimum support

B : Use of minimum support and confidence

C : Use of same minimum threshold at each abstraction level

D : Use of minimum support and support count

Q.no 26. The Microsoft SQL Server 2000 is the example of

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 27. Which of the following activities is a data mining task?

A : Monitoring the heart rate of a patient for abnormalities

B : Extracting the frequencies of a sound wave

C : Predicting the outcomes of tossing a (fair) pair of dice

D : Dividing the customers of a company according to their profitability

Q.no 28. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

A : Imbalanced problems should not be measured using Accuracy metric.

B : Accuracy metric is not a good idea for imbalanced class problems.

C : Precision and recall metrics aren't good for imbalanced class problems.

D : Precision and recall metrics are good for imbalanced class problems.

Q.no 29. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

A : Zero

B : Infinity

C : Two

D : One

Q.no 30. one-versus-one(OVO) and one-versus-all (OVA) classification involves

A : more than two classes

B : Only two classes

C : Only one class

D : No class

Q.no 31. The accuracy of a classifier on a given test set is the percentage of

A : test set tuples that are correctly classified by the classifier

B : test set tuples that are incorrectly classified by the classifier

C : test set tuples that are incorrectly misclassified by the classifier

D : test set tuples that are not classified by the classifier

Q.no 32. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 33. How will you counter over-fitting in decision tree?

A : By creating new rules

B : By pruning the longer rules

C : Both By pruning the longer rules' and ' By creating new rules'

D : BY creating new tree

Q.no 34. The ultimate purpose of Frequent itemset mining is

A : For business decision-making process

B : For generation of association rules

C : For generation of candidate set

D : For generation of interesting patterns

Q.no 35. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

A : Multiclassification

B : Multi-label classification

C : Imbalanced classification

D : Binary Classification

Q.no 36. In which step of Knowledge Discovery, multiple data sources are combined?

- A : Data Cleaning
- B : Data Integration
- C : Data Selection
- D : Data Transformation

Q.no 37. The confusion matrix is a useful tool for analyzing

- A : Regression
- B : Classification
- C : Sampling
- D : Cross validation

Q.no 38. This operation may add new dimension to the cube

- A : Roll up
- B : Drill down
- C : Slice
- D : Dice

Q.no 39. Specificity is also referred to as

- A : true negative rate
- B : correctness
- C : misclassification rate
- D : True positive rate

Q.no 40. This supervised learning technique can process both numeric and categorical input attributes.

- A : linear regression
- B : Bayes classifier
- C : logistic regression
- D : backpropagation learning

Q.no 41. Correlation analysis is used for

- A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 42. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 43. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Traingle inequality

Q.no 44. Which operation is required to calculate Hamming distacne between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 45. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 46. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 47. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 48. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 49. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 50. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 51. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 52. Which one of these is a tree based learner?

- A : Rule based
- B : Bayesian Belief Network
- C : Bayesian classifier
- D : Random Forest

Q.no 53. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

- A : Primary
- B : Secondary
- C : Superkey
- D : Candidate

Q.no 54. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

- A : Precision = 0.88, Recall=0.64
- B : Precision = 0.44, Recall=0.78
- C : Precision = 0.88, Recall=0.22
- D : Precision = 0.77, Recall=0.55

Q.no 55. How the bayesian network can be used to answer any query?

- A : Full distribution
- B : Joint distribution
- C : Partial distribution
- D : All of the mentioned

Q.no 56. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

- A : Precision= 0.90
- B : Precision= 0.79
- C : Precision= 0.45
- D : Precision= 0.68

Q.no 57. What does a Pearson's product-moment allow you to identify?

- A : Whether there is a relationship between variables
- B : Whether there is a significant effect and interaction of independent variables
- C : Whether there is a significant difference between variables
- D : Whether there is a significant effect and interaction of dependent variables

Q.no 58. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

- A : 7
- B : 9
- C : 10
- D : 11

Q.no 59. When do we use Manhattan distance in data mining?

- A : Dimension of the data decreases
- B : Dimension of the data increases
- C : Underfitting
- D : Moderate size of the dimensions

Q.no 60. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

- A : Suffix path
- B : FP-tree
- C : Prefix path
- D : Condition pattern base

Answer for Question No 1. is d

Answer for Question No 2. is c

Answer for Question No 3. is d

Answer for Question No 4. is c

Answer for Question No 5. is a

Answer for Question No 6. is a

Answer for Question No 7. is c

Answer for Question No 8. is d

Answer for Question No 9. is a

Answer for Question No 10. is a

Answer for Question No 11. is b

Answer for Question No 12. is c

Answer for Question No 13. is a

Answer for Question No 14. is b

Answer for Question No 15. is c

Answer for Question No 16. is c

Answer for Question No 17. is d

Answer for Question No 18. is b

Answer for Question No 19. is c

Answer for Question No 20. is b

Answer for Question No 21. is c

Answer for Question No 22. is c

Answer for Question No 23. is c

Answer for Question No 24. is a

Answer for Question No 25. is c

Answer for Question No 26. is c

Answer for Question No 27. is a

Answer for Question No 28. is c

Answer for Question No 29. is a

Answer for Question No 30. is a

Answer for Question No 31. is a

Answer for Question No 32. is d

Answer for Question No 33. is b

Answer for Question No 34. is a

Answer for Question No 35. is a

Answer for Question No 36. is b

Answer for Question No 37. is b

Answer for Question No 38. is b

Answer for Question No 39. is a

Answer for Question No 40. is b

Answer for Question No 41. is b

Answer for Question No 42. is a

Answer for Question No 43. is a

Answer for Question No 44. is d

Answer for Question No 45. is b

Answer for Question No 46. is a

Answer for Question No 47. is a

Answer for Question No 48. is c

Answer for Question No 49. is c

Answer for Question No 50. is a

Answer for Question No 51. is d

Answer for Question No 52. is d

Answer for Question No 53. is d

Answer for Question No 54. is a

Answer for Question No 55. is b

Answer for Question No 56. is a

Answer for Question No 57. is a

Answer for Question No 58. is b

Answer for Question No 59. is b

Answer for Question No 60. is d

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Multi-class classification makes the assumption that each sample is assigned to

- A : one and only one label
- B : many labels
- C : one or many labels
- D : no label

Q.no 2. Color is an example of which type of attribute

- A : Nominal
- B : Binary
- C : Ordinal
- D : numeric

Q.no 3. What is C4.5 is used to build

- A : Decision tree
- B : Regression Analysis

C : Induction

D : Association Rules

Q.no 4. Which is the keyword that distinguishes data warehouses from other data repository systems ?

A : Subject-oriented

B : Object-oriented

C : Client server

D : Time-invariant

Q.no 5. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 6. What are closed frequent itemsets?

A : A closed itemset

B : A frequent itemset

C : An itemset which is both closed and frequent

D : Not frequent itemset

Q.no 7. Constraint-based mining provides

A : User flexibility

B : System optimization

C : Both (a) and (b)

D : High computation

Q.no 8. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 9. What do you mean by dissimilarity measure of two objects?

- A : Is a numerical measure of how alike two data objects are.
- B : Is a numerical measure of how different two data objects are.
- C : Higher when objects are more alike
- D : Lower when objects are more different

Q.no 10. The most widely used metrics and tools to assess a classification model are:

- A : Confusion Matrix
- B : Support
- C : Entropy
- D : Probability

Q.no 11. Which of the following is correct about Proximity measures?

- A : Similarity
- B : Dissimilarity
- C : Similarity as well as Dissimilarity
- D : Neither similarity nor dissimilarity

Q.no 12. A data matrix in which attributes are of the same type and asymmetric is called

- A : Pattern matrix
- B : Sparse data matrix
- C : Document term matrix
- D : Normal matrix

Q.no 13. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 14. Training process that generates tree is called as

- A : Pruning

B : Rule generation

C : Induction

D : splitting

Q.no 15. Supervised learning and unsupervised clustering both require at least one

A : hidden attribute

B : output attribute

C : input attribute

D : categorical attribute

Q.no 16. cross-validation and bootstrap methods are common techniques for assessing

A : accuracy

B : Precision

C : recall

D : performance

Q.no 17. Each dimension is represented by only one table. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 18. What are two steps of tree pruning work?

A : Pessimistic pruning and Optimistic pruning

B : Postpruning and Prepruning

C : Cost complexity pruning and time complexity pruning

D : None of the options

Q.no 19. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 20. Choose the correct concept hierarchy.

- A : city < street < state < country
- B : street < city < state < country
- C : street > city > state > country
- D : street > city > country > state

Q.no 21. Holdout and random subsampling are common techniques for assessing

- A : K-Fold validation
- B : cross validation
- C : accuracy
- D : sampling

Q.no 22. When you use cross validation in machine learning, it means

- A : you verify how accurate your model is on multiple and different subsets of data.
- B : you verify how accurate your model is on same dataset.
- C : you verify how accurate your model is on new dataset.
- D : you verify how accurate your model on unknown dataset

Q.no 23. Which of the following is necessary operation to calculate dissimilarity between ordinal attributes?

- A : Replacement of ordinal categories
- B : Correlation coefficient
- C : Discretization
- D : Randomization

Q.no 24. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

- A : Zero
- B : Infinity
- C : Two
- D : One

Q.no 25. This operation may add new dimension to the cube

- A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 26. This supervised learning technique can process both numeric and categorical input attributes.

A : linear regression

B : Bayes classifier

C : logistic regression

D : backpropagation learning

Q.no 27. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 28. The rule is considered as interesting if

A : They satisfy both minimum support and minimum confidence threshold

B : They satisfy both maximum support and maximum confidence threshold

C : They satisfy maximum support and minimum confidence threshold

D : They satisfy minimum support and maximum confidence threshold

Q.no 29. Which of the following operations are used to calculate proximity measures for ordinal attribute?

A : Replacement and discretization

B : Replacement and characterization

C : Replacement and normalization

D : Normalization and discretization

Q.no 30. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 31. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 32. OLAP Summarization means

A : Consolidated

B : Primitive

C : Highly detailed

D : Recent data

Q.no 33. Which statement is true about the decision tree attribute selection process

A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 34. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 35. Cross validation involves

A : testing the machine on all possible ways by substituting the original sample into training set

B : testing the machine on all possible ways by dividing the original sample into training and validation sets.

C : testing the machine with only validation sets

D : testing the machine on only testing datasets.

Q.no 36. Which of these distributions is used for a testing hypothesis?

- A : Normal Distribution
- B : Chi-Squared Distribution
- C : Gamma Distribution
- D : Poisson Distribution

Q.no 37. What is the approach of basic algorithm for decision tree induction?

- A : Greedy
- B : Top Down
- C : Procedural
- D : Step by Step

Q.no 38. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

- A : Multiclassification
- B : Multi-label classification
- C : Imbalanced classification
- D : Binary Classification

Q.no 39. When do you consider an association rule interesting?

- A : If it only satisfies minimum support
- B : If it only satisfies minimum confidence
- C : If it satisfies both minimum support and minimum confidence
- D : There are other measures to check interesting rules

Q.no 40. What is the limitation behind rule generation in Apriori algorithm?

- A : Need to generate a huge number of candidate sets
- B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching
- C : Dropping itemsets with valued information
- D : Both (a) and (b)

Q.no 41. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 42. Which operation is required to calculate Hamming distance between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 43. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 44. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 45. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 46. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 47. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 48. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 49. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 50. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 51. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Q.no 52. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

- A : Primary
- B : Secondary
- C : Superkey
- D : Candidate

Q.no 53. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

- A : 7
- B : 9
- C : 10
- D : 11

Q.no 54. Cost complexity pruning algorithm is used in?

- A : CART
- B : C4.5
- C : ID3
- D : ALL

Q.no 55. Correlation analysis is used for

- A : handling missing values
- B : identifying redundant attributes
- C : handling different data formats
- D : eliminating noise

Q.no 56. Which of the following operation is required to calculate cosine similarity?

- A : Vector dot product
- B : Exponent
- C : Modulus
- D : Percentage

Q.no 57. High entropy means that the partitions in classification are

- A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 58. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 59. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 60. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Color is an example of which type of attribute

- A : Nominal
- B : Binary
- C : Ordinal
- D : numeric

Q.no 2. In Data Characterization, class under study is called as?

- A : Study Class
- B : Intial Class
- C : Target Class
- D : Final Class

Q.no 3. Which of the following is the data mining tool?

- A : Borland C
- B : Weka

C : Borland C++

D : Visual C

Q.no 4. cross-validation and bootstrap methods are common techniques for assessing

A : accuracy

B : Precision

C : recall

D : performance

Q.no 5. What does the leaf node in decision tree indicates

A : sub tree

B : class label

C : testing node

D : condition

Q.no 6. to evaluate a classifier's quality we use

A : confusion matrix

B : error detection code

C : error correction code

D : classifier

Q.no 7. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 8. Multi-class classification makes the assumption that each sample is assigned to

A : one and only one label

B : many labels

C : one or many labels

D : no label

Q.no 9. A decision tree is also known as

- A : general tree
- B : binary tree
- C : prediction tree
- D : None of the options

Q.no 10. What are closed itemsets?

- A : An itemset for which at least super-itemset has same confidence
- B : An itemset whose no proper super-itemset has same support
- C : An itemset for which at least one proper super-itemset has same support
- D : An itemset whose no proper super-itemset has same confidence

Q.no 11. What is the range of the cosine similarity of the two documents?

- A : Zero to One
- B : Zero to infinity
- C : Infinity to infinity
- D : Zero to Zero

Q.no 12. The schema is collection of stars. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 13. Postpruning is

- A : Removing branches from fully grown tree
- B : Stop constructing tree if this would result in the measure falling below a threshold
- C : construting a new tree
- D : Flow-Chart

Q.no 14. Multilevel association rules can be mined efficiently using

- A : Support
- B : Confidence
- C : Support count

D : Concept Hierarchies under support-confidence framework

Q.no 15. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 16. This is a visualization operation that rotates the data axes in view to provide an alternative data presentation

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 17. Which of these is not a frequent pattern mining algorithm?

A : Decision trees

B : Eclat

C : FP growth

D : Apriori

Q.no 18. Removing duplicate records is a process called

A : recovery

B : data cleaning

C : data cleansing

D : data pruning

Q.no 19. Bayesian classification is based on

A : probability for the hypothesis

B : Support

C : tree induction

D : Trees

Q.no 20. Supervised learning and unsupervised clustering both require at least one

- A : hidden attribute
- B : output attribute
- C : input attribute
- D : categorical attribute

Q.no 21. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

- A : Replacement discretization and distance measure
- B : Replacement characterizarion and distance measure
- C : Normalization discretization and distance measure
- D : Replacement normalization and distance measure

Q.no 22. This operation may add new dimension to the cube

- A : Roll up
- B : Drill down
- C : Slice
- D : Dice

Q.no 23. The probability of a hypothesis before the presentation of evidence is called as

- A : Apriori probability
- B : subjective probability
- C : posterior probability
- D : conditional probability

Q.no 24. In Apriori algorithm, for generating e. g. 5 itemsets, we use

- A : Frequent 5 itemsets
- B : Frequent 3 itemsets
- C : Frequent 4 itemsets
- D : Frequent 6 itemsets

Q.no 25. If first object X and Y coordinates are 3 and 5 respectively and second object X and Y coordinates are 10 and 3 respectively, then what is Manhattan distance between these two objects?

- A : 8
- B : 13
- C : 9
- D : 10

Q.no 26. The property of Apriori algorithm is

- A : All nonempty subsets of a frequent itemsets must also be frequent
- B : All empty subsets of a frequent itemsets must also be frequent
- C : All nonempty subsets of a frequent itemsets must be not frequent
- D : All nonempty subsets of a frequent itemsets can frequent or not frequent

Q.no 27. The accuracy of a classifier on a given test set is the percentage of

- A : test set tuples that are correctly classified by the classifier
- B : test set tuples that are incorrectly classified by the classifier
- C : test set tuples that are incorrectly misclassified by the classifier
- D : test set tuples that are not classified by the classifier

Q.no 28. Holdout and random subsampling are common techniques for assessing

- A : K-Fold validation
- B : cross validation
- C : accuracy
- D : sampling

Q.no 29. Number of records are comparatively more in

- A : OLAP
- B : OLTP
- C : Same in OLAP and OLTP
- D : Can not compare

Q.no 30. When you use cross validation in machine learning, it means

- A : you verify how accurate your model is on multiple and different subsets of data.
- B : you verify how accurate your model is on same dataset.
- C : you verify how accurate your model is on new dataset.

D : you verify how accurate your model on unknown dataset

Q.no 31. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

A : Zero

B : Infinity

C : Two

D : One

Q.no 32. Where does the bayes rule used?

A : Solving queries

B : Increasing complexity

C : Decreasing complexity

D : Answering probabilistic query

Q.no 33. Which of the following activities is a data mining task?

A : Monitoring the heart rate of a patient for abnormalities

B : Extracting the frequencies of a sound wave

C : Predicting the outcomes of tossing a (fair) pair of dice

D : Dividing the customers of a company according to their profitability

Q.no 34. For mining frequent itemsets, the Data format used by Apriori and FP-Growth algorithms are

A : Apriori uses horizontal and FP-Growth uses vertical data format

B : Apriori uses vertical and FP-Growth uses horizontal data format

C : Apriori and FP-Growth both uses vertical data format

D : Apriori and FP-Growth both uses horizontal data format

Q.no 35. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 36. Lazy learner classification approach is

- A : learner waits until the last minute before constructing model to classify
- B : a given training data constructs a model first and then uses it to classify
- C : the network is constructed by human experts
- D : None of the options

Q.no 37. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

- A : Imbalanced problems should not be measured using Accuracy metric.
- B : Accuracy metric is not a good idea for imbalanced class problems.
- C : Precision and recall metrics aren't good for imbalanced class problems.
- D : Precision and recall metrics are good for imbalanced class problems.

Q.no 38. Which of the following is not correct use of cross validation?

- A : Selecting variables to include in a model
- B : Comparing predictors
- C : Selecting parameters in prediction function
- D : classification

Q.no 39. The Galaxy Schema is also called as

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 40. Identify the example of sequence data

- A : weather forecast
- B : data matrix
- C : market basket data
- D : genomic data

Q.no 41. Which one of these is a tree based learner?

- A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 42. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 43. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 44. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 45. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 46. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 47. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Fourty Five

Q.no 48. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 49. Rotating the axes in a 3-D cube is the examplele of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 50. A database has 4 transactions.Of these, 4 transactions include milk and bread. Further , of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 51. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 52. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 53. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 54. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 55. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Triangle inequality

Q.no 56. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 57. Transforming a 3-D cube into a series of 2-D planes is the example of

- A : Pivot
- B : Roll up
- C : Drill down
- D : Slice

Q.no 58. Which operation is required to calculate Hamming distance between two objects?

- A : AND
- B : OR
- C : NOT
- D : XOR

Q.no 59. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

- A : smooth by bin boundaries
- B : smooth by bin median
- C : smooth by bin means
- D : smooth by bin values

Q.no 60. The tables are easy to maintain and saves storage space.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Answer for Question No 1. is a

Answer for Question No 2. is c

Answer for Question No 3. is b

Answer for Question No 4. is a

Answer for Question No 5. is b

Answer for Question No 6. is a

Answer for Question No 7. is b

Answer for Question No 8. is a

Answer for Question No 9. is c

Answer for Question No 10. is b

Answer for Question No 11. is a

Answer for Question No 12. is c

Answer for Question No 13. is a

Answer for Question No 14. is d

Answer for Question No 15. is a

Answer for Question No 16. is a

Answer for Question No 17. is a

Answer for Question No 18. is b

Answer for Question No 19. is a

Answer for Question No 20. is c

Answer for Question No 21. is d

Answer for Question No 22. is b

Answer for Question No 23. is a

Answer for Question No 24. is c

Answer for Question No 25. is c

Answer for Question No 26. is a

Answer for Question No 27. is a

Answer for Question No 28. is c

Answer for Question No 29. is b

Answer for Question No 30. is a

Answer for Question No 31. is a

Answer for Question No 32. is d

Answer for Question No 33. is a

Answer for Question No 34. is d

Answer for Question No 35. is d

Answer for Question No 36. is a

Answer for Question No 37. is c

Answer for Question No 38. is d

Answer for Question No 39. is c

Answer for Question No 40. is d

Answer for Question No 41. is d

Answer for Question No 42. is d

Answer for Question No 43. is b

Answer for Question No 44. is b

Answer for Question No 45. is d

Answer for Question No 46. is c

Answer for Question No 47. is b

Answer for Question No 48. is c

Answer for Question No 49. is a

Answer for Question No 50. is a

Answer for Question No 51. is d

Answer for Question No 52. is a

Answer for Question No 53. is d

Answer for Question No 54. is a

Answer for Question No 55. is a

Answer for Question No 56. is a

Answer for Question No 57. is a

Answer for Question No 58. is d

Answer for Question No 59. is d

Answer for Question No 60. is b

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. For Apriori algorithm, what is the first phase?

- A : Pruning
- B : Partitioning
- C : Candidate generation
- D : Itemset generation

Q.no 2. Data mining is best described as the process of

- A : identifying patterns in data
- B : deducing relationships in data
- C : representing data
- D : simulating trends in data

Q.no 3. A data matrix in which attributes are of the same type and asymmetric is called

- A : Pattern matrix
- B : Sparse data matrix

C : Document term matrix

D : Normal matrix

Q.no 4. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 5. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 6. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non- supervised

Q.no 7. What are closed itemsets?

A : An itemset for which at least super-itemset has same confidence

B : An itemset whose no proper super-itemset has same support

C : An itemset for which at least one proper super-itemset has same support

D : An itemset whose no proper super-itemset has same confidence

Q.no 8. Cotraining is one form of

A : sampling

B : Reinforcement learning

C : unsupervised classification

D : semi-supervised classification

Q.no 9. Which of the following are methods for supervised classification?

A : Decision tree

B : K-Means

C : Hierarchical

D : Apriori

Q.no 10. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 11. Data matrix is also called as

A : Object by object structure

B : Object by attribute structure

C : Attribute by attribute structure

D : Attribute by object structure

Q.no 12. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 13. cross-validation and bootstrap methods are common techniques for assessing

A : accuracy

B : Precision

C : recall

D : performance

Q.no 14. Training process that generates tree is called as

A : Pruning

B : Rule generation

C : Induction

D : splitting

Q.no 15. What is C4.5 is used to build

A : Decision tree

B : Regression Analysis

C : Induction

D : Association Rules

Q.no 16. Which is the keyword that distinguishes data warehouses from other data repository systems ?

A : Subject-oriented

B : Object-oriented

C : Client server

D : Time-invariant

Q.no 17. In Data Characterization, class under study is called as?

A : Study Class

B : Intial Class

C : Target Class

D : Final Class

Q.no 18. Choose the correct concept hierarchy.

A : city < street < state < country

B : street < city < state < country

C : street > city > state > country

D : street > city > country > state

Q.no 19. The task of building decision model from labeled training data is called as

A : Supervised Learning

B : Unsupervised Learning

C : Reinforcement Learning

D : Structure Learning

Q.no 20. Bayesian classification is based on

- A : probability for the hypothesis
- B : Support
- C : tree induction
- D : Trees

Q.no 21. The accuracy of a classifier on a given test set is the percentage of

- A : test set tuples that are correctly classified by the classifier
- B : test set tuples that are incorrectly classified by the classifier
- C : test set tuples that are incorrectly misclassified by the classifier
- D : test set tuples that are not classified by the classifier

Q.no 22. A lattice of cuboids is called as

- A : Data cube
- B : Dimension lattice
- C : Master lattice
- D : Fact table

Q.no 23. OLAP Summarization means

- A : Consolidated
- B : Primitive
- C : Highly detailed
- D : Recent data

Q.no 24. Which statement is true about the decision tree attribute selection process

- A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.
- B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.
- C : Both numeric and categorical attributes may appear in several tree nodes.
- D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 25. When you use cross validation in machine learning, it means

- A : you verify how accurate your model is on multiple and different subsets of data.

B : you verify how accurate your model is on same dataset.

C : you verify how accurate your model is on new dataset.

D : you verify how accurate your model on unknown dataset

Q.no 26. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 27. Where does the bayes rule used?

A : Solving queries

B : Increasing complexity

C : Decreasing complexity

D : Answering probabilistic query

Q.no 28. What do you mean by support(A)?

A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 29. The ultimate purpose of Frequent itemset mining is

A : For business decision-making process

B : For generation of association rules

C : For generation of candidate set

D : For generation of interesting patterns

Q.no 30. When do you consider an association rule interesting?

A : If it only satisfies minimum support

B : If it only satisfies minimum confidence

C : If it satisfies both minimum support and minimum confidence

D : There are other measures to check interesting rules

Q.no 31. Which of the following operation is correct about supremum distance?

- A : It gives maximum difference between any attribute of the objects
- B : It gives minimum difference between any attribute of the objects
- C : It gives maximum difference between first attribute of the objects
- D : It gives minimum difference between first attribute of the objects

Q.no 32. A nearest neighbor approach is best used

- A : with large-sized datasets.
- B : when irrelevant attributes have been removed from the data.
- C : when a generalized model of the data is desirable.
- D : when an explanation of what has been found is of primary importance.

Q.no 33. If first object X and Y coordinates are 3 and 5 respectively and second object X and Y coordinates are 10 and 3 respectively, then what is Manhattan distance between these two objects?

- A : 8
- B : 13
- C : 9
- D : 10

Q.no 34. The probability of a hypothesis before the presentation of evidence is called as

- A : Apriori probability
- B : subjective probability
- C : posterior probability
- D : conditional probability

Q.no 35. K-fold Cross Validation envisages

- A : partitioning of the original sample into one sample.
- B : partitioning of the original sample into 'k' equal sized sub-samples.
- C : partitioning of the original sample into 'k' unequal sized sub-samples.
- D : partitioning of the original sample into 'k' random samples.

Q.no 36. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

- A : Imbalanced problems should not be measured using Accuracy metric.
- B : Accuracy metric is not a good idea for imbalanced class problems.
- C : Precision and recall metrics aren't good for imbalanced class problems.
- D : Precision and recall metrics are good for imbalanced class problems.

Q.no 37. The Galaxy Schema is also called as

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 38. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

- A : Zero
- B : Infinity
- C : Two
- D : One

Q.no 39. Which of the following is measure of document similarity?

- A : Cosine dissimilarity
- B : Sine similarity
- C : Sine dissimilarity
- D : Cosine similarity

Q.no 40. Multilevel association rule mining is

- A : Association rules generated from candidate-generation method
- B : Association rules generated from without candidate-generation method
- C : Association rules generated from mining data at multiple abstraction level
- D : Association rules generated from frequent itemsets

Q.no 41. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 42. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 43. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 44. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Q.no 45. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 46. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 47. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 48. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 49. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 50. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 51. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 52. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 53. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 54. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 55. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 56. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 57. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 58. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 59. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 60. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Answer for Question No 1. is c

Answer for Question No 2. is a

Answer for Question No 3. is b

Answer for Question No 4. is b

Answer for Question No 5. is d

Answer for Question No 6. is c

Answer for Question No 7. is b

Answer for Question No 8. is d

Answer for Question No 9. is a

Answer for Question No 10. is d

Answer for Question No 11. is b

Answer for Question No 12. is b

Answer for Question No 13. is a

Answer for Question No 14. is c

Answer for Question No 15. is a

Answer for Question No 16. is a

Answer for Question No 17. is c

Answer for Question No 18. is b

Answer for Question No 19. is a

Answer for Question No 20. is a

Answer for Question No 21. is a

Answer for Question No 22. is a

Answer for Question No 23. is a

Answer for Question No 24. is b

Answer for Question No 25. is a

Answer for Question No 26. is b

Answer for Question No 27. is d

Answer for Question No 28. is c

Answer for Question No 29. is a

Answer for Question No 30. is c

Answer for Question No 31. is a

Answer for Question No 32. is b

Answer for Question No 33. is c

Answer for Question No 34. is a

Answer for Question No 35. is d

Answer for Question No 36. is c

Answer for Question No 37. is c

Answer for Question No 38. is a

Answer for Question No 39. is d

Answer for Question No 40. is c

Answer for Question No 41. is a

Answer for Question No 42. is a

Answer for Question No 43. is d

Answer for Question No 44. is b

Answer for Question No 45. is b

Answer for Question No 46. is a

Answer for Question No 47. is d

Answer for Question No 48. is b

Answer for Question No 49. is c

Answer for Question No 50. is a

Answer for Question No 51. is d

Answer for Question No 52. is a

Answer for Question No 53. is b

Answer for Question No 54. is d

Answer for Question No 55. is a

Answer for Question No 56. is b

Answer for Question No 57. is b

Answer for Question No 58. is d

Answer for Question No 59. is a

Answer for Question No 60. is a

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Which of the following are methods for supervised classification?

- A : Decision tree
- B : K-Means
- C : Hierarchical
- D : Apriori

Q.no 2. Which of the following is not a type of constraints?

- A : Data constraints
- B : Rule constraints
- C : Knowledge type constraints
- D : Time constraints

Q.no 3. What does the leaf node in decision tree indicates

- A : sub tree
- B : class label

C : testing node

D : condition

Q.no 4. accuracy is used to measure

A : classifier's true abilities

B : classifier's analytic abilities

C : classifier's decision abilities

D : classifier's predictive abilities

Q.no 5. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 6. The most widely used metrics and tools to assess a classification model are:

A : Conusion Matrix

B : Support

C : Entropy

D : Probability

Q.no 7. Each dimension is represented by only one table. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 8. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 9. Which one of the following is true for decision tree

- A : Decision tree is useful in decision making
- B : Decision tree is similar to OLTP
- C : Decision Tree is similar to cluster analysis
- D : Decision tree needs to find probabilities of hypothesis

Q.no 10. Color is an example of which type of attribute

- A : Nominal
- B : Binary
- C : Ordinal
- D : numeric

Q.no 11. cross-validation and bootstrap methods are common techniques for assessing

- A : accuracy
- B : Precision
- C : recall
- D : performance

Q.no 12. Data matrix is also called as

- A : Object by object structure
- B : Object by attribute structure
- C : Attribute by attribute structure
- D : Attribute by object structure

Q.no 13. Training process that generates tree is called as

- A : Pruning
- B : Rule generation
- C : Induction
- D : splitting

Q.no 14. What is association rule mining?

- A : Using association to find correlation rules
- B : Same as frequent itemset mining
- C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 15. What technique can be used to improve the efficiency of apriori algorithm?

A : Hash-based techniques

B : Transaction Reduction

C : Candidate generation

D : Both (a) and (b)

Q.no 16. What is gini index?

A : It is a type of index structure

B : It is a measure of purity

C : Both options except none

D : None of the options

Q.no 17. the positive tuples that were correctly labeled by the classifier are

A : True negatives (TN)

B : False negatives(FN)

C : False positives(FP)

D : True positives(TP)

Q.no 18. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 19. What is C4.5 is used to build

A : Decision tree

B : Regression Analysis

C : Induction

D : Association Rules

Q.no 20. A decision tree is also known as

- A : general tree
- B : binary tree
- C : prediction tree
- D : None of the options

Q.no 21. This supervised learning technique can process both numeric and categorical input attributes.

- A : linear regression
- B : Bayes classifier
- C : logistic regression
- D : backpropagation learning

Q.no 22. To improve the accuracy of multiclass classification we can use

- A : cross validation
- B : sampling
- C : Error-detecting codes
- D : Error-correcting codes

Q.no 23. Which of the following is a predictive model?

- A : Clustering
- B : Regression
- C : Summarization
- D : Association rules

Q.no 24. What type of matrix is required to represent binary data for proximity measures?

- A : Normal matrix
- B : Sparse matrix
- C : Dense matrix
- D : Contingency matrix

Q.no 25. Sensitivity is also referred to as

- A : misclassification rate
- B : true negative rate

C : True positive rate

D : correctness

Q.no 26. Identify the example of sequence data

A : weather forecast

B : data matrix

C : market basket data

D : genomic data

Q.no 27. What is the approach of basic algorithm for decision tree induction?

A : Greedy

B : Top Down

C : Procedural

D : Step by Step

Q.no 28. Which of the following probabilities are used in the Bayes theorem.

A : $P(C_i|X)$

B : $P(C_i)$

C : $P(X|C_i)$

D : $P(X)$

Q.no 29. In asymmetric attribute

A : No value is considered important over other values

B : All values are equal

C : Only non-zero value is important

D : Range of values is important

Q.no 30. In which step of Knowledge Discovery, multiple data sources are combined?

A : Data Cleaning

B : Data Integration

C : Data Selection

D : Data Transformation

Q.no 31. Which of the following is not correct use of cross validation?

- A : Selecting variables to include in a model
- B : Comparing predictors
- C : Selecting parameters in prediction function
- D : classification

Q.no 32. A nearest neighbor approach is best used

- A : with large-sized datasets.
- B : when irrelevant attributes have been removed from the data.
- C : when a generalized model of the data is desireable.
- D : when an explanation of what has been found is of primary importance.

Q.no 33. Which is the wrong combination.

- A : True negative=correctly identified
- B : False negative=incorrectly identified
- C : False positive=correctly identified
- D : True positive=correctly identified

Q.no 34. What is another name of data matrix?

- A : Single mode
- B : Two mode
- C : Multi mode
- D : Large mode

Q.no 35. Where does the bayes rule used?

- A : Solving queries
- B : Increasing complexity
- C : Decreasing complexity
- D : Answering probabilistic query

Q.no 36. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

- A : Replacement discretization and distance measure
- B : Replacement characterizarion and distance measure

C : Normalization discretization and distance measure

D : Replacement normalization and distance measure

Q.no 37. It is the main technique employed for data selection.

A : Noise

B : Sampling

C : Clustering

D : Histogram

Q.no 38. Cross validation involves

A : testing the machine on all possible ways by substituting the original sample into training set

B : testing the machine on all possible ways by dividing the original sample into training and validation sets.

C : testing the machine with only validation sets

D : testing the machine on only testing datasets.

Q.no 39. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

A : Imbalanced problems should not be measured using Accuracy metric.

B : Accuracy metric is not a good idea for imbalanced class problems.

C : Precision and recall metrics aren't good for imbalanced class problems.

D : Precision and recall metrics are good for imbalanced class problems.

Q.no 40. Data independence means

A : Data is defined separately and not included in programs

B : Programs are not dependent on the physical attributes of the data

C : Programs are not dependent on the logical attributes of the data

D : Programs are not dependent on the physical attributes as well as logical attributes of the data

Q.no 41. Ordinal attribute has three distinct values such as Fair, Good, and Excellent.

If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 42. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 43. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 44. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 45. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 46. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 47. Name the property of objects for which distance from first object to second and vice-versa is same.

- A : Symmetry
- B : Transitive
- C : Positive definiteness
- D : Triangle inequality

Q.no 48. Which is the most well known association rule algorithm and is used in most commercial products.

- A : Apriori algorithm
- B : Pincer-search algorithm
- C : Distributed algorithm
- D : Partition algorithm

Q.no 49. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

- A : Suffix path
- B : FP-tree
- C : Prefix path
- D : Condition pattern base

Q.no 50. Rotating the axes in a 3-D cube is the example of

- A : Pivot
- B : Roll up
- C : Drill down
- D : Slice

Q.no 51. Correlation analysis is used for

- A : handling missing values
- B : identifying redundant attributes
- C : handling different data formats
- D : eliminating noise

Q.no 52. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support(V1) is greater than support (V2)

B : support(V3) is greater than support (V2)

C : support(V1) is greater than support(V3)

D : support(V2) is greater than support(V3)

Q.no 53. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 54. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 55. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 56. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 57. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 58. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 59. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 60. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Answer for Question No 1. is a

Answer for Question No 2. is d

Answer for Question No 3. is b

Answer for Question No 4. is d

Answer for Question No 5. is c

Answer for Question No 6. is a

Answer for Question No 7. is a

Answer for Question No 8. is b

Answer for Question No 9. is a

Answer for Question No 10. is a

Answer for Question No 11. is a

Answer for Question No 12. is b

Answer for Question No 13. is c

Answer for Question No 14. is c

Answer for Question No 15. is d

Answer for Question No 16. is b

Answer for Question No 17. is d

Answer for Question No 18. is d

Answer for Question No 19. is a

Answer for Question No 20. is c

Answer for Question No 21. is b

Answer for Question No 22. is d

Answer for Question No 23. is b

Answer for Question No 24. is d

Answer for Question No 25. is c

Answer for Question No 26. is d

Answer for Question No 27. is a

Answer for Question No 28. is a

Answer for Question No 29. is c

Answer for Question No 30. is b

Answer for Question No 31. is d

Answer for Question No 32. is b

Answer for Question No 33. is c

Answer for Question No 34. is b

Answer for Question No 35. is d

Answer for Question No 36. is d

Answer for Question No 37. is b

Answer for Question No 38. is c

Answer for Question No 39. is c

Answer for Question No 40. is d

Answer for Question No 41. is c

Answer for Question No 42. is a

Answer for Question No 43. is b

Answer for Question No 44. is d

Answer for Question No 45. is d

Answer for Question No 46. is a

Answer for Question No 47. is a

Answer for Question No 48. is a

Answer for Question No 49. is d

Answer for Question No 50. is a

Answer for Question No 51. is b

Answer for Question No 52. is b

Answer for Question No 53. is b

Answer for Question No 54. is d

Answer for Question No 55. is b

Answer for Question No 56. is a

Answer for Question No 57. is a

Answer for Question No 58. is a

Answer for Question No 59. is a

Answer for Question No 60. is a

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Supervised learning and unsupervised clustering both require at least one

A : hidden attribute

B : output attribute

C : input attribute

D : categorical attribute

Q.no 2. Data mining is best described as the process of

A : identifying patterns in data

B : deducing relationships in data

C : representing data

D : simulating trends in data

Q.no 3. How can one represent document to calculate cosine similarity?

A : Vector

B : Matirx

C : List

D : Term frequency vector

Q.no 4. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 5. Which of the following is correct about Proximity measures?

A : Similarity

B : Dissimilarity

C : Similarity as well as Dissimilarity

D : Neither similarity nor dissimilarity

Q.no 6. The schema is collection of stars. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 7. Constraint-based mining provides

A : User flexibility

B : System optimization

C : Both (a) and (b)

D : High computation

Q.no 8. Removing duplicate records is a process called

A : recovery

B : data cleaning

C : data cleansing

D : data pruning

Q.no 9. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 10. OLAP database design is

A : Application-oriented

B : Object-oriented

C : Goal-oriented

D : Subject-oriented

Q.no 11. the negative tuples that were correctly labeled by the classifier

A : False positives(FP)

B : True positives(TP)

C : True negatives (TN)

D : False negatives(FN)

Q.no 12. Which of the following is the data mining tool?

A : Borland C

B : Weka

C : Borland C++

D : Visual C

Q.no 13. Which technique finds the frequent itemsets in just two database scans?

A : Partitioning

B : Sampling

C : Hashing

D : Dynamic itemset counting

Q.no 14. Multilevel association rules can be mined efficiently using

A : Support

B : Confidence

C : Support count

D : Concept Hierarchies under support-confidence framework

Q.no 15. In Data Characterization, class under study is called as?

A : Study Class

B : Intial Class

C : Target Class

D : Final Class

Q.no 16. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 17. Cotraining is one form of

A : sampling

B : Reinforcement learning

C : unsupervised classification

D : semi-supervised classification

Q.no 18. Which angle is used to measure document similarity?

A : Sin

B : Tan

C : Cos

D : Sec

Q.no 19. A data cube is defined by

A : Dimensions

B : Facts

C : Dimensions and Facts

D : Dimensions or Facts

Q.no 20. Data matrix is also called as

- A : Object by object structure
- B : Object by attribute structure
- C : Attribute by attribute structure
- D : Attribute by object structure

Q.no 21. The correlation coefficient is used to determine:

- A : A specific value of the y-variable given a specific value of the x-variable
- B : A specific value of the x-variable given a specific value of the y-variable
- C : The strength of the relationship between the x and y variables
- D : None of these

Q.no 22. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

- A : Imbalanced problems should not be measured using Accuracy metric.
- B : Accuracy metric is not a good idea for imbalanced class problems.
- C : Precision and recall metrics aren't good for imbalanced class problems.
- D : Precision and recall metrics are good for imbalanced class problems.

Q.no 23. Every key structure in the data warehouse contains a time element

- A : records
- B : Explicitly
- C : Implicitly and explicitly
- D : Implicitly or explicitly

Q.no 24. Which of the following probabilities are used in the Bayes theorem.

- A : $P(C_i|X)$
- B : $P(C_i)$
- C : $P(X|C_i)$
- D : $P(X)$

Q.no 25. Sensitivity is also referred to as

A : misclassification rate

B : true negative rate

C : True positive rate

D : correctness

Q.no 26. To improve the accuracy of multiclass classification we can use

A : cross validation

B : sampling

C : Error-detecting codes

D : Error-correcting codes

Q.no 27. A lattice of cuboids is called as

A : Data cube

B : Dimesnion lattice

C : Master lattice

D : Fact table

Q.no 28. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 29. The Galaxy Schema is also called as

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 30. The Microsoft SQL Server 2000 is the example of

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 31. OLAP Summarization means

A : Consolidated

B : Primitive

C : Highly detailed

D : Recent data

Q.no 32. Number of records are comparatively more in

A : OLAP

B : OLTP

C : Same in OLAP and OLTP

D : Can not compare

Q.no 33. Which of the following is necessary operation to calculate dissimilarity between ordinal attributes?

A : Replacement of ordinal categories

B : Correlation coefficient

C : Discretization

D : Randomization

Q.no 34. The ultimate purpose of Frequent itemset mining is

A : For business decision-making process

B : For generation of association rules

C : For generation of candidate set

D : For generation of interesting patterns

Q.no 35. How will you counter over-fitting in decision tree?

A : By creating new rules

B : By pruning the longer rules

C : Both By pruning the longer rules' and ' By creating new rules'

D : BY creating new tree

Q.no 36. Which of the following is a predictive model?

A : Clustering

B : Regression

C : Summarization

D : Association rules

Q.no 37. Which of the following operations are used to calculate proximity measures for ordinal attribute?

A : Replacement and discretization

B : Replacement and characterizarion

C : Replacement and normalization

D : Normalization and discretization

Q.no 38. It is the main technique employed for data selection.

A : Noise

B : Sampling

C : Clustering

D : Histogram

Q.no 39. Which of the following activities is a data mining task?

A : Monitoring the heart rate of a patient for abnormalities

B : Extracting the frequencies of a sound wave

C : Predicting the outcomes of tossing a (fair) pair of dice

D : Dividing the customers of a company according to their profitability

Q.no 40. Which of these distributions is used for a testing hypothesis?

A : Normal Distribution

B : Chi-Squared Distribution

C : Gamma Distribution

D : Poisson Distribution

Q.no 41. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 42. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 43. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 44. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 45. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 46. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 47. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 48. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 49. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 50. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 51. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset {Tea, milk} is antecedent and {sugar} is consequent

Q.no 52. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

- A : min-max normalization
- B : z-score normalization
- C : decimal scaling
- D : decimal smoothing

Q.no 53. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

- A : 0.6
- B : 0.75
- C : 0.8
- D : 0.7

Q.no 54. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

- A : Precision = 0.89
- B : Precision = 0.23
- C : Precision = 0.45
- D : Precision = 0.75

Q.no 55. Cost complexity pruning algorithm is used in?

- A : CART
- B : C4.5
- C : ID3
- D : ALL

Q.no 56. Which one of these is a tree based learner?

- A : Rule based
- B : Bayesian Belief Network
- C : Bayesian classifier
- D : Random Forest

Q.no 57. Transforming a 3-D cube into a series of 2-D planes is the example of

- A : Pivot
- B : Roll up
- C : Drill down
- D : Slice

Q.no 58. Which operation is required to calculate Hamming distance between two objects?

- A : AND
- B : OR
- C : NOT
- D : XOR

Q.no 59. How the bayesian network can be used to answer any query?

- A : Full distribution
- B : Joint distribution
- C : Partial distribution
- D : All of the mentioned

Q.no 60. What is the range of the angle between two term frequency vectors?

- A : Zero to Thirty
- B : Zero to Ninety
- C : Zero to One Eighty
- D : Zero to Forty Five

Answer for Question No 1. is c

Answer for Question No 2. is a

Answer for Question No 3. is d

Answer for Question No 4. is a

Answer for Question No 5. is c

Answer for Question No 6. is c

Answer for Question No 7. is c

Answer for Question No 8. is b

Answer for Question No 9. is a

Answer for Question No 10. is d

Answer for Question No 11. is c

Answer for Question No 12. is b

Answer for Question No 13. is a

Answer for Question No 14. is d

Answer for Question No 15. is c

Answer for Question No 16. is d

Answer for Question No 17. is d

Answer for Question No 18. is c

Answer for Question No 19. is c

Answer for Question No 20. is b

Answer for Question No 21. is c

Answer for Question No 22. is c

Answer for Question No 23. is d

Answer for Question No 24. is a

Answer for Question No 25. is c

Answer for Question No 26. is d

Answer for Question No 27. is a

Answer for Question No 28. is d

Answer for Question No 29. is c

Answer for Question No 30. is c

Answer for Question No 31. is a

Answer for Question No 32. is b

Answer for Question No 33. is a

Answer for Question No 34. is a

Answer for Question No 35. is b

Answer for Question No 36. is b

Answer for Question No 37. is c

Answer for Question No 38. is b

Answer for Question No 39. is a

Answer for Question No 40. is b

Answer for Question No 41. is c

Answer for Question No 42. is b

Answer for Question No 43. is a

Answer for Question No 44. is a

Answer for Question No 45. is a

Answer for Question No 46. is c

Answer for Question No 47. is c

Answer for Question No 48. is a

Answer for Question No 49. is a

Answer for Question No 50. is d

Answer for Question No 51. is d

Answer for Question No 52. is c

Answer for Question No 53. is a

Answer for Question No 54. is d

Answer for Question No 55. is a

Answer for Question No 56. is d

Answer for Question No 57. is a

Answer for Question No 58. is d

Answer for Question No 59. is b

Answer for Question No 60. is b

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 2. Data matrix is also called as

A : Object by object structure

B : Object by attribute structure

C : Attribute by attribute structure

D : Attribute by object structure

Q.no 3. accuracy is used to measure

A : classifier's true abilities

- B : classifier's analytic abilities
- C : classifier's decision abilities
- D : classifier's predictive abilities

Q.no 4. Which is the keyword that distinguishes data warehouses from other data repository systems ?

- A : Subject-oriented
- B : Object-oriented
- C : Client server
- D : Time-invariant

Q.no 5. Multilevel association rules can be mined efficiently using

- A : Support
- B : Confidence
- C : Support count
- D : Concept Hierarchies under support-confidence framework

Q.no 6. A multidimensional data model is typically organized around a central theme which is represented by

- A : Dimension table
- B : Fact table
- C : Dimension table and Fact table
- D : Dimension table or Fact table

Q.no 7. What do you mean by dissimilarity measure of two objects?

- A : Is a numerical measure of how alike two data objects are.
- B : Is a numerical measure of how different two data objects are.
- C : Higher when objects are more alike
- D : Lower when objects are more different

Q.no 8. Data mining is best described as the process of

- A : identifying patterns in data
- B : deducing relationships in data
- C : representing data

D : simulating trends in data

Q.no 9. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 10. Bayesian classification is based on

A : probability for the hypothesis

B : Support

C : tree induction

D : Trees

Q.no 11. sensitivity is also known as

A : false rate

B : recall

C : negative rate

D : recognition rate

Q.no 12. What are closed itemsets?

A : An itemset for which at least super-itemset has same confidence

B : An itemset whose no proper super-itemset has same support

C : An itemset for which at least one proper super-itemset has same support

D : An itemset whose no proper super-itemset has same confidence

Q.no 13. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 14. Entropy is a measure of

A : impurity of an attribute

B : Purity of an attribute

C : Weight of an attribute

D : Class of an attribute

Q.no 15. A decision tree is also known as

A : general tree

B : binary tree

C : prediction tree

D : None of the options

Q.no 16. What are two steps of tree pruning work?

A : Pessimistic pruning and Optimistic pruning

B : Postpruning and Prepruning

C : Cost complexity pruning and time complexity pruning

D : None of the options

Q.no 17. The Synonym for data mining is

A : Data warehouse

B : Knowledge discovery in database

C : ETL

D : Business Intelligence

Q.no 18. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 19. Which of these is not a frequent pattern mining algorithm?

A : Decision trees

B : Eclat

C : FP growth

D : Apriori

Q.no 20. Which angle is used to measure document similarity?

A : Sin

B : Tan

C : Cos

D : Sec

Q.no 21. The fact table contains

A : The names of the facts

B : Keys to each of the related dimension tables

C : Facts and keys

D : Facts or keys

Q.no 22. Which of the following operations are used to calculate proximity measures for ordinal attribute?

A : Replacement and discretization

B : Replacement and characterizarion

C : Replacement and normalization

D : Normalization and discretization

Q.no 23. Which statement is true about the decision tree attribute selection process

A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 24. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) dnd (b)

Q.no 25. Which of the following probabilities are used in the Bayes theorem.

A : $P(C_i|X)$

B : $P(C_i)$

C : $P(X|C_i)$

D : $P(X)$

Q.no 26. If first object X and Y coordinates are 3 and 5 respectively and second object X and Y coordinates are 10 and 3 respectively, then what is Manhattan distance between these two objects?

A : 8

B : 13

C : 9

D : 10

Q.no 27. To improve the accuracy of multiclass classification we can use

A : cross validation

B : sampling

C : Error-detecting codes

D : Error-correcting codes

Q.no 28. When do you consider an association rule interesting?

A : If it only satisfies minimum support

B : If it only satisfies minimum confidence

C : If it satisfies both minimum support and minimum confidence

D : There are other measures to check interesting rules

Q.no 29. A lattice of cuboids is called as

A : Data cube

B : Dimesnion lattice

C : Master lattice

D : Fact table

Q.no 30. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 31. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 32. Which of the following is measure of document similarity?

A : Cosine dissimilarity

B : Sine similarity

C : Sine dissimilarity

D : Cosine similarity

Q.no 33. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data. Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

A : Imbalanced problems should not be measured using Accuracy metric.

B : Accuracy metric is not a good idea for imbalanced class problems.

C : Precision and recall metrics aren't good for imbalanced class problems.

D : Precision and recall metrics are good for imbalanced class problems.

Q.no 34. The accuracy of a classifier on a given test set is the percentage of

A : test set tuples that are correctly classified by the classifier

B : test set tuples that are incorrectly classified by the classifier

C : test set tuples that are incorrectly misclassified by the classifier

D : test set tuples that are not classified by the classifier

Q.no 35. In a decision tree each leaf node represents

A : Test conditions

B : Class labels

C : Attribute values

D : Decision

Q.no 36. How will you counter over-fitting in decision tree?

A : By creating new rules

B : By pruning the longer rules

C : Both By pruning the longer rules' and ' By creating new rules'

D : BY creating new tree

Q.no 37. What is uniform support in multilevel association rule minig?

A : Use of minimum support

B : Use of minimum support and confidence

C : Use of same minimum threshold at each abstraction level

D : Use of minimum support and support count

Q.no 38. In which step of Knowledge Discovery, multiple data sources are combined?

A : Data Cleaning

B : Data Integration

C : Data Selection

D : Data Transformation

Q.no 39. It is the main technique employed for data selection.

A : Noise

B : Sampling

C : Clustering

D : Histogram

Q.no 40. This supervised learning technique can process both numeric and categorical input attributes.

A : linear regression

B : Bayes classifier

C : logistic regression

D : backpropagation learning

Q.no 41. A concept hierarchy that is a total or partial order among attributes in a database schema is called

- A : Mixed hierarchy
- B : Total hierarchy
- C : Schema hierarchy
- D : Concept generalization

Q.no 42. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

- A : 7
- B : 9
- C : 10
- D : 11

Q.no 43. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

- A : 1
- B : 0
- C : 0.5
- D : 0.75

Q.no 44. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

- A : Precision = 0.88, Recall=0.64
- B : Precision = 0.44, Recall=0.78
- C : Precision = 0.88, Recall=0.22
- D : Precision = 0.77, Recall=0.55

Q.no 45. These server performs the faster computation

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 46. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

- A : Precision= 0.90
- B : Precision= 0.79
- C : Precision= 0.45
- D : Precision= 0.68

Q.no 47. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

- A : Precision = 0.89
- B : Precision = 0.23
- C : Precision = 0.45
- D : Precision = 0.75

Q.no 48. Which operation data warehouse requires ?

- A : Initial loading of data
- B : Transaction processing
- C : Recovery
- D : Concurrency control mechanisms

Q.no 49. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

- A : Primary
- B : Secondary
- C : Superkey
- D : Candidate

Q.no 50. Which of the following operation is required to calculate cosine similarity?

- A : Vector dot product
- B : Exponent
- C : Modulus
- D : Percentage

Q.no 51. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

- A : Suffix path
- B : FP-tree
- C : Prefix path
- D : Condition pattern base

Q.no 52. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

- A : smooth by bin boundaries
- B : smooth by bin median
- C : smooth by bin means
- D : smooth by bin values

Q.no 53. High entropy means that the partitions in classification are

- A : pure
- B : Not pure
- C : Useful
- D : Not useful

Q.no 54. How the bayesian network can be used to answer any query?

- A : Full distribution
- B : Joint distribution
- C : Partial distribution
- D : All of the mentioned

Q.no 55. Accuracy is

- A : Number of correct predictions out of total no. of predictions
- B : Number of incorrect predictions out of total no. of predictions
- C : Number of predictions out of total no. of predictions
- D : Total number of predictions

Q.no 56. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

- A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset {Tea, milk} is antecedent and {sugar} is consequent

Q.no 57. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 58. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 59. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 60. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Answer for Question No 1. is a

Answer for Question No 2. is b

Answer for Question No 3. is d

Answer for Question No 4. is a

Answer for Question No 5. is d

Answer for Question No 6. is b

Answer for Question No 7. is b

Answer for Question No 8. is a

Answer for Question No 9. is d

Answer for Question No 10. is a

Answer for Question No 11. is b

Answer for Question No 12. is b

Answer for Question No 13. is a

Answer for Question No 14. is a

Answer for Question No 15. is c

Answer for Question No 16. is b

Answer for Question No 17. is b

Answer for Question No 18. is c

Answer for Question No 19. is a

Answer for Question No 20. is c

Answer for Question No 21. is c

Answer for Question No 22. is c

Answer for Question No 23. is b

Answer for Question No 24. is d

Answer for Question No 25. is a

Answer for Question No 26. is c

Answer for Question No 27. is d

Answer for Question No 28. is c

Answer for Question No 29. is a

Answer for Question No 30. is d

Answer for Question No 31. is c

Answer for Question No 32. is d

Answer for Question No 33. is c

Answer for Question No 34. is a

Answer for Question No 35. is b

Answer for Question No 36. is b

Answer for Question No 37. is c

Answer for Question No 38. is b

Answer for Question No 39. is b

Answer for Question No 40. is b

Answer for Question No 41. is c

Answer for Question No 42. is b

Answer for Question No 43. is c

Answer for Question No 44. is a

Answer for Question No 45. is b

Answer for Question No 46. is a

Answer for Question No 47. is d

Answer for Question No 48. is a

Answer for Question No 49. is d

Answer for Question No 50. is a

Answer for Question No 51. is d

Answer for Question No 52. is d

Answer for Question No 53. is b

Answer for Question No 54. is b

Answer for Question No 55. is a

Answer for Question No 56. is d

Answer for Question No 57. is a

Answer for Question No 58. is d

Answer for Question No 59. is a

Answer for Question No 60. is b

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Training process that generates tree is called as

- A : Pruning
- B : Rule generation
- C : Induction
- D : splitting

Q.no 2. If two documents are similar, then what is the measure of angle between two documents?

- A : 30
- B : 60
- C : 90
- D : 0

Q.no 3. What are closed itemsets?

- A : An itemset for which at least super-itemset has same confidence
- B : An itemset whose no proper super-itemset has same support

C : An itemset for which at least one proper super-itemset has same support

D : An itemset whose no proper super-itemset has same confidence

Q.no 4. Hidden knowledge referred to

A : A set of databases from different vendors, possibly using different database paradigms

B : An approach to a problem that is not guaranteed to work but performs well in most cases

C : Information that is hidden in a database and that cannot be recovered by a simple SQL query

D : None of these

Q.no 5. What are closed frequent itemsets?

A : A closed itemset

B : A frequent itemset

C : An itemset which is both closed and frequent

D : Not frequent itemset

Q.no 6. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 7. The task of building decision model from labeled training data is called as

A : Supervised Learning

B : Unsupervised Learning

C : Reinforcement Learning

D : Structure Learning

Q.no 8. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 9. In Data Characterization, class under study is called as?

A : Study Class

B : Intial Class

C : Target Class

D : Final Class

Q.no 10. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 11. The schema is collection of stars. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 12. the positive tuples that were correctly labeled by the classifier are

A : True negatives (TN)

B : False negatives(FN)

C : False positives(FP)

D : True positives(TP)

Q.no 13. What is an alternative form of Euclidean distance?

A : L1 norm

B : L2 norm

C : Lmax norm

D : L norm

Q.no 14. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 15. An automatic car driver and business intelligent systems are examples of

A : Regression

B : Classification

C : Machine Learning

D : Reinforcement learning

Q.no 16. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non- supervised

Q.no 17. Postpruning is

A : Removing branches from fully grown tree

B : Stop constructing tree if this would result in the measure falling below a threshold

C : constructing a new tree

D : Flow-Chart

Q.no 18. OLAP database design is

A : Application-oriented

B : Object-oriented

C : Goal-oriented

D : Subject-oriented

Q.no 19. Data used to build a data mining model.

A : Validation Data

B : Training Data

C : Testing Data

D : Hidden Data

Q.no 20. Which technique finds the frequent itemsets in just two database scans?

- A : Partitioning
- B : Sampling
- C : Hashing
- D : Dynamic itemset counting

Q.no 21. A lattice of cuboids is called as

- A : Data cube
- B : Dimesnion lattice
- C : Master lattice
- D : Fact table

Q.no 22. Which of the following probabilities are used in the Bayes theorem.

- A : $P(C_i|X)$
- B : $P(C_i)$
- C : $P(X|C_i)$
- D : $P(X)$

Q.no 23. Which is the wrong combination.

- A : True negative=correctly identified
- B : False negative=incorrectly identified
- C : False positive=correctly identified
- D : True positive=correctly identified

Q.no 24. The probability of a hypothesis before the presentation of evidence is called as

- A : Apriori probability
- B : subjective probability
- C : posterior probability
- D : conditional probability

Q.no 25. What type of matrix is required to represent binary data for proximity measures?

- A : Normal matrix
- B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 26. Which of the following activities is a data mining task?

A : Monitoring the heart rate of a patient for abnormalities

B : Extracting the frequencies of a sound wave

C : Predicting the outcomes of tossing a (fair) pair of dice

D : Dividing the customers of a company according to their profitability

Q.no 27. The fact table contains

A : The names of the facts

B : Keys to each of the related dimension tables

C : Facts and keys

D : Facts or keys

Q.no 28. When you use cross validation in machine learning, it means

A : you verify how accurate your model is on multiple and different subsets of data.

B : you verify how accurate your model is on same dataset.

C : you verify how accurate your model is on new dataset.

D : you verify how accurate your model on unknown dataset

Q.no 29. What is the approach of basic algorithm for decision tree induction?

A : Greedy

B : Top Down

C : Procedural

D : Step by Step

Q.no 30. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 31. Frequent patterns generated from association can be used for classification is called

A : Naïve Bays

B : Associative Classification

C : Predictive Mining

D : Decision Tree

Q.no 32. Sensitivity is also referred to as

A : misclassification rate

B : true negative rate

C : True positive rate

D : correctness

Q.no 33. Holdout and random subsampling are common techniques for assessing

A : K-Fold validation

B : cross validation

C : accuracy

D : sampling

Q.no 34. Specificity is also referred to as

A : true negative rate

B : correctness

C : misclassification rate

D : True positive rate

Q.no 35. If A, B are two sets of items, and A is a subset of B. Which of the following statement is always true?

A : Support(A) is less than or equal to Support(B)

B : Support(A) is greater than or equal to Support(B)

C : Support(A) is equal to Support(B)

D : Support(A) is not equal to Support(B)

Q.no 36. Learning with a complete system in mind with reference to interactions among the systems and subsystems with proper understanding of systemic boundaries is

A : Multi-label classification

B : Reinforcement learning

C : Systemic learning

D : Machine Learning

Q.no 37. Lazy learner classification approach is

A : learner waits until the last minute before constructing model to classify

B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 38. K-fold Cross Validation envisages

A : partitioning of the original sample into one sample.

B : partitioning of the original sample into 'k' equal sized sub-samples.

C : partitioning of the original sample into 'k' unequal sized sub-samples.

D : partitioning of the original sample into 'k' random samples.

Q.no 39. Which of the following is necessary operation to calculate dissimilarity between ordinal attributes?

A : Replacement of ordinal categories

B : Correlation coefficient

C : Discretization

D : Randomization

Q.no 40. The rule is considered as interesting if

A : They satisfy both minimum support and minimum confidence threshold

B : They satisfy both maximum support and maximum confidence threshold

C : They satisfy maximum support and minimum confidence threshold

D : They satisfy minimum support and maximum confidence threshold

Q.no 41. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 42. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

- A : Suffix path
- B : FP-tree
- C : Prefix path
- D : Condition pattern base

Q.no 43. High entropy means that the partitions in classification are

- A : pure
- B : Not pure
- C : Useful
- D : Not useful

Q.no 44. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

- A : 1
- B : 0
- C : 0.5
- D : 0.75

Q.no 45. Which of the following sentence is FALSE regarding regression?

- A : It relates inputs to outputs.
- B : It is used for prediction.
- C : It may be used for interpretation.
- D : It discovers causal relationships.

Q.no 46. The cuboid that holds the lowest level of summarization is called as

- A : 0-D cuboid
- B : 1-D cuboid
- C : Base cuboid
- D : 2-D cuboid

Q.no 47. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further , of the given 4 transactions, 3 transactions include cheese. Find the support

percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 48. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 49. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 50. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 51. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 52. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 53. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 54. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 55. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 56. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 57. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 58. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 59. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 60. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

A : 7

B : 9

C : 10

D : 11

Answer for Question No 1. is c

Answer for Question No 2. is d

Answer for Question No 3. is b

Answer for Question No 4. is c

Answer for Question No 5. is c

Answer for Question No 6. is b

Answer for Question No 7. is a

Answer for Question No 8. is c

Answer for Question No 9. is c

Answer for Question No 10. is d

Answer for Question No 11. is c

Answer for Question No 12. is d

Answer for Question No 13. is b

Answer for Question No 14. is d

Answer for Question No 15. is d

Answer for Question No 16. is c

Answer for Question No 17. is a

Answer for Question No 18. is d

Answer for Question No 19. is b

Answer for Question No 20. is a

Answer for Question No 21. is a

Answer for Question No 22. is a

Answer for Question No 23. is c

Answer for Question No 24. is a

Answer for Question No 25. is d

Answer for Question No 26. is a

Answer for Question No 27. is c

Answer for Question No 28. is a

Answer for Question No 29. is a

Answer for Question No 30. is c

Answer for Question No 31. is b

Answer for Question No 32. is c

Answer for Question No 33. is c

Answer for Question No 34. is a

Answer for Question No 35. is b

Answer for Question No 36. is c

Answer for Question No 37. is a

Answer for Question No 38. is d

Answer for Question No 39. is a

Answer for Question No 40. is a

Answer for Question No 41. is a

Answer for Question No 42. is d

Answer for Question No 43. is b

Answer for Question No 44. is c

Answer for Question No 45. is d

Answer for Question No 46. is c

Answer for Question No 47. is a

Answer for Question No 48. is c

Answer for Question No 49. is a

Answer for Question No 50. is a

Answer for Question No 51. is b

Answer for Question No 52. is d

Answer for Question No 53. is d

Answer for Question No 54. is c

Answer for Question No 55. is b

Answer for Question No 56. is a

Answer for Question No 57. is d

Answer for Question No 58. is a

Answer for Question No 59. is a

Answer for Question No 60. is b

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Each dimension is represented by only one table. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 2. What are closed itemsets?

- A : An itemset for which at least super-itemset has same confidence
- B : An itemset whose no proper super-itemset has same support
- C : An itemset for which at least one proper super-itemset has same support
- D : An itemset whose no proper super-itemset has same confidence

Q.no 3. A decision tree is also known as

- A : general tree
- B : binary tree

C : prediction tree

D : None of the options

Q.no 4. What are two steps of tree pruning work?

A : Pessimistic pruning and Optimistic pruning

B : Postpruning and Prepruning

C : Cost complexity pruning and time complexity pruning

D : None of the options

Q.no 5. Entropy is a measure of

A : impurity of an attribute

B : Purity of an attribute

C : Weight of an attribute

D : Class of an attribute

Q.no 6. What is C4.5 is used to build

A : Decision tree

B : Regression Analysis

C : Induction

D : Association Rules

Q.no 7. The first steps involved in the knowledge discovery is?

A : Data Integration

B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 8. What is an alternative form of Euclidean distance?

A : L1 norm

B : L2 norm

C : Lmax norm

D : L norm

Q.no 9. What does the leaf node in decision tree indicates

- A : sub tree
- B : class label
- C : testing node
- D : condition

Q.no 10. The schema is collection of stars. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 11. Which of the following is the data mining tool?

- A : Borland C
- B : Weka
- C : Borland C++
- D : Visual C

Q.no 12. Which of the following is correct about Proximity measures?

- A : Similarity
- B : Dissimilarity
- C : Similarity as well as Dissimilarity
- D : Neither similarity nor dissimilarity

Q.no 13. Data mining is best described as the process of

- A : identifying patterns in data
- B : deducing relationships in data
- C : representing data
- D : simulating trends in data

Q.no 14. Multi-class classification makes the assumption that each sample is assigned to

- A : one and only one label
- B : many labels
- C : one or many labels

D : no label

Q.no 15. For Apriori algorithm, what is the second phase?

A : Pruning

B : Partitioning

C : Candidate generation

D : Itemset generation

Q.no 16. Bayesian classification is based on

A : probability for the hypothesis

B : Support

C : tree induction

D : Trees

Q.no 17. What are closed frequent itemsets?

A : A closed itemset

B : A frequent itemset

C : An itemset which is both closed and frequent

D : Not frequent itemset

Q.no 18. The task of building decision model from labeled training data is called as

A : Supervised Learning

B : Unsupervised Learning

C : Reinforcement Learning

D : Structure Learning

Q.no 19. the positive tuples that were correctly labeled by the classifier are

A : True negatives (TN)

B : False negatives(FN)

C : False positives(FP)

D : True positives(TP)

Q.no 20. The Synonym for data mining is

A : Data warehouse

B : Knowledge discovery in database

C : ETL

D : Business Intelligence

Q.no 21. Cross validation involves

A : testing the machine on all possible ways by substituting the original sample into training set

B : testing the machine on all possible ways by dividing the original sample into training and validation sets.

C : testing the machine with only validation sets

D : testing the machine on only testing datasets.

Q.no 22. For mining frequent itemsets, the Data format used by Apriori and FP-Growth algorithms are

A : Apriori uses horizontal and FP-Growth uses vertical data format

B : Apriori uses vertical and FP-Growth uses horizontal data format

C : Apriori and FP-Growth both uses vertical data format

D : Apriori and FP-Growth both uses horizontal data format

Q.no 23. Data independence means

A : Data is defined separately and not included in programs

B : Programs are not dependent on the physical attributes of the data

C : Programs are not dependent on the logical attributes of the data

D : Programs are not dependent on the physical attributes as well as logical attributes of the data

Q.no 24. In asymmetric attribute

A : No value is considered important over other values

B : All values are equal

C : Only non-zero value is important

D : Range of values is important

Q.no 25. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

A : Imbalanced problems should not be measured using Accuracy metric.

B : Accuracy metric is not a good idea for imbalanced class problems.

C : Precision and recall metrics aren't good for imbalanced class problems.

D : Precision and recall metrics are good for imbalanced class problems.

Q.no 26. In multilevel association rules, which strategy is employed

A : Top-down

B : Recursive

C : Bottom-up

D : Divide and conquer

Q.no 27. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 28. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 29. Which of the following operation is correct about supremum distance?

A : It gives maximum difference between any attribute of the objects

B : It gives minimum difference between any attribute of the objects

C : It gives maximum difference between first attribute of the objects

D : It gives minimum difference between first attribute of the objects

Q.no 30. OLAP Summarization means

A : Consolidated

B : Primitive

C : Highly detailed

D : Recent data

Q.no 31. When do you consider an association rule interesting?

- A : If it only satisfies minimum support
- B : If it only satisfies minimum confidence
- C : If it satisfies both minimum support and minimum confidence
- D : There are other measures to check interesting rules

Q.no 32. The property of Apriori algorithm is

- A : All nonempty subsets of a frequent itemsets must also be frequent
- B : All empty subsets of a frequent itemsets must also be frequent
- C : All nonempty subsets of a frequent itemsets must be not frequent
- D : All nonempty subsets of a frequent itemsets can frequent or not frequent

Q.no 33. Lazy learner classification approach is

- A : learner waits until the last minute before constructing model to classify
- B : a given training data constructs a model first and then uses it to classify
- C : the network is constructed by human experts
- D : None of the options

Q.no 34. The Microsoft SQL Server 2000 is the example of

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 35. In Apriori algorithm, for generating e. g. 5 itemsets, we use

- A : Frequent 5 itemsets
- B : Frequent 3 itemsets
- C : Frequent 4 itemsets
- D : Frequent 6 itemsets

Q.no 36. Which statement is true about the decision tree attribute selection process

- A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 37. Frequent patterns generated from association can be used for classification is called

A : Naïve Bays

B : Associative Classification

C : Predictive Mining

D : Decision Tree

Q.no 38. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 39. Which of the following probabilities are used in the Bayes theorem.

A : $P(C_i|X)$

B : $P(C_i)$

C : $P(X|C_i)$

D : $P(X)$

Q.no 40. Sensitivity is also referred to as

A : misclassification rate

B : true negative rate

C : True positive rate

D : correctness

Q.no 41. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 42. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 43. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 44. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 45. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 46. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 47. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

- A : 25
- B : 210
- C : 62
- D : 30

Q.no 48. Name the property of objects for which distance from first object to second and vice-versa is same.

- A : Symmetry
- B : Transitive
- C : Positive definiteness
- D : Traingle inequality

Q.no 49. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further , of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

- A : 0.6
- B : 0.75
- C : 0.8
- D : 0.7

Q.no 50. precision of model is 0.75 and recall is 0.43 then F-Score is

- A : F-Score= 0.99
- B : F-Score= 0.84
- C : F-Score= 0.55
- D : F-Score= 0.49

Q.no 51. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

- A : Precision
- B : Classifier performance
- C : Recall
- D : F-measure

Q.no 52. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

- A : smooth by bin boundaries
- B : smooth by bin median
- C : smooth by bin means
- D : smooth by bin values

Q.no 53. The problem of finding hidden structure from unlabeled data is called as

- A : Supervised learning
- B : Unsupervised learning
- C : Reinforcement Learning
- D : Semisupervised learning

Q.no 54. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

- A : Suffix path
- B : FP-tree
- C : Prefix path
- D : Condition pattern base

Q.no 55. Which operation data warehouse requires ?

- A : Initial loading of data
- B : Transaction processing
- C : Recovery
- D : Concurrency control mechanisms

Q.no 56. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

- A : Recall=0.9
- B : Recall=0.39
- C : Recall=0.65
- D : Recall=5.0

Q.no 57. Which operation is required to calculate Hamming distance between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 58. Rotating the axes in a 3-D cube is the examplele of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 59. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 60. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Answer for Question No 1. is a

Answer for Question No 2. is b

Answer for Question No 3. is c

Answer for Question No 4. is b

Answer for Question No 5. is a

Answer for Question No 6. is a

Answer for Question No 7. is d

Answer for Question No 8. is b

Answer for Question No 9. is b

Answer for Question No 10. is c

Answer for Question No 11. is b

Answer for Question No 12. is c

Answer for Question No 13. is a

Answer for Question No 14. is a

Answer for Question No 15. is a

Answer for Question No 16. is a

Answer for Question No 17. is c

Answer for Question No 18. is a

Answer for Question No 19. is d

Answer for Question No 20. is b

Answer for Question No 21. is c

Answer for Question No 22. is d

Answer for Question No 23. is d

Answer for Question No 24. is c

Answer for Question No 25. is c

Answer for Question No 26. is a

Answer for Question No 27. is c

Answer for Question No 28. is d

Answer for Question No 29. is a

Answer for Question No 30. is a

Answer for Question No 31. is c

Answer for Question No 32. is a

Answer for Question No 33. is a

Answer for Question No 34. is c

Answer for Question No 35. is c

Answer for Question No 36. is b

Answer for Question No 37. is b

Answer for Question No 38. is d

Answer for Question No 39. is a

Answer for Question No 40. is c

Answer for Question No 41. is a

Answer for Question No 42. is d

Answer for Question No 43. is c

Answer for Question No 44. is b

Answer for Question No 45. is a

Answer for Question No 46. is c

Answer for Question No 47. is d

Answer for Question No 48. is a

Answer for Question No 49. is a

Answer for Question No 50. is c

Answer for Question No 51. is b

Answer for Question No 52. is d

Answer for Question No 53. is b

Answer for Question No 54. is d

Answer for Question No 55. is a

Answer for Question No 56. is a

Answer for Question No 57. is d

Answer for Question No 58. is a

Answer for Question No 59. is b

Answer for Question No 60. is a

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. What is an alternative form of Euclidean distance?

- A : L1 norm
- B : L2 norm
- C : Lmax norm
- D : L norm

Q.no 2. Which of the following is correct about Proximity measures?

- A : Similarity
- B : Dissimilarity
- C : Similarity as well as Dissimilarity
- D : Neither similarity nor dissimilarity

Q.no 3. Entropy is a measure of

- A : impurity of an attribute
- B : Purity of an attribute

C : Weight of an attribute

D : Class of an attribute

Q.no 4. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 5. Removing duplicate records is a process called

A : recovery

B : data cleaning

C : data cleansing

D : data pruning

Q.no 6. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 7. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 8. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 9. Data matrix is also called as

- A : Object by object structure
- B : Object by attribute structure
- C : Attribute by attribute structure
- D : Attribute by object structure

Q.no 10. A data matrix in which attributes are of the same type and asymmetric is called

- A : Pattern matrix
- B : Sparse data matrix
- C : Document term matrix
- D : Normal matrix

Q.no 11. Which one of the following is true for decision tree

- A : Decision tree is useful in decision making
- B : Decision tree is similar to OLTP
- C : Decision Tree is similar to cluster analysis
- D : Decision tree needs to find probabilities of hypothesis

Q.no 12. If two documents are similar, then what is the measure of angle between two documents?

- A : 30
- B : 60
- C : 90
- D : 0

Q.no 13. Supervised learning and unsupervised clustering both require at least one

- A : hidden attribute
- B : output attribute
- C : input attribute
- D : categorical attribute

Q.no 14. What technique can be used to improve the efficiency of apriori algorithm?

- A : Hash-based techniques

B : Transaction Reduction

C : Candidate generation

D : Both (a) and (b)

Q.no 15. Constraint-based mining provides

A : User flexibility

B : System optimization

C : Both (a) and (b)

D : High computation

Q.no 16. Which of these is not a frequent pattern mining algorithm?

A : Decision trees

B : Eclat

C : FP growth

D : Apriori

Q.no 17. Postpruning is

A : Removing branches from fully grown tree

B : Stop constructing tree if this would result in the measure falling below a threshold

C : constructing a new tree

D : Flow-Chart

Q.no 18. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 19. Which of the following are methods for supervised classification?

A : Decision tree

B : K-Means

C : Hierarchical

D : Apriori

Q.no 20. What do you mean by dissimilarity measure of two objects?

- A : Is a numerical measure of how alike two data objects are.
- B : Is a numerical measure of how different two data objects are.
- C : Higher when objects are more alike
- D : Lower when objects are more different

Q.no 21. The frequent-item-header-table consists of number fields

- A : Only one
- B : Two
- C : Three
- D : Four

Q.no 22. What do you mean by support(A)?

- A : Total number of transactions containing A
- B : Total Number of transactions not containing A
- C : Number of transactions containing A / Total number of transactions
- D : Number of transactions not containing A / Total number of transactions

Q.no 23. When you use cross validation in machine learning, it means

- A : you verify how accurate your model is on multiple and different subsets of data.
- B : you verify how accurate your model is on same dataset.
- C : you verify how accurate your model is on new dataset.
- D : you verify how accurate your model on unknown dataset

Q.no 24. In Apriori algorithm, for generating e. g. 5 itemsets, we use

- A : Frequent 5 itemsets
- B : Frequent 3 itemsets
- C : Frequent 4 itemsets
- D : Frequent 6 itemsets

Q.no 25. In a decision tree each leaf node represents

- A : Test conditions
- B : Class labels

C : Attribute values

D : Decision

Q.no 26. Which of the following is a predictive model?

A : Clustering

B : Regression

C : Summarization

D : Association rules

Q.no 27. The fact table contains

A : The names of the facts

B : Keys to each of the related dimension tables

C : Facts and keys

D : Facts or keys

Q.no 28. It is the main technique employed for data selection.

A : Noise

B : Sampling

C : Clustering

D : Histogram

Q.no 29. Lazy learner classification approach is

A : learner waits until the last minute before constructing model to classify

B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 30. In multilevel association rules, which strategy is employed

A : Top-down

B : Recursive

C : Bottom-up

D : Divide and conquer

Q.no 31. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) and (b)

Q.no 32. If A, B are two sets of items, and A is a subset of B. Which of the following statement is always true?

A : Support(A) is less than or equal to Support(B)

B : Support(A) is greater than or equal to Support(B)

C : Support(A) is equal to Support(B)

D : Support(A) is not equal to Support(B)

Q.no 33. one-versus-one(OVO) and one-versus-all (OVA) classification involves

A : more than two classes

B : Only two classes

C : Only one class

D : No class

Q.no 34. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 35. Which of the following is necessary operation to calculate dissimilarity between ordinal attributes?

A : Replacement of ordinal categories

B : Correlation coefficient

C : Discretization

D : Randomization

Q.no 36. Frequent patterns generated from association can be used for classification is called

A : Naïve Bays

B : Associative Classification

C : Predictive Mining

D : Decision Tree

Q.no 37. K-fold Cross Validation envisages

A : partitioning of the original sample into one sample.

B : partitioning of the original sample into 'k' equal sized sub-samples.

C : partitioning of the original sample into 'k' unequal sized sub-samples.

D : partitioning of the original sample into 'k' random samples.

Q.no 38. Specificity is also referred to as

A : true negative rate

B : correctness

C : misclassification rate

D : True positive rate

Q.no 39. Number of records are comparatively more in

A : OLAP

B : OLTP

C : Same in OLAP and OLTP

D : Can not compare

Q.no 40. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

A : Zero

B : Infinity

C : Two

D : One

Q.no 41. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 42. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 43. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Q.no 44. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 45. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Triangle inequality

Q.no 46. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 47. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block distance

C : Chebyshev distance

D : Euclidean distance

Q.no 48. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 49. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 50. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 51. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 52. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 53. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 54. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 55. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 56. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Fourty Five

Q.no 57. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

A : 1

B : 0

C : 0.5

D : 0.75

Q.no 58. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 59. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 60. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Answer for Question No 1. is b

Answer for Question No 2. is c

Answer for Question No 3. is a

Answer for Question No 4. is b

Answer for Question No 5. is b

Answer for Question No 6. is c

Answer for Question No 7. is a

Answer for Question No 8. is a

Answer for Question No 9. is b

Answer for Question No 10. is b

Answer for Question No 11. is a

Answer for Question No 12. is d

Answer for Question No 13. is c

Answer for Question No 14. is d

Answer for Question No 15. is c

Answer for Question No 16. is a

Answer for Question No 17. is a

Answer for Question No 18. is b

Answer for Question No 19. is a

Answer for Question No 20. is b

Answer for Question No 21. is b

Answer for Question No 22. is c

Answer for Question No 23. is a

Answer for Question No 24. is c

Answer for Question No 25. is b

Answer for Question No 26. is b

Answer for Question No 27. is c

Answer for Question No 28. is b

Answer for Question No 29. is a

Answer for Question No 30. is a

Answer for Question No 31. is d

Answer for Question No 32. is b

Answer for Question No 33. is a

Answer for Question No 34. is b

Answer for Question No 35. is a

Answer for Question No 36. is b

Answer for Question No 37. is d

Answer for Question No 38. is a

Answer for Question No 39. is b

Answer for Question No 40. is a

Answer for Question No 41. is a

Answer for Question No 42. is a

Answer for Question No 43. is b

Answer for Question No 44. is a

Answer for Question No 45. is a

Answer for Question No 46. is d

Answer for Question No 47. is c

Answer for Question No 48. is b

Answer for Question No 49. is d

Answer for Question No 50. is b

Answer for Question No 51. is c

Answer for Question No 52. is a

Answer for Question No 53. is c

Answer for Question No 54. is d

Answer for Question No 55. is c

Answer for Question No 56. is b

Answer for Question No 57. is c

Answer for Question No 58. is c

Answer for Question No 59. is a

Answer for Question No 60. is a

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. For Apriori algorithm, what is the second phase?

- A : Pruning
- B : Partitioning
- C : Candidate generation
- D : Itemset generation

Q.no 2. Choose the correct concept hierarchy.

- A : city < street < state < country
- B : street < city < state < country
- C : street > city > state > country
- D : street > city > country > state

Q.no 3. A person trained to interact with a human expert in order to capture their knowledge.

- A : knowledge programmer
- B : knowledge developer

C : knowledge engineer

D : knowledge extractor

Q.no 4. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 5. cross-validation and bootstrap methods are common techniques for assessing

A : accuracy

B : Precision

C : recall

D : performance

Q.no 6. Color is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : numeric

Q.no 7. Each dimension is represented by only one table. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 8. Data used to build a data mining model.

A : Validation Data

B : Training Data

C : Testing Data

D : Hidden Data

Q.no 9. Which of the following is the data mining tool?

A : Borland C

B : Weka

C : Borland C++

D : Visual C

Q.no 10. The fact is also called as

A : Dimension

B : Key

C : Schema

D : Measure

Q.no 11. The example of knowledge type constraints in constraint based mining is

A : Association or Correlation

B : Rule templates

C : Task relevant data

D : Threshold measures

Q.no 12. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 13. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 14. Which angle is used to measure document similarity?

A : Sin

B : Tan

C : Cos

D : Sec

Q.no 15. The task of building decision model from labeled training data is called as

A : Supervised Learning

B : Unsupervised Learning

C : Reinforcement Learning

D : Structure Learning

Q.no 16. A multidimensional data model is typically organized around a central theme which is represented by

A : Dimension table

B : Fact table

C : Dimension table and Fact table

D : Dimension table or Fact table

Q.no 17. Bayesian classification is based on

A : probability for the hypothesis

B : Support

C : tree induction

D : Trees

Q.no 18. Constraint-based mining provides

A : User flexibility

B : System optimization

C : Both (a) and (b)

D : High computation

Q.no 19. An automatic car driver and business intelligent systems are examples of

A : Regression

B : Classification

C : Machine Learning

D : Reinforcement learning

Q.no 20. Self-training is the simplest form of

A : supervised classification

B : semi-supervised classification

C : unsupervised classification

D : regression

Q.no 21. The Microsoft SQL Server 2000 is the example of

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 22. one-versus-one(OVO) and one-versus-all (OVA) classification involves

A : more than two classes

B : Only two classes

C : Only one class

D : No class

Q.no 23. K-fold Cross Validation envisages

A : partitioning of the original sample into one sample.

B : partitioning of the original sample into 'k' equal sized sub-samples.

C : partitioning of the original sample into 'k' unequal sized sub-samples.

D : partitioning of the original sample into 'k' random samples.

Q.no 24. Number of records are comparatively more in

A : OLAP

B : OLTP

C : Same in OLAP and OLTP

D : Can not compare

Q.no 25. Where does the bayes rule used?

A : Solving queries

B : Increasing complexity

C : Decreasing complexity

D : Answering probabilistic query

Q.no 26. The Galaxy Schema is also called as

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 27. In Apriori algorithm, for generating e. g. 5 itemsets, we use

A : Frequent 5 itemsets

B : Frequent 3 itemsets

C : Frequent 4 itemsets

D : Frequent 6 itemsets

Q.no 28. The accuracy of a classifier on a given test set is the percentage of

A : test set tuples that are correctly classified by the classifier

B : test set tuples that are incorrectly classified by the classifier

C : test set tuples that are incorrectly misclassified by the classifier

D : test set tuples that are not classified by the classifier

Q.no 29. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 30. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) and (b)

Q.no 31. Specificity is also referred to as

A : true negative rate

B : correctness

C : misclassification rate

D : True positive rate

Q.no 32. Joins will be needed to execute the query. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 33. Learning with a complete system in mind with reference to interactions among the systems and subsystems with proper understanding of systemic boundaries is

A : Multi-label classification

B : Reinforcement learning

C : Systemic learning

D : Machine Learning

Q.no 34. A frequent pattern tree is a tree structure consisting of

A : A frequent-item-node

B : An item-prefix-tree

C : A frequent-item-header table

D : both B and C

Q.no 35. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 36. Which of these distributions is used for a testing hypothesis?

A : Normal Distribution

B : Chi-Squared Distribution

C : Gamma Distribution

D : Poisson Distribution

Q.no 37. The ultimate purpose of Frequent itemset mining is

A : For business decision-making process

B : For generation of association rules

C : For generation of candidate set

D : For generation of interesting patterns

Q.no 38. It is the main technique employed for data selection.

A : Noise

B : Sampling

C : Clustering

D : Histogram

Q.no 39. In asymmetric attribute

A : No value is considered important over other values

B : All values are equal

C : Only non-zero value is important

D : Range of values is important

Q.no 40. The rule is considered as interesting if

A : They satisfy both minimum support and minimum confidence threshold

B : They satisfy both maximum support and maximum confidence threshold

C : They satisfy maximum support and minimum confidence threshold

D : They satisfy minimum support and maximum confidence threshold

Q.no 41. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 42. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 43. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 44. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 45. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 46. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 47. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 48. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

A : 7

B : 9

C : 10

D : 11

Q.no 49. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 50. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 51. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 52. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 53. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Traingle inequality

Q.no 54. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 55. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 56. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 57. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 58. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 59. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 60. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Answer for Question No 1. is a

Answer for Question No 2. is b

Answer for Question No 3. is c

Answer for Question No 4. is d

Answer for Question No 5. is a

Answer for Question No 6. is a

Answer for Question No 7. is a

Answer for Question No 8. is b

Answer for Question No 9. is b

Answer for Question No 10. is d

Answer for Question No 11. is a

Answer for Question No 12. is c

Answer for Question No 13. is b

Answer for Question No 14. is c

Answer for Question No 15. is a

Answer for Question No 16. is b

Answer for Question No 17. is a

Answer for Question No 18. is c

Answer for Question No 19. is d

Answer for Question No 20. is b

Answer for Question No 21. is c

Answer for Question No 22. is a

Answer for Question No 23. is d

Answer for Question No 24. is b

Answer for Question No 25. is d

Answer for Question No 26. is c

Answer for Question No 27. is c

Answer for Question No 28. is a

Answer for Question No 29. is d

Answer for Question No 30. is d

Answer for Question No 31. is a

Answer for Question No 32. is b

Answer for Question No 33. is c

Answer for Question No 34. is d

Answer for Question No 35. is d

Answer for Question No 36. is b

Answer for Question No 37. is a

Answer for Question No 38. is b

Answer for Question No 39. is c

Answer for Question No 40. is a

Answer for Question No 41. is a

Answer for Question No 42. is a

Answer for Question No 43. is d

Answer for Question No 44. is a

Answer for Question No 45. is a

Answer for Question No 46. is b

Answer for Question No 47. is c

Answer for Question No 48. is b

Answer for Question No 49. is a

Answer for Question No 50. is a

Answer for Question No 51. is a

Answer for Question No 52. is c

Answer for Question No 53. is a

Answer for Question No 54. is b

Answer for Question No 55. is a

Answer for Question No 56. is b

Answer for Question No 57. is d

Answer for Question No 58. is a

Answer for Question No 59. is c

Answer for Question No 60. is d

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. What does the leaf node in decision tree indicates

- A : sub tree
- B : class label
- C : testing node
- D : condition

Q.no 2. For Apriori algorithm, what is the second phase?

- A : Pruning
- B : Partitioning
- C : Candidate generation
- D : Itemset generation

Q.no 3. The first steps involved in the knowledge discovery is?

- A : Data Integration
- B : Data Selection

C : Data Transformation

D : Data Cleaning

Q.no 4. What is gini index?

A : It is a type of index structure

B : It is a measure of purity

C : Both options except none

D : None of the options

Q.no 5. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 6. A person trained to interact with a human expert in order to capture their knowledge.

A : knowledge programmer

B : knowledge developer

C : knowledge engineer

D : knowledge extractor

Q.no 7. What is the method to interpret the results after rule generation?

A : Absolute Mean

B : Lift ratio

C : Gini Index

D : Apriori

Q.no 8. Postpruning is

A : Removing branches from fully grown tree

B : Stop constructing tree if this would result in the measure falling below a threshold

C : constructing a new tree

D : Flow-Chart

Q.no 9. In Data Characterization, class under study is called as?

A : Study Class

B : Intial Class

C : Target Class

D : Final Class

Q.no 10. The fact is also called as

A : Dimension

B : Key

C : Schema

D : Measure

Q.no 11. Which of the following is not frequent pattern?

A : Itemsets

B : Subsequences

C : Substructures

D : Associations

Q.no 12. CART stands for

A : Regression

B : Classification

C : Classification and Regression Trees

D : Decision Trees

Q.no 13. The task of building decision model from labeled training data is called as

A : Supervised Learning

B : Unsupervised Learning

C : Reinforcement Learning

D : Structure Learning

Q.no 14. Multi-class classification makes the assumption that each sample is assigned to

A : one and only one label

B : many labels

C : one or many labels

D : no label

Q.no 15. Hidden knowledge referred to

A : A set of databases from different vendors, possibly using different database paradigms

B : An approach to a problem that is not guaranteed to work but performs well in most cases

C : Information that is hidden in a database and that cannot be recovered by a simple SQL query

D : None of these

Q.no 16. Choose the correct concept hierarchy.

A : city < street < state < country

B : street < city < state < country

C : street > city > state > country

D : street > city > country > state

Q.no 17. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 18. Removing duplicate records is a process called

A : recovery

B : data cleaning

C : data cleansing

D : data pruning

Q.no 19. the negative tuples that were correctly labeled by the classifier

A : False positives(FP)

B : True positives(TP)

C : True negatives (TN)

D : False negatives(FN)

Q.no 20. What is association rule mining?

- A : Using association to find correlation rules
- B : Same as frequent itemset mining
- C : Finding of strong association rules using frequent itemsets
- D : Finding of frequent itemset from large database

Q.no 21. For a classification problem with highly imbalanced class. The majority class is observed 99% of times in the training data.

Your model has 99% accuracy after taking the predictions on test data. Which of the following is not true in such a case?

- A : Imbalanced problems should not be measured using Accuracy metric.
- B : Accuracy metric is not a good idea for imbalanced class problems.
- C : Precision and recall metrics aren't good for imbalanced class problems.
- D : Precision and recall metrics are good for imbalanced class problems.

Q.no 22. The data cubes are generally

- A : 1 Dimensional
- B : 2 Dimensional
- C : 3 Dimensional
- D : n-Dimensional

Q.no 23. What type of data do you need for a chi-square test?

- A : Categorical
- B : Ordinal
- C : Interval
- D : Scales

Q.no 24. Sensitivity is also referred to as

- A : misclassification rate
- B : true negative rate
- C : True positive rate
- D : correctness

Q.no 25. Where does the bayes rule used?

- A : Solving queries

- B : Increasing complexity
- C : Decreasing complexity
- D : Answering probabilistic query

Q.no 26. A frequent pattern tree is a tree structure consisting of

- A : A frequent-item-node
- B : An item-prefix-tree
- C : A frequent-item-header table
- D : both B and C

Q.no 27. What is another name of data matrix?

- A : Single mode
- B : Two mode
- C : Multi mode
- D : Large mode

Q.no 28. The probability of a hypothesis before the presentation of evidence is called as

- A : Apriori probability
- B : subjective probability
- C : posterior probability
- D : conditional probability

Q.no 29. How will you counter over-fitting in decision tree?

- A : By creating new rules
- B : By pruning the longer rules
- C : Both By pruning the longer rules' and ' By creating new rules'
- D : BY creating new tree

Q.no 30. In Apriori algorithm, for generating e. g. 5 itemsets, we use

- A : Frequent 5 itemsets
- B : Frequent 3 itemsets
- C : Frequent 4 itemsets
- D : Frequent 6 itemsets

Q.no 31. This supervised learning technique can process both numeric and categorical input attributes.

- A : linear regression
- B : Bayes classifier
- C : logistic regression
- D : backpropagation learning

Q.no 32. Learning with a complete system in mind with reference to interactions among the systems and subsystems with proper understanding of systemic boundaries is

- A : Multi-label classification
- B : Reinforcement learning
- C : Systemic learning
- D : Machine Learning

Q.no 33. In asymmetric attribute

- A : No value is considered important over other values
- B : All values are equal
- C : Only non-zero value is important
- D : Range of values is important

Q.no 34. This operation may add new dimension to the cube

- A : Roll up
- B : Drill down
- C : Slice
- D : Dice

Q.no 35. K-fold Cross Validation envisages

- A : partitioning of the original sample into one sample.
- B : partitioning of the original sample into 'k' equal sized sub-samples.
- C : partitioning of the original sample into 'k' unequal sized sub-samples.
- D : partitioning of the original sample into 'k' random samples.

Q.no 36. One of the most well known software used for classification is

- A : Java

B : C4.5

C : Oracle

D : C++

Q.no 37. When you use cross validation in machine learning, it means

A : you verify how accurate your model is on multiple and different subsets of data.

B : you verify how accurate your model is on same dataset.

C : you verify how accurate your model is on new dataset.

D : you verify how accurate your model on unknown dataset

Q.no 38. In a decision tree each leaf node represents

A : Test conditions

B : Class labels

C : Attribute values

D : Decision

Q.no 39. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 40. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 41. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Forty Five

Q.no 42. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

- A : 7
- B : 9
- C : 10
- D : 11

Q.no 43. A concept hierarchy that is a total or partial order among attributes in a database schema is called

- A : Mixed hierarchy
- B : Total hierarchy
- C : Schema hierarchy
- D : Concept generalization

Q.no 44. The tables are easy to maintain and saves storage space.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 45. Which of the following operation is required to calculate cosine similarity?

- A : Vector dot product
- B : Exponent
- C : Modulus
- D : Percentage

Q.no 46. precision of model is 0.75 and recall is 0.43 then F-Score is

- A : F-Score= 0.99
- B : F-Score= 0.84
- C : F-Score= 0.55
- D : F-Score= 0.49

Q.no 47. The problem of finding hidden structure from unlabeled data is called as

- A : Supervised learning

- B : Unsupervised learning
- C : Reinforcement Learning
- D : Semisupervised learning

Q.no 48. Name the property of objects for which distance from first object to second and vice-versa is same.

- A : Symmetry
- B : Transitive
- C : Positive definiteness
- D : Traingle inequality

Q.no 49. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

- A : Precision= 0.90
- B : Precision= 0.79
- C : Precision= 0.45
- D : Precision= 0.68

Q.no 50. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

- A : min-max normalization
- B : z-score normalization
- C : decimal scaling
- D : decimal smoothing

Q.no 51. Which of the following sentence is FALSE regarding regression?

- A : It relates inputs to outputs.
- B : It is used for prediction.
- C : It may be used for interpretation.
- D : It discovers causal relationships.

Q.no 52. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

- A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset {Tea, milk} is antecedent and {sugar} is consequent

Q.no 53. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 54. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 55. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 56. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 57. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 58. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 59. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 60. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Answer for Question No 1. is b

Answer for Question No 2. is a

Answer for Question No 3. is d

Answer for Question No 4. is b

Answer for Question No 5. is b

Answer for Question No 6. is c

Answer for Question No 7. is b

Answer for Question No 8. is a

Answer for Question No 9. is c

Answer for Question No 10. is d

Answer for Question No 11. is d

Answer for Question No 12. is c

Answer for Question No 13. is a

Answer for Question No 14. is a

Answer for Question No 15. is c

Answer for Question No 16. is b

Answer for Question No 17. is a

Answer for Question No 18. is b

Answer for Question No 19. is c

Answer for Question No 20. is c

Answer for Question No 21. is c

Answer for Question No 22. is d

Answer for Question No 23. is a

Answer for Question No 24. is c

Answer for Question No 25. is d

Answer for Question No 26. is d

Answer for Question No 27. is b

Answer for Question No 28. is a

Answer for Question No 29. is b

Answer for Question No 30. is c

Answer for Question No 31. is b

Answer for Question No 32. is c

Answer for Question No 33. is c

Answer for Question No 34. is b

Answer for Question No 35. is d

Answer for Question No 36. is b

Answer for Question No 37. is a

Answer for Question No 38. is b

Answer for Question No 39. is c

Answer for Question No 40. is d

Answer for Question No 41. is b

Answer for Question No 42. is b

Answer for Question No 43. is c

Answer for Question No 44. is b

Answer for Question No 45. is a

Answer for Question No 46. is c

Answer for Question No 47. is b

Answer for Question No 48. is a

Answer for Question No 49. is a

Answer for Question No 50. is c

Answer for Question No 51. is d

Answer for Question No 52. is d

Answer for Question No 53. is c

Answer for Question No 54. is d

Answer for Question No 55. is a

Answer for Question No 56. is a

Answer for Question No 57. is d

Answer for Question No 58. is a

Answer for Question No 59. is d

Answer for Question No 60. is d

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Postpruning is

- A : Removing branches from fully grown tree
- B : Stop constructing tree if this would result in the measure falling below a threshold
- C : construting a new tree
- D : Flow-Chart

Q.no 2. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 3. What is gini index?

- A : It is a type of index structure
- B : It is a measure of purity

C : Both options except none

D : None of the options

Q.no 4. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 5. A multidimensional data model is typically organized around a central theme which is represented by

A : Dimension table

B : Fact table

C : Dimension table and Fact table

D : Dimension table or Fact table

Q.no 6. How can one represent document to calculate cosine similarity?

A : Vector

B : Matirx

C : List

D : Term frequency vector

Q.no 7. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 8. What is C4.5 is used to build

A : Decision tree

B : Regression Analysis

C : Induction

D : Association Rules

Q.no 9. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 10. Which of the following is not frequent pattern?

A : Itemsets

B : Subsequences

C : Substructures

D : Associations

Q.no 11. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 12. Training process that generates tree is called as

A : Pruning

B : Rule generation

C : Induction

D : splitting

Q.no 13. In Data Characterization, class under study is called as?

A : Study Class

B : Initial Class

C : Target Class

D : Final Class

Q.no 14. The problem of agents to learn from the environment by their interactions with dynamic environment is done in

- A : Reinforcement learning
- B : Multi-label classification
- C : Binary Classification
- D : Multiclassification

Q.no 15. If two documents are similar, then what is the measure of angle between two documents?

- A : 30
- B : 60
- C : 90
- D : 0

Q.no 16. Color is an example of which type of attribute

- A : Nominal
- B : Binary
- C : Ordinal
- D : numeric

Q.no 17. Baysian classification in based on

- A : probability for the hypothesis
- B : Support
- C : tree induction
- D : Trees

Q.no 18. What technique can be used to improve the efficiency of apriori algorithm?

- A : Hash-based techniques
- B : Transaction Reduction
- C : Candidate generation
- D : Both (a) dnd (b)

Q.no 19. Which of the following is the data mining tool?

- A : Borland C

B : Weka

C : Borland C++

D : Visual C

Q.no 20. Which of the following is not a type of constraints?

A : Data constraints

B : Rule constraints

C : Knowledge type constraints

D : Time constraints

Q.no 21. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

A : Zero

B : Infinity

C : Two

D : One

Q.no 22. Which of the following probabilities are used in the Bayes theorem.

A : $P(C_i|X)$

B : $P(C_i)$

C : $P(X|C_i)$

D : $P(X)$

Q.no 23. The frequent-item-header-table consists of number fields

A : Only one

B : Two

C : Three

D : Four

Q.no 24. Which of the following operations are used to calculate proximity measures for ordinal attribute?

A : Replacement and discretization

B : Replacement and characterization

C : Replacement and normalization

D : Normalization and discretization

Q.no 25. What do you mean by support(A)?

A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 26. Which of the following is measure of document similarity?

A : Cosine dissimilarity

B : Sine similarity

C : Sine dissimilarity

D : Cosine similarity

Q.no 27. Identify the example of sequence data

A : weather forecast

B : data matrix

C : market basket data

D : genomic data

Q.no 28. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 29. Specificity is also referred to as

A : true negative rate

B : correctness

C : misclassification rate

D : True positive rate

Q.no 30. The probability of a hypothesis before the presentation of evidence is called as

A : Apriori probability

B : subjective probability

C : posterior probability

D : conditional probability

Q.no 31. Data independence means

A : Data is defined separately and not included in programs

B : Programs are not dependent on the physical attributes of the data

C : Programs are not dependent on the logical attributes of the data

D : Programs are not dependent on the physical attributes as well as logical attributes of the data

Q.no 32. When you use cross validation in machine learning, it means

A : you verify how accurate your model is on multiple and different subsets of data.

B : you verify how accurate your model is on same dataset.

C : you verify how accurate your model is on new dataset.

D : you verify how accurate your model on unknown dataset

Q.no 33. This supervised learning technique can process both numeric and categorical input attributes.

A : linear regression

B : Bayes classifier

C : logistic regression

D : backpropagation learning

Q.no 34. The rule is considered as interesting if

A : They satisfy both minimum support and minimum confidence threshold

B : They satisfy both maximum support and maximum confidence threshold

C : They satisfy maximum support and minimum confidence threshold

D : They satisfy minimum support and maximum confidence threshold

Q.no 35. Joins will be needed to execute the query. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 36. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 37. Cross validation involves

A : testing the machine on all possible ways by substituting the original sample into training set

B : testing the machine on all possible ways by dividing the original sample into training and validation sets.

C : testing the machine with only validation sets

D : testing the machine on only testing datasets.

Q.no 38. Lazy learner classification approach is

A : learner waits until the last minute before constructing model to classify

B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 39. In a decision tree each leaf node represents

A : Test conditions

B : Class labels

C : Attribute values

D : Decision

Q.no 40. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 41. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

- A : Suffix path
- B : FP-tree
- C : Prefix path
- D : Condition pattern base

Q.no 42. Ordinal attribute has three distinct values such as Fair, Good, and Excellent. If x and y are two objects of ordinal attribute with Fair and Good values respectively, then what is the distance from object y to x?

- A : 1
- B : 0
- C : 0.5
- D : 0.75

Q.no 43. Name the property of objects for which distance from first object to second and vice-versa is same.

- A : Symmetry
- B : Transitive
- C : Positive definiteness
- D : Triangle inequality

Q.no 44. This technique uses mean and standard deviation scores to transform real-valued attributes.

- A : decimal scaling
- B : min-max normalization
- C : z-score normalization
- D : logarithmic normalization

Q.no 45. Rotating the axes in a 3-D cube is the example of

- A : Pivot
- B : Roll up
- C : Drill down
- D : Slice

Q.no 46. Transforming a 3-D cube into a series of 2-D planes is the example of

- A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 47. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 48. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 49. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 50. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset {Tea, milk} is antecedent and {sugar} is consequent

Q.no 51. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 52. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 53. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 54. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 55. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

A : 7

B : 9

C : 10

D : 11

Q.no 56. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 57. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 58. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 59. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 60. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. What is the method to interpret the results after rule generation?

- A : Absolute Mean
- B : Lift ratio
- C : Gini Index
- D : Apriori

Q.no 2. Supervised learning and unsupervised clustering both require at least one

- A : hidden attribute
- B : output attribute
- C : input attribute
- D : categorical attribute

Q.no 3. Which one of the following is true for decision tree

- A : Decision tree is useful in decision making
- B : Decision tree is similar to OLTP

C : Decision Tree is similar to cluster analysis

D : Decision tree needs to find probabilities of hypothesis

Q.no 4. The schema is collection of stars. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 5. Which technique finds the frequent itemsets in just two database scans?

A : Partitioning

B : Sampling

C : Hashing

D : Dynamic itemset counting

Q.no 6. Which angle is used to measure document similarity?

A : Sin

B : Tan

C : Cos

D : Sec

Q.no 7. Cotraining is one form of

A : sampling

B : Reinforcement learning

C : unsupervised classification

D : semi-supervised classification

Q.no 8. to evaluate a classifier's quality we use

A : confusion matrix

B : error detection code

C : error correction code

D : classifier

Q.no 9. Choose the correct concept hierarchy.

A : city < street < state < country

B : street < city < state < country

C : street > city > state > country

D : street > city > country > state

Q.no 10. Height is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : Numeric

Q.no 11. Color is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : numeric

Q.no 12. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 13. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 14. In Data Characterization, class under study is called as?

A : Study Class

B : Intial Class

C : Target Class

D : Final Class

Q.no 15. A person trained to interact with a human expert in order to capture their knowledge.

A : knowledge programmer

B : knowledge developer

C : knowledge engineer

D : knowledge extractor

Q.no 16. Which of the following is not a type of constraints?

A : Data constraints

B : Rule constraints

C : Knowledge type constraints

D : Time constraints

Q.no 17. A multidimensional data model is typically organized around a central theme which is represented by

A : Dimension table

B : Fact table

C : Dimension table and Fact table

D : Dimension table or Fact table

Q.no 18. What are two steps of tree pruning work?

A : Pessimistic pruning and Optimistic pruning

B : Postpruning and Prepruning

C : Cost complexity pruning and time complexity pruning

D : None of the options

Q.no 19. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 20. What are closed frequent itemsets?

- A : A closed itemset
- B : A frequent itemset
- C : An itemset which is both closed and frequent
- D : Not frequent itemset

Q.no 21. A nearest neighbor approach is best used

- A : with large-sized datasets.
- B : when irrelevant attributes have been removed from the data.
- C : when a generalized model of the data is desirable.
- D : when an explanation of what has been found is of primary importance.

Q.no 22. Which of the following probabilities are used in the Bayes theorem.

- A : $P(C_i|X)$
- B : $P(C_i)$
- C : $P(X|C_i)$
- D : $P(X)$

Q.no 23. Which of the following activities is a data mining task?

- A : Monitoring the heart rate of a patient for abnormalities
- B : Extracting the frequencies of a sound wave
- C : Predicting the outcomes of tossing a (fair) pair of dice
- D : Dividing the customers of a company according to their profitability

Q.no 24. Frequent patterns generated from association can be used for classification is called

- A : Naïve Bays
- B : Associative Classification
- C : Predictive Mining
- D : Decision Tree

Q.no 25. The data cubes are generally

- A : 1 Dimensional
- B : 2 Dimensional

C : 3 Dimensional

D : n-Dimensional

Q.no 26. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 27. In which step of Knowledge Discovery, multiple data sources are combined?

A : Data Cleaning

B : Data Integration

C : Data Selection

D : Data Transformation

Q.no 28. Which of the following is measure of document similarity?

A : Cosine dissimilarity

B : Sine similarity

C : Sine dissimilarity

D : Cosine similarity

Q.no 29. Which of the following property typically does not hold for similarity measures between two objects ?

A : Symmetry

B : Definiteness

C : Triangle inequality

D : Transitive

Q.no 30. OLAP Summarization means

A : Consolidated

B : Primitive

C : Highly detailed

D : Recent data

Q.no 31. A lattice of cuboids is called as

- A : Data cube
- B : Dimesnion lattice
- C : Master lattice
- D : Fact table

Q.no 32. Which is the wrong combination.

- A : True negative=correctly indentified
- B : False negative=incorrectly identified
- C : False positive=correctly identified
- D : True positive=correctly identified

Q.no 33. What is the approach of basic algorithm for decision tree induction?

- A : Greedy
- B : Top Down
- C : Procedural
- D : Step by Step

Q.no 34. To improve the accuracy of multiclass classification we can use

- A : cross validation
- B : sampling
- C : Error-detecting codes
- D : Error-correcting codes

Q.no 35. Cross validation involves

- A : testing the machine on all possible ways by substituting the original sample into training set
- B : testing the machine on all possible ways by dividing the original sample into training and validation sets.
- C : testing the machine with only validation sets
- D : testing the machine on only testing datasets.

Q.no 36. This supervised learning technique can process both numeric and categorical input attributes.

- A : linear regression

B : Bayes classifier

C : logistic regression

D : backpropagation learning

Q.no 37. The Microsoft SQL Server 2000 is the example of

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 38. Where does the bayes rule used?

A : Solving queries

B : Increasing complexity

C : Decreasing complexity

D : Answering probabilistic query

Q.no 39. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 40. For mining frequent itemsets, the Data format used by Apriori and FP-Growth algorithms are

A : Apriori uses horizontal and FP-Growth uses vertical data format

B : Apriori uses vertical and FP-Growth uses horizontal data format

C : Apriori and FP-Growth both uses vertical data format

D : Apriori and FP-Growth both uses horizontal data format

Q.no 41. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 42. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 43. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 44. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 45. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 46. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 47. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 48. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

A : Suffix path

B : FP-tree

C : Prefix path

D : Condition pattern base

Q.no 49. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 50. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 51. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 52. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 53. Which is the most well known association rule algorithm and is used in most commercial products.

A : Apriori algorithm

B : Pincer-search algorithm

C : Distributed algorithm

D : Partition algorithm

Q.no 54. Which operation is required to calculate Hamming distance between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 55. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 56. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 57. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 58. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 59. Cost complexity pruning algorithm is used in?

A : CART

B : C4.5

C : ID3

D : ALL

Q.no 60. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Answer for Question No 1. is b

Answer for Question No 2. is c

Answer for Question No 3. is a

Answer for Question No 4. is c

Answer for Question No 5. is a

Answer for Question No 6. is c

Answer for Question No 7. is d

Answer for Question No 8. is a

Answer for Question No 9. is b

Answer for Question No 10. is d

Answer for Question No 11. is a

Answer for Question No 12. is a

Answer for Question No 13. is d

Answer for Question No 14. is c

Answer for Question No 15. is c

Answer for Question No 16. is d

Answer for Question No 17. is b

Answer for Question No 18. is b

Answer for Question No 19. is c

Answer for Question No 20. is c

Answer for Question No 21. is b

Answer for Question No 22. is a

Answer for Question No 23. is a

Answer for Question No 24. is b

Answer for Question No 25. is d

Answer for Question No 26. is b

Answer for Question No 27. is b

Answer for Question No 28. is d

Answer for Question No 29. is c

Answer for Question No 30. is a

Answer for Question No 31. is a

Answer for Question No 32. is c

Answer for Question No 33. is a

Answer for Question No 34. is d

Answer for Question No 35. is c

Answer for Question No 36. is b

Answer for Question No 37. is c

Answer for Question No 38. is d

Answer for Question No 39. is d

Answer for Question No 40. is d

Answer for Question No 41. is a

Answer for Question No 42. is d

Answer for Question No 43. is b

Answer for Question No 44. is d

Answer for Question No 45. is b

Answer for Question No 46. is c

Answer for Question No 47. is a

Answer for Question No 48. is d

Answer for Question No 49. is a

Answer for Question No 50. is d

Answer for Question No 51. is b

Answer for Question No 52. is a

Answer for Question No 53. is a

Answer for Question No 54. is d

Answer for Question No 55. is b

Answer for Question No 56. is d

Answer for Question No 57. is b

Answer for Question No 58. is c

Answer for Question No 59. is a

Answer for Question No 60. is b

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. accuracy is used to measure

- A : classifier's true abilities
- B : classifier's analytic abilities
- C : classifier's decision abilities
- D : classifier's predictive abilities

Q.no 2. cross-validation and bootstrap methods are common techniques for assessing

- A : accuracy
- B : Precision
- C : recall
- D : performance

Q.no 3. Height is an example of which type of attribute

- A : Nominal
- B : Binary

C : Ordinal

D : Numeric

Q.no 4. The example of knowledge type constraints in constraint based mining is

A : Association or Correlation

B : Rule templates

C : Task relevant data

D : Threshold measures

Q.no 5. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 6. Hidden knowledge referred to

A : A set of databases from different vendors, possibly using different database paradigms

B : An approach to a problem that is not guaranteed to work but performs well in most cases

C : Information that is hidden in a database and that cannot be recovered by a simple SQL query

D : None of these

Q.no 7. Which of the following is correct about Proximity measures?

A : Similarity

B : Dissimilarity

C : Similarity as well as Dissimilarity

D : Neither similarity nor dissimilarity

Q.no 8. The Synonym for data mining is

A : Data warehouse

B : Knowledge discovery in database

C : ETL

D : Business Intelligence

Q.no 9. How can one represent document to calculate cosine similarity?

A : Vector

B : Matirx

C : List

D : Term frequency vector

Q.no 10. Color is an example of which type of attribute

A : Nominal

B : Binary

C : Ordinal

D : numeric

Q.no 11. Which of the following is direct application of frequent itemset mining?

A : Social Network Analysis

B : Market Basket Analysis

C : Outlier Detection

D : Intrusion Detection

Q.no 12. Data matrix is also called as

A : Object by object structure

B : Object by attribute structure

C : Attribute by attribute structure

D : Attribute by object structure

Q.no 13. Data used to build a data mining model.

A : Validation Data

B : Training Data

C : Testing Data

D : Hidden Data

Q.no 14. to evaluate a classifier's quality we use

A : confusion matrix

B : error detection code

C : error correction code

D : classifier

Q.no 15. Which is the keyword that distinguishes data warehouses from other data repository systems ?

A : Subject-oriented

B : Object-oriented

C : Client server

D : Time-invariant

Q.no 16. The schema is collection of stars. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 17. Training process that generates tree is called as

A : Pruning

B : Rule generation

C : Induction

D : splitting

Q.no 18. What technique can be used to improve the efficiency of apriori algorithm?

A : Hash-based techniques

B : Transaction Reduction

C : Candidate generation

D : Both (a) and (b)

Q.no 19. A multidimensional data model is typically organized around a central theme which is represented by

A : Dimension table

B : Fact table

C : Dimension table and Fact table

D : Dimension table or Fact table

Q.no 20. Supervised learning and unsupervised clustering both require at least one

A : hidden attribute

B : output attribute

C : input attribute

D : categorical attribute

Q.no 21. What is the approach of basic algorithm for decision tree induction?

A : Greedy

B : Top Down

C : Procedural

D : Step by Step

Q.no 22. What do you mean by support(A)?

A : Total number of transactions containing A

B : Total Number of transactions not containing A

C : Number of transactions containing A / Total number of transactions

D : Number of transactions not containing A / Total number of transactions

Q.no 23. Sensitivity is also referred to as

A : misclassification rate

B : true negative rate

C : True positive rate

D : correctness

Q.no 24. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

A : Replacement discretization and distance measure

B : Replacement characterization and distance measure

C : Normalization discretization and distance measure

D : Replacement normalization and distance measure

Q.no 25. The frequent-item-header-table consists of number fields

A : Only one

B : Two

C : Three

D : Four

Q.no 26. OLAP Summarization means

A : Consolidated

B : Primitive

C : Highly detailed

D : Recent data

Q.no 27. Which of the following activities is a data mining task?

A : Monitoring the heart rate of a patient for abnormalities

B : Extracting the frequencies of a sound wave

C : Predicting the outcomes of tossing a (fair) pair of dice

D : Dividing the customers of a company according to their profitability

Q.no 28. one-versus-one(OVO) and one-versus-all (OVA) classification involves

A : more than two classes

B : Only two classes

C : Only one class

D : No class

Q.no 29. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) and (b)

Q.no 30. The ultimate purpose of Frequent itemset mining is

A : For business decision-making process

B : For generation of association rules

C : For generation of candidate set

D : For generation of interesting patterns

Q.no 31. Every key structure in the data warehouse contains a time element

- A : records
- B : Explicitly
- C : Implicitly and explicitly
- D : Implicitly or explicitly

Q.no 32. Which of the following is a predictive model?

- A : Clustering
- B : Regression
- C : Summarization
- D : Association rules

Q.no 33. Cross validation involves

- A : testing the machine on all possible ways by substituting the original sample into training set
- B : testing the machine on all possible ways by dividing the original sample into training and validation sets.
- C : testing the machine with only validation sets
- D : testing the machine on only testing datasets.

Q.no 34. This supervised learning technique can process both numeric and categorical input attributes.

- A : linear regression
- B : Bayes classifier
- C : logistic regression
- D : backpropagation learning

Q.no 35. Data independence means

- A : Data is defined separately and not included in programs
- B : Programs are not dependent on the physical attributes of the data
- C : Programs are not dependent on the logical attributes of the data
- D : Programs are not dependent on the physical attributes as well as logical attributes of the data

Q.no 36. Frequent patterns generated from association can be used for classification is called

- A : Naïve Bays

B : Associative Classification

C : Predictive Mining

D : Decision Tree

Q.no 37. The Microsoft SQL Server 2000 is the example of

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 38. Where does the bayes rule used?

A : Solving queries

B : Increasing complexity

C : Decreasing complexity

D : Answering probabilistic query

Q.no 39. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 40. How are metarules useful in mining of association rules?

A : Allow users to specify threshold measures

B : Allow users to specify task relevant data

C : Allow users to specify the syntactic forms of rules

D : Allow users to specify correlation or association

Q.no 41. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 42. A sub-database which consists of set of prefix paths in the FP-tree co-occurring with the suffix pattern is called as

- A : Suffix path
- B : FP-tree
- C : Prefix path
- D : Condition pattern base

Q.no 43. These server performs the faster computation

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 44. Which is the most well known association rule algorithm and is used in most commercial products.

- A : Apriori algorithm
- B : Pincer-search algorithm
- C : Distributed algorithm
- D : Partition algorithm

Q.no 45. This technique uses mean and standard deviation scores to transform real-valued attributes.

- A : decimal scaling
- B : min-max normalization
- C : z-score normalization
- D : logarithmic normalization

Q.no 46. When do we use Manhattan distance in data mining?

- A : Dimension of the data decreases
- B : Dimension of the data increases
- C : Underfitting
- D : Moderate size of the dimensions

Q.no 47. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 48. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Triangle inequality

Q.no 49. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 50. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 51. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Forty Five

Q.no 52. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 53. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 54. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 55. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 56. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 57. Which operation is required to calculate Hamming distance between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 58. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 59. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 60. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Answer for Question No 1. is d

Answer for Question No 2. is a

Answer for Question No 3. is d

Answer for Question No 4. is a

Answer for Question No 5. is b

Answer for Question No 6. is c

Answer for Question No 7. is c

Answer for Question No 8. is b

Answer for Question No 9. is d

Answer for Question No 10. is a

Answer for Question No 11. is b

Answer for Question No 12. is b

Answer for Question No 13. is b

Answer for Question No 14. is a

Answer for Question No 15. is a

Answer for Question No 16. is c

Answer for Question No 17. is c

Answer for Question No 18. is d

Answer for Question No 19. is b

Answer for Question No 20. is c

Answer for Question No 21. is a

Answer for Question No 22. is c

Answer for Question No 23. is c

Answer for Question No 24. is d

Answer for Question No 25. is b

Answer for Question No 26. is a

Answer for Question No 27. is a

Answer for Question No 28. is a

Answer for Question No 29. is d

Answer for Question No 30. is a

Answer for Question No 31. is d

Answer for Question No 32. is b

Answer for Question No 33. is c

Answer for Question No 34. is b

Answer for Question No 35. is d

Answer for Question No 36. is b

Answer for Question No 37. is c

Answer for Question No 38. is d

Answer for Question No 39. is d

Answer for Question No 40. is c

Answer for Question No 41. is b

Answer for Question No 42. is d

Answer for Question No 43. is b

Answer for Question No 44. is a

Answer for Question No 45. is c

Answer for Question No 46. is b

Answer for Question No 47. is a

Answer for Question No 48. is a

Answer for Question No 49. is d

Answer for Question No 50. is a

Answer for Question No 51. is b

Answer for Question No 52. is c

Answer for Question No 53. is c

Answer for Question No 54. is d

Answer for Question No 55. is b

Answer for Question No 56. is c

Answer for Question No 57. is d

Answer for Question No 58. is a

Answer for Question No 59. is a

Answer for Question No 60. is c

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. The task of building decision model from labeled training data is called as

- A : Supervised Learning
- B : Unsupervised Learning
- C : Reinforcement Learning
- D : Structure Learning

Q.no 2. What are closed frequent itemsets?

- A : A closed itemset
- B : A frequent itemset
- C : An itemset which is both closed and frequent
- D : Not frequent itemset

Q.no 3. What are closed itemsets?

- A : An itemset for which at least super-itemset has same confidence
- B : An itemset whose no proper super-itemset has same support

C : An itemset for which at least one proper super-itemset has same support

D : An itemset whose no proper super-itemset has same confidence

Q.no 4. What is gini index?

A : It is a type of index structure

B : It is a measure of purity

C : Both options except none

D : None of the options

Q.no 5. Entropy is a measure of

A : impurity of an attribute

B : Purity of an attribute

C : Weight of an attribute

D : Class of an attribute

Q.no 6. In Data Characterization, class under study is called as?

A : Study Class

B : Intial Class

C : Target Class

D : Final Class

Q.no 7. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 8. This is a visualization operation that rotates the data axes in view to provide an alternative data presentation

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 9. Constraint-based mining provides

- A : User flexibility
- B : System optimization
- C : Both (a) and (b)
- D : High computation

Q.no 10. Bayesian classification is based on

- A : probability for the hypothesis
- B : Support
- C : tree induction
- D : Trees

Q.no 11. recall is a measure of

- A : completeness of what percentage of positive tuples are labeled
- B : a measure of exactness for misclassification
- C : a measure of exactness of what percentage of tuples are not classified
- D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 12. Each dimension is represented by only one table. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 13. What are two steps of tree pruning work?

- A : Pessimistic pruning and Optimistic pruning
- B : Postpruning and Prepruning
- C : Cost complexity pruning and time complexity pruning
- D : None of the options

Q.no 14. What is association rule mining?

- A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 15. Hidden knowledge referred to

A : A set of databases from different vendors, possibly using different database paradigms

B : An approach to a problem that is not guaranteed to work but performs well in most cases

C : Information that is hidden in a database and that cannot be recovered by a simple SQL query

D : None of these

Q.no 16. the negative tuples that were correctly labeled by the classifier

A : False positives(FP)

B : True positives(TP)

C : True negatives (TN)

D : False negatives(FN)

Q.no 17. Multilevel association rules can be mined efficiently using

A : Support

B : Confidence

C : Support count

D : Concept Hierarchies under support-confidence framework

Q.no 18. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non- supervised

Q.no 19. A data matrix in which attributes are of the same type and asymmetric is called

A : Pattern matrix

B : Sparse data matrix

C : Document term matrix

D : Normal matrix

Q.no 20. If two documents are similar, then what is the measure of angle between two documents?

A : 30

B : 60

C : 90

D : 0

Q.no 21. If x and y are two objects of nominal attribute with COMP and IT values respectively, then what is the similarity between these two objects?

A : Zero

B : Infinity

C : Two

D : One

Q.no 22. A frequent pattern tree is a tree structure consisting of

A : A frequent-item-node

B : An item-prefix-tree

C : A frequent-item-header table

D : both B and C

Q.no 23. Which of the following operation is correct about supremum distance?

A : It gives maximum difference between any attribute of the objects

B : It gives minimum difference between any attribute of the objects

C : It gives maximum difference between first attribute of the objects

D : It gives minimum difference between first attribute of the objects

Q.no 24. The frequent-item-header-table consists of number fields

A : Only one

B : Two

C : Three

D : Four

Q.no 25. One of the most well known software used for classification is

A : Java

B : C4.5

C : Oracle

D : C++

Q.no 26. Which of the following property typically does not hold for similarity measures between two objects ?

A : Symmetry

B : Definiteness

C : Triangle inequality

D : Transitive

Q.no 27. Which is the wrong combination.

A : True negative=correctly identified

B : False negative=incorrectly identified

C : False positive=correctly identified

D : True positive=correctly identified

Q.no 28. Which statement is true about the decision tree attribute selection process

A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 29. For mining frequent itemsets, the Data format used by Apriori and FP-Growth algorithms are

A : Apriori uses horizontal and FP-Growth uses vertical data format

B : Apriori uses vertical and FP-Growth uses horizontal data format

C : Apriori and FP-Growth both uses vertical data format

D : Apriori and FP-Growth both uses horizontal data format

Q.no 30. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

- A : Replacement discretization and distance measure
- B : Replacement characterization and distance measure
- C : Normalization discretization and distance measure
- D : Replacement normalization and distance measure

Q.no 31. Holdout and random subsampling are common techniques for assessing

- A : K-Fold validation
- B : cross validation
- C : accuracy
- D : sampling

Q.no 32. The Microsoft SQL Server 2000 is the example of

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 33. How are metarules useful in mining of association rules?

- A : Allow users to specify threshold measures
- B : Allow users to specify task relevant data
- C : Allow users to specify the syntactic forms of rules
- D : Allow users to specify correlation or association

Q.no 34. The ultimate purpose of Frequent itemset mining is

- A : For business decision-making process
- B : For generation of association rules
- C : For generation of candidate set
- D : For generation of interesting patterns

Q.no 35. What is uniform support in multilevel association rule mining?

- A : Use of minimum support
- B : Use of minimum support and confidence
- C : Use of same minimum threshold at each abstraction level

D : Use of minimum support and support count

Q.no 36. Lazy learner classification approach is

A : learner waits until the last minute before constructing model to classify

B : a given training data constructs a model first and then uses it to classify

C : the network is constructed by human experts

D : None of the options

Q.no 37. Identify the example of sequence data

A : weather forecast

B : data matrix

C : market basket data

D : genomic data

Q.no 38. Which of the following operations are used to calculate proximity measures for ordinal attribute?

A : Replacement and discretization

B : Replacement and characterizarion

C : Replacement and normalization

D : Normalization and discretization

Q.no 39. one-versus-one(OVO) and one-versus-all (OVA) classification involves

A : more than two classes

B : Only two classes

C : Only one class

D : No class

Q.no 40. Learning with a complete system in mind with reference to interactions among the systems and subsystems with proper understanding of systemic boundaries is

A : Multi-label classification

B : Reinforcement learning

C : Systemic learning

D : Machine Learning

Q.no 41. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

- A : support($V1$) is greater than support ($V2$)
- B : support($V3$) is greater than support ($V2$)
- C : support($V1$) is greater than support($V3$)
- D : support($V2$) is greater than support($V3$)

Q.no 42. Which one of these is a tree based learner?

- A : Rule based
- B : Bayesian Belief Network
- C : Bayesian classifier
- D : Random Forest

Q.no 43. This technique uses mean and standard deviation scores to transform real-valued attributes.

- A : decimal scaling
- B : min-max normalization
- C : z-score normalization
- D : logarithmic normalization

Q.no 44. Which of the following operation is required to calculate cosine similarity?

- A : Vector dot product
- B : Exponent
- C : Modulus
- D : Percentage

Q.no 45. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

- A : {Tea} is antecedent and {sugar} is consequent
- B : {Tea} is antecedent and the itemset {milk, sugar} is consequent
- C : The itemset {Tea, milk} is consequent and {sugar} is antecedent
- D : The itemset {Tea, milk} is antecedent and {sugar} is consequent

Q.no 46. Which is the most well known association rule algorithm and is used in most commercial products.

- A : Apriori algorithm
- B : Pincer-search algorithm
- C : Distributed algorithm
- D : Partition algorithm

Q.no 47. The cuboid that holds the lowest level of summarization is called as

- A : 0-D cuboid
- B : 1-D cuboid
- C : Base cuboid
- D : 2-D cuboid

Q.no 48. The following represents age distribution of students in an elementary class. Find the mode of the values: 7, 9, 10, 13, 11, 7, 9, 19, 12, 11, 9, 7, 9, 10, 11.

- A : 7
- B : 9
- C : 10
- D : 11

Q.no 49. Cost complexity pruning algorithm is used in?

- A : CART
- B : C4.5
- C : ID3
- D : ALL

Q.no 50. These server performs the faster computation

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 51. Correlation analysis is used for

- A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 52. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 53. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 54. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 55. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 56. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 57. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 58. Transforming a 3-D cube into a series of 2-D planes is the examplele of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 59. Which of the following sentence is FALSE regarding regression?

A : It relates inputs to outputs.

B : It is used for prediction.

C : It may be used for interpretation.

D : It discovers causal relationships.

Q.no 60. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Answer for Question No 1. is a

Answer for Question No 2. is c

Answer for Question No 3. is b

Answer for Question No 4. is b

Answer for Question No 5. is a

Answer for Question No 6. is c

Answer for Question No 7. is a

Answer for Question No 8. is a

Answer for Question No 9. is c

Answer for Question No 10. is a

Answer for Question No 11. is a

Answer for Question No 12. is a

Answer for Question No 13. is b

Answer for Question No 14. is c

Answer for Question No 15. is c

Answer for Question No 16. is c

Answer for Question No 17. is d

Answer for Question No 18. is c

Answer for Question No 19. is b

Answer for Question No 20. is d

Answer for Question No 21. is a

Answer for Question No 22. is d

Answer for Question No 23. is a

Answer for Question No 24. is b

Answer for Question No 25. is b

Answer for Question No 26. is c

Answer for Question No 27. is c

Answer for Question No 28. is b

Answer for Question No 29. is d

Answer for Question No 30. is d

Answer for Question No 31. is c

Answer for Question No 32. is c

Answer for Question No 33. is c

Answer for Question No 34. is a

Answer for Question No 35. is c

Answer for Question No 36. is a

Answer for Question No 37. is d

Answer for Question No 38. is c

Answer for Question No 39. is a

Answer for Question No 40. is c

Answer for Question No 41. is b

Answer for Question No 42. is d

Answer for Question No 43. is c

Answer for Question No 44. is a

Answer for Question No 45. is d

Answer for Question No 46. is a

Answer for Question No 47. is c

Answer for Question No 48. is b

Answer for Question No 49. is a

Answer for Question No 50. is b

Answer for Question No 51. is b

Answer for Question No 52. is d

Answer for Question No 53. is d

Answer for Question No 54. is a

Answer for Question No 55. is c

Answer for Question No 56. is b

Answer for Question No 57. is b

Answer for Question No 58. is a

Answer for Question No 59. is d

Answer for Question No 60. is b

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. Which of these is not a frequent pattern mining algorithm?

- A : Decision trees
- B : Eclat
- C : FP growth
- D : Apriori

Q.no 2. Training process that generates tree is called as

- A : Pruning
- B : Rule generation
- C : Induction
- D : splitting

Q.no 3. Constraint-based mining provides

- A : User flexibility
- B : System optimization

C : Both (a) and (b)

D : High computation

Q.no 4. Bayesian classification is based on

A : probability for the hypothesis

B : Support

C : tree induction

D : Trees

Q.no 5. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 6. What do you mean by dissimilarity measure of two objects?

A : Is a numerical measure of how alike two data objects are.

B : Is a numerical measure of how different two data objects are.

C : Higher when objects are more alike

D : Lower when objects are more different

Q.no 7. How can one represent document to calculate cosine similarity?

A : Vector

B : Matrix

C : List

D : Term frequency vector

Q.no 8. Entropy is a measure of

A : impurity of an attribute

B : Purity of an attribute

C : Weight of an attribute

D : Class of an attribute

Q.no 9. Postpruning is

A : Removing branches from fully grown tree

B : Stop constructing tree if this would result in the measure falling below a threshold

C : constructing a new tree

D : Flow-Chart

Q.no 10. A decision tree is also known as

A : general tree

B : binary tree

C : prediction tree

D : None of the options

Q.no 11. Learning algorithm which trains with combination of labeled and unlabeled data.

A : Supervised

B : Unsupervised

C : Semi supervised

D : Non- supervised

Q.no 12. A data matrix in which attributes are of the same type and asymmetric is called

A : Pattern matrix

B : Sparse data matrix

C : Document term matrix

D : Normal matrix

Q.no 13. An ROC curve for a given model shows the trade-off between

A : random sampling

B : test data and train data

C : cross validation

D : the true positive rate (TPR) and the false positive rate (FPR)

Q.no 14. The most widely used metrics and tools to assess a classification model are:

A : Confusion Matrix

B : Support

C : Entropy

D : Probability

Q.no 15. What is the range of the cosine similarity of the two documents?

A : Zero to One

B : Zero to infinity

C : Infinity to infinity

D : Zero to Zero

Q.no 16. Supervised learning and unsupervised clustering both require at least one

A : hidden attribute

B : output attribute

C : input attribute

D : categorical attribute

Q.no 17. The task of building decision model from labeled training data is called as

A : Supervised Learning

B : Unsupervised Learning

C : Reinforcement Learning

D : Structure Learning

Q.no 18. What is gini index?

A : It is a type of index structure

B : It is a measure of purity

C : Both options except none

D : None of the options

Q.no 19. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 20. The example of knowledge type constraints in constraint based mining is

- A : Association or Correlation
- B : Rule templates
- C : Task relevant data
- D : Threshold measures

Q.no 21. This operation may add new dimension to the cube

- A : Roll up
- B : Drill down
- C : Slice
- D : Dice

Q.no 22. In which step of Knowledge Discovery, multiple data sources are combined?

- A : Data Cleaning
- B : Data Integration
- C : Data Selection
- D : Data Transformation

Q.no 23. Holdout and random subsampling are common techniques for assessing

- A : K-Fold validation
- B : cross validation
- C : accuracy
- D : sampling

Q.no 24. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

- A : Multiclassification
- B : Multi-label classification
- C : Imbalanced classification
- D : Binary Classification

Q.no 25. Which of the following property typically does not hold for similarity measures between two objects ?

- A : Symmetry

B : Definiteness

C : Triangle inequality

D : Transitive

Q.no 26. Which of the following operations are used to calculate proximity measures for ordinal attribute?

A : Replacement and discretization

B : Replacement and characterizarion

C : Replacement and normalization

D : Normalization and discretization

Q.no 27. The Galaxy Schema is also called as

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 28. This supervised learning technique can process both numeric and categorical input attributes.

A : linear regression

B : Bayes classifier

C : logistic regression

D : backpropagation learning

Q.no 29. To improve the accuracy of multiclass classification we can use

A : cross validation

B : sampling

C : Error-detecting codes

D : Error-correcting codes

Q.no 30. In Apriori algorithm, for generating e. g. 5 itemsets, we use

A : Frequent 5 itemsets

B : Frequent 3 itemsets

C : Frequent 4 itemsets

D : Frequent 6 itemsets

Q.no 31. A nearest neighbor approach is best used

A : with large-sized datasets.

B : when irrelevant attributes have been removed from the data.

C : when a generalized model of the data is desirable.

D : when an explanation of what has been found is of primary importance.

Q.no 32. Every key structure in the data warehouse contains a time element

A : records

B : Explicitly

C : Implicitly and explicitly

D : Implicitly or explicitly

Q.no 33. Which of the following is not correct use of cross validation?

A : Selecting variables to include in a model

B : Comparing predictors

C : Selecting parameters in prediction function

D : classification

Q.no 34. Where does the bayes rule used?

A : Solving queries

B : Increasing complexity

C : Decreasing complexity

D : Answering probabilistic query

Q.no 35. A frequent pattern tree is a tree structure consisting of

A : A frequent-item-node

B : An item-prefix-tree

C : A frequent-item-header table

D : both B and C

Q.no 36. The accuracy of a classifier on a given test set is the percentage of

A : test set tuples that are correctly classified by the classifier

B : test set tuples that are incorrectly classified by the classifier

C : test set tuples that are incorrectly misclassified by the classifier

D : test set tuples that are not classified by the classifier

Q.no 37. What type of matrix is required to represent binary data for proximity measures?

A : Normal matrix

B : Sparse matrix

C : Dense matrix

D : Contingency matrix

Q.no 38. How will you counter over-fitting in decision tree?

A : By creating new rules

B : By pruning the longer rules

C : Both By pruning the longer rules' and ' By creating new rules'

D : BY creating new tree

Q.no 39. Which statement is true about the decision tree attribute selection process

A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 40. The rule is considered as interesting if

A : They satisfy both minimum support and minimum confidence threshold

B : They satisfy both maximum support and maximum confidence threshold

C : They satisfy maximum support and minimum confidence threshold

D : They satisfy minimum support and maximum confidence threshold

Q.no 41. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 42. How the bayesian network can be used to answer any query?

A : Full distribution

B : Joint distribution

C : Partial distribution

D : All of the mentioned

Q.no 43. The cuboid that holds the lowest level of summarization is called as

A : 0-D cuboid

B : 1-D cuboid

C : Base cuboid

D : 2-D cuboid

Q.no 44. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 45. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 46. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 47. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support(V1) is greater than support (V2)

B : support(V3) is greater than support (V2)

C : support(V1) is greater than support(V3)

D : support(V2) is greater than support(V3)

Q.no 48. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Q.no 49. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 50. Which operation is required to calculate Hamming distance between two objects?

A : AND

B : OR

C : NOT

D : XOR

Q.no 51. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Triangle inequality

Q.no 52. What is the range of the angle between two term frequency vectors?

A : Zero to Thirty

B : Zero to Ninety

C : Zero to One Eighty

D : Zero to Fourty Five

Q.no 53. What is the another name of Supremum distance?

A : Wighted Euclidean distance

B : City Block
distance

C : Chebyshev distance

D : Euclidean distance

Q.no 54. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 55. Which of the following operation is required to calculate cosine similarity?

A : Vector dot product

B : Exponent

C : Modulus

D : Percentage

Q.no 56. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 57. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 58. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 59. A model makes predictions and predicts 120 examples as belonging to the minority class, 90 of which are correct, and 30 of which are incorrect. Precision of model is

A : Precision = 0.89

B : Precision = 0.23

C : Precision = 0.45

D : Precision = 0.75

Q.no 60. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Answer for Question No 1. is a

Answer for Question No 2. is c

Answer for Question No 3. is c

Answer for Question No 4. is a

Answer for Question No 5. is b

Answer for Question No 6. is b

Answer for Question No 7. is d

Answer for Question No 8. is a

Answer for Question No 9. is a

Answer for Question No 10. is c

Answer for Question No 11. is c

Answer for Question No 12. is b

Answer for Question No 13. is d

Answer for Question No 14. is a

Answer for Question No 15. is a

Answer for Question No 16. is c

Answer for Question No 17. is a

Answer for Question No 18. is b

Answer for Question No 19. is a

Answer for Question No 20. is a

Answer for Question No 21. is b

Answer for Question No 22. is b

Answer for Question No 23. is c

Answer for Question No 24. is a

Answer for Question No 25. is c

Answer for Question No 26. is c

Answer for Question No 27. is c

Answer for Question No 28. is b

Answer for Question No 29. is d

Answer for Question No 30. is c

Answer for Question No 31. is b

Answer for Question No 32. is d

Answer for Question No 33. is d

Answer for Question No 34. is d

Answer for Question No 35. is d

Answer for Question No 36. is a

Answer for Question No 37. is d

Answer for Question No 38. is b

Answer for Question No 39. is b

Answer for Question No 40. is a

Answer for Question No 41. is b

Answer for Question No 42. is b

Answer for Question No 43. is c

Answer for Question No 44. is d

Answer for Question No 45. is d

Answer for Question No 46. is a

Answer for Question No 47. is b

Answer for Question No 48. is b

Answer for Question No 49. is b

Answer for Question No 50. is d

Answer for Question No 51. is a

Answer for Question No 52. is b

Answer for Question No 53. is c

Answer for Question No 54. is a

Answer for Question No 55. is a

Answer for Question No 56. is c

Answer for Question No 57. is b

Answer for Question No 58. is b

Answer for Question No 59. is d

Answer for Question No 60. is d

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. What are closed itemsets?

- A : An itemset for which at least super-itemset has same confidence
- B : An itemset whose no proper super-itemset has same support
- C : An itemset for which at least one proper super-itemset has same support
- D : An itemset whose no proper super-itemset has same confidence

Q.no 2. For Apriori algorithm, what is the first phase?

- A : Pruning
- B : Partitioning
- C : Candidate generation
- D : Itemset generation

Q.no 3. OLAP database design is

- A : Application-oriented
- B : Object-oriented

C : Goal-oriented

D : Subject-oriented

Q.no 4. Which of the following is the data mining tool?

A : Borland C

B : Weka

C : Borland C++

D : Visual C

Q.no 5. Self-training is the simplest form of

A : supervised classification

B : semi-supervised classification

C : unsupervised classification

D : regression

Q.no 6. Choose the correct concept hierarchy.

A : city < street < state < country

B : street < city < state < country

C : street > city > state > country

D : street > city > country > state

Q.no 7. cross-validation and bootstrap methods are common techniques for assessing

A : accuracy

B : Precision

C : recall

D : performance

Q.no 8. recall is a measure of

A : completeness of what percentage of positive tuples are labeled

B : a measure of exactness for misclassification

C : a measure of exactness of what percentage of tuples are not classified

D : a measure of exactness of what percentage of tuples labeled as negative are at actual

Q.no 9. the positive tuples that were correctly labeled by the classifier are

- A : True negatives (TN)
- B : False negatives(FN)
- C : False positives(FP)
- D : True positives(TP)

Q.no 10. What is the method to interpret the results after rule generation?

- A : Absolute Mean
- B : Lift ratio
- C : Gini Index
- D : Apriori

Q.no 11. Data matrix is also called as

- A : Object by object structure
- B : Object by attribute structure
- C : Attribute by attribute structure
- D : Attribute by object structure

Q.no 12. Multi-class classification makes the assumption that each sample is assigned to

- A : one and only one label
- B : many labels
- C : one or many labels
- D : no label

Q.no 13. What do you mean by dissimilarity measure of two objects?

- A : Is a numerical measure of how alike two data objects are.
- B : Is a numerical measure of how different two data objects are.
- C : Higher when objects are more alike
- D : Lower when objects are more different

Q.no 14. A decision tree is also known as

- A : general tree
- B : binary tree

C : prediction tree

D : None of the options

Q.no 15. Data mining is best described as the process of

A : identifying patterns in data

B : deducing relationships in data

C : representing data

D : simulating trends in data

Q.no 16. Removing duplicate records is a process called

A : recovery

B : data cleaning

C : data cleansing

D : data pruning

Q.no 17. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 18. Supervised learning and unsupervised clustering both require at least one

A : hidden attribute

B : output attribute

C : input attribute

D : categorical attribute

Q.no 19. to evaluate a classifier's quality we use

A : confusion matrix

B : error detection code

C : error correction code

D : classifier

Q.no 20. Each dimension is represented by only one table. Recognize the type of schema.

- A : Star Schema
- B : Snowflake schema
- C : Fact constellation
- D : Database schema

Q.no 21. Which of the following probabilities are used in the Bayes theorem.

- A : $P(C_i|X)$
- B : $P(C_i)$
- C : $P(X|C_i)$
- D : $P(X)$

Q.no 22. Data independence means

- A : Data is defined separately and not included in programs
- B : Programs are not dependent on the physical attributes of the data
- C : Programs are not dependent on the logical attributes of the data
- D : Programs are not dependent on the physical attributes as well as logical attributes of the data

Q.no 23. K-fold Cross Validation envisages

- A : partitioning of the original sample into one sample.
- B : partitioning of the original sample into 'k' equal sized sub-samples.
- C : partitioning of the original sample into 'k' unequal sized sub-samples.
- D : partitioning of the original sample into 'k' random samples.

Q.no 24. In multilevel association rules, which strategy is employed

- A : Top-down
- B : Recursive
- C : Bottom-up
- D : Divide and conquer

Q.no 25. Which of the following operations are used to calculate proximity measures for ordinal attribute?

- A : Replacement and discretization
- B : Replacement and characterization

C : Replacement and normalization

D : Normalization and discretization

Q.no 26. Which of the following activities is a data mining task?

A : Monitoring the heart rate of a patient for abnormalities

B : Extracting the frequencies of a sound wave

C : Predicting the outcomes of tossing a (fair) pair of dice

D : Dividing the customers of a company according to their profitability

Q.no 27. If A, B are two sets of items, and A is a subset of B. Which of the following statement is always true?

A : Support(A) is less than or equal to Support(B)

B : Support(A) is greater than or equal to Support(B)

C : Support(A) is equal to Support(B)

D : Support(A) is not equal to Support(B)

Q.no 28. Which statement is true about the KNN algorithm?

A : All attribute values must be categorical

B : The output attribute must be categorical.

C : Attribute values may be either categorical or numeric.

D : All attributes must be numeric.

Q.no 29. To improve the accuracy of multiclass classification we can use

A : cross validation

B : sampling

C : Error-detecting codes

D : Error-correcting codes

Q.no 30. Identify the example of sequence data

A : weather forecast

B : data matrix

C : market basket data

D : genomic data

Q.no 31. Number of records are comparatively more in

- A : OLAP
- B : OLTP
- C : Same in OLAP and OLTP
- D : Can not compare

Q.no 32. This supervised learning technique can process both numeric and categorical input attributes.

- A : linear regression
- B : Bayes classifier
- C : logistic regression
- D : backpropagation learning

Q.no 33. Learning with a complete system in mind with reference to interactions among the systems and subsystems with proper understanding of systemic boundaries is

- A : Multi-label classification
- B : Reinforcement learning
- C : Systemic learning
- D : Machine Learning

Q.no 34. Which of the following is necessary operation to calculate dissimilarity between ordinal attributes?

- A : Replacement of ordinal categories
- B : Correlation coefficient
- C : Discretization
- D : Randomization

Q.no 35. Handwritten digit recognition classifying an image of a handwritten number into a digit from 0 to 9 is example of

- A : Multiclassification
- B : Multi-label classification
- C : Imbalanced classification
- D : Binary Classification

Q.no 36. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 37. What is another name of data matrix?

A : Single mode

B : Two mode

C : Multi mode

D : Large mode

Q.no 38. A nearest neighbor approach is best used

A : with large-sized datasets.

B : when irrelevant attributes have been removed from the data.

C : when a generalized model of the data is desirable.

D : when an explanation of what has been found is of primary importance.

Q.no 39. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 40. The rule is considered as interesting if

A : They satisfy both minimum support and minimum confidence threshold

B : They satisfy both maximum support and maximum confidence threshold

C : They satisfy maximum support and minimum confidence threshold

D : They satisfy minimum support and maximum confidence threshold

Q.no 41. Holdout method, Cross-validation and Bootstrap methods are techniques to estimate

A : Precision

B : Classifier performance

C : Recall

D : F-measure

Q.no 42. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 43. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 44. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 45. precision of model is 0.75 and recall is 0.43 then F-Score is

A : F-Score= 0.99

B : F-Score= 0.84

C : F-Score= 0.55

D : F-Score= 0.49

Q.no 46. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 47. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 48. Which one of these is a tree based learner?

A : Rule based

B : Bayesian Belief Network

C : Bayesian classifier

D : Random Forest

Q.no 49. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 50. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 51. The tables are easy to maintain and saves storage space.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 52. When do we use Manhattan distance in data mining?

A : Dimension of the data decreases

B : Dimension of the data increases

C : Underfitting

D : Moderate size of the dimensions

Q.no 53. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 54. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 55. Transforming a 3-D cube into a series of 2-D planes is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 56. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly. Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 57. The basic idea of the apriori algorithm is to generate the item sets of a particular size & scans the database. These item sets are

A : Primary

B : Secondary

C : Superkey

D : Candidate

Q.no 58. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 59. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset { Tea, milk} is antecedent and {sugar} is consequent

Q.no 60. The problem of finding hidden structure from unlabeled data is called as

A : Supervised learning

B : Unsupervised learning

C : Reinforcement Learning

D : Semisupervised learning

Answer for Question No 1. is b

Answer for Question No 2. is c

Answer for Question No 3. is d

Answer for Question No 4. is b

Answer for Question No 5. is b

Answer for Question No 6. is b

Answer for Question No 7. is a

Answer for Question No 8. is a

Answer for Question No 9. is d

Answer for Question No 10. is b

Answer for Question No 11. is b

Answer for Question No 12. is a

Answer for Question No 13. is b

Answer for Question No 14. is c

Answer for Question No 15. is a

Answer for Question No 16. is b

Answer for Question No 17. is b

Answer for Question No 18. is c

Answer for Question No 19. is a

Answer for Question No 20. is a

Answer for Question No 21. is a

Answer for Question No 22. is d

Answer for Question No 23. is d

Answer for Question No 24. is a

Answer for Question No 25. is c

Answer for Question No 26. is a

Answer for Question No 27. is b

Answer for Question No 28. is d

Answer for Question No 29. is d

Answer for Question No 30. is d

Answer for Question No 31. is b

Answer for Question No 32. is b

Answer for Question No 33. is c

Answer for Question No 34. is a

Answer for Question No 35. is a

Answer for Question No 36. is b

Answer for Question No 37. is b

Answer for Question No 38. is b

Answer for Question No 39. is c

Answer for Question No 40. is a

Answer for Question No 41. is b

Answer for Question No 42. is b

Answer for Question No 43. is a

Answer for Question No 44. is c

Answer for Question No 45. is c

Answer for Question No 46. is b

Answer for Question No 47. is a

Answer for Question No 48. is d

Answer for Question No 49. is a

Answer for Question No 50. is d

Answer for Question No 51. is b

Answer for Question No 52. is b

Answer for Question No 53. is d

Answer for Question No 54. is a

Answer for Question No 55. is a

Answer for Question No 56. is a

Answer for Question No 57. is d

Answer for Question No 58. is a

Answer for Question No 59. is d

Answer for Question No 60. is b

Things I do for L

Seat No -

Total number of questions : 60

12695_Data Mining and Warehousing

Time : 1hr

Max Marks : 50

N.B

- 1) All questions are Multiple Choice Questions having single correct option.
 - 2) Attempt any 50 questions out of 60.
 - 3) Use of calculator is allowed.
 - 4) Each question carries 1 Mark.
 - 5) Specially abled students are allowed 20 minutes extra for examination.
 - 6) Do not use pencils to darken answer.
 - 7) Use only black/blue ball point pen to darken the appropriate circle.
 - 8) No change will be allowed once the answer is marked on OMR Sheet.
 - 9) Rough work shall not be done on OMR sheet or on question paper.
 - 10) Darken ONLY ONE CIRCLE for each answer.
-

Q.no 1. For Apriori algorithm, what is the second phase?

- A : Pruning
- B : Partitioning
- C : Candidate generation
- D : Itemset generation

Q.no 2. These are the intermediate servers that stand in between a relational back-end server and client front-end tools

- A : ROLAP
- B : MOLAP
- C : HOLAP
- D : HaoLap

Q.no 3. Training process that generates tree is called as

- A : Pruning
- B : Rule generation

C : Induction

D : splitting

Q.no 4. Which is the keyword that distinguishes data warehouses from other data repository systems ?

A : Subject-oriented

B : Object-oriented

C : Client server

D : Time-invariant

Q.no 5. The distance between two points calculated using Pythagoras theorem is

A : Supremum distance

B : Euclidean distance

C : Linear distance

D : Manhattan Distance

Q.no 6. The most widely used metrics and tools to assess a classification model are:

A : Confusion Matrix

B : Support

C : Entropy

D : Probability

Q.no 7. Which of the following is correct about Proximity measures?

A : Similarity

B : Dissimilarity

C : Similarity as well as Dissimilarity

D : Neither similarity nor dissimilarity

Q.no 8. Each dimension is represented by only one table. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Q.no 9. What are closed itemsets?

- A : An itemset for which at least super-itemset has same confidence
- B : An itemset whose no proper super-itemset has same support
- C : An itemset for which at least one proper super-itemset has same support
- D : An itemset whose no proper super-itemset has same confidence

Q.no 10. Data matrix is also called as

- A : Object by object structure
- B : Object by attribute structure
- C : Attribute by attribute structure
- D : Attribute by object structure

Q.no 11. Which one of the following is true for decision tree

- A : Decision tree is useful in decision making
- B : Decision tree is similar to OLTP
- C : Decision Tree is similar to cluster analysis
- D : Decision tree needs to find probabilities of hypothesis

Q.no 12. The first steps involved in the knowledge discovery is?

- A : Data Integration
- B : Data Selection
- C : Data Transformation
- D : Data Cleaning

Q.no 13. Which angle is used to measure document similarity?

- A : Sin
- B : Tan
- C : Cos
- D : Sec

Q.no 14. Entropy is a measure of

- A : impurity of an attribute
- B : Purity of an attribute

C : Weight of an attribute

D : Class of an attribute

Q.no 15. What is association rule mining?

A : Using association to find correlation rules

B : Same as frequent itemset mining

C : Finding of strong association rules using frequent itemsets

D : Finding of frequent itemset from large database

Q.no 16. OLAP database design is

A : Application-oriented

B : Object-oriented

C : Goal-oriented

D : Subject-oriented

Q.no 17. Which of the following is not a type of constraints?

A : Data constraints

B : Rule constraints

C : Knowledge type constraints

D : Time constraints

Q.no 18. the negative tuples that were correctly labeled by the classifier

A : False positives(FP)

B : True positives(TP)

C : True negatives (TN)

D : False negatives(FN)

Q.no 19. The fact is also called as

A : Dimension

B : Key

C : Schema

D : Measure

Q.no 20. Which of the following is the data mining tool?

- A : Borland C
- B : Weka
- C : Borland C++
- D : Visual C

Q.no 21. In Apriori algorithm, for generating e. g. 5 itemsets, we use

- A : Frequent 5 itemsets
- B : Frequent 3 itemsets
- C : Frequent 4 itemsets
- D : Frequent 6 itemsets

Q.no 22. The confusion matrix is a useful tool for analyzing

- A : Regression
- B : Classification
- C : Sampling
- D : Cross validation

Q.no 23. Which of the following operation is correct about supremum distance?

- A : It gives maximum difference between any attribute of the objects
- B : It gives minimum difference between any attribute of the objects
- C : It gives maximum difference between first attribute of the objects
- D : It gives minimum difference between first attribute of the objects

Q.no 24. The accuracy of a classifier on a given test set is the percentage of

- A : test set tuples that are correctly classified by the classifier
- B : test set tuples that are incorrectly classified by the classifier
- C : test set tuples that are incorrectly misclassified by the classifier
- D : test set tuples that are not classified by the classifier

Q.no 25. Frequent patterns generated from association can be used for classification is called

- A : Naïve Bays
- B : Associative Classification

C : Predictive Mining

D : Decision Tree

Q.no 26. This operation may add new dimension to the cube

A : Roll up

B : Drill down

C : Slice

D : Dice

Q.no 27. one-versus-one(OVO) and one-versus-all (OVA) classification involves

A : more than two classes

B : Only two classes

C : Only one class

D : No class

Q.no 28. What is the limitation behind rule generation in Apriori algorithm?

A : Need to generate a huge number of candidate sets

B : Need to repeatedly scan the whole database and Check a large set of candidates by pattern matching

C : Dropping itemsets with valued information

D : Both (a) and (b)

Q.no 29. If first object X and Y coordinates are 3 and 5 respectively and second object X and Y coordinates are 10 and 3 respectively, then what is Manhattan distance between these two objects?

A : 8

B : 13

C : 9

D : 10

Q.no 30. The correlation coefficient is used to determine:

A : A specific value of the y-variable given a specific value of the x-variable

B : A specific value of the x-variable given a specific value of the y-variable

C : The strength of the relationship between the x and y variables

D : None of these

Q.no 31. Holdout and random subsampling are common techniques for assessing

A : K-Fold validation

B : cross validation

C : accuracy

D : sampling

Q.no 32. A lattice of cuboids is called as

A : Data cube

B : Dimesnion lattice

C : Master lattice

D : Fact table

Q.no 33. Sensitivity is also referred to as

A : misclassification rate

B : true negative rate

C : True positive rate

D : correctness

Q.no 34. Which of the following sequence is used to calculate proximity measures for ordinal attribute?

A : Replacement discretization and distance measure

B : Replacement characterizarion and distance measure

C : Normalization discretization and distance measure

D : Replacement normalization and distance measure

Q.no 35. Which statement is true about the decision tree attribute selection process

A : A categorical attribute may appear in a tree node several times but a numeric attribute may appear at most once.

B : A numeric attribute may appear in several tree nodes but a categorical attribute may appear at most once.

C : Both numeric and categorical attributes may appear in several tree nodes.

D : Numeric and categorical attributes may appear in at most one tree node.

Q.no 36. Every key structure in the data warehouse contains a time element

- A : records
- B : Explicitly
- C : Implicitly and explicitly
- D : Implicitly or explicitly

Q.no 37. Which of the following probabilities are used in the Bayes theorem.

- A : $P(C_i|X)$
- B : $P(C_i)$
- C : $P(X|C_i)$
- D : $P(X)$

Q.no 38. This supervised learning technique can process both numeric and categorical input attributes.

- A : linear regression
- B : Bayes classifier
- C : logistic regression
- D : backpropagation learning

Q.no 39. Specificity is also referred to as

- A : true negative rate
- B : correctness
- C : misclassification rate
- D : True positive rate

Q.no 40. Which of these distributions is used for a testing hypothesis?

- A : Normal Distribution
- B : Chi-Squared Distribution
- C : Gamma Distribution
- D : Poisson Distribution

Q.no 41. a model predicts 50 examples belonging to the minority class, 45 of which are true positives and five of which are false positives. Precision of model is

- A : Precision= 0.90

B : Precision= 0.79

C : Precision= 0.45

D : Precision= 0.68

Q.no 42. Name the property of objects for which distance from first object to second and vice-versa is same.

A : Symmetry

B : Transitive

C : Positive definiteness

D : Traingle inequality

Q.no 43. High entropy means that the partitions in classification are

A : pure

B : Not pure

C : Useful

D : Not useful

Q.no 44. A model makes predictions and predicts 90 of the positive class predictions correctly and 10 incorrectly.Recall of model is

A : Recall=0.9

B : Recall=0.39

C : Recall=0.65

D : Recall=5.0

Q.no 45. In Binning, we first sort data and partition into (equal-frequency) bins and then which of the following is not valid step

A : smooth by bin boundaries

B : smooth by bin median

C : smooth by bin means

D : smooth by bin values

Q.no 46. What does a Pearson's product-moment allow you to identify?

A : Whether there is a relationship between variables

B : Whether there is a significant effect and interaction of independent variables

C : Whether there is a significant difference between variables

D : Whether there is a significant effect and interaction of dependent variables

Q.no 47. These numbers are taken from the number of people that attended a particular church every Friday for 7 weeks: 62, 18, 39, 13, 16, 37, 25. Find the mean.

A : 25

B : 210

C : 62

D : 30

Q.no 48. In one of the frequent itemset example, it is observed that if tea and milk are bought then sugar is also purchased by customers. After, generating an association rule among the given set of items, it is inferred:

A : {Tea} is antecedent and {sugar} is consequent

B : {Tea} is antecedent and the itemset {milk, sugar} is consequent

C : The itemset {Tea, milk} is consequent and {sugar} is antecedent

D : The itemset {Tea, milk} is antecedent and {sugar} is consequent

Q.no 49. A concept hierarchy that is a total or partial order among attributes in a database schema is called

A : Mixed hierarchy

B : Total hierarchy

C : Schema hierarchy

D : Concept generalization

Q.no 50. This technique uses mean and standard deviation scores to transform real-valued attributes.

A : decimal scaling

B : min-max normalization

C : z-score normalization

D : logarithmic normalization

Q.no 51. Rotating the axes in a 3-D cube is the example of

A : Pivot

B : Roll up

C : Drill down

D : Slice

Q.no 52. Accuracy is

A : Number of correct predictions out of total no. of predictions

B : Number of incorrect predictions out of total no. of predictions

C : Number of predictions out of total no. of predictions

D : Total number of predictions

Q.no 53. A data normalization technique for real-valued attributes that divides each numerical value by the same power of 10.

A : min-max normalization

B : z-score normalization

C : decimal scaling

D : decimal smoothing

Q.no 54. Which operation data warehouse requires ?

A : Initial loading of data

B : Transaction processing

C : Recovery

D : Concurrency control mechanisms

Q.no 55. These server performs the faster computation

A : ROLAP

B : MOLAP

C : HOLAP

D : HaoLap

Q.no 56. A database has 4 transactions. Of these, 4 transactions include milk and bread. Further, of the given 4 transactions, 3 transactions include cheese. Find the support percentage for the following association rule, " If milk and bread purchased then cheese is also purchased".

A : 0.6

B : 0.75

C : 0.8

D : 0.7

Q.no 57. If True Positives (TP): 7, False Positives (FP): 1, False Negatives (FN): 4, True Negatives (TN): 18. Calculate Precision and Recall.

A : Precision = 0.88, Recall=0.64

B : Precision = 0.44, Recall=0.78

C : Precision = 0.88, Recall=0.22

D : Precision = 0.77, Recall=0.55

Q.no 58. Correlation analysis is used for

A : handling missing values

B : identifying redundant attributes

C : handling different data formats

D : eliminating noise

Q.no 59. Consider three itemsets $V1=\{\text{tomato, potato, onion}\}$, $V2=\{\text{tomato, potato}\}$, $V3=\{\text{tomato}\}$. Which of the following statement is correct?

A : support($V1$) is greater than support ($V2$)

B : support($V3$) is greater than support ($V2$)

C : support($V1$) is greater than support($V3$)

D : support($V2$) is greater than support($V3$)

Q.no 60. Effectiveness of the browsing is highest. Recognize the type of schema.

A : Star Schema

B : Snowflake schema

C : Fact constellation

D : Database schema

Answer for Question No 1. is a

Answer for Question No 2. is a

Answer for Question No 3. is c

Answer for Question No 4. is a

Answer for Question No 5. is b

Answer for Question No 6. is a

Answer for Question No 7. is c

Answer for Question No 8. is a

Answer for Question No 9. is b

Answer for Question No 10. is b

Answer for Question No 11. is a

Answer for Question No 12. is d

Answer for Question No 13. is c

Answer for Question No 14. is a

Answer for Question No 15. is c

Answer for Question No 16. is d

Answer for Question No 17. is d

Answer for Question No 18. is c

Answer for Question No 19. is d

Answer for Question No 20. is b

Answer for Question No 21. is c

Answer for Question No 22. is b

Answer for Question No 23. is a

Answer for Question No 24. is a

Answer for Question No 25. is b

Answer for Question No 26. is b

Answer for Question No 27. is a

Answer for Question No 28. is d

Answer for Question No 29. is c

Answer for Question No 30. is c

Answer for Question No 31. is c

Answer for Question No 32. is a

Answer for Question No 33. is c

Answer for Question No 34. is d

Answer for Question No 35. is b

Answer for Question No 36. is d

Answer for Question No 37. is a

Answer for Question No 38. is b

Answer for Question No 39. is a

Answer for Question No 40. is b

Answer for Question No 41. is a

Answer for Question No 42. is a

Answer for Question No 43. is b

Answer for Question No 44. is a

Answer for Question No 45. is d

Answer for Question No 46. is a

Answer for Question No 47. is d

Answer for Question No 48. is d

Answer for Question No 49. is c

Answer for Question No 50. is c

Answer for Question No 51. is a

Answer for Question No 52. is a

Answer for Question No 53. is c

Answer for Question No 54. is a

Answer for Question No 55. is b

Answer for Question No 56. is a

Answer for Question No 57. is a

Answer for Question No 58. is b

Answer for Question No 59. is b

Answer for Question No 60. is a

Things I do for L