



sayso.

Your terminal, on your say-so.

● SambaNova inference

● Hume voice

● Pipecat pipeline

A voice-native developer agent that runs your terminal, browser and GitHub — at conversation speed, in a voice that listens to how you feel.

Track 1 agents that act **Track 2** voice-controlled software

Voice agents talk. They don't do.

1

0:00
0:12



Dead air

You speak. Then you wait.

2



Flat voice

Same tone whether you're thrilled or furious.


3

"I would run that for you..."

Toy demos

They narrate. They don't act.

Developers live in three windows and switch between them hundreds of times a day.

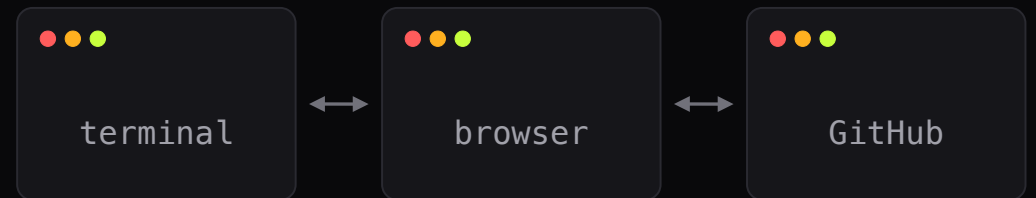

context switches, all day

One conversation. Real actions.

Sayso collapses the three windows into one voice loop.

TRACK 2 • VOICE-CONTROLLED SOFTWARE

Software you operate entirely by speaking — terminal → browser.

TRACK 1 • AGENTS THAT ACT

An agent that acts — it files real GitHub issues.

BUILT TODAY ON

- **SambaNova** inference
- **Hume** voice + emotion
- **Pipecat** orchestration

The screenshot displays the Sayso application interface, which integrates a voice-controlled terminal and browser. The interface is divided into several sections:

- Top Bar:** Displays the Sayso logo, the current model (SambaNova - Meta-Llama-3.3-70B-Instruct), and various performance metrics (STT 173 ms, LLM TTFT 164 ms, 668 tok/s, TTS 89 ms). It also includes buttons for 'Mock session' and 'End'.
- Left Panel:** Features a large yellow sphere representing the voice loop, with a 'Listening...' status. Below it, an 'Excitement 71%' gauge shows sub-metrics: Joy (44%), Satisfaction (39%), and voice quality (upbeat, bright). A list of commands is visible, including 'Filing it on vnmooorthy slash sayso.', 'github_create_issue', 'Opened issue number four.', 'Delete the build folder', 'That one is destructive — I need your say-so.', and 'run_shell rm -rf build'.
- Terminal:** The central area shows the execution of commands. It starts with 'python3 -m http.server 8000 --directory pulse', followed by 'python3 test_app.py'. The output shows a failed test with an AssertionError: '<title>Pulse</title>' not found in '<!doctype html>\n<html lang="en">\n<head>\n <meta charset="utf-8">\n <title>pulse</title>_'. Subsequent commands include 'python3 test_app.py' (which passes) and 'rm -rf build'.
- Right Panel:** An 'ACTIONS' log showing a sequence of tasks: 'write file pulse/index.html' (17ms), 'start background' (671ms), 'open url http://localhost:8000' (206ms), 'write file pulse/index.html' (22ms), 'run shell python3 test_app.py' (1.1s, failed), 'write file pulse/index.html' (17ms), 'run shell python3 test_app.py' (942ms, passed), 'github create issue' (906ms), 'Issue #4' (created), and 'run shell rm -rf build' (13ms).

Live demo: seven beats

- 1 “Create a web app called pulse... run it on port 8000”
3 tool calls · HUD shows TTFT and tok/s
- 2 “Open it in the browser”
the clock renders in the in-app Browser tab
- 3 “Ugh, the clock is tiny – make it huge and neon”
said annoyed → emotion badge · voice softens · file rewritten
- 4 “Run the tests”
the failing test streams line by line, exit 1
- 5 “Fix it”
rewrite · re-run · green
- 6 “File a GitHub issue to add dark mode”
a real issue on a real repo, via the gh CLI
- 7 “Delete the pulse folder”
say-so gate → “yes” → gone

The screenshot shows a terminal window with the following content:

```

> ...
beat 4
RUNNING pulse: 8000 pid 48213
$ python3 -m http.server 8000 --directory pulse
Serving HTTP on 0.0.0.0 port 8000 (http://0.0.0.0:8000/) ...
$ python3 test_app.py
F
=====
FAIL: test_title (__main__.PulseTests.test_title)
-----
Traceback (most recent call last):
  File "/Users/you/sayso/workspace/test_app.py", line 14, in test_title
    self.assertIn("<title>Pulse</title>", html)
AssertionError: '<title>Pulse</title>' not found in '<doctype html>\n<html lang="en">\n<head>\n  <meta charset="utf-8">\n  <title>pulse</title>...'

Ran 1 test in 0.004s

FAILED (failures=1)

```

The screenshot shows a 'Sayso needs your say-so' gate interface. It includes a shield icon, the text 'Sayso needs your say-so', a 'DESTRUCTIVE' badge, and a terminal snippet showing the command `$ rm -rf build`. Below the command, it says 'destructive: recursive delete'. At the bottom, there are two buttons: 'Approve' (with a checkmark) and 'Deny' (with an X), followed by the text '...or just say "yes"'.


sayso.

Architecture

→ audio & control flow

- - - RTVI messages

say-so gate

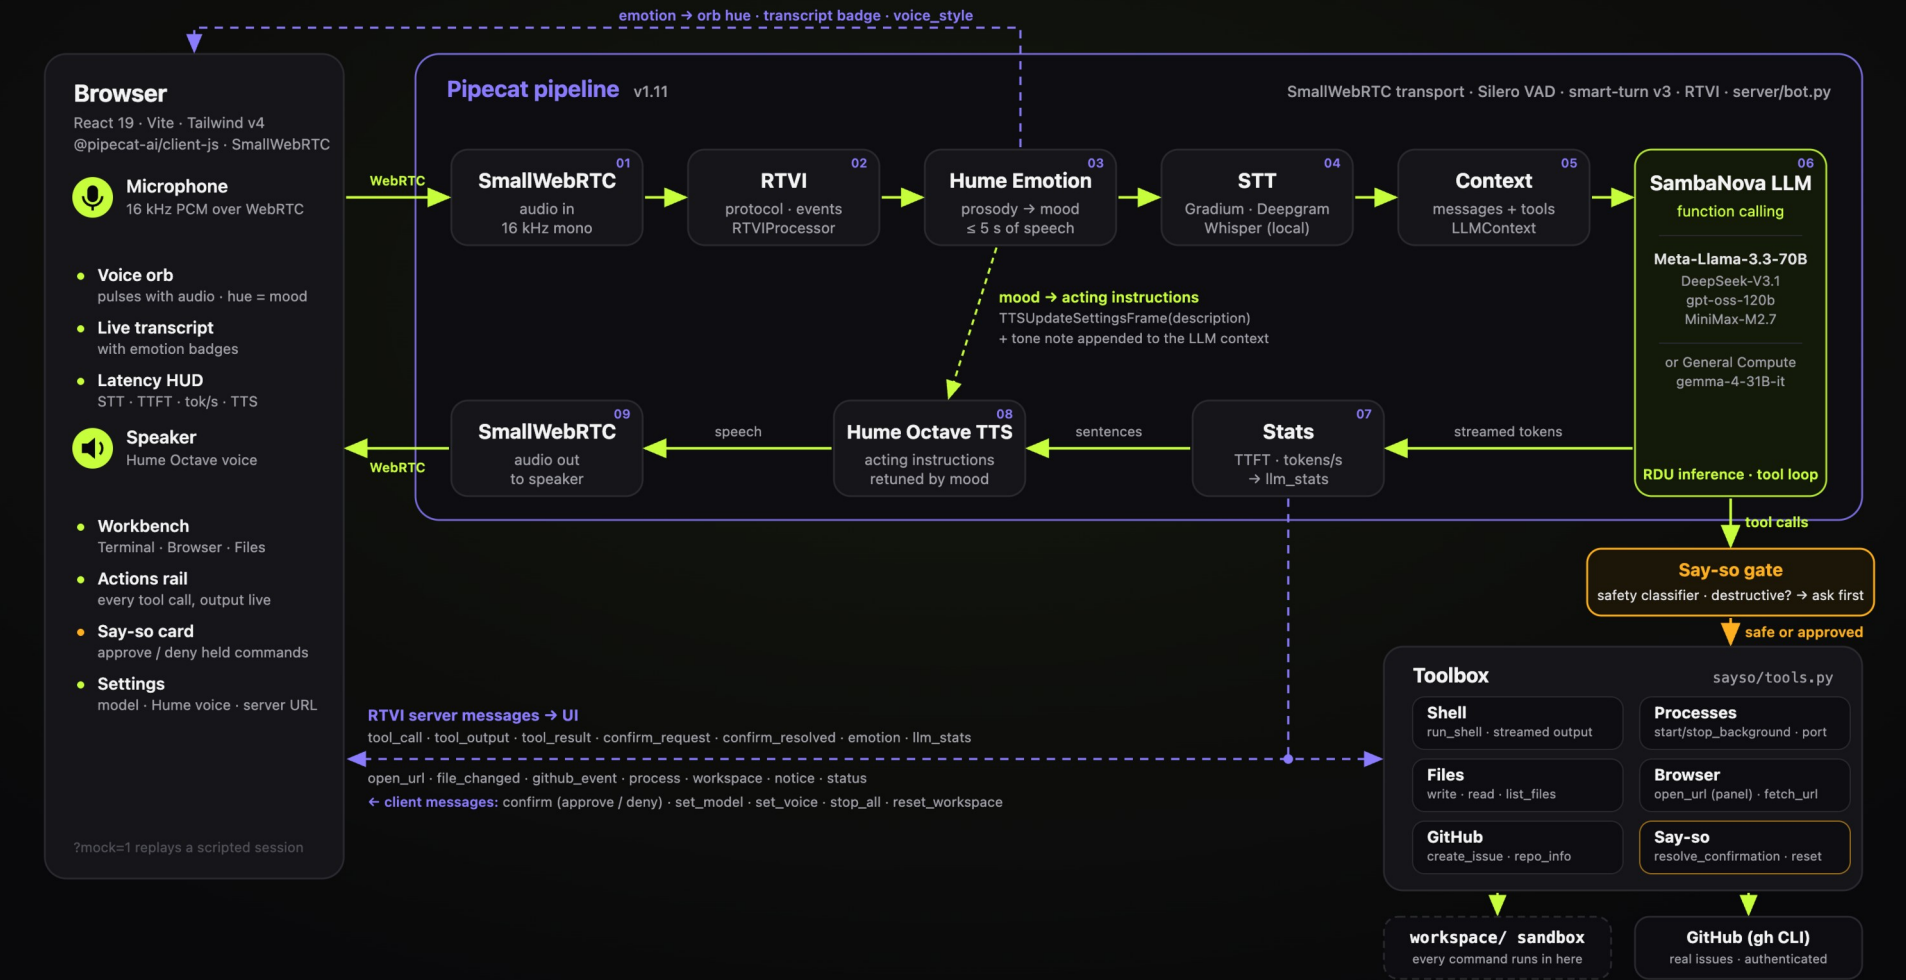

Why silicon speed matters

A tool-heavy turn is hundreds of tokens of JSON.

300–600 tokens for three tool calls

● **hundreds of tok/s** → sub-second turn

● **30 tok/s** → 10–20 s of dead air

STT 173 ms

LLM TTFT 164 ms

668 tok/s

TTS 89 ms

The live HUD, every turn: STT · TTFT · tok/s · TTS — measured, not quoted.

Models · Meta-Llama-3.3-70B (default) · DeepSeek-V3.1 ·
gpt-oss-120b · gemma-4-31B (General Compute)

Time to emit a 500-token tool turn

arithmetic, not a benchmark · 500 tokens ÷ tok/s

30 tok/s

16.7 s

100 tok/s

5.0 s

300 tok/s

1.7 s

800 tok/s

0.6 s

A voice that listens

Hume prosody

48 emotions

8 moods

2 levers

1 Octave acting instructions

the voice adapts — “calm, warm, reassuring”

2 A tone note in the LLM context

so the words adapt too

Same request, different delivery.

Hume expression measurement scores up to 5 s of each utterance; the orb changes hue with the mood.

MOOD

OCTAVE ACTING INSTRUCTION



neutral

“confident, friendly, crisp”



calm

“calm, steady, warm”



excited

“upbeat, bright, energetic”



happy

“warm, cheerful, light”



frustrated

“calm, warm, reassuring, unhurried”



stressed

“gentle, grounded, reassuring”



confused

“patient, clear, gently pedagogical”



sad

“soft, gentle, empathetic”

Safe enough to give root

Every command is classified before it runs.

`rm -rf``sudo``git push --force``kill / pkill``mkfs · dd``curl ... | sh``paths outside workspace/`

1 Destructive → say-so card

held, shown with the exact command and the reason

2 Approve by click or by voice

“yes” resolves it; denied commands run nothing

3 Sandboxed workspace/

paths that escape it are held too — nothing happens off-screen



Sayso needs your say-so

DESTRUCTIVE

```
$ rm -rf pulse
```

destructive: recursive delete

Approve

Deny

...or just say “yes”

confirm_request → say-so card → resolve_confirmation
→ run

Streaming transparency: every tool streams RTVI events to the screen — nothing happens off-screen.

Built today

ORCHESTRATION	Pipecat 1.11 · SmallWebRTC · Silero VAD · smart-turn v3
INFERENCE	SambaNova — Llama-3.3-70B · DeepSeek-V3.1 · gpt-oss-120b · MiniMax-M2.7 · General Compute — gemma-4-31B
VOICE	Hume Octave TTS · Hume expression measurement (prosody)
SPEECH-TO-TEXT	Gradium · Deepgram · local Whisper (MLX)
TOOLS	12 tools — shell · processes · files · browser · GitHub (gh CLI)
WEB APP	React 19 · Vite · Tailwind v4 · framer-motion · @pipecat-ai/client-js
SERVER	Python 3.12 · uv · FastAPI demo brain

- keyless demo mode
- ?mock=1 replay
- pre-flight key checker
- MIT



github.com/vnmoorthy/sayso

open source · MIT · running in ten minutes

What's next



Thank you

Your terminal, on your say-so.

SambaNova · Hume · General Compute · Infinity · Pipecat / Daily · Gradium · AGI House