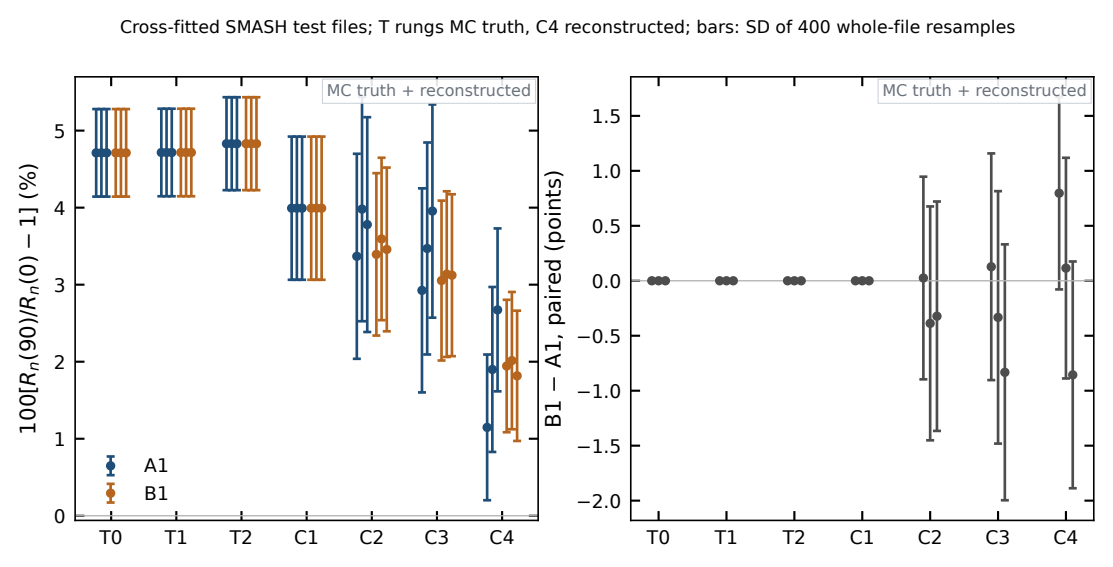
Cross-fitted SMASH test files; T rungs MC truth, C4 reconstructed; bars: SD of 400 whole-file resamples
MC truth + reconstructed
100[$R_n(90)/R_n(0) - 1$] (%)
A1
B1
T0
T1
T2
C1
C2
C3
C4
MC truth + reconstructed
B1 − A1, paired (points)
T0
T1
T2
C1
C2
C3
C4