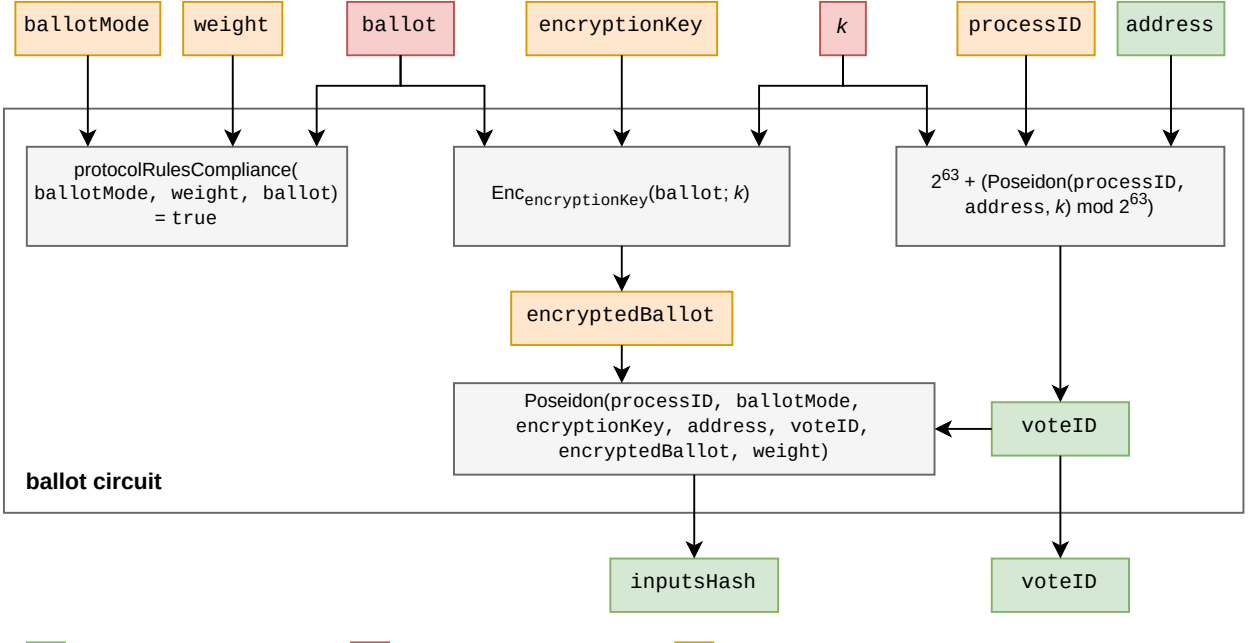
ballotMode
weight
ballot
encryptionKey
k
processID
address
protocolRulesCompliance(ballotMode, weight, ballot) = true
Enc_encryptionKey(ballot; k)
2^63 + (Poseidon(processID, address, k) mod 2^63)
encryptedBallot
Poseidon(processID, ballotMode, encryptionKey, address, voteID, encryptedBallot, weight)
voteID
ballot circuit
inputsHash
voteID
public input
secret private input
private input bound by inputsHash