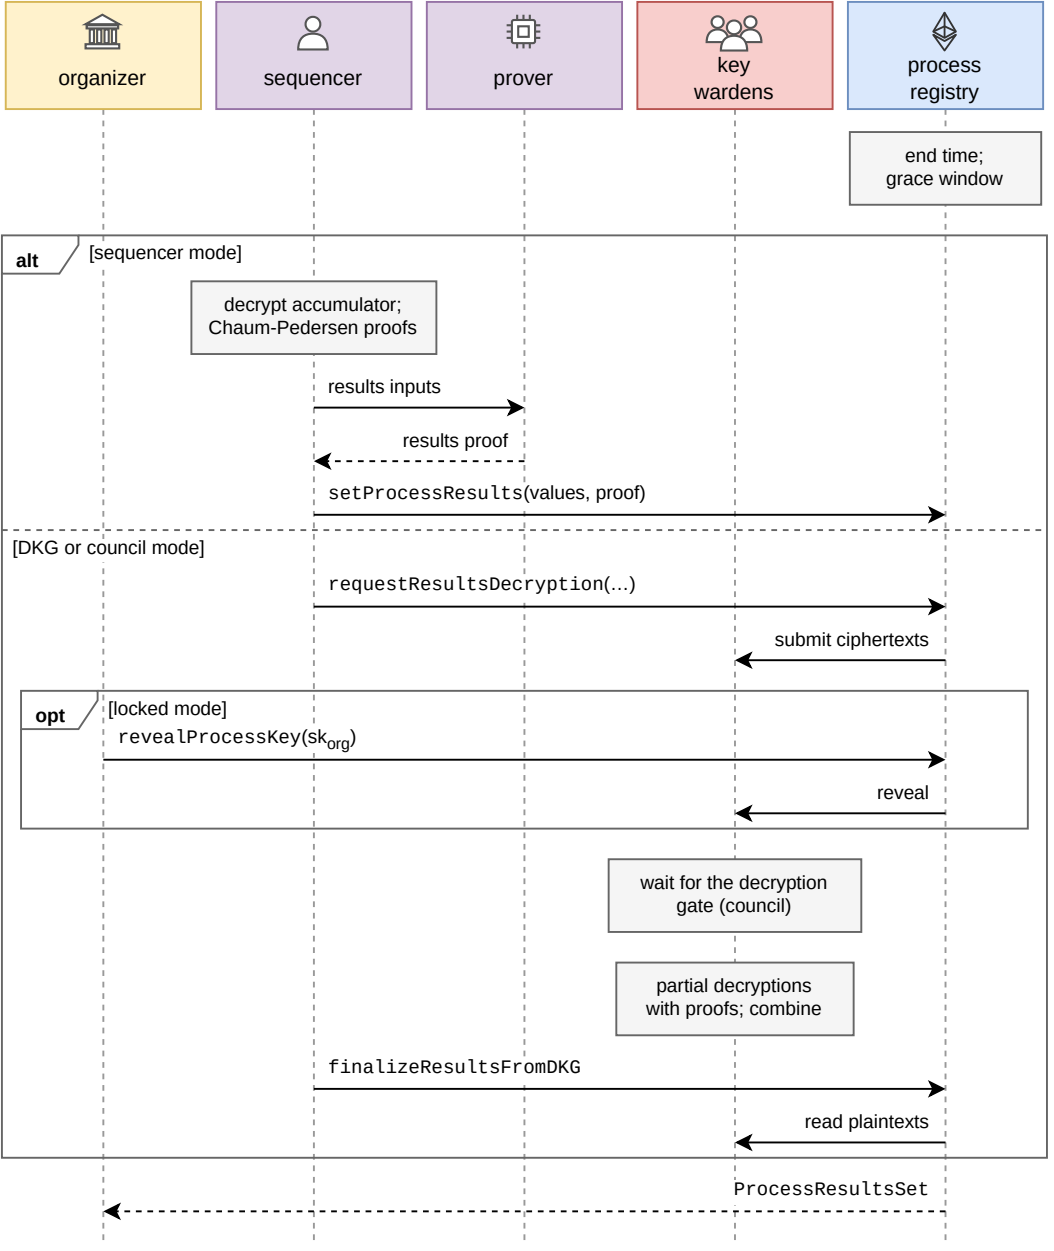
organizer
sequencer
prover
key wardens
process registry
end time; grace window
alt
[sequencer mode]
decrypt accumulator; Chaum-Pedersen proofs
results inputs
results proof
setProcessResults(values, proof)
[DKG or council mode]
requestResultsDecryption(...)
submit ciphertexts
opt
[locked mode]
revealProcessKey(sk_org)
reveal
wait for the decryption gate (council)
partial decryptions with proofs; combine
finalizeResultsFromDKG
read plaintexts
ProcessResultsSet