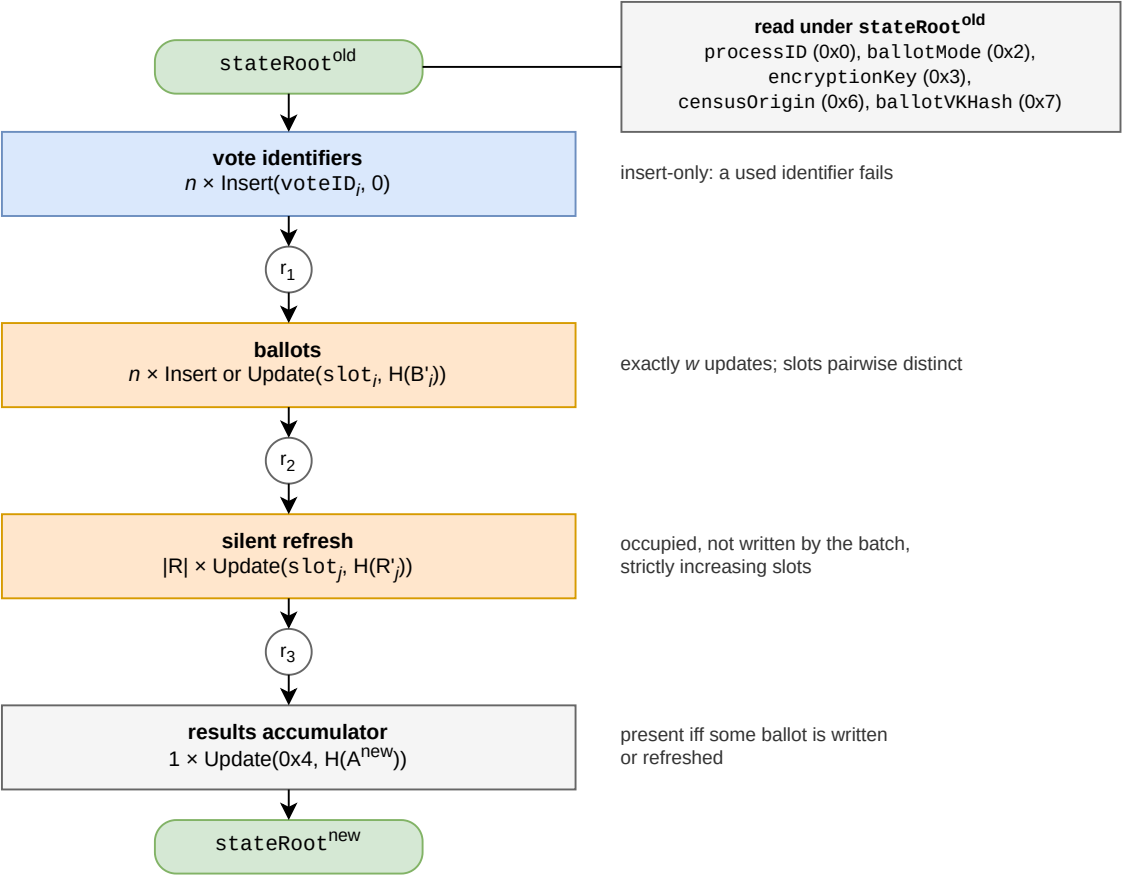
stateRoot^old
read under stateRoot^old
processID (0x0), ballotMode (0x2),
encryptionKey (0x3),
censusOrigin (0x6), ballotVKHash (0x7)
vote identifiers
n × Insert(voteID_i, 0)
insert-only: a used identifier fails
r1
ballots
n × Insert or Update(slot_i, H(B'_i))
exactly w updates; slots pairwise distinct
r2
silent refresh
|R| × Update(slot_j, H(R'_j))
occupied, not written by the batch,
strictly increasing slots
r3
results accumulator
1 × Update(0x4, H(A^new))
present iff some ballot is written
or refreshed
stateRoot^new