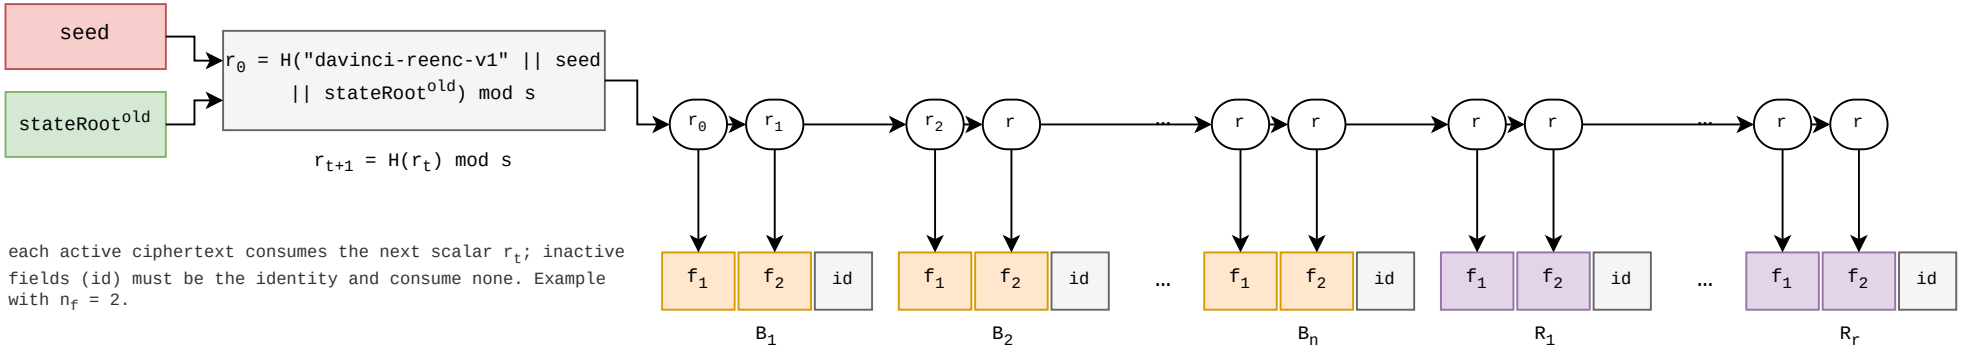

reencryption of a ciphertext with r_t:
$(C_1, C_2) \rightarrow (C_1 + r_t \cdot G,\ C_2 + r_t \cdot \text{encryptionKey})$
no scalar repeats within a batch, nor across batches (the old root differs)

results accumulation
$A^{new} = A^{old} + \Sigma\ B'_i - \Sigma\ B^{old}_i + \Sigma\ (R'_j - R_j)$
new ballots, minus overwritten ballots, plus encryptions of zero from refreshes