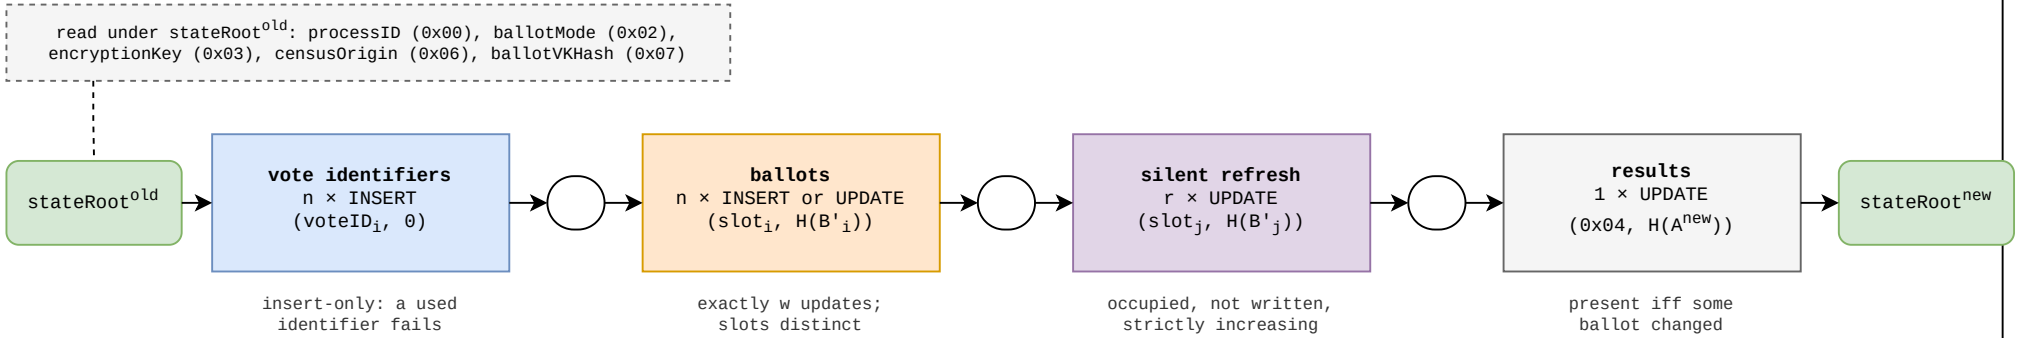

Each transition is proven against the root left by the previous one (intermediate roots shown as circles). H = SHA-256 of the 64 coordinates of a ballot; B' = reencrypted ballot; A = results accumulator.