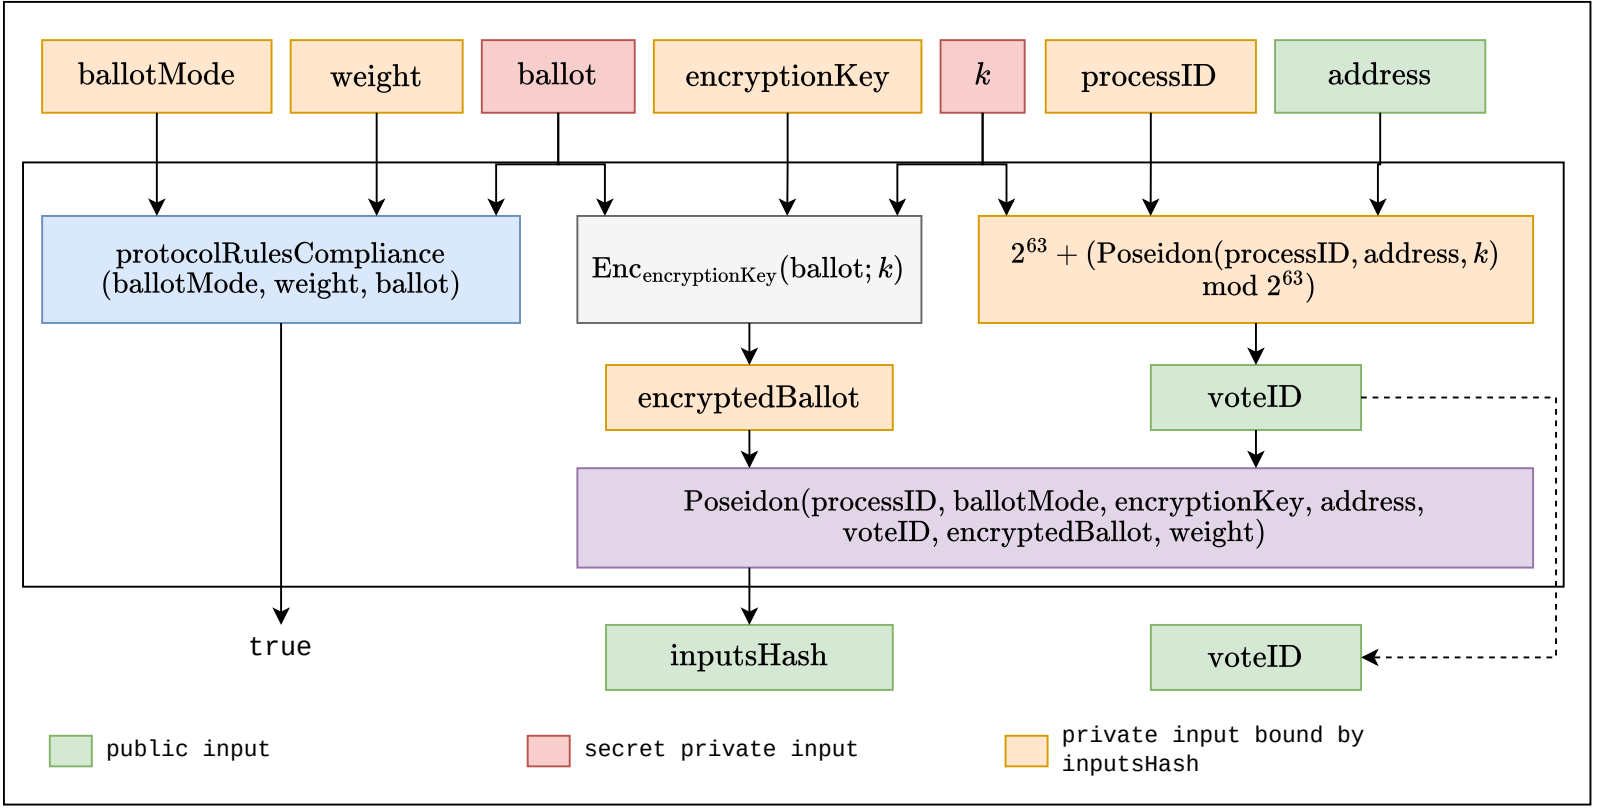

ballotMode
weight
ballot
encryptionKey
k
processID
address
protocolRulesCompliance (ballotMode, weight, ballot)
$\text{Enc}_{\text{encryptionKey}}(\text{ballot}; k)$
$2^{63} + (\text{Poseidon}(\text{processID}, \text{address}, k) \bmod 2^{63})$
encryptedBallot
voteID
Poseidon(processID, ballotMode, encryptionKey, address, voteID, encryptedBallot, weight)
true
inputsHash
voteID
public input
secret private input
private input bound by inputsHash