

Technical University of Košice
Faculty of Electrical Engineering and Informatics

Atmosphere: Concurrency enabled data
synchronization platform with HTML5/JS
and Cocoa clients

Bachelor's Thesis

2012

Vojtech Riník

Technical University of Košice
Faculty of Electrical Engineering and Informatics

Atmosphere: Concurrency enabled data
synchronization platform with HTML5/JS
and Cocoa clients

Bachelor's Thesis

Study Programme: Informatics
Field of study: 9.2.1 Informatics
Department: Department of Computers and Informatics (DCI)
Supervisor: Assoc. Prof. Ing. František Jakab, PhD.
Consultant(s): Ing. Ivan Klimek

Košice 2012

Vojtech Riník

Abstract

This thesis describes Atmosphere, a platform that improves user experience of web, mobile and desktop applications by storing remote objects in local database. The first chapters describe the background and state of existing solutions. Next chapters focus on available technologies that could be employed. With this knowledge the thesis proposes a design for the platform. The implementations are described in detail in the next chapter including example applications. The thesis is concluded by comparing Atmosphere to other projects.

Keywords

Web applications, Cocoa, Synchronization, Real-time applications

Abstrakt

Táto práca opisuje Atmosphere, platformu, ktorá zlepšuje používanie internetových aplikácií tým, že vzdialené objekty ukladá v lokálnej pamäti. Prvé kapitoly opisujú pozadie a stav terajších riešení. Ďalšie kapitoly sú zamerané na dostupné technológie, ktoré by mohli byť využité. S týmito znalosťami práca navrhuje štruktúru platformy. Implementácie a ukážkové aplikácie sú detailne popísané v ďalších kapitolách. Práca je zakončená porovnaním Atmosphere a iných projektov.

Kľúčové slová

Webové aplikácie, Cocoa, Synchronizácia, Aplikácie v reálnom čase

TECHNICAL UNIVERSITY OF KOŠICE

Faculty of Electrical Engineering and Informatics

Department of Computers and Informatics

BACHELOR THESIS ASSIGNMENT

Field of study: **9.2.1 Informatics**

Study programme: **Informatics**

Thesis title:

**Atmosphere: Concurrency enabled data synchronization platform with
HTML5/JS and Cocoa clients**

**Atmosphere: Dátová synchronizačná platforma v prostredí HTML5/JS a
Cocoa s podporou konkurenčného prístupu**

Student (titles, given name, family name): **Vojtech Riník**

Supervisor (titles, given name, family name): **doc. Ing. František Jakab, PhD.**

Supervising department: **Department of Computers and Informatics**

Consultant (titles, given name, family name): **Ing. Ivan Klimek**

Consultant's affiliation: **Department of Computers and Informatics**

Thesis preparation instructions:

- 1) Analyze data synchronization methods for client applications of cloud services
- 2) Analyze features of HTML5 and Cocoa technologies in the context of data synchronization
- 3) Design an architecture for data synchronization between client applications and web services based on the performed analysis
- 4) Implement the proposed synchronization platform
- 5) Evaluate the results and prepare documentation according to the department standards

Language of the thesis:

English

Thesis submission deadline:

25.05.2012

Assigned on:

31.10.2011

prof. Ing. Ján Kollár, CSc.
Head of the Department



prof. Ing. Liberios Vokorokos, PhD.
Dean of the Faculty

Declaration

I hereby declare that this thesis is my own work and effort. Where other sources of information have been used, they have been acknowledged.

Košice, May 22, 2012

.....

Signature

Acknowledgement

I would like to thank my supervisor Assoc. Prof. Ing. František Jakab, PhD. and my consultant Ing. Ivan Klimek. I would also like to thank my friends at Relevance, Inc. where the work on Atmosphere was started during open-source fridays. Lastly I would like to thank my family for always supporting me in achieving my goals.

Preface

The world is online. There is hardly any computer program left that does not utilize the global network.

When the data is stored somewhere else, there is a new challenge: How to hide this fact from the user? In most cases it is not hidden at all, it is obvious that data is somewhere else. Users have to wait seconds for data to load before being able to interact with them.

There are better solutions though. One example is Google Mail. When user opens Google Mail, unread messages are downloaded from the server, so when user decides to read them, they can see the contents instantly, without having to wait. This idea costs little work and saves user a coupleseconds of waiting.

Atmosphere is a platform that hides networking, like Google Mail does. When an Atmosphere-powered application is used, it seems like the data is on the same computer, which makes using the application much better an experience.

Atmosphere was built along with this thesis, and this thesis describes many aspects of designing, implementing and using Atmosphere.

Contents

List of Tables	12
Introduction	1
1 Background	3
1.1 Cloud computing	3
1.2 Infrastructure as a service	4
1.3 Platform as a service	4
1.4 Software as a service	5
2 Motivation	6
2.1 Desktop applications	7
2.2 Mobile applications	8
2.3 Web applications	9
3 Technologies	11
3.1 HTTP and REST	11
3.2 HTML5	12
3.2.1 CSS3	13
3.2.2 Geolocation	13
3.2.3 Canvas	14
3.2.4 WebGL	14
3.2.5 Audio	14
3.2.6 Local Storage	14
3.2.7 WebSQL and IndexedDB	15
3.2.8 WebSockets	16
3.2.9 Cache Manifest (Offline Applications)	17
3.2.10 Other features	17
3.3 PhoneGap and MacGap	17

3.4	Cocoa	19
4	Design	21
4.1	Approach	21
4.1.1	Asynchronous interfaces	21
4.1.2	Local Storage	21
4.1.3	Recovering from failure	23
4.1.4	Exceptions	25
4.1.5	Other solutions	25
4.1.6	Notifications	26
4.1.7	Live updates	26
4.2	Components	27
4.2.1	Client	27
4.2.2	REST Source	28
4.2.3	Notification server	29
5	Implementation	30
5.1	Classes, data structures and algorithms	30
5.1.1	Data structures	30
5.1.2	Classes overview	30
5.1.3	Synchronizer	31
5.1.4	Communication	32
5.1.5	Persistence	33
5.2	JavaScript details	34
5.3	Cocoa details	35
6	Use cases	36
6.1	TaskDo	36
6.2	Edukit	37
6.2.1	Real-time updates	38

6.2.2	Failure recovery by using UUIDs	39
6.3	Zone	40
7	Other solutions	41
7.1	Meteor	41
7.2	Firestore	42
7.3	Simperium	42
7.4	Comparison with Atmosphere	43
8	Conclusion	45
	Bibliography	47

List of Figures

1–1 Use of information system with fixed hardware capacity	4
2–1 Diagram of clients in cloud architecture	6
3–1 LinkedIn iPad application	19
4–1 Fetching objects using Atmosphere	22
4–2 Creating objects using Atmosphere	23
4–3 Recovery from failure by keeping track of local objects	24
4–4 Types of Atmosphere notifications	26
4–5 Main components of the client	27
4–6 Communication between the client and the REST source	28
4–7 Use of the notification server by the client and the REST Source . . .	29
5–1 Classes used in implementation of Atmosphere	30
5–2 Example routing table for resource client	32
5–3 Usage of Spine by Atmosphere	34
6–1 Screenshot of TaskDo	36
6–2 Diagram of OAuth authentication	37
6–3 Screenshot of Edukit showing list of topics in a course	38
6–4 Posting messages with real-time updates in Edukit	39
6–5 Components of Zone	40

List of Tables

7-1 Comparison of solutions similar to Atmosphere	44
---	----

List of Terms

AJAX Asynchronous JavaScript and XML

HTTP Hypertext Transfer Protocol

PaaS Platform as a service, a type of cloud solution

REST Representational state transfer

SaaS Software as a service, a type of cloud solution

Introduction

The basic idea behind Atmosphere is to make SaaS (Software as a service) client applications more user friendly by caching objects locally, synchronizing them in the background and propagating changes between users in real-time.

At the time of writing there were already projects solving this problem, but only partially. Atmosphere aims to create an integrated solution, that would work on both web and Mac/iOS platforms, allow offline usage, and be open-source. Additionally, it aims to work with an existing REST server, so developers would not have to rewrite their code from scratch. The results should be released as open-source and provide an easy way to build new applications.

The area of SaaS client applications is under fast development, specifically the area of JavaScript applications. Some new projects similar to Atmosphere with strong focus on JavaScript implementation were released during the time of writing. Atmosphere still provides some unique features (namely support for custom server) as described in the last chapter.

The overall goal for Atmosphere is to provide a platform that would allow building very user friendly client applications with minimal effort. It is best-suited for cases when the sever code is already available.

The first chapter defines cloud computing and individual types of cloud solutions. The next chapter talks about the current state of client applications and how they could be improved. Then available technologies are described, specifically HTML5 and Cocoa.

The next part proposes high level design of Atmosphere. It discusses the basic idea of asynchronous interfaces, how local storage could be used, how to recover from failure and also what other design solutions were considered and why the one described was chosen.

The next chapter is about the building blocks of the implementation: classes, data structures and algorithms. This description applies to all platforms, while

platform specifics are described by the end of the chapter.

Use cases describe specific applications that use Atmosphere: TaskDo, Edukit and Zone. These are examples of JavaScript and Cocoa applications, using custom or third-party servers.

The thesis is concluded with description of other open or closed-source solutions that were recently released to the public. These products are all compared with Atmosphere.

1 Background

1.1 Cloud computing

Cloud computing is defined as delivery of computing as a service through the Internet. The term cloud computing expands to all kinds of computing services.

There are two basic models of cloud computing. The first one is the deployment model and the second is the service model. In this thesis we focus mostly on the service model as Atmosphere enables building of software with shared data, a case of “Software as a service” cloud.

There are other kinds of service clouds: The most common include “Platform as a service”, “Infrastructure as a service” and aforementioned “Software as a service”.

Cloud computing abstracts all the details such as physical location of actual hardware (most cloud products actually run on multiple machines). Thanks to that, tasks like scaling are made easy for the end user. For example, Amazon Cloud services allow scaling to multiple machines in a couple of clicks. [2]

Easy scaling is also an economic advantage. Figure 5–1 demonstrates the economic advantage on a fictive example of school information system.

Students use this system occasionally throughout the semester. The use is significantly increased during the exams period, because students signup for terms and they check their results. This change in use is still not as significant as change during the time when students can choose their time slots for courses. Everybody wants to have the best timetable, they all access the system at once and the system crashes.

Cloud computing would resolve this problem by scaling up for a couple of hours during the time when everybody uses the system, and it would save money by scaling down during semester when the system is not used too heavily. Such type of cloud computing is “called platform as a service”. [1]

Another cloud computing solution to the described problem would be to use an existing academic system, available as a service, where hosting is handled by third

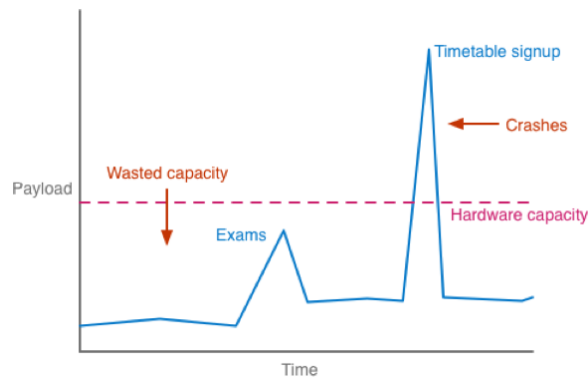


Figure 1 – 1: Use of information system with fixed hardware capacity

party and is responsibility of the service provider. This is an example of “software as a service” cloud. [36]

1.2 Infrastructure as a service

Infrastructure services deliver computer hardware as a service. Clients, instead of having to purchase the infrastructure, pay regular fee to the provider to get scalable infrastructure.

An example of platform as a service is Amazon EC2:

“Amazon Elastic Compute Cloud (Amazon EC2) is a web service that provides resizable compute capacity in the cloud. It is designed to make web-scale computing easier for developers.” [2]

1.3 Platform as a service

Platform as a service is a whole platform moved to the cloud.

“PaaS solutions are development platforms for which the development tool itself is hosted in the cloud and accessed through a browser. With PaaS, developers can build web applications without installing any tools on their computer and then deploy those applications without any specialized systems administration skills.” [1]

An example of PaaS is Google App Engine.

“App Engine offers fast development and deployment; simple administration, with no need to worry about hardware, patches or backups; and effortless scalability.”

[3]

1.4 Software as a service

Another term in cloud computing is “software as a service”. Software as a service is a new model of selling software: Instead of selling individual versions, the provider hosts software and user data, giving user access from anywhere as long as they pay the regular fee. [36]

2 Motivation

During the last couple of years a lot of software is moving from desktop to the web.

Many tasks can be now performed using only the web browser. A project called Chromebook [19] introduced a laptop which contains only a web browser and all the work is done using web applications.

That makes development and use of software better in many ways: Web applications are faster to implement, it is easier to customize their interfaces (using CSS), it is not necessary to download new versions of software as they are released and the data are stored and processed by the server.

When the data are stored on the server, they are stored more safely than on user's hard drive. Thanks to the client-server architecture, features for sharing and communication between users become trivial to implement.

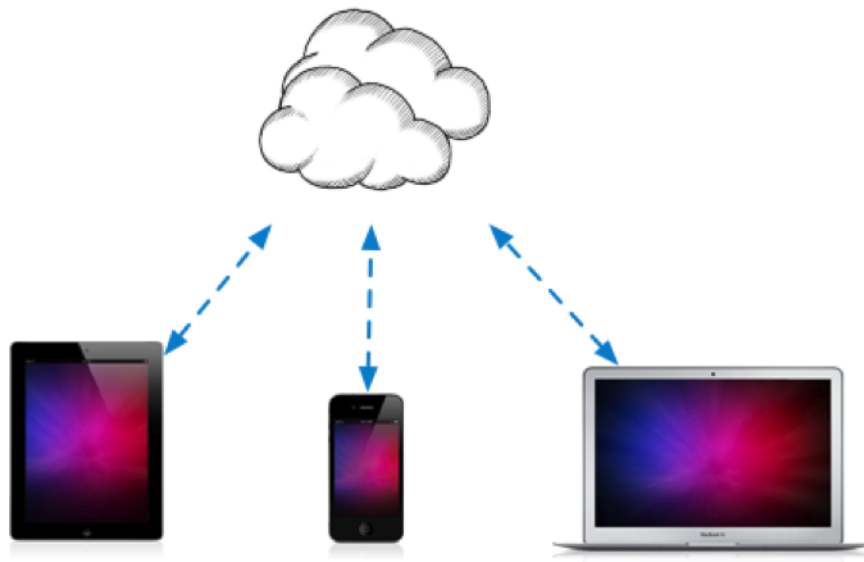


Figure 2 – 1: Diagram of clients in cloud architecture

In the cloud architecture, client is the device that connects to the internet to access software in the cloud. Client application is software that runs on client and communicates with the cloud service. In SaaS, the client application is often

delivered in form of web application: User can access it using their browser.

However, a web application is not the only solution. For example, on iPhone platform, web applications are limited, they cannot access some hardware features, such as camera. Native applications support these features, and those can be installed via App Store. So a client application can either be a website, or it can be a native application that requires installation.

If there is a native application, in the SaaS business model it is usually free: The company charges users for using the service, not for installing software. If user downloads the free application, but is not subscribed to the service, they are not able to use it.

Atmosphere tries to improve these client applications and make their development faster. The next sections will discuss the current state of client applications.

2.1 Desktop applications

With SaaS becoming a popular model for software business, companies focus less on desktop applications. Instead, they build services that work online and the clients use web interface to access these services.

It is possible to build desktop applications for SaaS products. But developing for desktop (for all platforms) takes more time and effort than developing for web. (Which supports all platforms right away.) Building a desktop application for every platform is not a viable option in many cases.

This is not a case for social networks, for example. Social networks have millions of users and provide an API. Therefore many developers try to improve the user experience by building desktop applications for these services.

It seems that user experience is generally better with desktop application rather than web applications. The first reason is that the whole user interface is operating on the client side: That means only the data is transferred through the network. Some desktop applications even use local storage to cache the local data.

The only problem left to solve is the case when application does not work with local data, but always makes networks requests, blocking the interface, needlessly making user wait.

The desktop library of Atmosphere solves this problem by providing a library that extends local storage framework and adds transparent networking without interface blocking.

One last type of desktop applications are those with purpose of notifying users of events. Should an event occur in a web application, the only way of immediately notifying user is via email. These emails tend to get very annoying after time, so user start creating filters that hide them from the inbox, which partly defies the purpose.

A better way of notifying users is to provide a desktop application they can launch and quit. Part of Atmosphere is the notification server which together with client libraries allow instant notifications for events that occurred in the application.

2.2 Mobile applications

Mobile applications became a very important part of SaaS. It is the time when many users own smartphones with constant connection to the Internet, and they expect every service to provide a mobile application that would allow them to perform the basic tasks using a simplified user interface. [32]

Mobile applications have often high priority when a new SaaS product is shipped. In many cases a special, mobile version of the site could solve the full the purpose, but compared to native mobile apps, these lack a great deal of responsiveness and speed.

Also, a native mobile application provides access to hardware-specific features, such as the the camera, GPS, the accelerometers, multi-touch event handling, and others.

Mobile applications have become very popular. [32] Compared to desktop ap-

plications, they are developed a lot more frequently. Compared to web applications, native mobile applications are much more responsive and faster.

There is a mobile framework RestKit [9] that solves a similar problem as Atmosphere for iOS and Mac applications. Its first feature is to simplify working with REST interfaces, but in addition it provides a way of caching remote objects in local storage, similarly to Atmosphere.

The only flaw of this framework is that it does not support creating objects locally, when there is no internet connection. Atmosphere solves this problem by tracking local changes all the time, no matter if user has internet connection or not, and synchronizing them with the web service when the internet connection is available.

Notifications are supported on mobile platforms in different ways. On iOS there is a central notification system, that is managed by Apple infrastructure. [37] The application is not responsible for managing open connection to receive notifications, instead when an event occurs on the server side, it notifies the Apple notification service that then delivers notification to the client. This solution is superior to managing connection by every client connection individually. First, it saves the memory footprint, CPU usage, thus it saves battery life. Secondly, the code responsible for managing the connection is provided and well tested by Apple. Network programming is a very unstable, so it would take a lot of effort to come up with solution as reliable as Apple's.

Atmosphere will not deal with push notifications in a way of receiving notifications when application is not active. But it will apply the same solution of updating objects as soon as they are changed on a different machine to mobile applications.

2.3 Web applications

There is one significant difference between desktop/mobile apps and those that run in a browser. Native apps ship a package of client code that needs to be installed

and run on the client platform. Web applications, in contrast, can run anywhere without any installation.

One of the issues of the current web applications is that most of them is just a set of web pages and forms. Some use AJAX to make requests in the background, but there is still occasional page reload.

That requires most of the logic (including fronted logic - logic responsible for rendering user interfaces) on the server side while only the results of requests are delivered to user. This concept is old [38] and is being replaced by JavaScript-heavy client side applications that have their own logic, especially for the user interface. They make requests only when necessary - to transfer only the data, not HTML.

This thesis does not explore all of the possible solutions of achieving this goal because there are many various options. Instead, Atmosphere assumes the developer has or is building a JavaScript application.

Moving logic to the client side is already an improvement. But even with that, the problem mentioned before still exist.

For example, TaskDo (one of Atmosphere-based applications, that were built along with the framework), provides an easy way to access user's tasks in Google Tasks. The simple interface consists of two screens: List of "task lists" and list of tasks in the list. Without Atmosphere, clicking on a task list would result in a few seconds wait for the tasks inside to load. With Atmosphere, the data is already cached locally, so opening a task list is instant. TaskDo and other applications are described in section Case Study.

The next problem with web applications is that there are no push notifications, unless the business domain explicitly requires them. (Such as a chat application, or a game.) For most applications, it's necessary to update objects in real time between users, but it would make the application better.

3 Technologies

In order to build a framework like Atmosphere, a solid knowledge of available technologies is required. This chapter will analyze the basic technologies on which SaaS applications are built, then it will discuss new technologies and how could Atmosphere benefit from them.

3.1 HTTP and REST

HTTP (Hypertext Transfer Protocol) is one of the basic protocols of the World Wide Web. HTTP implements the request-response and the client-server model. Take example of user navigation to search engine. In such case, the user's web browser is the **client**, and the computer where search engine is stored is the **server**. Typing the URL and hitting return key creates a **request** which is sent to the server over HTTP. Server processes this request and generates a **response**. The response is sent back to client (the user's browser) which processes it and presents data to user.

The request message is a short message containing the following: Method, path, headers and optional message body.

Representational state transfer, or REST, is a style of architecture for HTTP interfaces. The basic idea behind REST is that every object is represented as a resource. Actions can be performed on resources, such as index (will return list of all objects for specific entity), create (will create new record for entity), update (will update parameters of record) and delete (will remove a record). In REST, these actions are mapped to method and URL pairs. [17]

Atmosphere will act as client in the REST architecture. It will expect the source to be a RESTful HTTP interface.

3.2 HTML5

Since Atmosphere relies heavily on HTML5 features, some of them will be described in this section. [29] [33] [34]

HTML5 is the new version of HTML with support for many new features. The following sections will go through these features, discuss their use and support in the web browsers. Another question is how these features fit with Atmosphere and what use can they be made of.

One aspect of new HTML5 feature is the browser support. By using HTML5 there is increased chance that the application will not work correctly, or will not work at all for some users with outdated browsers. In an ideal solution, users with old browsers are informed that their browser is not supported and are not allowed to use the application at all. If the application is allowed to be used with unsupported browsers, users might think it is broken instead of upgrading their software.

Can be this problem solved in a more elegant manner? Is there any solution that would bring the new features to users with old browsers? That depends on what feature it is. For example, if the browser does not support WebSockets (which is a real situation – Android web browser does not support it.), then the push notifications should be disabled, but the application should work without them. That is of course the case if the application is not completely based on WebSockets. Atmosphere applies this concept of graceful degradation: If the WebSocket support is not present, it simply will not be used, but the application will still work through the REST interface as normal. [39]

That was an example of degradable feature, there are more fundamental ones that simply require support. In that case there is no other solution than demanding user to upgrade their browser.

Another interesting solution is to bundle the application along with a modern browser and distribute it as a desktop application.

3.2.1 CSS3

CSS3 allows advanced styling of interface elements without use of images. The main advantage is being able to change looks later in the development process without having to use an image editor. [34]

Animations generally improve user experience by visualizing the action performed by the user. With CSS3, animations can be rendered without using JavaScript. That means, instead of computing properties for each frame of animations, it is the responsibility of web browser to render it. Some browsers use GPU to accelerate these animations, which makes the interface feel much more like a native application.

Border radius is a simple feature that allows rendering elements with a border radius.

Shadows allow rendering shadows as if cast by text (text-shadow) or by some element (box-shadow).

Flex box is a feature for creating “flexible” boxes, that means making elements automatically expand to some part of the screen. It allows building interfaces, that looks like native user interface instead of web page. The original solution was mostly absolute positioning or JavaScript that would automatically reposition elements whenever the window was resized.

Font face allows using custom fonts and is already widely used. There are services, such as Typekit [40] or Google Web Fonts, [41] that let developers use any font from their collection by simply including short stylesheet in the page.

Gradients allow styling elements with gradients without having to use images.

Atmosphere does not directly require any of these features as it is not working with the interface directly.

3.2.2 Geolocation

Some HTML5 browsers support geolocation – a programming interface that lets web application request current location of the user, after user allows the appli-

cation to access it. It is easy to gracefully degrade when this feature is not available. It is available on most of the mobile devices. Atmosphere does not use this feature in any way.

3.2.3 Canvas

Canvas is a HTML5 element that allows dynamic rendering of vector objects and bitmaps. It is commonly used in graphic applications. It is supported in all browsers, except Internet Explorer, which supports it only from version 9.0. Atmosphere does not use the canvas element.

3.2.4 WebGL

WebGL is a JavaScript extension that allows generation of interactive 3D graphics by sending instructions directly to GPU. It is based on OpenGL ES 2.0.

In supported browsers, WebGL is automatically enabled if user hardware is compatible. WebGL is supported in version 9.0 and newer of Google Chrome, 4.0 and newer of Mozilla Firefox, 5.1 and newer of Safari (although Safari has WebGL disabled by default.) As of time of writing, it is not supported by Internet Explorer.

Atmosphere does not use this feature either.

3.2.5 Audio

Audio is an element that is used to play sounds in web browsers. Before HTML5, this task was usually handled by embedding Flash file.

Audio has been around for longer than other features and is currently supported by all major browsers.

3.2.6 Local Storage

Local storage is the one feature that used to make desktop application superior to web application in many cases. In the years 2000 to 2009 there have been many

attempts to somehow add local storage to web applications. These include userData of Internet Explorer (part of DHTML Behaviors), Local Shared Objects of Adobe Flash and bridges with JavaScript, and SQLite databases provided by Google Gears.

HTML5 brings a new feature, Local Storage or sometimes called Web Storage. Websites can store up to 5MB of data in key/value pairs and even more after demanding user's permission. Local Storage is supported by all major browsers, including Internet Explorer from version 8.0. It is also supported on mobile browsers, both Android (2.0 and up) and iPhone (2.0 and up.).

Local Storage is thus a reliable way of storing application data on the client side. Atmosphere uses it to store local objects.

3.2.7 WebSQL and IndexedDB

Simple key value storage is a good solution for simple applications. But sometimes greater flexibility is required. In desktop application such cases usually employ SQLite database, or other SQL based database solution.

There are two solutions for the web: First one is WebSQL, which is similar to Google Gears a JavaScript interface to SQLite database. Such solution provides enough flexibility to store data in a more sophisticated manner than simple key value storage.

Unfortunately, WebSQL is not supported by Internet Explorer or Mozilla Firefox. This is not a result of slowness in development, Mozilla has stated they are not planning to support WebSQL. [4] Also, in 2010, W3C announced that WebSQL is a deprecated specification. [5]

There is another solution, IndexedDB, which differs from WebSQL in API. Instead of writing SQL requests manually, it provides a JavaScript API to manipulate objects. Mozilla has implemented this database in version 4.0 of Firefox, it is also partially supported by Google Chrome 11.

Since not of these database is fully supported, Atmosphere does not use either. Instead, applications should execute complicated database requests on the server and

use REST API to retrieve a subset of resources relevant to the user thus minimizing complexity of client-side database requests making key-value storage sufficient.

Client-side SQL databases will be an interesting solution, and as they become a feature that is supported on all platforms Atmosphere will try to use them. For now the support is very limited and Atmosphere will rely on local storage instead.

3.2.8 WebSockets

WebSockets is an extension of HTTP protocol. WebSockets hide the low level networking to provide simple API for connecting and sending simple text messages.

WebSockets are most commonly used in web browsers, but not limited to. There are client libraries in languages such as Objective-C or Java, so they can be used in native iOS or Android applications.

The server part can be written in any language. There are servers written in Ruby, PHP, Java and others. One server environment, Node.js, uses JavaScript as the server language. Thanks to Node.js it is possible to write server and client side (that utilizes WebSockets) in the same language with very similar API.

WebSockets are supported in all current browsers. For Atmosphere, that would be sufficient, because the application can work without WebSockets. Without WebSockets it would gracefully degrade to work without the notifications. But notifications work also without WebSockets by using Socket.IO. [6]

“Socket.IO aims to make realtime apps possible in every browser and mobile device, blurring the differences between the different transport mechanisms. It’s care-free realtime 100% in JavaScript.” [6]

The idea behind Socket.IO is to use WebSocket when available and gracefully downgrade to other solutions for push notifications in the browser. These include Flash file, bridged with JavaScript, AJAX long polling and others. To use Socket.IO, a library needs to be included on both client and server side. With Socket.IO library the server side is expected to be written in JavaScript on Node.js, but there are other third party libraries that work in other environments.

Atmosphere uses Socket.IO and that allows notifications to work in most of the browsers available. (Internet Explorer 5.5+, Safari 3+, Google Chrome 4+, Firefox 3+, Opera 10.61+).

3.2.9 Cache Manifest (Offline Applications)

Cache Manifest is a feature that allows accessing a web application without active network connection. In order to implement cache manifest, a list of all resources that application require to work must be created and exposed using the cache manifest API. This will cause browser to store the resources for offline usage.

One of the effects is that the next time the web application is used, these resources will be loaded locally making the web application load instantly.

Using cache manifest also allows web application to be used offline without any internet connection at all. Atmosphere makes this possible by storing all objects locally. When user alters an object, it is only marked as changed and pushed to the server the next time internet connection is available.

By using both cache manifest and Atmosphere it is possible to build web applications that simply work offline.

3.2.10 Other features

Features listed here hardly include all of the ever evolving features of HTML5. The technologies analysis is focus on features that could be used in Atmosphere, also other features are mentioned too, features that could help building a next generation web application.

3.3 PhoneGap and MacGap

“PhoneGap is an HTML5 app platform that allows you to author native applications with web technologies and get access to APIs and app stores. PhoneGap leverages web technologies developers already know best... HTML and JavaScript.”

[7]

PhoneGap is a platform for wrapping HTML5 application into native packages. MacGap is an extension of PhoneGap that allows doing the same with desktop applications. MacGap works only on Mac computers.

PhoneGap allows accessing native features of the device with JavaScript API. This connection is made using bridge between native code and UI element responsible for displaying the web page. (Usually called a WebView.) It is possible to use some native features, such as accelerometer, camera or compass. Lower level features are available too: Files, media, storage, notifications.

Users are used to web applications being slow and unresponsive. Native applications, on the other hand, are perceived as fast and easy to use. Today it is possible to build applications based on HTML5, that are almost as good as native applications.

PhoneGap and MacGap helps disguising a well-made web application as a native application, which may result into user believing they are working with a native app. When users are aware that they are dealing with a web application, not a native one, they expect the application to be slow and unresponsive, but on the other hand, when they believe it is a native application, they expect it to be fast.

An example is recently released LinkedIn iPad application of which 95% is built with HTML5 instead of native technologies. (Shown in Figure 3–1.) [18]

The last reason is the ability to publish application in the App Store or Android Market. For Apple platform, App Store is the only way to distribute software (except for jailbroken devices.) For Android platform, it is possible to install applications from other sources than the Market, but in both cases having an application exposed in the App Store/Market helps users find it, and increases downloads or sales.

Atmosphere does not use these platforms in a direct way, but some of the example applications are packaged using PhoneGap or MacGap and it helps achieving the overall goal - it improves the user experience.



Figure 3 – 1: LinkedIn iPad application

3.4 Cocoa

Cocoa is a platform for developing Mac desktop and iOS mobile applications. The implementation of Atmosphere includes libraries for this platform.

Cocoa allows building native applications using the Objective-C language and a tool called Interface Builder. [42] This two allow developer to instantiate objects and graphically layout interface elements. All of the objects are then archived, frozen in place. When the interface file is loaded, the contents are unarchived, but not instantiated.

Cocoa provides basic elements to build both desktop and mobile applications. On desktop, forms elements, tables, collections and other user interface elements are available. Mobile version contains different views made for touch devices. Also, the mobile version is extended by the touch framework for recognizing touch gestures, and other features specific for mobile devices.

The code is usually organized according to the MVC pattern. For the model layer, Core Data is used. Core Data is a library, that acts as persistence framework. The desktop version of Cocoa supports data bindings that automatically update in-

interfaces elements according to changes to models. This feature significantly reduces glue code in the controllers.

Another very common pattern used by Cocoa is the observer pattern. Cocoa provides the notification center, which is an object, usually one for the application, that any objects can use to subscribe to notifications, or post notifications to.

Objects that are to be stored using Core Data are called managed objects and are persisted into file or a database. Core Data manages attributes and relations of objects. Core Data uses fixed data schema which can be defined using a file or programatically. This is different from HTML5 as Core Data objects have fixed schema, and HTML5 are just objects serialized into key value storage. With Core Data it is possible to write more complicated applications with more complicated requests, because it can use SQLite as storage mechanism.

Atmosphere library sits on top of Core Data and adds automatic networking. Fetching or synchronizing objects can be triggered manually, or by watching for changes using the notification center. (Observer pattern.)

Cocoa is a fairly complex framework with many features. This chapter is an introduction to basic concepts and features of Cocoa that are later utilized by Atmosphere.

4 Design

4.1 Approach

This chapter describes the high level design of Atmosphere platform, while the implementation details are described in later chapters.

So far the thesis discussed the issue of current client applications. The conclusion is that interface blocking during network requests is one of the issues that could be solved.

4.1.1 Asynchronous interfaces

This section defines the term asynchronous user interface. [8]

In computer science, an asynchronous operation is such one, that does not block the caller while being processed, instead it returns immediately. It can be passed a callback that is called when the processing is finished.

Asynchronous interface is the result of applying the same concept to users and interfaces. The idea is to minimize amount of interface blocking. (Displaying some graphic that informs user the program is doing some work.)

An asynchronous interface gives immediate response, processing is done in the background and as soon as it is finished, the interface might present further results if needed.

4.1.2 Local Storage

The first step to achieve an asynchronous interface is storing some of the application data locally.

Figure 5–1 presents a situation of fetching a set of objects. When user tries to access a set of objects, ① the application will first attempt to retrieve them from local storage, ② which is an instant operation. User is provided with some data in zero time.

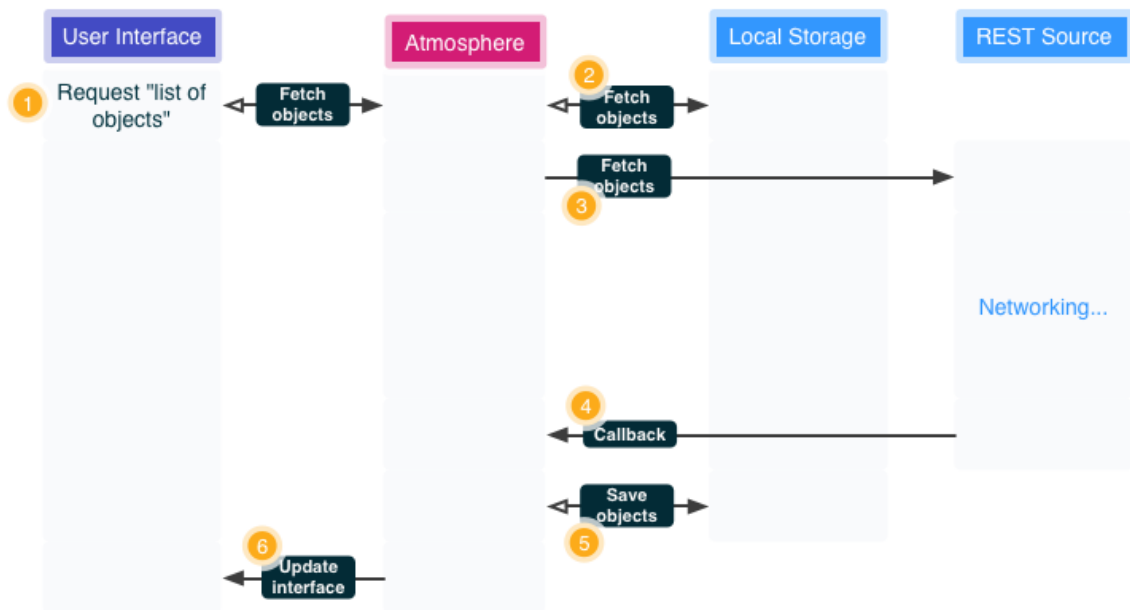


Figure 4 – 1: Fetching objects using Atmosphere

And the same time the application makes a network request to retrieve the newest data. **3** When the data is retrieved from the server, **4** Atmosphere will look at their unique identifiers and try to find an existing copy in the local storage. If the object is found, its attributes are updated and it is saved back to the local storage. If it is not, a new object is created locally. **5**

The user interface is bound to the local data. When new local data are saved, it is automatically updated to reflect current local data. **6**

For making changes the objects, the workflow is similar, depicted in Figure 4–2.

When user makes changes to an object, **1** the changes are immediately written to the local storage. **2** This operation is instant, so user sees response without any blocking. Now the object is marked as “changed locally”, which schedules it for synchronization. The synchronization module picks it up, and sends it to the server. **3** The rest of the process works in the same way as with fetching objects.

Since the REST services have different actions for creating new objects and updating existing ones, it is important to decide whether to send a “create” or an

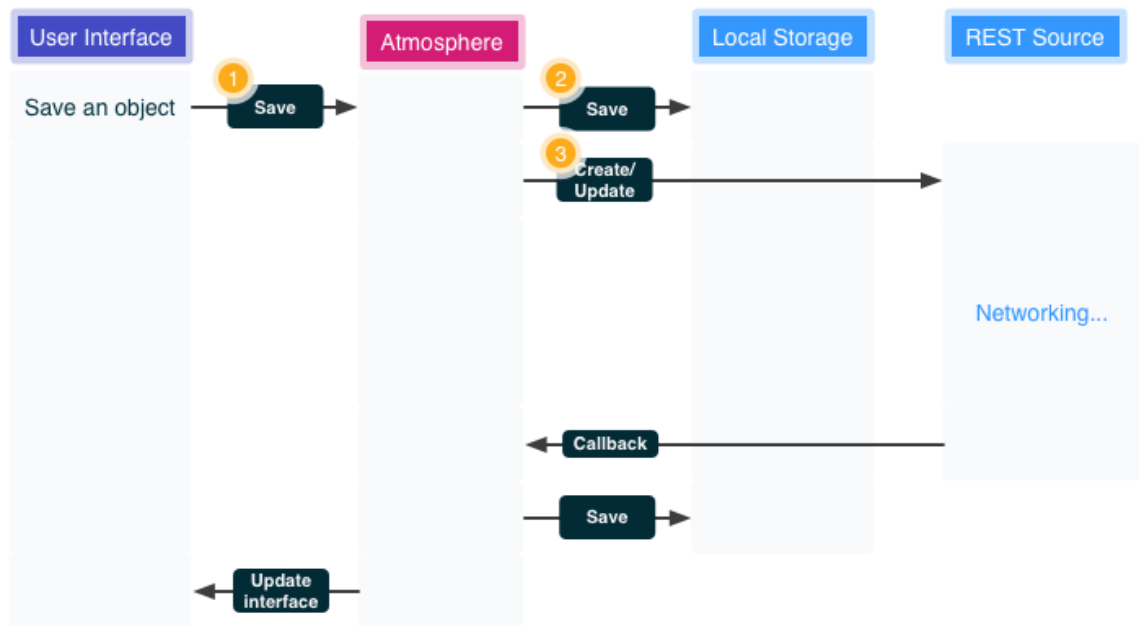


Figure 4–2: Creating objects using Atmosphere

“update” request. For this purpose Atmosphere keeps track of boolean information which indicates whether the object is “local only”. This value is set true at the first time object is created, and is changed to false once confirmation about creation is received from the server.

Also, local objects need to be identified somehow. When an object is created locally, it is assigned a temporary identifier in form of UUID. Once it is successfully created remotely, the identifier is updated to permanent identifier assigned by the server.

4.1.3 Recovering from failure

Synchronization relies on network requests and network connection might be very unreliable at times. Also we have to consider that many of Atmosphere-based applications are developed especially for mobile devices and mobile connection is even less reliable.

The case of fetching objects does not require much attention. If objects fail to load, user will not see them. A notification about network failure can be displayed,

but this is responsibility of application logic.

The case of saving object is more complicated. Atmosphere is designed in a way that it will always create a local object first. If the remote request fails, the local object exists, but the remote does not.

This problem is partly solved by keeping track of which objects are “local only”. (See Figure 4–3.) Every object is marked as “local only” for as long as its existence was not confirmed by the server. ① If one request fails, ② the “local only” mark remains on object, ③ and the synchronization is attempted in the next cycle. ④

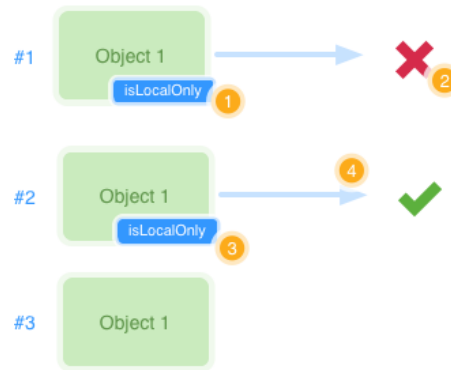


Figure 4–3: Recovery from failure by keeping track of local objects

A more complicated situation is when the network request is made, processed by the server (therefore the object is created), but the response never makes it back to the client. The object is created remotely, but the client application is not informed about this, so it never removes the “local only” mark. Then it tries to create the object again, because the mark was not removed and that results in two objects of the same attributes being created.

A possible solution is assigning permanent ID on the client side. Such solution would expect server to take ID as an argument to the create request.

Now a new object is created on the client side, it is assigned a temporary ID. Then it is sent to the server and server creates object with that ID. The response never comes back to the client, so client makes another create request, with the same ID. Server declines to create another object with the same ID, so it returns a

confirmation message for existing object. This time client receives the confirmation message, so the object is marked as not local only.

This solution is not implemented by Atmosphere because it takes server side logic and Atmosphere is purely client-side framework. Implementing such a solution in fact takes only minor modification on server side, and is implemented by Edukit, as described in section 6.2.

4.1.4 Exceptions

Always storing data locally whenever a new object is created might be harmful in certain cases.

For example a web commerce site might provide actions for adding products to the cart, and it might provide an action for submitting the order.

The programmer would probably decide to let Atmosphere manage creation of cart item object. But for order submission, it is better to block user interface, because users want to be sure everything worked. Doing such operation in the background might also lead users into thinking their order was submitted while it was not.

For this purpose, Atmosphere implementations provide a way to create or update an object using a synchronous (in terms of user interface blocking) request.

4.1.5 Other solutions

There are simpler ways of achieving asynchronous interface.

One of them would be to create transient objects that would represent remote objects and still hide networking from the user. Such solution would be less complex because there would have to be no synchronization.

One drawback would be that opening application for the first time would be slow as user would have to wait for network request to complete.

Another reason to use local storage and synchronization is that the application can be used offline.

4.1.6 Notifications



Figure 4–4: Types of Atmosphere notifications

Atmosphere provides a WebSocket-based notification system for realtime updating of objects. The source application can use this system by making HTTP request to the Atmosphere notification server. (More detailed description is in section 4.2.3.) There are two types of notifications.

The first type is called **object update**. It is used to propagate an object update to a subset of connected clients. Such message contains object's attributes and list of users to send the notification to. Sending the object update message will cause connected clients to update their local object with the new attributes sent by the server. Using bindings or some other technique, the user interface is updated and user sees the new attributes in real time.

The second type is called **notification**. A notification contains custom object to be passed to the connected clients. Similarly, it contains list of clients to send the message to.

A notification message will forward custom object to specified users. The client application is responsible for parsing and processing such message. Atmosphere provides a way for application to subscribe to these notifications.

4.1.7 Live updates

Notifications themselves do not suffice in all cases. Take as an example an application where multiple users would like to edit one page together. Once a change is made by one user, a notification could be sent to other users containing

the whole page object.

What happens if a page is very long? Sending the whole object would be infeasible. The solution for this problem is to send only the changes made, not the whole objects.

Doing that requires further processing on the server side, to avoid conflicts. This processing can be done using operational transformation. [27] Since the processing has to happen on the server side, a custom server logic is required. Adding custom server logic is unfortunately not possible for Atmosphere, because one of the design decisions was to support custom REST servers.

This issue could be solved in future by developing a custom extendable Atmosphere server, with support for operational transformation.

4.2 Components

4.2.1 Client

Client is the computer where Atmosphere-based application is running. It can be a web, desktop or a mobile application.

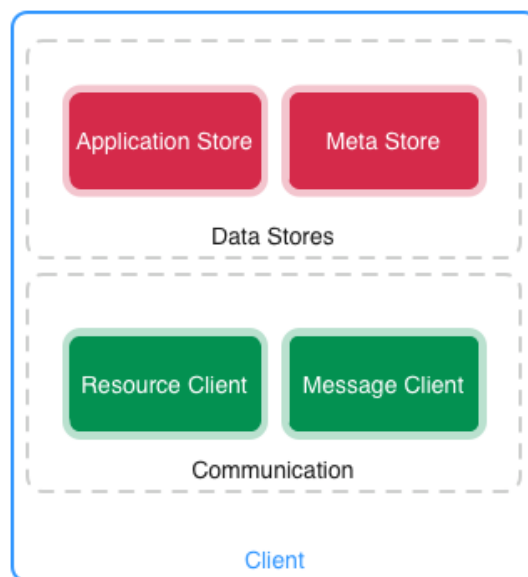


Figure 4–5: Main components of the client

The implementations differ across platforms, but from a high level view there are two main component groups: One responsible for storing data locally and one responsible for communication with the HTTP server.

The Application Data Store is a component that is responsible for managing application objects. It is used for tasks like looking up an application object, or updating an application object. This component always depends on native way of storing data. In case of desktop applications, it depends on Core Data framework, etc.

The Meta Store is a component that is responsible for storing meta objects, objects that encapsulate information that are needed by Atmosphere and that can be ignored by application itself.

List of meta data:

1. “is object changed” is a Boolean value that indicates whether the object was changed locally since the last synchronization.
2. “is object local only” is a Boolean value that indicates, whether the object was retrieved from the server, or if it exists only in the local store.

Components in the communication group are responsible for networking. Resource Client is component responsible for communication with the REST source while Message Client is responsible for communication with the Atmosphere notification server.

4.2.2 REST Source

REST Source is an existing HTTP server. It is not important what language or technology is used to build this server, the only requirement for the server is to implement the basic CRUD methods: create, read, update and delete.



Figure 4–6: Communication between the client and the REST source

The source can be also provided by a third party. For example, in application TaskDo (see section Case Study), the source is RESTful API of Google Tasks.

Once the server is available and its methods are known, the client must be configured to use the correct methods to create, read, update and delete objects.

The communication between client and the REST source is then performed using HTTP methods.

4.2.3 Notification server

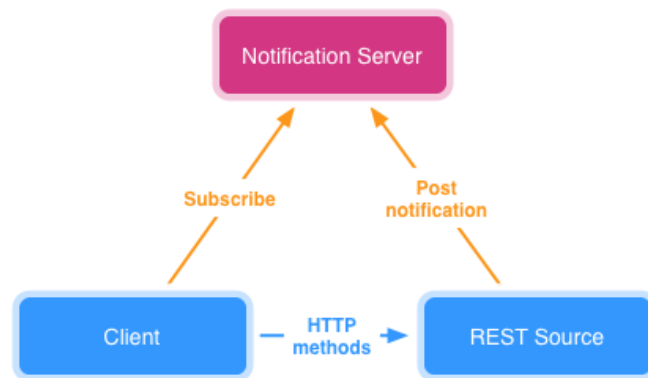


Figure 4–7: Use of the notification server by the client and the REST Source

Notification server is a component that stands between client application and REST source. Client subscribes to notifications on the notification server and the REST source posts notifications to the notification server.

5 Implementation

This section starts by describing some important algorithms and implementation details of Atmosphere.

5.1 Classes, data structures and algorithms

The following text describes data structures and algorithms used in JavaScript implementation.

5.1.1 Data structures

URI is a structure (in JavaScript implemented as object) which represents unique address of a local object. It consists of **entity** and **identifier**.

Meta object is structure which represents the meta information for an object. It contains the link back to the original object in the application store, and the values of meta attributes. Every application object managed by Atmosphere is assigned a meta object.

5.1.2 Classes overview

Both implementations provide object-oriented system of code organization. Components of Atmosphere are represented using classes as pictured in Figure 5–1.

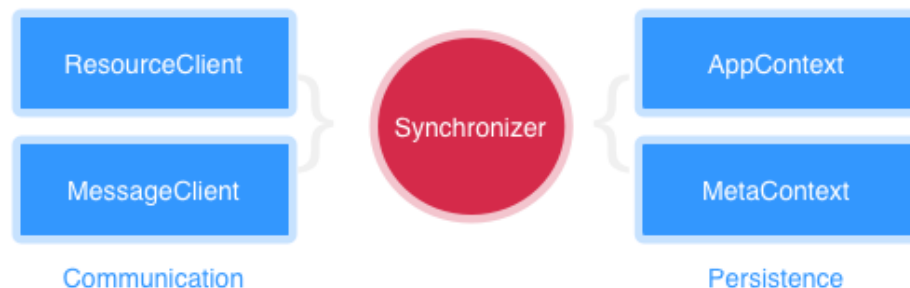


Figure 5–1: Classes used in implementation of Atmosphere

5.1.3 Synchronizer

Synchronizer is the main class of Atmosphere. It lies on top of other classes, and other classes use it to accomplish tasks. Its methods can be divided into following groups.

1. Object lifecycle
2. Updating local objects with new data
3. Fetching objects
4. Saving objects
5. Making custom REST requests
6. Marking object as changed or synchronized
7. Synchronization

Object lifecycle consists of class constructor, which initializes the class and all other required classes.

Updating local objects provides method for updating object specified by URI with new data. It also checks if updating data would change identifier of object, if so, then it updates the identifier in both application and meta context.

Fetching objects and **making custom REST requests** forward the call to resource client. These are only convenience methods. Similarly, **marking object as changed or synchronized** methods are forwarded to the meta context.

Saving objects allows specifying option which would make the saving “synchronous”. In such case Atmosphere will immediately produce a save network request. When this option is set to false, the object is only marked as changed, and is synchronized in the next synchronization loop.

There are two purposes for this option: First, it disables offline usage. If the request fails, it will not be attempted again. Second, it is possible to pass options

to such request. Note that asynchronous saving does not allow any options to be sent along with the save method. Making saving synchronous enables extra options, such as URL arguments or extra POST body.

Synchronization contains logic for looking up changed objects in meta context, deciding whether to send a create or update request, and finally calling the save method of resource client.

5.1.4 Communication

The communication layer consists of two classes: The resource client and the message client.

Resource client is used to download data over HTTP protocol conforming to REST style. In order to make a HTTP request, we need a URL for the resource. The process of converting a model and action pair to URL string is called routing. It is done by specifying an application specific routing table similar to one pictured in Figure 5–2.

	Index	Create	Update
Page	GET /pages	POST /pages	PUT /page/:id
Topic	GET /topics	POST /topics	PUT /topic/:id

Figure 5–2: Example routing table for resource client

Once the correct URL is looked up in the table, the resource client prepends the base URL for the REST source, replaces occurrences of ID string with ID of record being saved, processes extra request-specific options and sends the request.

Resource client is also responsible for extracting data contained in the response returned from HTTP call. In the current implementation, only the JSON format is supported. Since the response could store data in many different ways (see Listing 1), Atmosphere allows setting custom function (or block in Objective-C) for retrieving

these data from the JSON response.

```
// Simple JSON response
[{name: "Edukit"}, {name: "Atmosphere"}]
// More complicated JSON response
{"projects": [{"project": {name: "Edukit"}}, {"project": {name: "Atmosphere"}}]}
```

Listing 1: Different formats of response JSON data

Message client is responsible for opening and maintaining connection over WebSocket. Both JavaScript and Cocoa implementations use Socket.IO [6], a pseudo-protocol implemented on top of WebSocket.

The typical update message contains object identifier and its data. The message client is responsible for updating the object with data contained in the message and it does so by calling appropriate method in the synchronizer class. Therefore message client remains a very lightweight class.

5.1.5 Persistence

Application context is class that manages application objects by providing methods such as create, update, change identifier or delete.

Its job is to unify interfaces of different model layers where Atmosphere might be used. In the current version, the only model layer is the one of Spine framework, but this class provides portability to other environments by encapsulating framework-specific model-related code.

Meta context manages meta information for each of application objects. It provides methods for finding meta objects for existing application objects, creating new ones, changing identifiers and updating meta attributes.

The motivation for this class came from the original implementation of Atmosphere which was intended only for Cocoa applications. Cocoa uses SQLite to store application objects, so it is not possible to dynamically add attributes to the schema.

Atmosphere needs some extra attributes, such as “is changed” or “is local only”. Therefore a new schema is used, where each item contains identifier of the application object and values for these meta attributes.

5.2 JavaScript details

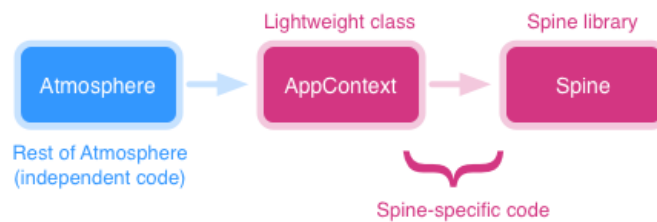


Figure 5 – 3: Usage of Spine by Atmosphere

At the time of writing, JavaScript implementation of Atmosphere is built on top of the Spine [11] library which is a lightweight framework for building JavaScript web applications.

The library does not completely rely on Spine, instead it only utilizes its model layer. Furthermore, all the code that requires Spine is contained in one small file (application context), which can be easily rewritten for other client side frameworks and their own model layers.

The implementation is written in CoffeeScript [10], which is a language that improves syntax of JavaScript by introducing many syntactic shortcuts such as semantic whitespace (inspired by Python) or accessing instance variables with the “@” sign. (inspired by Ruby).

The classes in persistence and communication layers implement the basic roles of Atmosphere, while the Synchronizer class is the entry point for working with Atmosphere.

The Spine integration contains shortcuts for calling Atmosphere methods directly from Spine models using the API users are already developers are already familiar with.

JavaScript implementation uses Socket.IO [6] client library for opening WebSocket connections. The library enables socket-like functionality in browsers that do not support WebSocket using long-polling or Adobe Flash.

5.3 Cocoa details

The Cocoa implementation is packaged as Xcode framework. It is written in Objective-C and can be compiled for both desktop(Mac) and mobile (iPhone and iPad) platforms.

The Cocoa implementation relies on Core Data which is standard for storing objects in Cocoa applications. It binds onto Core Data workflow that allows automatically saving objects remotely as they are saved in the local storage.

6 Use cases

6.1 TaskDo

TaskDo [13] is a task manager application written using CoffeeScript [10], Spine [11] and Atmosphere. It features offline usage, synchronization with Google Tasks API [14] and is bundled as application for Mac platform using MacGap. [15]

The strong point of TaskDo is its close resemblance to native application. TaskDo is bundled as one and it is highly responsive. This responsiveness is achieved by storing objects locally and synchronizing them with Google Tasks API using Atmosphere.

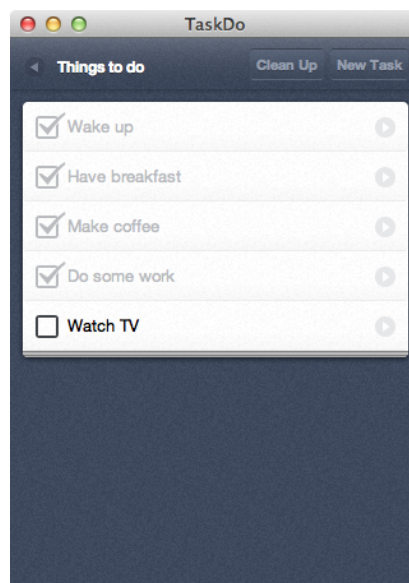


Figure 6 – 1: Screenshot of TaskDo

One of the problems during implementation was OAuth authentication. To successfully authenticate user, the OAuth2 protocol [16] first requires redirection to provider's website. Then the user has to confirm that they want to share their data with third party application. At the end of the authentication process the user is redirected back to the original application.

Now the application is sent a session token, which has to be used with every

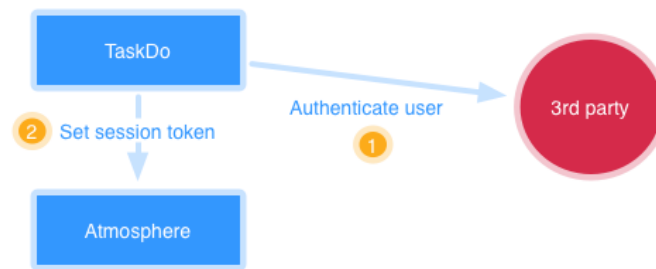


Figure 6 – 2: Diagram of OAuth authentication

subsequent API call in form of HTTP header.

Atmosphere provides a method for sending custom HTTP header with each request. TaskDo implements logic for completing the authentication process and then updates configuration for resource client to use the newly retrieved token with each request.

The Google Tasks API also returns JSON in a slightly more complicated format. For this reason, Atmosphere allows configuration of the way data are extracted from the response.

6.2 Edukit

Edukit is a data sharing platform intended for students. It features simple wiki-like pages, discussions and notifications. It helps students share and discuss knowledge.

Edukit is an existing web application written in Ruby on Rails, not using Atmosphere. Edukit Beta is the new version that is written in JavaScript and uses Atmosphere to communicate with the API of the existing version.

One of its key strengths is ease of use, the social aspect and the speed. Edukit is a very fast web application because of its minimal nature. But generating a new page with each action and delivering it to user can only be so fast. By using Atmosphere in Edukit Beta it was possible to go even further and make the application feel like a desktop application that provides instant response to almost every action made

by user.

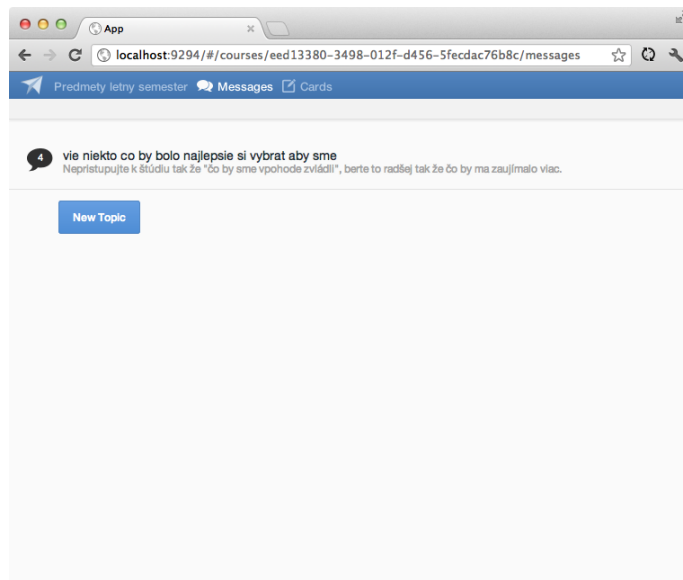


Figure 6–3: Screenshot of Edukit showing list of topics in a course

The new version of Edukit uses Spine.js and Atmosphere to create fully client-side web application, which stores data locally into the local storage of browser.

Atmosphere synchronizes these local data with the REST API of the original Edukit in the background. There are no changes in the original application involved, only exposing the REST API. The result is that it is possible to use both applications, the old and the new one at the same time.

6.2.1 Real-time updates

Edukit also utilizes the real-time notification server provided by Atmosphere as pictured in Figure 6–4. When a user creates a new message, a request is made against the original API written in Ruby. ❶ The Ruby application collects information about the newly created message: its sender, contents and intended recipients. (All users that are in the course.) This information is then sent to Atmosphere notification server. ❷ Atmosphere server now forwards the notification to clients connected via WebSocket. ❸

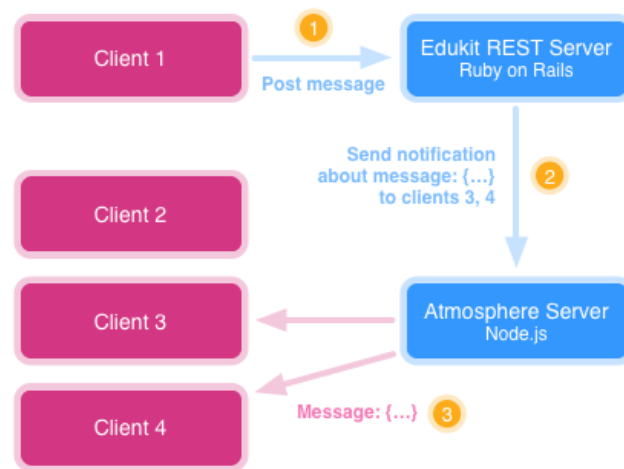


Figure 6 – 4: Posting messages with real-time updates in Edukit

Since the Ruby application and the live notification server are running on the same machine, and the Atmosphere server is written in Node.js, there is almost no extra processing time for the original request. Thanks to non-blocking event-based API of Node.js, it is possible to allow access for many users at once without using multithreading. [43] The result is ability to chat in real time with other users who are currently viewing the same topic.

6.2.2 Failure recovery by using UUIDs

Edukit implements failure recovery (see section 4.1.3) by using same object identifiers on both client and server side.

When a local object is created, it is assigned a new UUID. When it is synchronized, the server creates it in the database, and sets its identifier to the one created on the client side.

This helps prevent the case of one local object being created two times on the server side in case of network failure. This situation can never happen, because server uses client identifier to create remote object, so if an object with same identifier already exists, it will simply return that object instead of creating a new one.

6.3 Zone

Zone is an application for Mac that allows simple time tracking. At its first iteration the mission was to help people focus on their work by “zoning in”, [35] which would make the toolbar icon purple, reminding user they are working.

At later iterations, a new feature was added: Overview of previous zones throughout the week. This feature would help users find their productive time of the day by letting them visualize how long they were able to focus without taking a break.

The last iteration added synchronization with a web service. Its web interface allows viewing zones, exporting them into PDF and generating invoices. The last iteration utilizes Atmosphere’s Cocoa client library to synchronize local data about zones with the web interface.

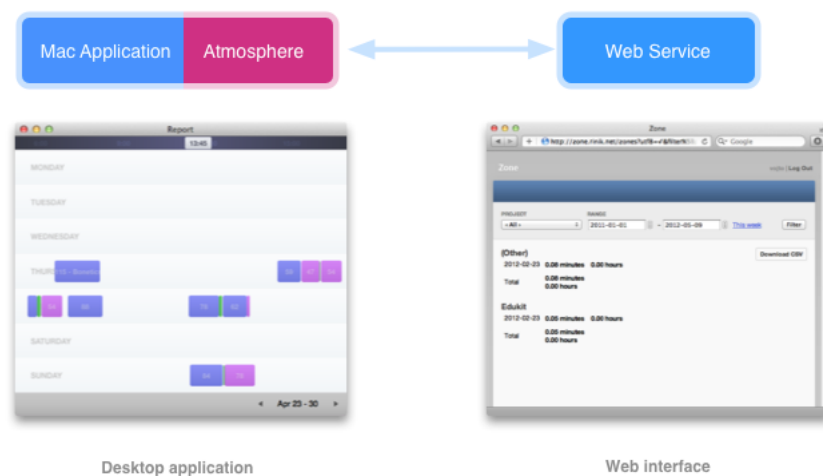


Figure 6–5: Components of Zone

7 Other solutions

During the time of writing many new projects were released. Some of them are very similar to Atmosphere, others target wider range of problems.

7.1 Meteor

Meteor [20] is a whole JavaScript framework for building distributed, real-time JavaScript applications. First of all, it provides the environment for building JavaScript applications. This environment includes automatic template rendering based on model updates.

The problem with this approach is that if the developer already knows a UI framework, such as Spine.js, [11] they can either use Meteor instead, or figure out a way to connect the UI part of their framework and the data part of Meteor.

It provides a database-like API on the client side. Client-side code can manipulate objects in the application directly. Changes made to objects are propagated to other clients automatically in real-time using WebSockets.

The server side is written in Node.js and the documentation [21] does not mention any means of implementing custom logic on the server side. That, first of all, represents a security risk. The client makes changes directly to database objects. Client is written in JavaScript and since it is not a compiled language, it can be changed by user at any time. Therefore, client can change database objects directly, which can become an issue if application is used by multiple users.

Secondly, using this approach could result in unexpected state of objects in case of network failure. For example, single action may create two interdependent objects. If one of these requests fails, there is one object which depends on another objects, which does not exist.

If these two objects were created in a server procedure called using one request, it would assure that either both or none of the objects are created.

Meteor uses MongoDB to store its data. Meteor does not provide a library for

Cocoa, or any other desktop or mobile platform. It is open-source and its source code is released under MIT license.

7.2 Firebase

Firebase [22] is a product similar to Meteor. The key difference is that it does not provide a whole framework for building JavaScript applications, but only the data layer.

This allows using existing JavaScript applications written in other frameworks and adding Firebase data layer. The data binding is done by attaching callbacks to Firebase data layer. Existing application with its own custom UI logic first attaches a callback to be called when Firebase data changes, and then is notified of changes so it could display the current state.

Another difference between Meteor and Firebase is that Firebase requires users to use their hosting to store the data. It is not open source and it does not provide a way to self-host the data. It is founded by YCombinator [25] and it total it received 1.4 millions of dollars in founding. [44] It also does not provide a library for other than web platform.

7.3 Simperium

Simperium is a project that is very similar to Firebase. It also does not provide a whole JavaScript framework, only data layer.

Similarly to Meteor and Firebase, Simperium provides real-time object synchronization. One very powerful difference is built-in operational transformation. [27] This allows sending only the portions of data that have changed, which improves performance dramatically when dealing with larger objects. Also it adds automatic resolution of conflicts: If two users change one object, their both changes will be preserved.

Simperium also allows writing custom server logic. Programmers have to use

the environment provided by Simperium. The server side hosting is still provided by Simperium. It is also founded by YCombinator [25] and not open-source.

Simperium also comes with a Cocoa framework for building iOS application. This framework adds feature of caching data for offline use. Interestingly, this feature is not provided for web applications.

7.4 Comparison with Atmosphere

Atmosphere is very similar to Simperium by a few key points: It provides custom server logic, real-time synchronization, Cocoa library and an option for offline usage.

It is still very different from these frameworks in one aspect: It allows building applications that utilize an existing application with its REST API. All of the frameworks mentioned here require a whole new server-side application practically making developers rewrite their server code from scratch. (Or in worse case skip writing the server code.) Atmosphere is also open-source.

Because of this design decision Atmosphere cannot bring some features such as operational transformation for live editing. It would be impossible to implement it without drastically changing server code, which is one of the strong points of Atmosphere: It allows building real-time application with minimal change at the server side.

The overview of features provided by these projects is shown in Table 7–1.

	Platforms	Requirements	Server	Real-time	Offline use	Open-source
Meteor	JavaScript	Meteor framework UI	Provided	Yes	No	Yes
Firebase	JavaScript	None	Provided	Yes	No	No
Simperium	JavaScript, Mac, iOS	None	Provided	With operational transformation	Mac and iOS only	No
Atmosphere	JavaScript, Mac, iOS	None	Any REST API	Yes	Yes	Yes

Table 7 – 1: Comparison of solutions similar to Atmosphere

8 Conclusion

The aim of this work was to describe all aspects of building Atmosphere, a data synchronization platform for web and Mac/iOS applications.

The first chapters started by general analysis of the client applications, their strong and weak points. The result was that there is still a lot of space to improve, specifically in objects caching. Most of the applications require users to wait for network requests to finish, even when it is not needed. It was also concluded that only some of the applications provide concurrent access by exchanging data in real-time. This features should be supported by all applications and Atmosphere allows that.

Once the problem was defined, the thesis continued by analyzing related technologies. There are many new HTML5 features such as WebSockets, or local storage that are utilized by Atmosphere. Since Atmosphere is not only web applications platform, technologies in the area of desktop and mobile applications were analyzed too, specifically the Mac and iOS platforms.

The next part introduced basic ideas behind the design of Atmosphere. Basic design decisions were concluded, such as that Atmosphere should allow working with an existing server application, it should cache objects locally and synchronize them in background by keeping track of changed objects. Also, a high-level layout of components was outlined.

The platform was implemented for two environments, the web (JavaScript) and Mac/iOS (Cocoa). The thesis contains details of these implementations, such as specific data structures and algorithms. Since the two platforms are very different, some platform specifics were described too.

The part of the implementation work was to build example applications. Three applications with different technological background were built. The thesis contains real-world backing for some of the decisions made in the design phase, as well as description of new problems encountered while implementing these applications.

The work was concluded by comparing Atmosphere to other similar products. None of these products existed before the work on Atmosphere started, which shows how fast is the development in the area of SaaS applications.

Atmosphere is not the only project that uses local caching to improve user experience, but differs from others by the ability to use it with existing server and being open-source.

References

- [1] KEENE, C. 2009 *What is Platform as a Service (PaaS)?* [Online, accessed 31.1.2012]. <http://www.keeneview.com/2009/03/what-is-platform-as-service-paas.html>
- [2] *Amazon Elastic Compute Cloud (Amazon EC2.)* [Online, accessed 31.1.2012]. <http://aws.amazon.com/ec2/>
- [3] *Google App Engine* [Online, accessed 31.1.2012]. <http://code.google.com/appengine/>
- [4] *Beyond HTML5: Database APIs and the Road to IndexedDB.* [Online, accessed 31.1.2012]. <http://hacks.mozilla.org/2010/06/beyond-html5-database-apis-and-the-road-to-indexeddb/>
- [5] *Web SQL Database.* [Online, accessed 31.1.2012]. <http://www.w3.org/TR/webdatabase/>
- [6] *Socket.IO: the cross-browser WebSocket for realtime apps.* [Online, accessed 31.1.2012]. <http://socket.io>
- [7] *PhoneGap* [Online, accessed 31.1.2012]. <http://phonegap.com>
- [8] MACCAW, A. 2011 *Asynchronous UIs – the future of web user interfaces.* [Online, accessed 31.1.2012]. http://alexmaccaw.co.uk/posts/async_ui
- [9] WATTERS, B. 2011 *RestKit* [Online, accessed 31.1.2012]. <http://restkit.org/>
- [10] *CoffeeScript* [Online, accessed 1.5.2012] <http://coffeescript.org/>
- [11] MACCAW, A. 2012 *Spine.js* [Online, accessed 1.5.2012] <http://spinejs.com>

- [30] RINIK, V. 2012 *Atmos2* [Online, accessed 1.5.2012] <https://github.com/vojto/atmos2>
- [13] RINIK, V. 2012 *TaskDo* [Online, accessed 1.5.2012] <https://github.com/vojto/taskdo-js>
- [14] *Google Tasks API* [Online, accessed 1.5.2012] <https://developers.google.com/google-apps/tasks/>
- [15] MACCAW, A. 2012 *MacGap* [Online, accessed 1.5.2012] <https://github.com/maccman/macgap>
- [16] *OAuth 2.0* [Online, accessed 1.5.2012] <http://oauth.net/2/>
- [17] FERNANDEZ, O. 2007 *The Rails Way*
- [18] O'DELL, J. 2012 *You'll never believe how LinkedIn built its new iPad app* [Online, accessed 2.5.2012] <http://venturebeat.com/2012/05/02/linkedin-ipad-app-engineering/#s:1-linkedin-ipad>
- [19] *Chromebook* [Online, accessed 1.5.2012] <http://www.google.com/intl/en/chrome/devices/features.html>
- [20] *Meteor* [Online, accessed 1.5.2012] <http://meteor.com/>
- [21] *Meteor Documentation* [Online, accessed 1.5.2012] <http://docs.meteor.com/>
- [22] *Firebase* [Online, accessed 1.5.2012] <http://www.firebase.com/>
- [23] Open Source Initiative *MIT License* [Online, accessed 1.5.2012] <http://www.opensource.org/licenses/mit-license.php>
- [24] 10gen, Inc. *MongoDB* [Online, accessed 1.5.2012] <http://www.mongodb.org/>

-
- [25] GRAHAM, P. *YCombinator* [Online, accessed 1.5.2012] <http://ycombinator.com/>
- [26] Simperium, Inc. *Simperium* [Online, accessed 1.5.2012] <http://simperium.com/>
- [27] SPIEWAK, D. 2010 *Operational Transformation* [Online, accessed 1.5.2012] <http://www.codecommit.com/blog/java/understanding-and-applying-operational-transformation>
- [28] WANG, D., MAH, A., LASSEN, S., 2010 *Google Wave Operational Transformation*
- [29] MACCAW, A. 2011 *JavaScript Web Applications*
- [30] RINIK, V. 2012 *Atmos2, a JavaScript synchronization library* [Online, accessed 1.5.2012] <http://github.com/vojto/atmos2>
- [31] RINIK, V. 2012 *Atmos2, a Cocoa synchronization library* [Online, accessed 1.5.2012] <http://github.com/vojto/atmos2-cocoa>
- [32] AccuraCast Ltd., 2011 *Facebook Mobile Usage Stats* [Online, accessed 1.5.2012] <http://news accuracast.com/social-media-7471/facebook-mobile-usage-stats/s>
- [33] KEITH, J., 2010 *HTML5 For Web Designers*
- [34] CEDERHOLM, D., 2010 *CSS3 For Web Designers*
- [35] RINIK, V., 2012 *Zone* [Online, accessed 1.5.2012] <http://rinik.net/zone/>
- [36] BUYYA, R., 2011 *Cloud Computing: Principles and Paradigms*
- [37] TREBITOWSKI, B., 2010 *iPhone and iPad in action*
-

- [38] RAGGET, D., 1998 *A history of HTML* [Online, accessed 1.5.2012] <http://www.w3.org/People/Raggett/book4/ch02.html>
- [39] GOODMAN, D., 2010 *JavaScript Bible*
- [40] Typekit *Typekit* [Online, accessed 1.5.2012] <https://typekit.com/>
- [41] Google, Inc. *Google Webfonts* [Online, accessed 1.5.2012] <http://www.google.com/webfonts>
- [42] HILLEGASS, A., 2008 *Cocoa Programming for Mac OS X*
- [43] HUGHES-CROUCHER, T., 2012 *Node: Up and Running: Scalable Server-Side Code with JavaScript*
- [44] HA, A., 2012 *Firebase Raises \$1.1M For Real-Time App Infrastructure* [Online, accessed 23.5.2012] <http://techcrunch.com/2012/05/22/firebase-funding/>