Structural locality: the router changes the update mask, not the model interface

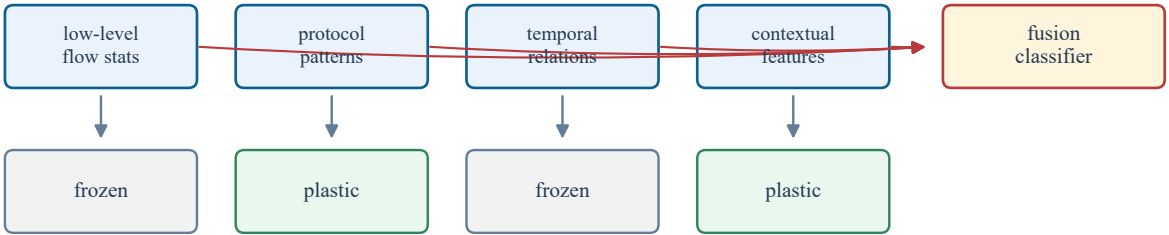

Illustrative mask: active modules are selected by evidence; inactive modules remain byte-identical.