
SAE A and what it connects to

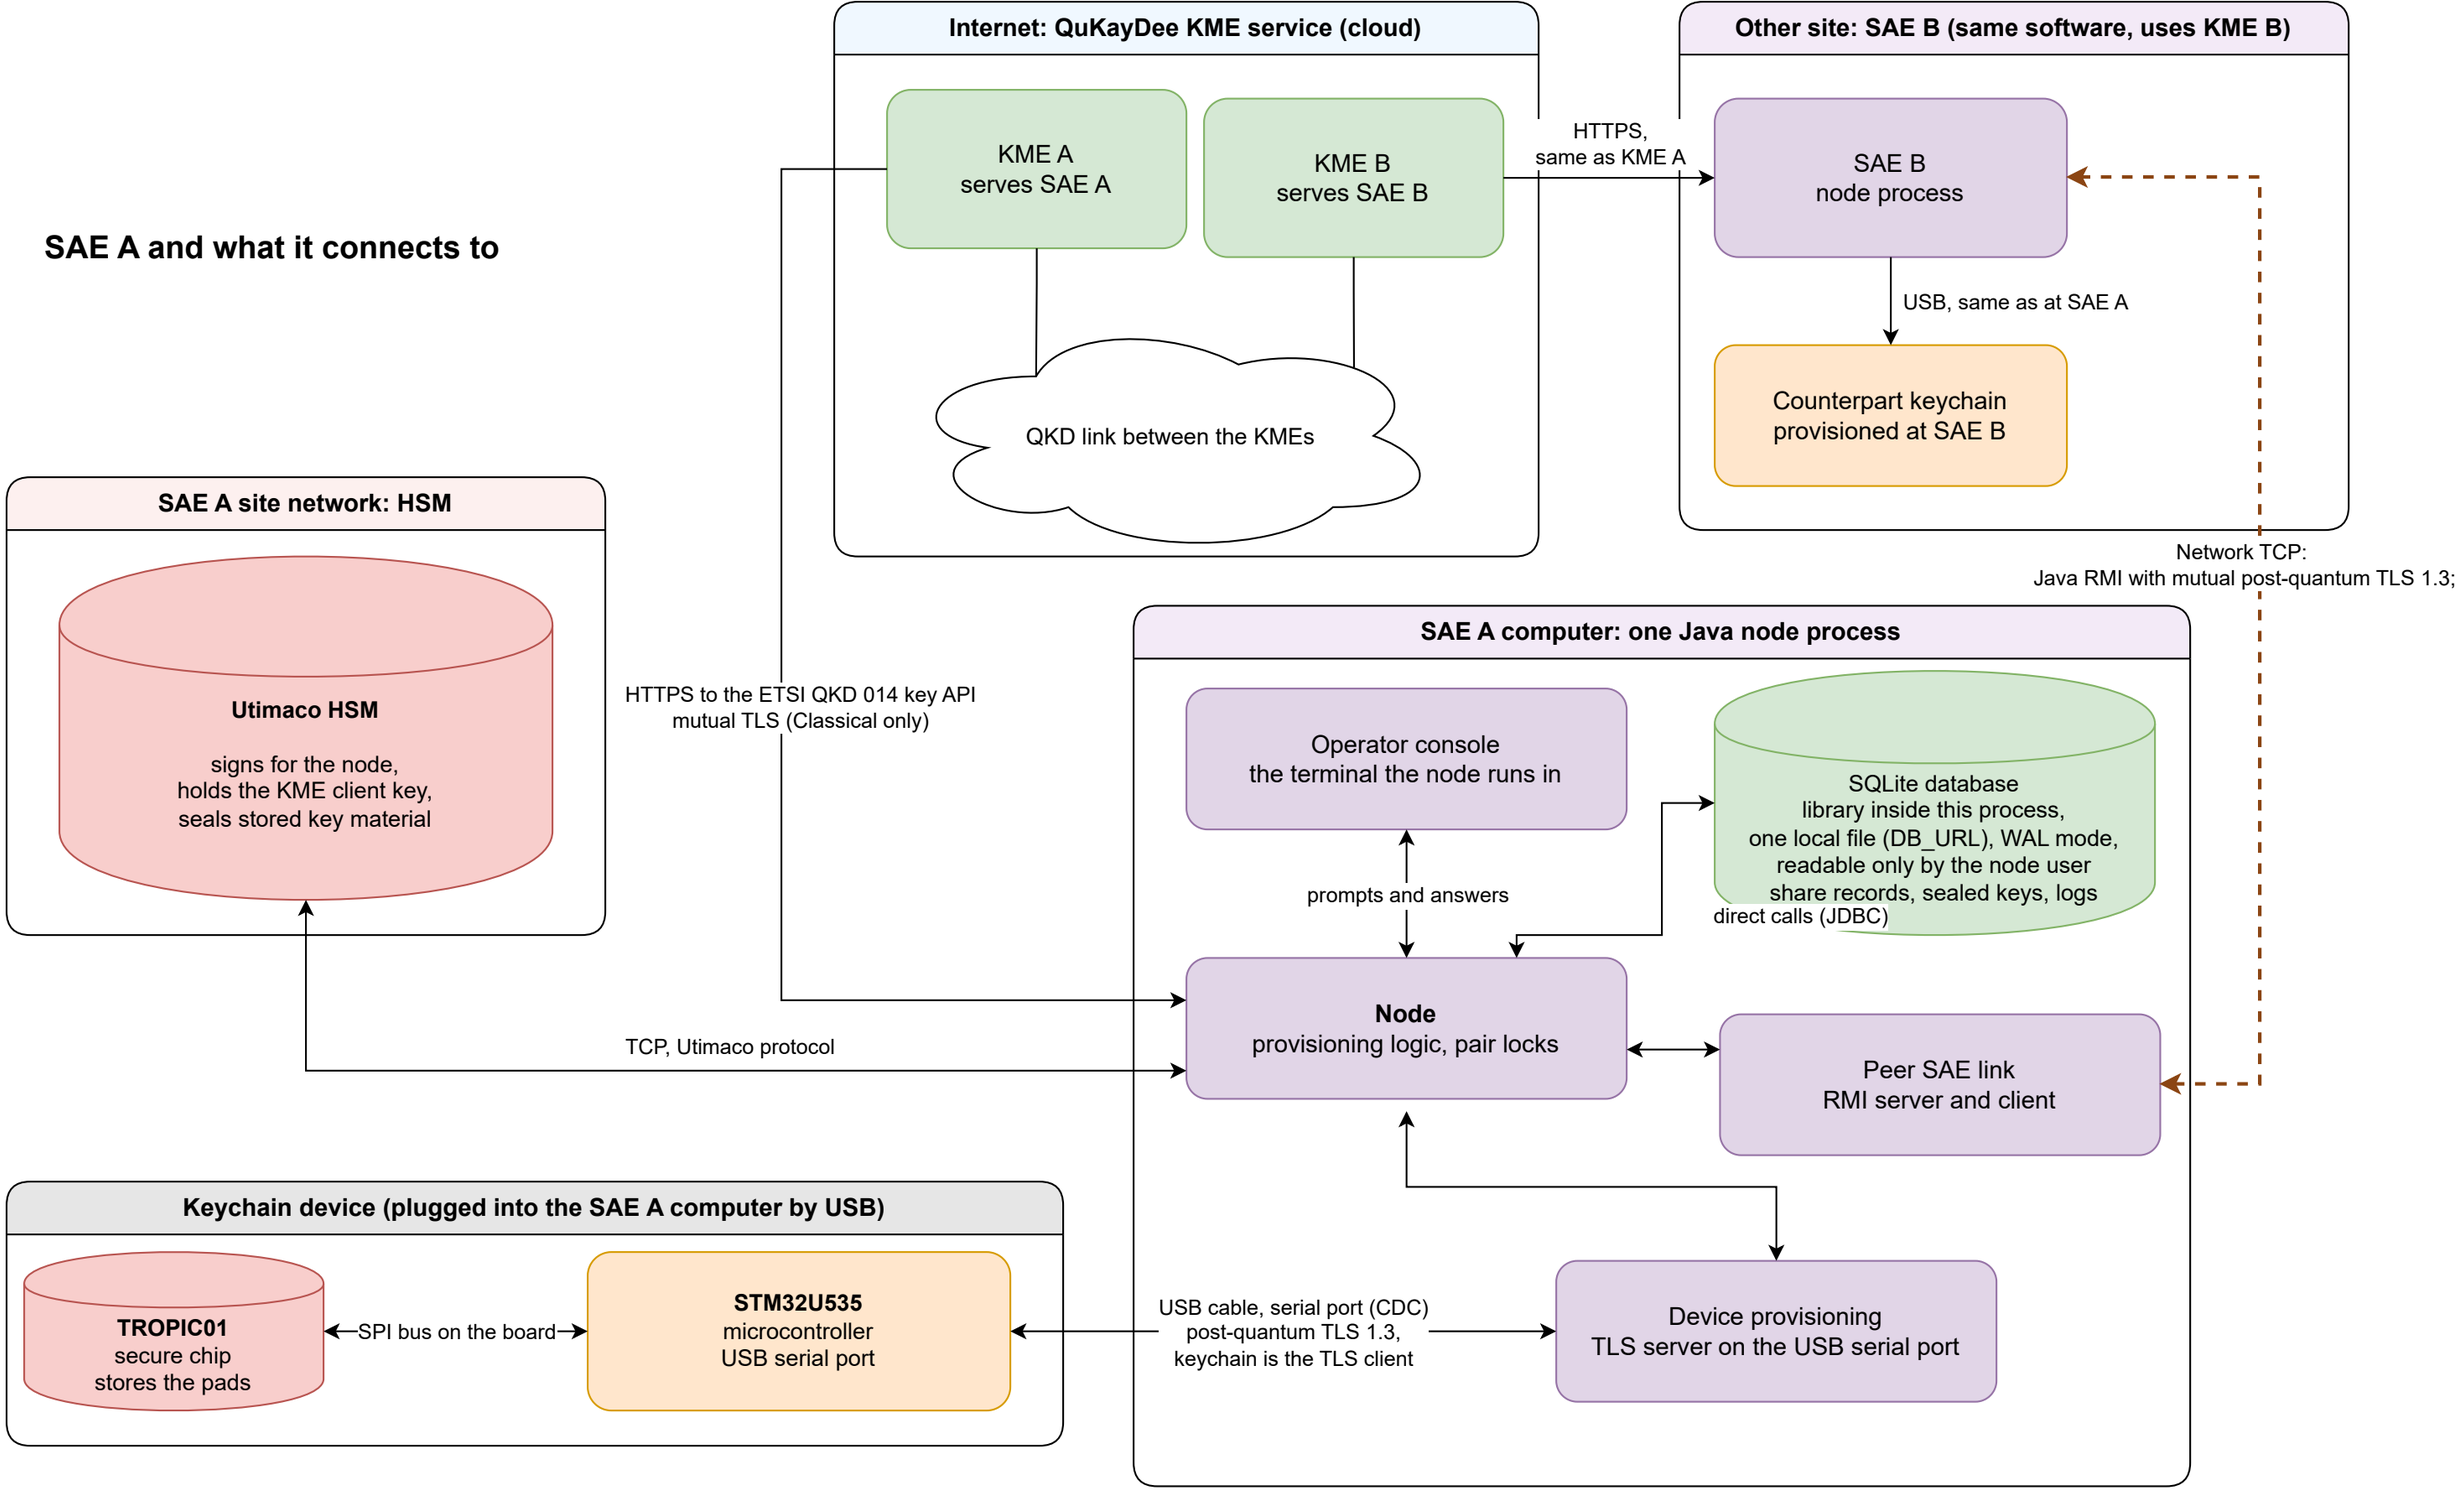

How to read: boxes are grouped by where each part runs. Everything inside "SAE A computer" is one process; the database is a file. Links to the KME, other SAEs and to the keychain all use mutual TLS;
TLS to SAEs and Keychain uses PQC while TLS to KME uses only Classical algorithms.
SAE B is set up the same way as SAE A.