



SKILL WEEK-6

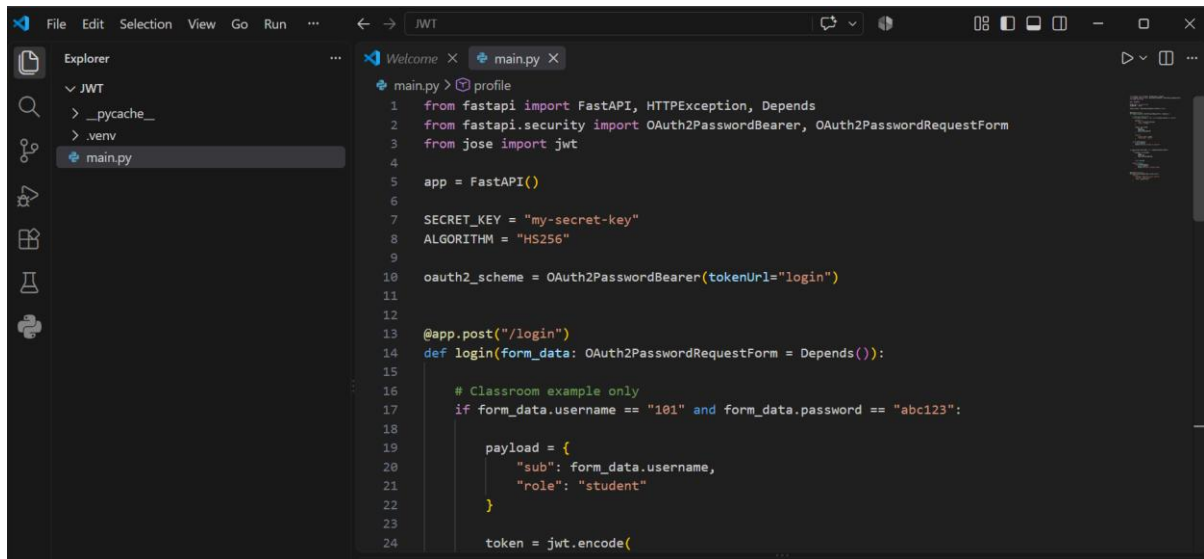


The screenshot shows the VS Code editor with the file explorer on the left displaying a project structure with folders `__pycache__` and `.venv`, and a file `main.py`. The `main.py` file is open in the editor, showing the following code:

```
1 from fastapi import FastAPI, HTTPException, Depends
2 from fastapi.security import OAuth2PasswordBearer, OAuth2PasswordRequestForm
3 from jose import jwt
4
5 app = FastAPI()
6
7 SECRET_KEY = "my-secret-key"
8 ALGORITHM = "HS256"
9
10 oauth2_scheme = OAuth2PasswordBearer(tokenUrl="login")
11
12
13 @app.post("/login")
14 def login(form_data: OAuth2PasswordRequestForm = Depends()):
15
16     # Classroom example only
17     if form_data.username == "101" and form_data.password == "abc123":
18
19         payload = {
20             "sub": form_data.username,
21             "role": "student"
22         }
23
24         token = jwt.encode(
```

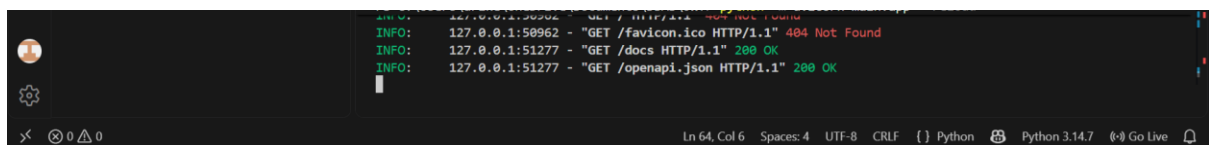

The screenshot shows the VS Code terminal with the following output:

```
INFO: 127.0.0.1:50962 - "GET / HTTP/1.1" 404 Not Found
INFO: 127.0.0.1:51277 - "GET /favicon.ico HTTP/1.1" 404 Not Found
INFO: 127.0.0.1:51277 - "GET /docs HTTP/1.1" 200 OK
INFO: 127.0.0.1:51277 - "GET /openapi.json HTTP/1.1" 200 OK
```

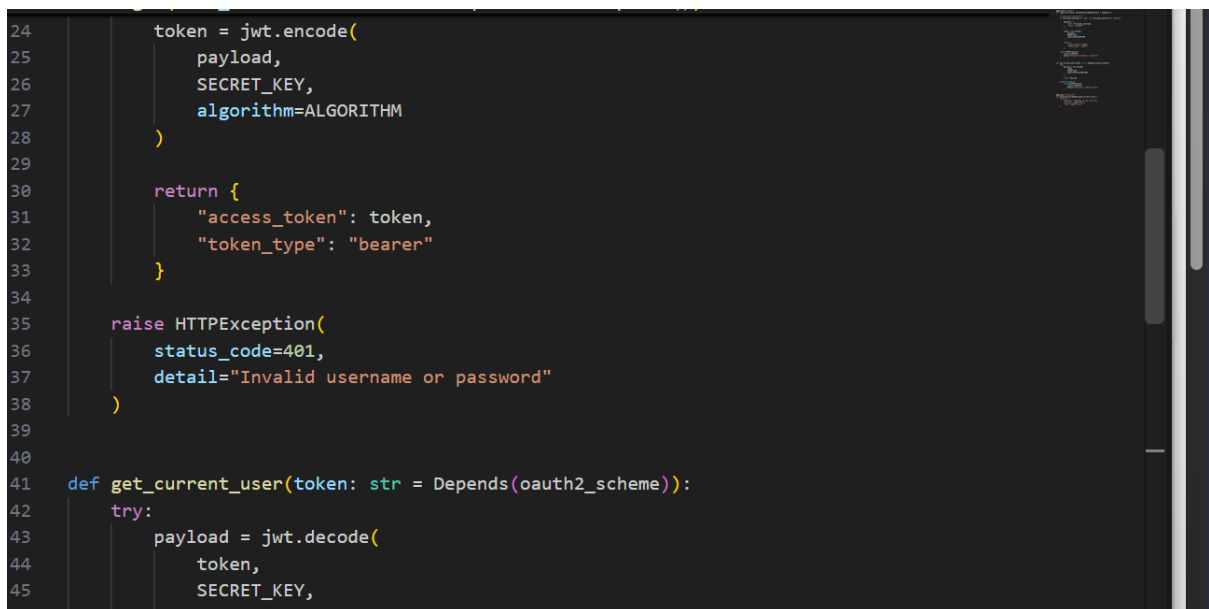

The screenshot shows the continuation of the `main.py` file in the VS Code editor, with line numbers 24 through 46 visible. The code continues from the previous snippet:

```
24         token = jwt.encode(
25             payload,
26             SECRET_KEY,
27             algorithm=ALGORITHM
28         )
29
30         return {
31             "access_token": token,
32             "token_type": "bearer"
33         }
34
35     raise HTTPException(
36         status_code=401,
37         detail="Invalid username or password"
38     )
39
40
41 def get_current_user(token: str = Depends(oauth2_scheme)):
42     try:
43         payload = jwt.decode(
44             token,
45             SECRET_KEY,
46             algorithm=ALGORITHM
```

```

main.py > profile
41 def get_current_user(token: str = Depends(oauth2_scheme)):
42     try:
43         payload = jwt.decode(
44             token,
45             SECRET_KEY,
46             algorithms=[ALGORITHM]
47         )
48     except Exception:
49         raise HTTPException(
50             status_code=401,
51             detail="Invalid or expired token"
52         )
53     return payload
54
55
56
57

```

```

57
58 @app.get("/profile")
59 def profile(user=Depends(get_current_user)):
60     return {
61         "message": "Welcome to your profile",
62         "user_id": user["sub"],
63         "role": user["role"]
64     }

```

POST/LOGIN

Execute

Clear

Responses

Curl

```
curl -X 'POST' \
  'http://127.0.0.1:8000/login' \
  -H 'accept: application/json' \
  -H 'Content-type: application/x-www-form-urlencoded' \
  -d 'grant_type=password&username=101&password=abc123&scope=&client_id=string&client_secret=*****'
```

Request URL

```
http://127.0.0.1:8000/login
```

Server response


Code	Details
200	Response body <pre>{ "access_token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJzdWIiOiIxMDE1CjYyZjI1Ijoic3R1ZGVudCJ9.NHqKdLPB1Q5BFQ1iKmdoWVlOjBlLUMdIm4ARQ6MK1zI", "token_type": "bearer" }</pre> Download

Response headers


```
content-length: 162
content-type: application/json
date: Wed, 16 Sep 2026 09:40:52 GMT
server: uvicorn
```

Responses

Code	Description	Links
------	-------------	-------

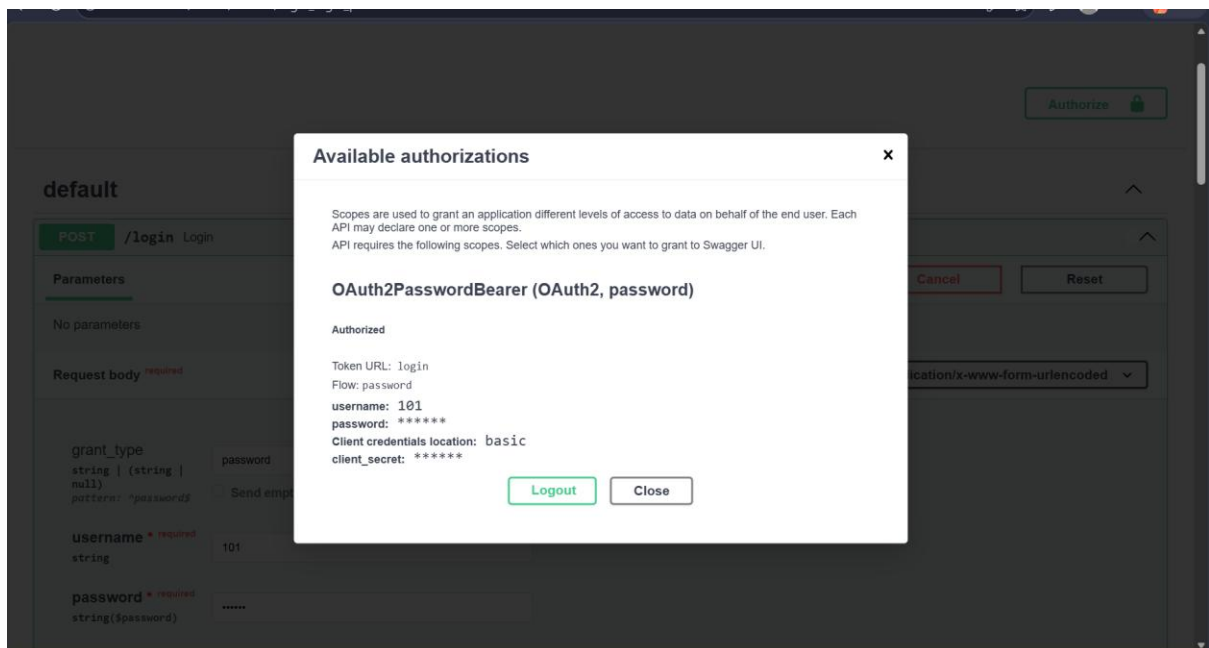

Or maybe:

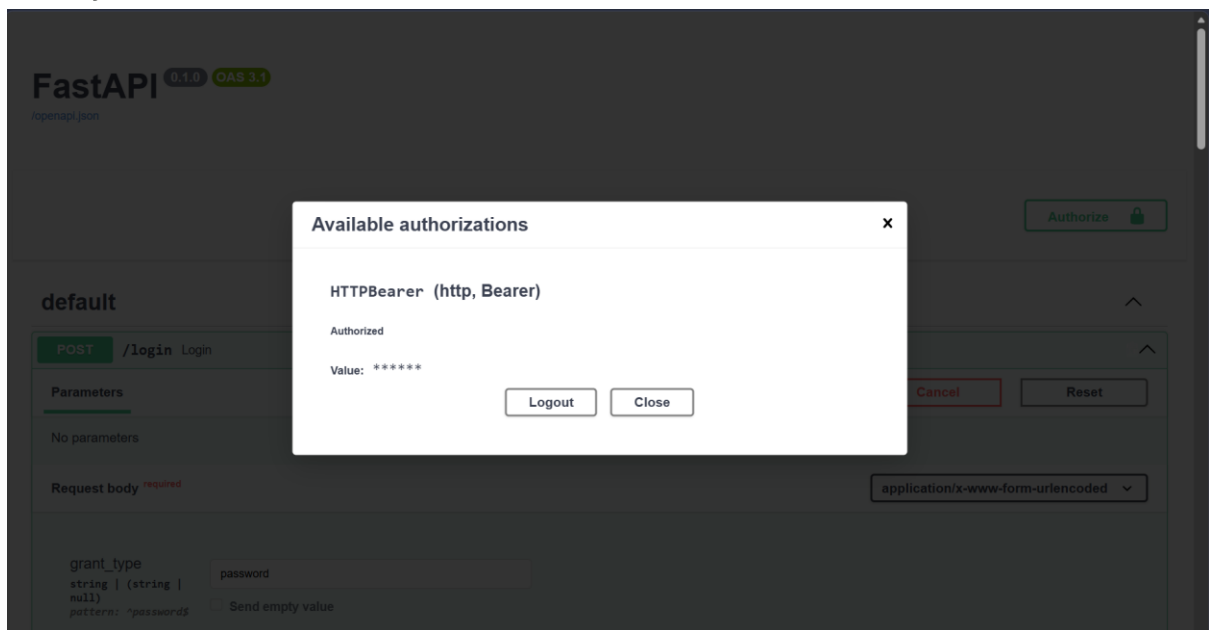

GET

/profile Profile

Parameters

No parameters

ExecuteClear

Responses

Curl

```
curl -X 'GET' \
'http://127.0.0.1:8000/profile' \
-H 'accept: application/json' \
-H 'Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJzdWIiOiIxMDE1LTJyb2x1IiwiaWF0IjoiY3RlZGVudCJ9.NHqwkDLPB1QSBFQ11KmdowVLOjblUMdHm4arQGMk1zi'
```

Request URL

```
http://127.0.0.1:8000/profile
```

Server response

Code	Details
200	Response body<pre>{ "message": "Welcome to your profile", "user_id": "101", "role": "student" }</pre>