

NOTES (UNLESS OTHERWISE SPECIFIED):

1. MATERIAL SPECIFICATIONS:

1. MATERIAL: 5052 - H32, ALUMINUM

2. THICKNESS: 2.0 mm [0.080"]
2. COSMETIC SPECIFICATIONS:

1. FINISH: POWDER COATING, THICKNESS 0.0025"

2. COLOR: SINBAD PURPLE (PRIMATIC POWDER PN:PSS-1676)
3. MECHANICAL SPECIFICATIONS:

1. BREAK AND DEBURR ALL SHARP CORNERS AND EDGES.

2. INSTALL ANY SELF CLINCHING FASTENERS PER MANUFACTURES RECOMMENDATIONS.
4. GENERAL SPECIFICATIONS:





1. THIS IS A PARTIALLY DIMENSIONED DRAWING. NON-EXPLICIT DIMENSIONS ARE REFERENCED FROM 3D MODEL.

2. ALL DIMENSIONS ARE RELATED TO DATUM A (PRIMARY), DATUM B (SECONDARY), DATUM C (TERTIARY).

3. INTERPRET DRAWING PER ASME Y14.5.


4. GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED:

DIMENSION (mm)	+/-
FEATURE TO FEATURE:	0.1
EDGE TO HOLE:	0.25
EDGE TO EDGE:	0.25
HOLE / FEATURE SIZE:	0.05 / 0.08
FOLD TO HOLE:	0.4
FOLD TO EDGE:	0.25
FOLD TO FOLD:	0.5

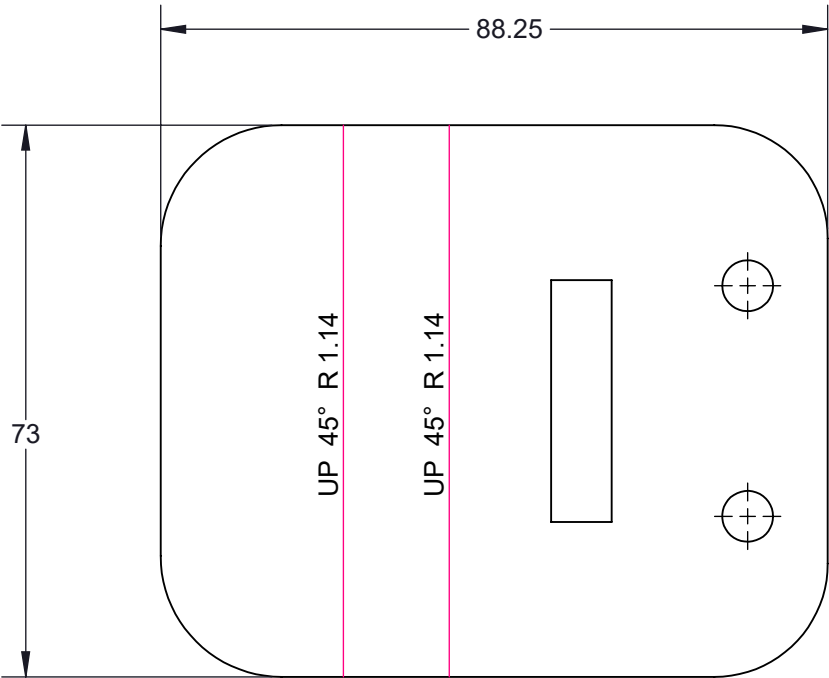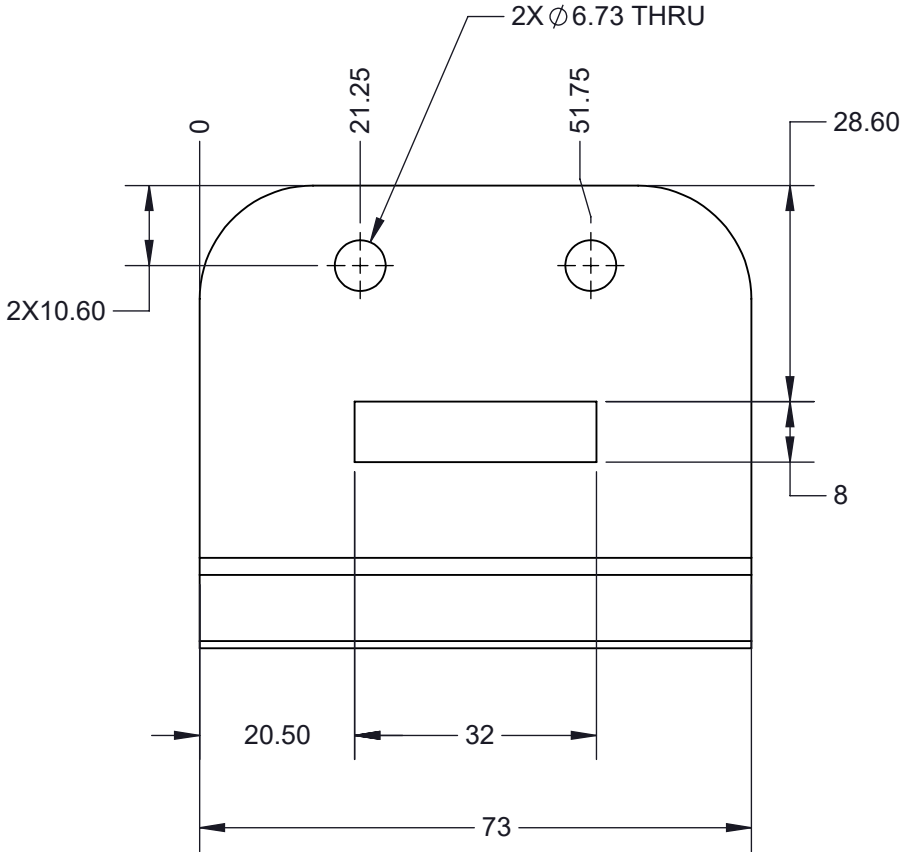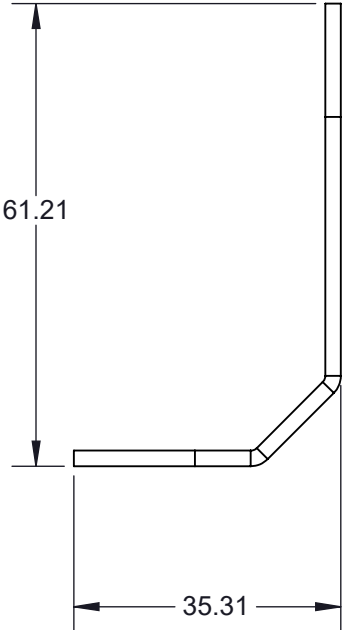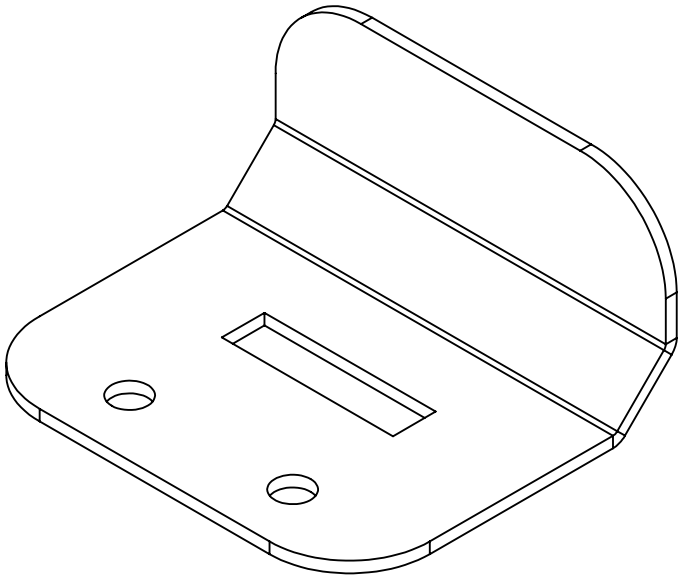

FLAT PATTERN

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
DO NOT SCALE DRAWING
TOLERANCES: SEE NOTES
THIRD ANGLE PROJECTION



NOVO CONFIDENTIAL
DO NOT DISTRIBUTE

DRAWN
A. UBACH

ENG
A. UBACH

CAD FILE
VX~02-10050

NOVOENGINEERING®
San Diego, CA | Minneapolis, MN | novoengineering.com

DESCRIPTION
TOE KICK OUTER

SIZE
B

DWG. NO.
VX~02-10050

REV.
X01

SCALE
1:1

SHEET
1 OF 1