


Ballot grid with 100 rows and 100 columns of circles. Each circle contains a number from 1 to 100, representing a unique combination of row and column indices (e.g., Row 1, Column 1 is 0101, Row 100, Column 100 is 100100).





Ballot grid with 100 rows and 100 columns of bubbles for marking answers.

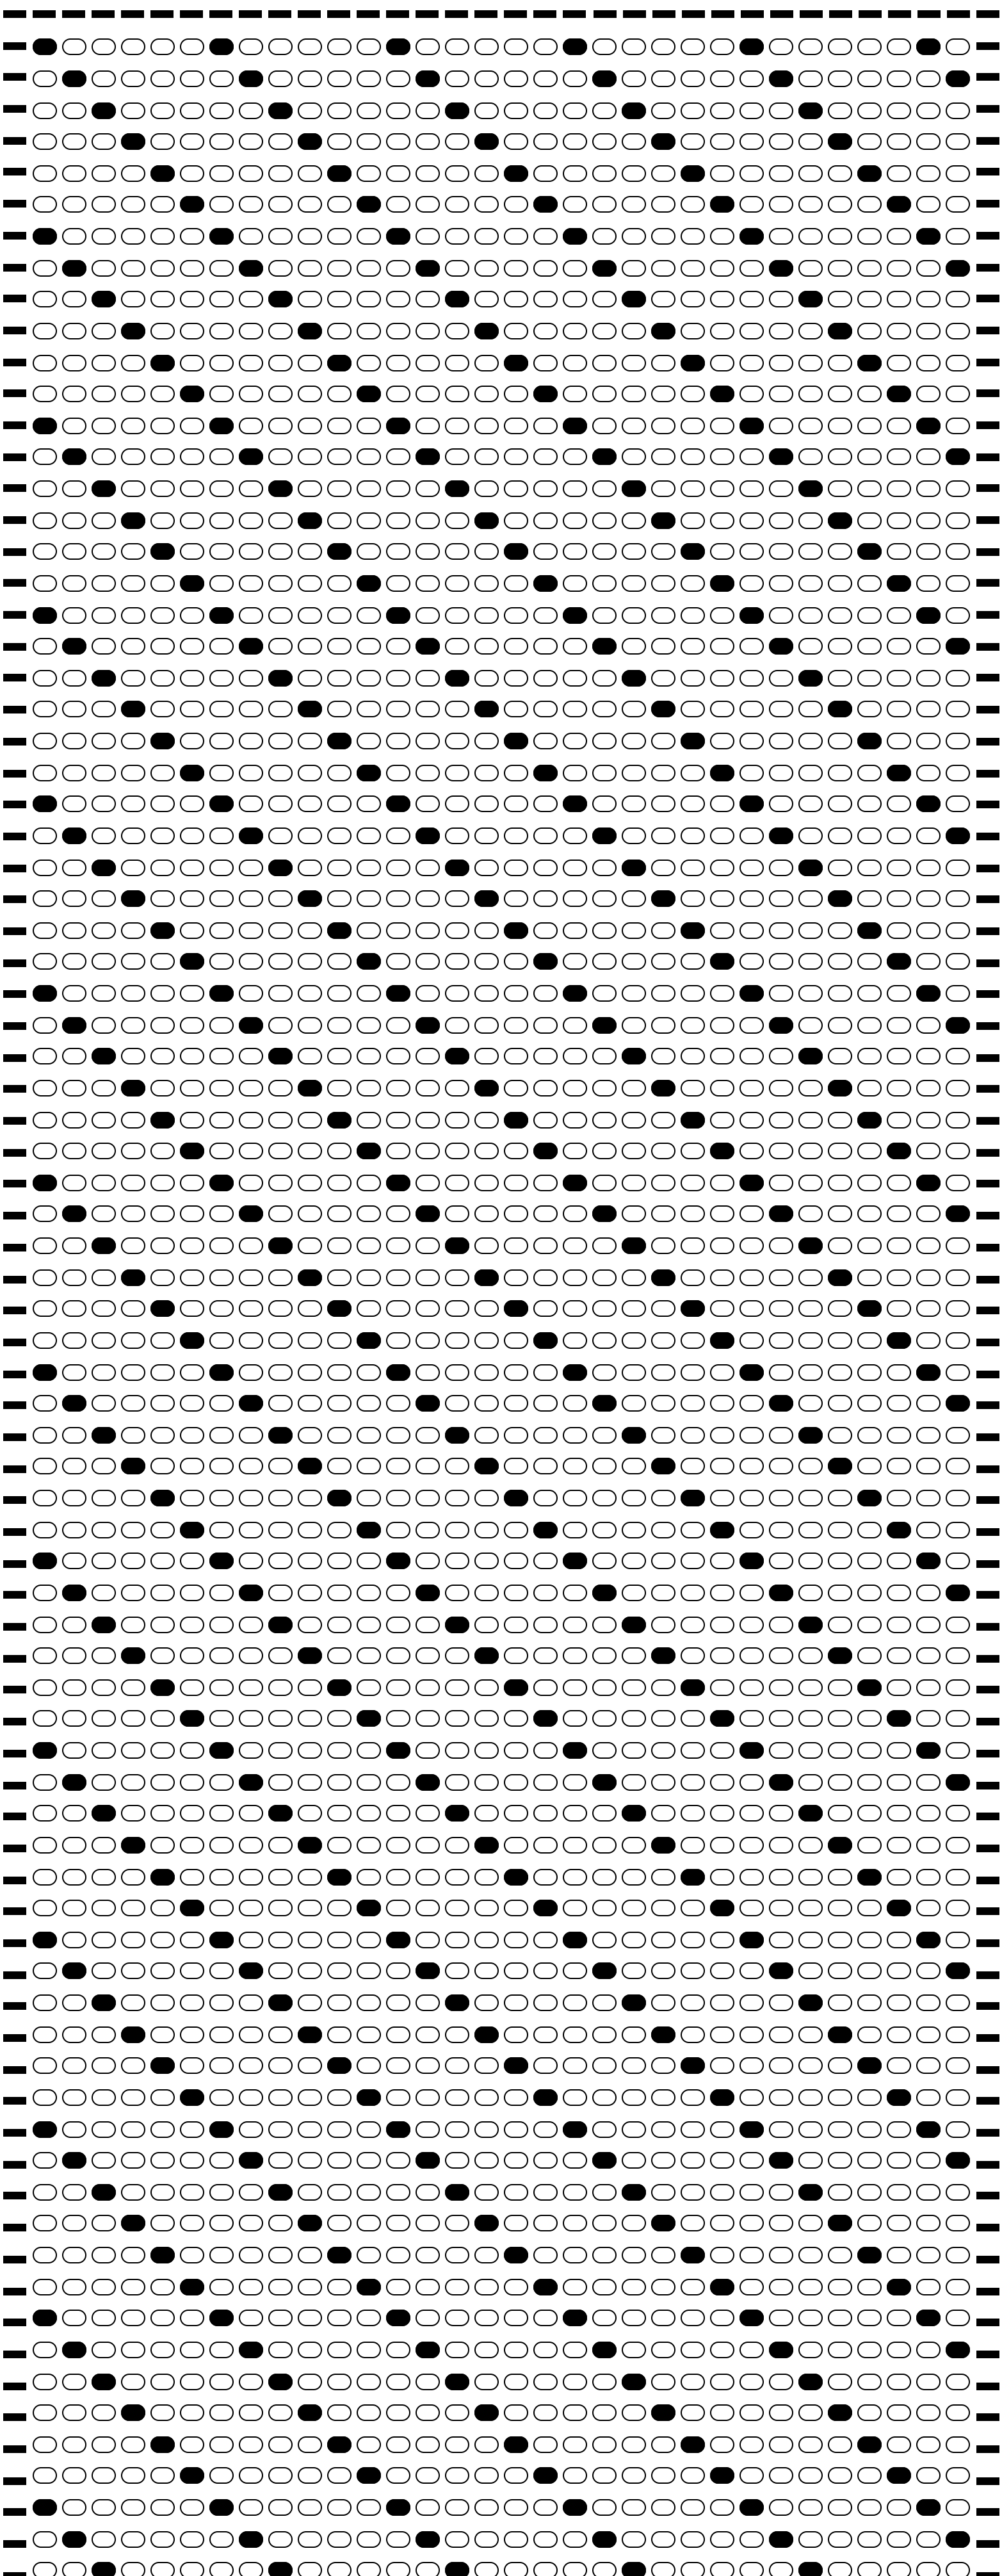






Ballot grid with 100 rows and 100 columns of circles. Each circle contains a number from 1 to 100, representing a unique combination of row and column indices (e.g., 0101, 0201, ..., 1000).






Ballot grid with 100 rows and 100 columns of circles. Each row contains a sequence of filled and empty circles, representing a binary code. The pattern of filled circles is consistent across all rows, indicating a specific data set or election result.



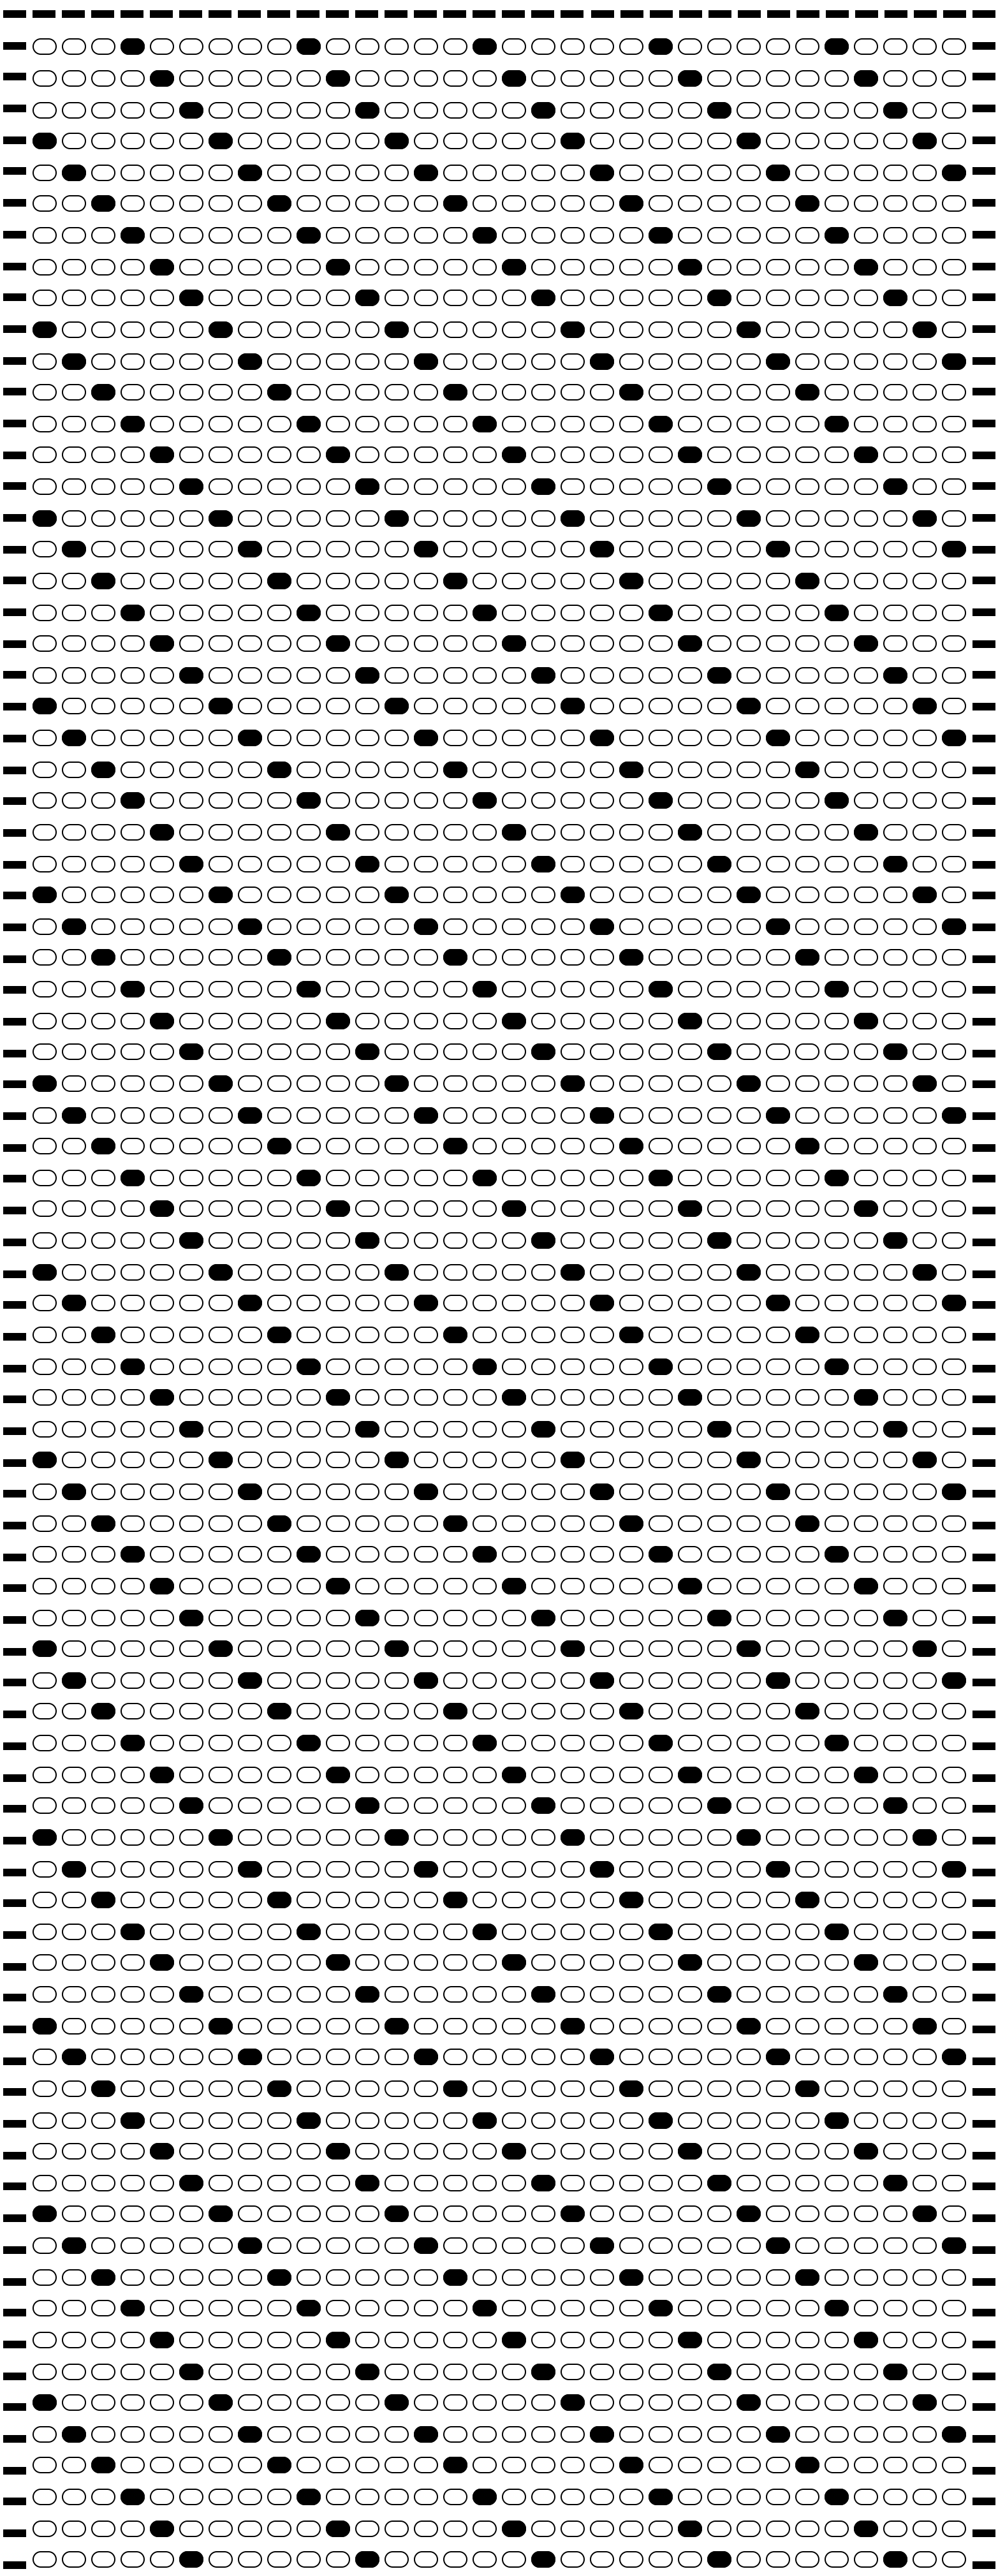

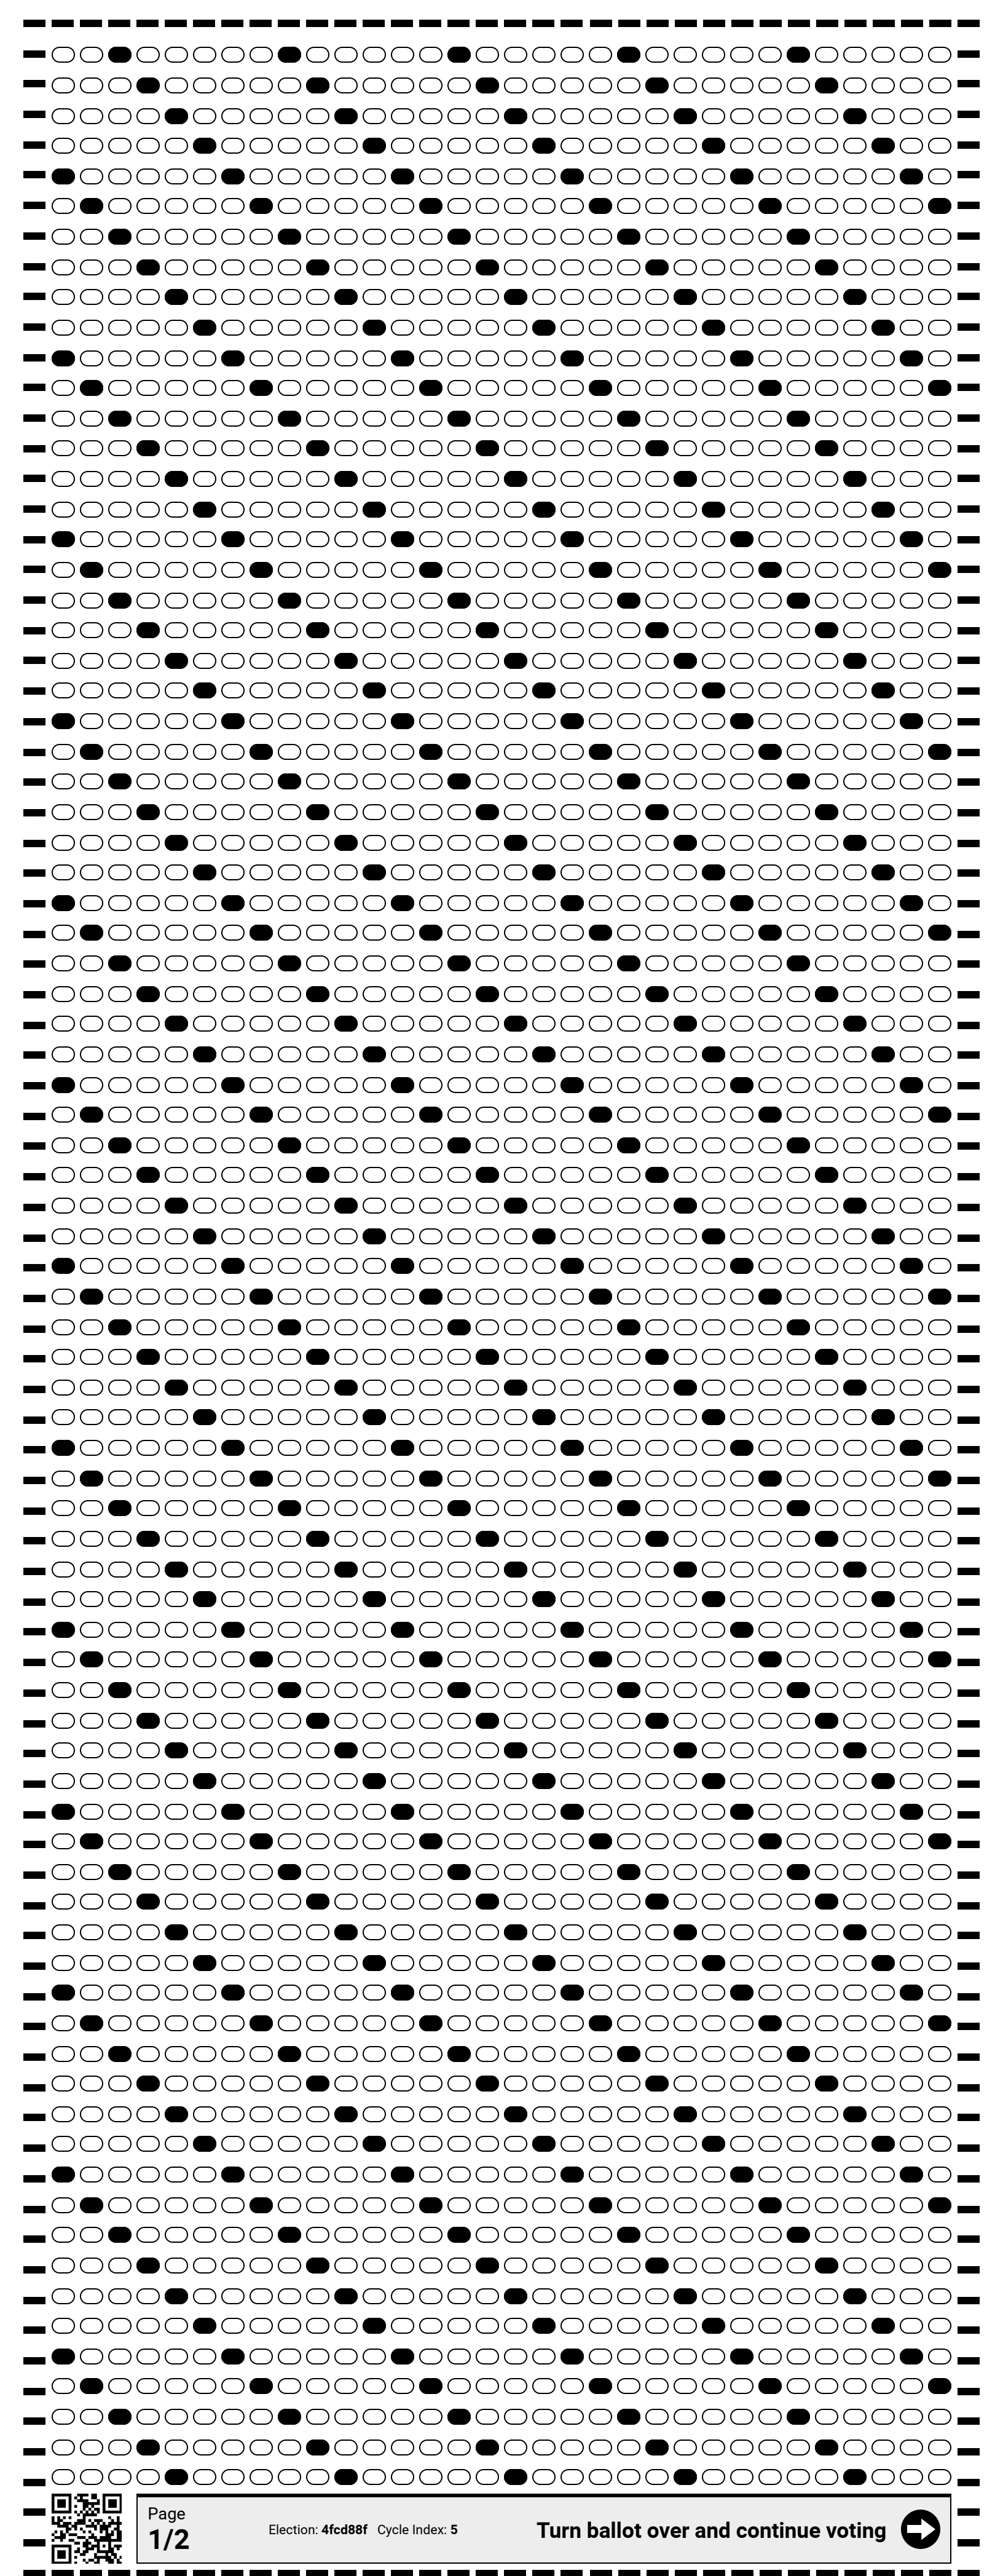





Ballot grid with 100 rows and 100 columns of circles. Each circle contains a number from 1 to 100, representing a unique combination of row and column indices (e.g., 0101, 0201, ..., 1000).



