


# DAY 4 - TASK 4

## Configure port to Jenkins file

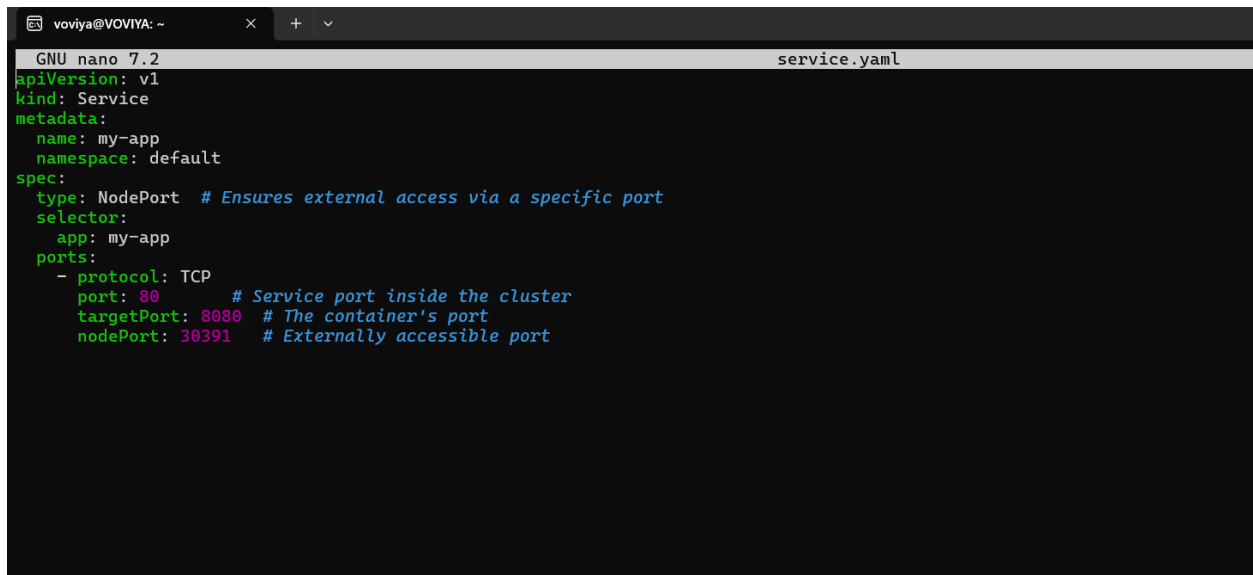

The image shows a terminal window with a nano editor open, editing a file named `service.yaml`. The terminal title bar indicates the user is `voviya@VOVIYA` in the `~` directory. The editor shows the following YAML configuration for a Kubernetes Service:

```
apiVersion: v1
kind: Service
metadata:
  name: my-app
  namespace: default
spec:
  type: NodePort # Ensures external access via a specific port
  selector:
    app: my-app
  ports:
    - protocol: TCP
      port: 80 # Service port inside the cluster
      targetPort: 8080 # The container's port
      nodePort: 30391 # Externally accessible port
```