


(a) Cue-driven memory activation

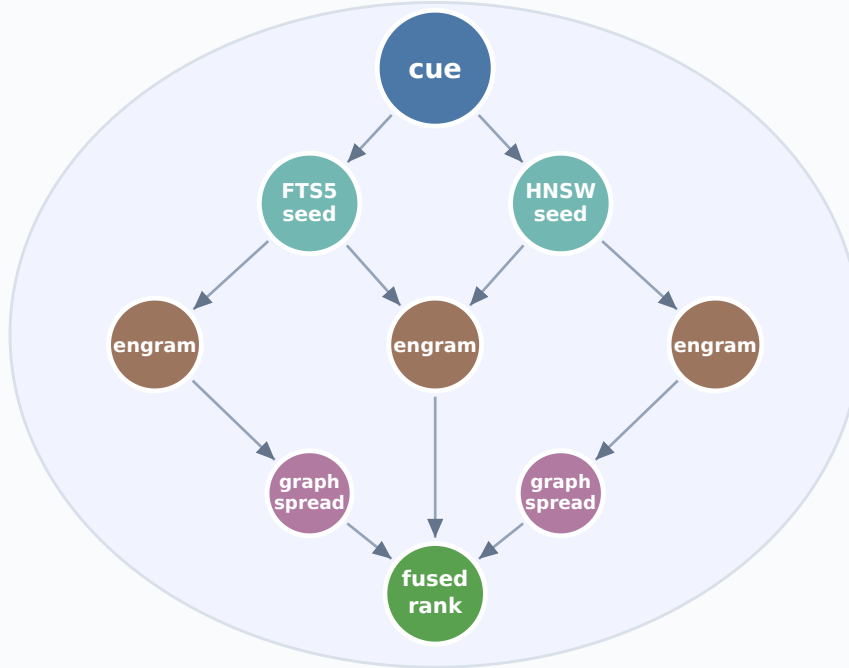

activate(cue)

● write path · experience() ● read path · activate(cue)

(b) Agent brain directory

```
manifest.json  
hippocampus/      engram segments  
graph/            synapse edges  
recall_index.sqlite  
    FTS5 + vector blobs  
*.wal              → checkpoint()
```

↓ stores engram uni

(c) Engram (logical unit)

```
content  
·  
context  
·  
outcome  
provenance      kind, verified  
rag             doc_id, chunk_id  
semantic_vector optional embedding  
graph wiring    co-activation edges
```

↓ upsert to sidecar

(d) Recall sidecar

FTS5 lexical seeds + HNSW semantic seeds

(e) Write: experience()

1. separation gate
2. encode episode
3. wire graph synapses
4. upsert recall sidecar

(f) Read: activate(cue)

1. lexical + semantic seed
2. graph spread (0–4 hops)
3. fuse FTS5 + vector scores
4. provenance boost → rank

(g) Third data model

Relational

- Typed rows
- Predicate match
- No graph

Vector DB

- ANN top-k
- Embedding in
- No provenanc