



MALAD KANDIVALI EDUCATION SOCIETY'S

**NAGINDAS KHANDWALA COLLEGE OF COMMERCE, ARTS &
MANAGEMENT STUDIES & SHANTABEN NAGINDAS KHANDWALA**

COLLEGE OF SCIENCE

MALAD [W], MUMBAI – 64

AUTONOMOUS INSTITUTION

(Affiliated To University Of Mumbai)

Reaccredited 'A' Grade by NAAC | ISO 9001:2015 Certified

CERTIFICATE

Name: MrVRAJ DALAL

Roll No: 370

Programme: BSc IT

Semester: III

This is certified to be a bonafide record of practical works done by the above student in the college laboratory for the course **Data Structures (Course Code: 2032UISPR)** for the partial fulfilment of Third Semester of BSc IT during the academic year 2020-21.

The journal work is the original study work that has been duly approved in the year 2020-21 by the undersigned.

External Examiner

Mr. Gangashankar Singh
(Subject-In-Charge)

Date of Examination:

(College Stamp)

Subject: Data Structures

INDEX

Sr No	Date	Topic	Sign
1	04/09/2020	Implement the following for Array: a) Write a program to store the elements in 1-D array and provide an option to perform the operations like searching, sorting, merging, reversing the elements. b) Write a program to perform the Matrix addition, Multiplication and Transpose Operation.	
2	11/09/2020	Implement Linked List. Include options for insertion, deletion and search of a number, reverse the list and concatenate two linked lists.	
3	18/09/2020	Implement the following for Stack: a) Perform Stack operations using Array implementation. b. b) Implement Tower of Hanoi. c) WAP to scan a polynomial using linked list and add two polynomials. d) WAP to calculate factorial and to compute the factors of a given no. (i) using recursion, (ii) using iteration	
4	25/09/2020	Perform Queues operations using Circular Array implementation.	
5	01/10/2020	Write a program to search an element from a list. Give user the option to perform Linear or Binary search.	
6	09/10/2020	WAP to sort a list of elements. Give user the option to perform sorting using Insertion sort, Bubble sort or Selection sort.	
7	16/10/2020	Implement the following for Hashing: a) Write a program to implement the collision technique. b) Write a program to implement the concept of linear probing.	
8	23/10/2020	Write a program for inorder, postorder and preorder traversal of tree.	

Practical 1(a)

Aim: Implement the following for Array:

- a) Write a program to store the elements in 1-D array and provide an option to perform the operations like searching, sorting, merging, reversing the elements.


Theory:

Storing Data in Arrays. Assigning values to an element in an array is similar to assigning values to scalar variables. Simply reference an individual element of an array using the array name and the index inside parentheses, then use the assignment operator (=) followed by a value.

Following are the basic operations supported by an array.

- Traverse – print all the array elements one by one.
- Insertion – Adds an element at the given index.
- Deletion – Deletes an element at the given index.
- Search – Searches an element using the given index or by the value

Code and Output:

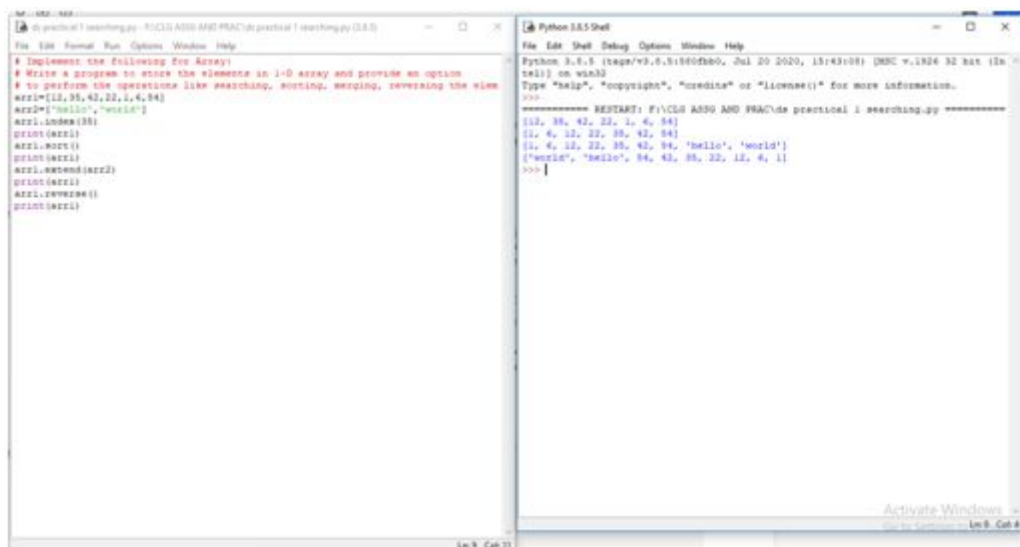

```
# Implement the following for Array!
# Write a program to store the elements in 1-D array and provide an option
# to perform the operations like searching, sorting, merging, reversing the elem
arr=[12,38,42,22,1,4,54]
arr2=['hello','world']
arr1.append(88)
print(arr1)
arr1.sort()
print(arr1)
arr1.extend(arr2)
print(arr1)
arr1.reverse()
print(arr1)
```

```
Python 3.8.5 Shell
Python 3.8.5 (tags/v3.8.5:3b60db0, Jul 20 2020, 15:43:08) [AMD64] on win32
Type "help", "copyright", "credits() or "license()" for more information.
>>>
===== RESTART: F:\CDS ADD AND PRAC\de practical 1 searching.py =====
[[12, 38, 42, 22, 1, 4, 54]]
[[12, 38, 42, 22, 1, 4, 54]]
[[12, 38, 42, 22, 1, 4, 54, 'hello', 'world']]
[54, 'world', 'hello', 88, 42, 38, 22, 12, 4, 1]
```

Practical 1(b)


Aim: Implement the following for Array:

Write a program to perform the Matrix addition, Multiplication and Transpose Operation.

Theory:

- add() – add elements of two matrices.
- subtract() – subtract elements of two matrices.
- divide() – divide elements of two matrices.
- multiply() – multiply elements of two matrices.
- dot() – It performs matrix multiplication, does not element wise multiplication.
- sqrt() – square root of each element of matrix.
- sum(x,axis) – add to all the elements in matrix. Second argument is optional, it is used when we want to compute the column sum if axis is 0 and row sum if axis is 1.
- “T” – It performs transpose of the specified matrix.

Code and Output:

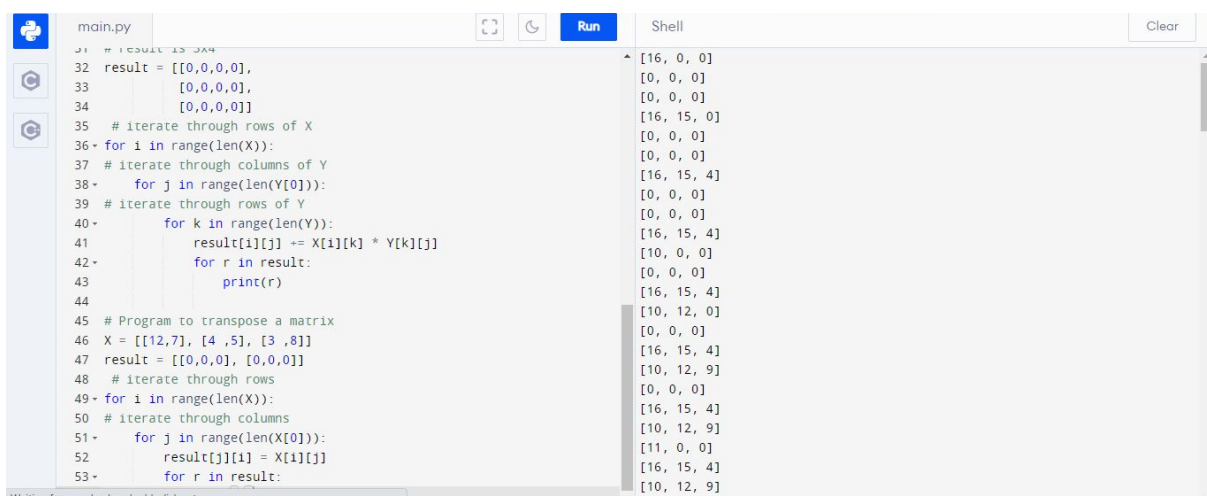

```
main.py
31 # RESULT IS 3*4
32 result = [[0,0,0,0],
33           [0,0,0,0],
34           [0,0,0,0]]
35 # Iterate through rows of X
36 for i in range(len(X)):
37     # Iterate through columns of Y
38     for j in range(len(Y[0])):
39         # Iterate through rows of Y
40         for k in range(len(Y)):
41             result[i][j] += X[i][k] * Y[k][j]
42         for r in result:
43             print(r)
44
45 # Program to transpose a matrix
46 X = [[12,7], [4 ,5], [3 ,8]]
47 result = [[0,0,0], [0,0,0]]
48 # Iterate through rows
49 for i in range(len(X)):
50     # Iterate through columns
51     for j in range(len(X[0])):
52         result[j][i] = X[i][j]
53     for r in result:
```

```
Shell
[16, 0, 0]
[0, 0, 0]
[0, 0, 0]
[16, 15, 0]
[0, 0, 0]
[0, 0, 0]
[16, 15, 4]
[0, 0, 0]
[0, 0, 0]
[0, 0, 0]
[16, 15, 4]
[10, 0, 0]
[0, 0, 0]
[16, 15, 4]
[10, 12, 0]
[0, 0, 0]
[16, 15, 4]
[10, 12, 9]
[0, 0, 0]
[16, 15, 4]
[10, 12, 9]
[11, 0, 0]
[16, 15, 4]
[10, 12, 9]
```

Practical 2

Aim: Implement Linked List. Include options for insertion, deletion and search of a number, reverse the list and concatenate two linked lists.

Theory:

A linked list is a sequence of data elements, which are connected together via links. Each data element contains a connection to another data element in form of a pointer. Python does not have linked lists in its standard library. We implement the concept of linked lists using the concept of nodes as discussed in the previous chapter. We have already seen how we create a node class and how to traverse the elements of a node. In this chapter we are going to study the types of linked lists known as singly linked lists. In this type of data structure there is only one link between any two data elements. We create such a list and create additional methods to insert, update and remove elements from the list.

- Insertion in a Linked list: Inserting element in the linked list involves reassigning the pointers from the existing nodes to the newly inserted node. Depending on whether the new data element is getting inserted at the beginning or at the middle or at the end of the linked list.
- Deleting an Item form a Linked List: We can remove an existing node using the key for that node. In the below program we locate the previous node of the node which is to be deleted. Then point the next pointer of this node to the next node of the node to be deleted.
- Searching in linked list: Searching is performed in order to find the location of a particular element in the list. Searching any element in the list needs traversing through the list and make the comparison of every element of the list with the specified element. If the element is matched with any of the list element then the location of the element is returned from the function.
- Reversing a Linked list: To reverse a Linked List recursively we need to divide the Linked List into two parts: head and remaining. Head points to the first element initially. Remaining points to the next element from the head. We traverse the Linked List recursively until the second last element.

- Concatenating Linked lists: Concatenate the two lists by traversing the first list until we reach it's a tail node and then point the next of the tail node to the head node of the second list. Store this concatenated list in the first list

Code and Output:



```
main.py
1 class Node:
2
3 def __init__(self, element, next = None):
4     self.element = element
5     self.next = next
6     self.previous = None
7 def display(self):
8     print(self.element)
9
10 class LinkedList:
11
12 def __init__(self):
13     self.head = None
14     self.size = 0
15
16
17
18 def _len_(self):
19     return self.size
20
21 def get_head(self):
22     return self.head
23
```

```

element 8
element 7
element 6
element 5
element 4
element 3
element 2
element 1
Searching at 0 and value is element 1
Searching at 1 and value is element 2
Searching at 2 and value is element 3
Searching at 3 and value is element 4
Searching at 4 and value is element 5
Searching at 5 and value is element 6
Found value at 5 location
>

```

Waiting for googleads.g.doubleclick.net...

Practical 3(a)

Aim: Implement the following for Stack:

- a) Perform Stack operations using Array implementation.


Theory:

Stacks is one of the earliest data structures defined in computer science. In simple words, Stack is a linear collection of items. It is a collection of objects that supports fast last-in, first-out (LIFO) semantics for insertion and deletion. It is an array or list structure of function calls and parameters used in modern computer programming and CPU architecture. Similar to a stack of plates at a restaurant, elements in a stack are added or removed from the top of the stack, in a “last in, first out” order. Unlike lists or arrays, random access is not allowed for the objects contained in the stack.

There are two types of operations in Stack:

- Push– To add data into the stack.
- Pop– To remove data from the stack

Code and Output:

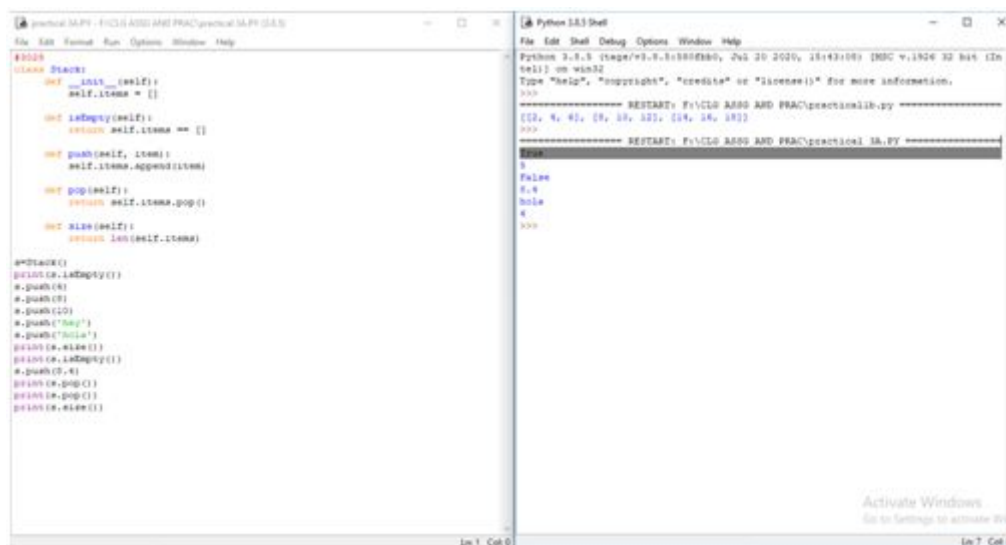

```
practical3A.PY - F:\C++ AND PRAC\practical3A.PY (3.8.5)
File Edit Format Run Options Window Help

class Stack:
    def __init__(self):
        self.items = []

    def isEmpty(self):
        return self.items == []

    def push(self, item):
        self.items.append(item)

    def pop(self):
        return self.items.pop()

    def size(self):
        return len(self.items)

s=Stack()
print(s.isEmpty())
s.push(4)
s.push(8)
s.push(10)
s.push('top')
s.push('hola')
print(s.size())
print(s.isEmpty())
s.push(7.4)
s.push(9)
print(s.pop())
print(s.pop())
print(s.size())

Python 3.8.5 Shell
File Edit Shell Debug Options Window Help

Python 3.8.5 (tags/v3.8.5:55f4f30, Jul 20 2020, 15:43:00) [AMD64] on win32
Type "help", "copyright", "credits" or "license()" for more
>>>
===== RESTART: F:\C++ AND PRAC\practical3A.PY =====
[[4, 8], [8, 10, 22], [14, 16, 18]]
>>>
===== RESTART: F:\C++ AND PRAC\practical3A.PY =====
True
False
8.4
hola
4
>>>
```


Practical 3(b)

Aim: Implement Tower of Hanoi.

Theory:

- We are given n disks and a series of rods, we need to transfer all the disks to the final rod under the given constraints
- We can move only one disk at a time.
- Only the uppermost disk.

Code and output:

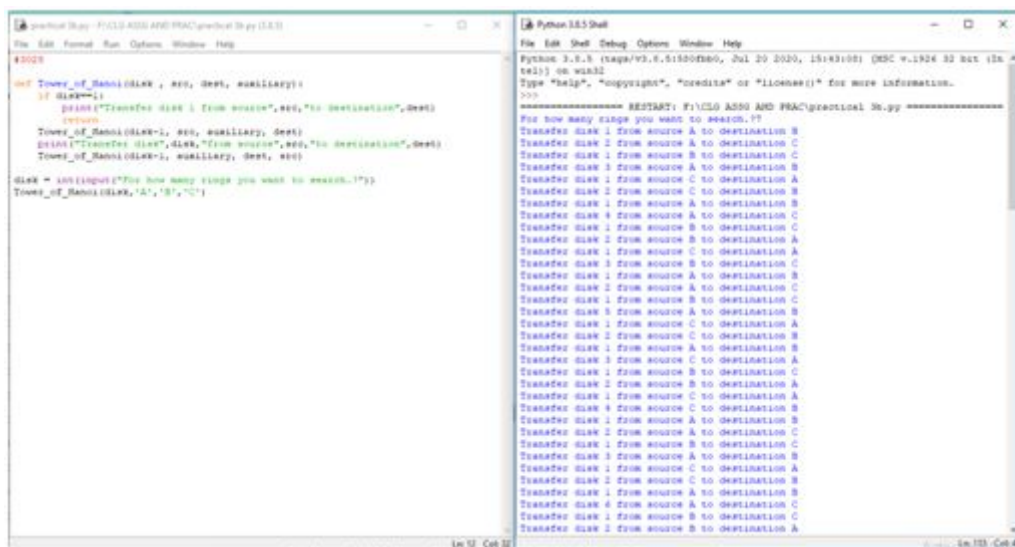

The screenshot displays a Python IDE with two windows. The left window, titled 'practical 3b.py - PYC3D ASSE AND PRAC/practical 3b.py (3.8.3)', contains the following Python code:

```
def Tower_of_Hanoi(disk, src, dest, auxiliary):
    if disk==1:
        print("Transfer disk 1 from source",src,"to destination",dest)
        return
    Tower_of_Hanoi(disk-1, src, auxiliary, dest)
    print("Transfer disk",disk,"from source",src,"to destination",dest)
    Tower_of_Hanoi(disk-1, auxiliary, dest, src)

disk = int(input("Enter how many disks you want to transfer..?"))
Tower_of_Hanoi(disk,'A','B','C')
```

The right window, titled 'Python 3.8.3 Shell', shows the output of the program. It starts with a prompt 'Enter how many disks you want to transfer..?' followed by the user input '3'. The output then lists 27 transfer steps for 3 disks, such as 'Transfer disk 1 from source A to destination B', 'Transfer disk 2 from source A to destination C', and so on, following the recursive algorithm.


Practical 3(C)

Aim: WAP to scan a polynomial using linked list and add two polynomials.

Theory:

Polynomial is a mathematical expression that consists of variables and coefficients. for example $x^2 - 4x + 7$. In the Polynomial linked list, the coefficients and exponents of the polynomial are defined as the data node of the list. For adding two polynomials that are stored as a linked list. We need to add the coefficients of variables with the same power. In a linked list node contains 3 members, coefficient value link to the next node a linked list that is used to store Polynomial looks like – Polynomial : $4x^7 + 12x^2 + 45$

Code and Output:

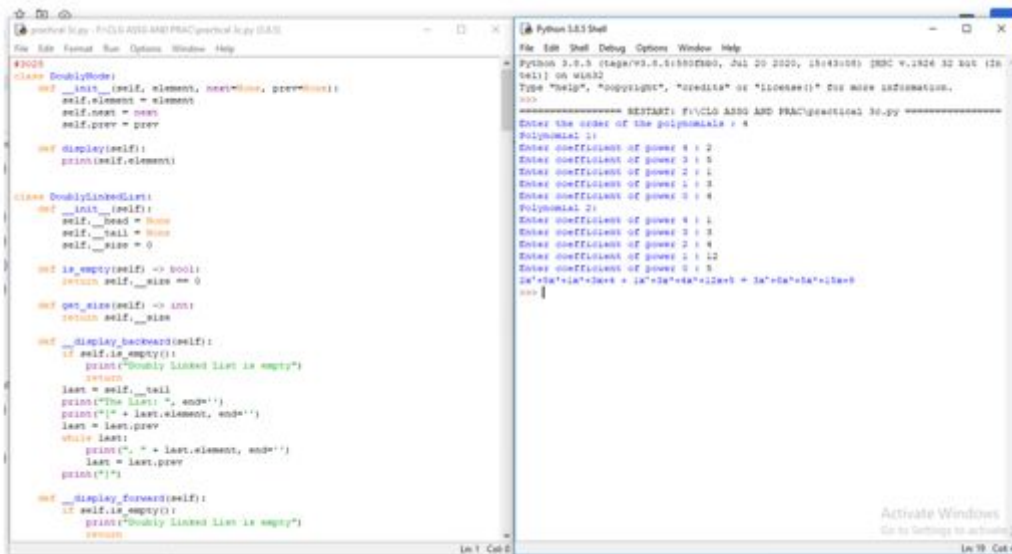

```
#Python 36.py - F:\CLD ADD AND PRAC\practical 36.py (IAD)
File Edit Format Run Options Window Help

class DoublyNode:
    def __init__(self, element, next=None, prev=None):
        self.element = element
        self.next = next
        self.prev = prev

    def display(self):
        print(self.element)

class DoublyLinkedList:
    def __init__(self):
        self.__head = None
        self.__tail = None
        self.__size = 0

    def is_empty(self) -> bool:
        return self.__size == 0

    def get_size(self) -> int:
        return self.__size

    def __display_backward(self):
        if self.is_empty():
            print("Doubly linked list is empty")
            return
        last = self.__tail
        print("The list: ", end='')
        print(str(last.element), end='')
        last = last.prev
        while last:
            print(" " + last.element, end='')
            last = last.prev
        print("")

    def __display_forward(self):
        if self.is_empty():
            print("Doubly linked list is empty")
            return

Python 3.8.5 Shell
File Edit Shell Debug Options Window Help

Python 3.8.5 (tags/v3.8.5:300c000, Jul 20 2020, 18:43:08) [AMD64] on win32
Type "help", "copyright", "credits() or "license()" for more
>>>
Enter the order of the polynomials : 4
Polynomial 1:
Enter coefficient of power 4 : 2
Enter coefficient of power 3 : 5
Enter coefficient of power 2 : 1
Enter coefficient of power 1 : 3
Enter coefficient of power 0 : 4
Polynomial 2:
Enter coefficient of power 4 : 1
Enter coefficient of power 3 : 3
Enter coefficient of power 2 : 4
Enter coefficient of power 1 : 12
Enter coefficient of power 0 : 5
2x^4+5x^3+1x^2+3x+4 + 1x^4+3x^3+4x^2+12x+5 = 3x^4+8x^3+5x^2+15x+9
>>>
```

Practical 3(d)

Aim: WAP to calculate factorial and to compute the factors of a given no.

(i) using recursion


(ii) using iteration

Theory:

The factorial of a number is the product of all the integers from 1 to that number. For example, the factorial of 6 is $1*2*3*4*5*6 = 720$. Factorial is not defined for negative numbers and the factorial of zero is one, $0! = 1$.

- Recursion: In Python, we know that a function can call other functions. It is even possible for the function to call itself. These types of construct are termed as recursive functions.
- Iteration: Repeating identical or similar tasks without making errors is something that computers do well and people do poorly. Repeated execution of a set of statements is called iteration. Because iteration is so common, Python provides several language features to make it easier.

Code and Output:

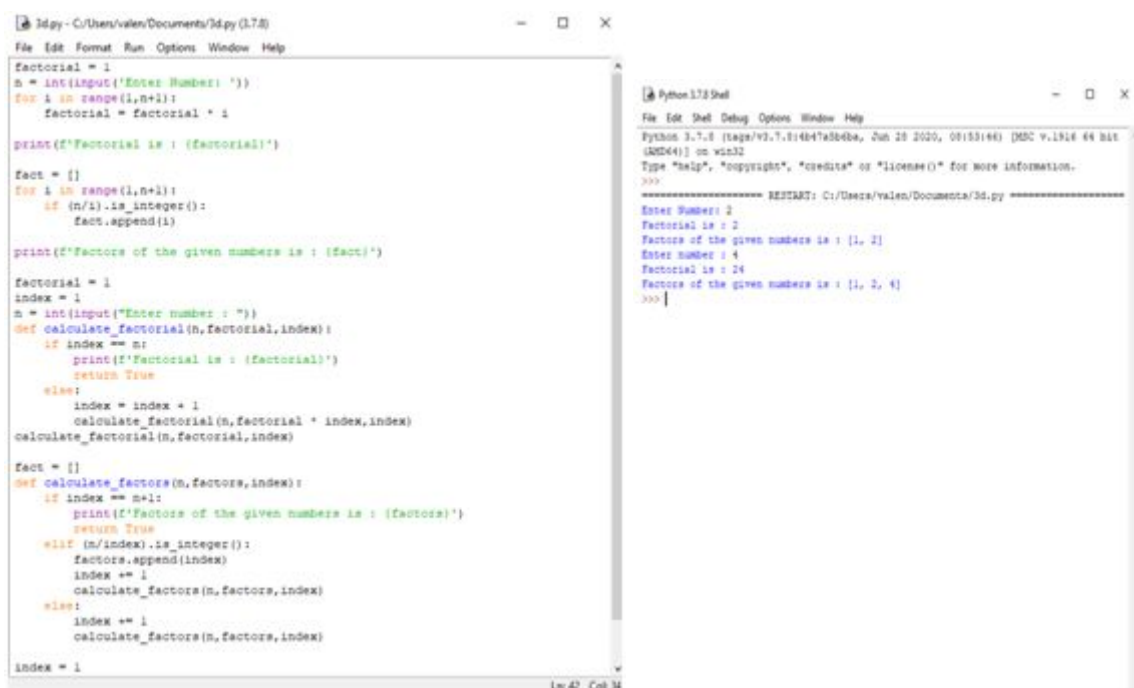

```
3d.py - C:/Users/valeu/Documents/3d.py (3.7.8)
File Edit Format Run Options Window Help

factorial = 1
n = int(input('Enter Number: '))
for i in range(1,n+1):
    factorial = factorial * i

print(f'Factorial is : {factorial}')

fact = []
for i in range(1,n+1):
    if (n/i).is_integer():
        fact.append(i)

print(f'Factors of the given numbers is : {fact}')

factorial = 1
index = 1
n = int(input("Enter number : "))
def calculate_factorial(n,factorial,index):
    if index == n:
        print(f'Factorial is : {factorial}')
        return True
    else:
        index = index + 1
        calculate_factorial(n,factorial * index,index)
    calculate_factorial(n,factorial,index)

fact = []
def calculate_factors(n,factors,index):
    if index == n+1:
        print(f'Factors of the given numbers is : {factors}')
        return True
    elif (n/index).is_integer():
        factors.append(index)
        index += 1
        calculate_factors(n,factors,index)
    else:
        index += 1
        calculate_factors(n,factors,index)

index = 1

Python 3.7.8 Shell
File Edit Shell Debug Options Window Help
Python 3.7.8 (tags/v3.7.8:10447a3b0be, Feb 28 2020, 09:53:06) [AMD64] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>>
===== RESTART: C:/Users/valeu/Documents/3d.py =====>>>
Enter Number: 2
Factorial is : 2
Factors of the given numbers is : [1, 2]
Enter number : 4
Factorial is : 24
Factors of the given numbers is : [1, 2, 4]
>>>
```

Practical 4

Aim: Perform Queues operations using Circular Array implementation.

Theory:

Circular queue avoids the wastage of space in a regular queue implementation using arrays. Circular Queue works by the process of circular increment i.e. when we try to increment the pointer and we reach the end of the queue, we start from the beginning of the queue. Here, the circular increment is performed by modulo division with the queue size. That is, if $REAR + 1 == 5$ (overflow!), $REAR = (REAR + 1) \% 5 = 0$ (start of queue) The circular queue work as follows:

two pointers FRONT and REAR FRONT track the first element of the queue

REAR track the last elements of the queue initially, set value of FRONT and REAR to -1

1. Enqueue Operation check if the queue is full for the first element, set value of FRONT to 0 circularly increase the REAR index by 1 (i.e. if the rear reaches the end, next it would be at the start of the queue) add the new element in the position pointed to by REAR
2. Dequeue Operation check if the queue is empty return the value pointed by FRONT circularly increase the FRONT index by 1 for the last element, reset the values of FRONT and REAR to -1

Code and Output:

```
python3.py -P/C:/ASD AND PRAC python3.py 0.0.0.0
File Edit Format Run Options Window Help
#0206
class ArrayQueue:
    DEFAULT_CAPACITY = 10

    def __init__(self):
        self._data = [None] * ArrayQueue.DEFAULT_CAPACITY
        self._size = 0
        self._front = 0

    def len(self):
        return self._size

    def is_empty(self):
        return self._size == 0

    def first(self):
        if self.is_empty():
            raise Exception("Queue is empty")
        return self._data[self._front]

    def dequeue(self):
        if self.is_empty():
            raise Exception("Queue is empty")
        answer = self._data[self._front]
        self._data[self._front] = None
        self._front = (self._front + 1) % len(self._data)
        self._size -= 1
        return answer

    def enqueue(self, el):
        if self._size == len(self._data):
            self._resize(2 * len(self._data))
        avail = (self._front + self._size) % len(self._data)
        self._data[avail] = el
        self._size += 1
```


Practical 5

Aim: Write a program to search an element from a list. Give user the option to perform Linear or Binary search.

Theory:

- **Linear Search:** This linear search is a basic search algorithm which searches all the elements in the list and finds the required value. This is also known as sequential search.
- **Binary Search:** In computer science, a binary searcher half-interval search algorithm finds the position of a target value within a sorted array. The binary search algorithm can be classified as a dichotomies divide-and-conquer search algorithm and executes in logarithmic time.

Code and Output:

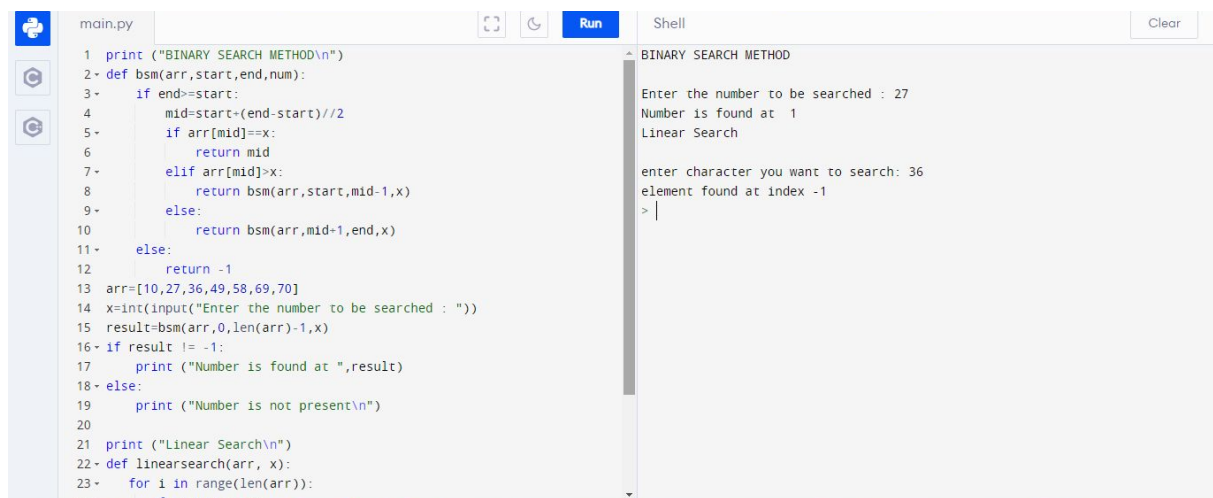

```
main.py
1 print ("BINARY SEARCH METHOD\n")
2 def bsm(arr,start,end,num):
3     if end==start:
4         mid=start+(end-start)//2
5         if arr[mid]==x:
6             return mid
7         elif arr[mid]>x:
8             return bsm(arr,start,mid-1,x)
9         else:
10            return bsm(arr,mid+1,end,x)
11     else:
12         return -1
13 arr=[10,27,36,49,58,69,70]
14 x=int(input("Enter the number to be searched : "))
15 result=bsm(arr,0,len(arr)-1,x)
16 if result != -1:
17     print ("Number is found at ",result)
18 else:
19     print ("Number is not present\n")
20
21 print ("Linear Search\n")
22 def linearsearch(arr, x):
23     for i in range(len(arr)):
24         if arr[i] == x:
```

```
Shell
BINARY SEARCH METHOD
Enter the number to be searched : 27
Number is found at  1
Linear Search

enter character you want to search: 36
element found at index -1
> |
```

Practical 6


Aim: Write a program to search an element from a list. Give user the option to perform Linear or Binary search.

Theory:

- Bubble Sort: Bubble Sort is the simplest sorting algorithm that works by repeatedly swapping the adjacent elements if they are in wrong order.
- Selection Sort: The selection sort algorithm sorts an array by repeatedly finding the minimum element (considering ascending order) from unsorted part and putting it at the beginning. The algorithm maintains two sub arrays in a given array
- Insertion Sort: Insertion sort iterates, consuming one input element each repetition, and growing a sorted output list. At each iteration, insertion sort removes one element from the input data, finds the location it belongs within the sorted list, and inserts it there. It repeats until no input elements remain.

Code and Output:

:

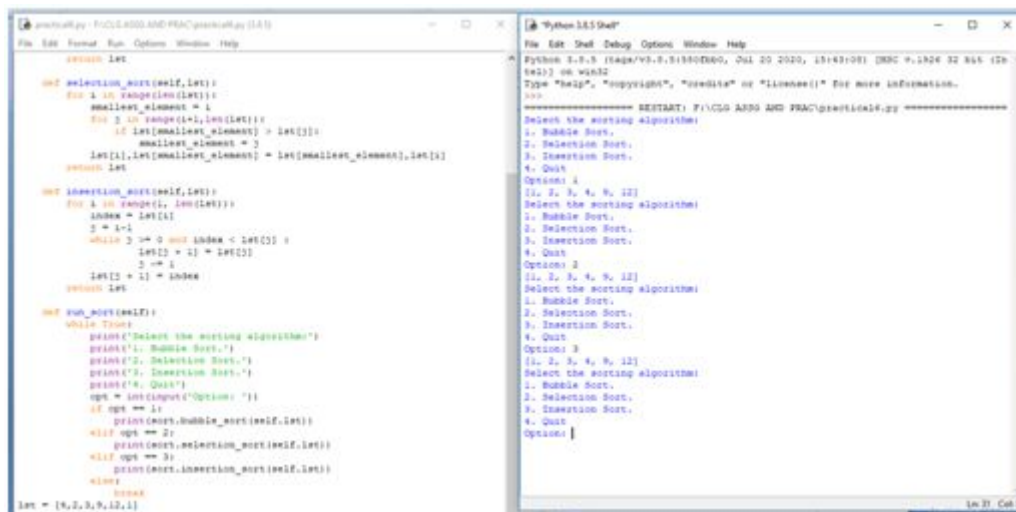

```
practic6.py - PyCharm 2020.1.3 (64-bit)
File Edit View Format Run Options Window Help

def selection_sort(self, lst):
    for i in range(len(lst)):
        smallest_element = i
        for j in range(i+1, len(lst)):
            if lst[smallest_element] > lst[j]:
                smallest_element = j
        lst[i], lst[smallest_element] = lst[smallest_element], lst[i]
    return lst

def insertion_sort(self, lst):
    for i in range(1, len(lst)):
        index = lst[i]
        j = i-1
        while j >= 0 and index < lst[j]:
            lst[j+1] = lst[j]
            j -= 1
        lst[j+1] = index
    return lst

def run_menu(self):
    while True:
        print("Select the sorting algorithm:")
        print("1. Bubble Sort.")
        print("2. Selection Sort.")
        print("3. Insertion Sort.")
        print("4. Quit")
        opt = int(input("Option: "))
        if opt == 1:
            print(self.selection_sort(self.lst))
        elif opt == 2:
            print(self.insertion_sort(self.lst))
        elif opt == 3:
            print(self.insertion_sort(self.lst))
        else:
            break
    lst = [4, 2, 3, 9, 12, 1]
    print(self.run_menu())

if __name__ == '__main__':
    obj = Practic6()
    obj.run_menu()
```

```
Python 3.8.5 Shell
Python 3.8.5 (tags/v3.8.5:100f80d0, Jul 20 2020, 13:43:08) [AMD64] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>>
===== RESTART: F:\CGO ADD AND PRAC\practic6.py =====
Select the sorting algorithm:
1. Bubble Sort.
2. Selection Sort.
3. Insertion Sort.
4. Quit
Option: 1
[1, 2, 3, 4, 9, 12]
Select the sorting algorithm:
1. Bubble Sort.
2. Selection Sort.
3. Insertion Sort.
4. Quit
Option: 2
[1, 2, 3, 4, 9, 12]
Select the sorting algorithm:
1. Bubble Sort.
2. Selection Sort.
3. Insertion Sort.
4. Quit
Option: 3
[1, 2, 3, 4, 9, 12]
Select the sorting algorithm:
1. Bubble Sort.
2. Selection Sort.
3. Insertion Sort.
4. Quit
Option: 4
>>>
```

Practical 7(a)

Aim: Implement the following for Hashing:

Write a program to implement the collision technique.


Theory:

Hashing:

Hashing is an important Data Structure which is designed to use a special function called the Hash function which is used to map a given value with a particular key for faster access of elements. The efficiency of mapping depends of the efficiency of the hash function used.

- Collisions: A Hash Collision Attack is an attempt to find two input strings of a hash function that produce the same hash result. If two separate inputs produce the same hash output, it is called a collision.
- Collision Techniques: When one or more hash values compete with a single hash table slot, collisions occur. To resolve this, the next available empty slot is assigned to the current hash value
- Separate Chaining: The idea is to make each cell of hash table point to a linked list of records that have same hash function value.
- Open Addressing: Like separate chaining, open addressing is a method for handling collisions. In Open Addressing, all elements are stored in the hash table itself. So at any point, the size of the table must be greater than or equal to the total number of keys (Note that we can increase table size by copying old data if needed)

Code and output:

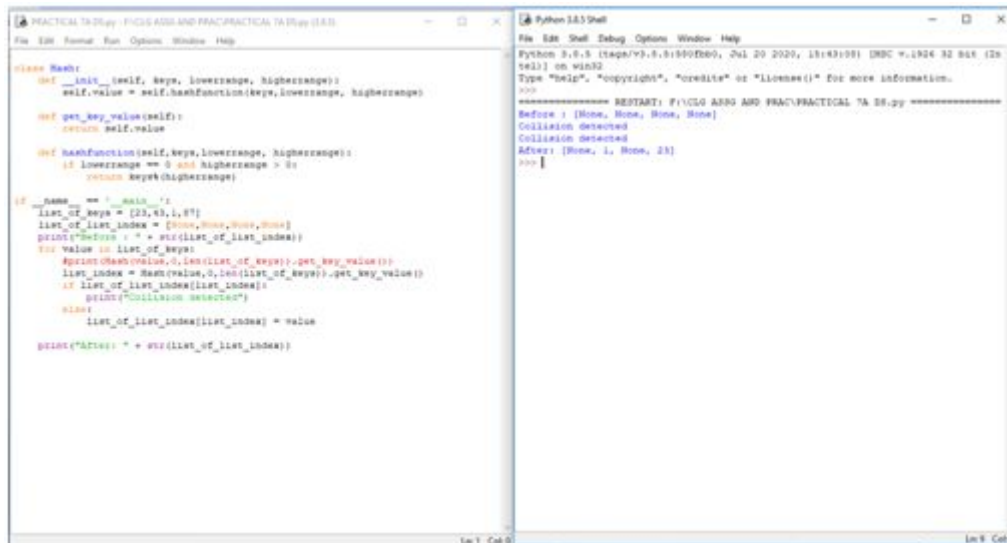

```
class Hash:
    def __init__(self, keys, lowrange, highrange):
        self.value = self.hashfunction(keys, lowrange, highrange)

    def get_key_value(self):
        return self.value

    def hashfunction(self, keys, lowrange, highrange):
        if lowrange == 0 and highrange > 0:
            return keys[highrange]

if __name__ == '__main__':
    list_of_keys = [23, 43, 1, 89]
    list_of_list_index = [None, None, None, None]
    print("Before : " + str(list_of_list_index))
    for value in list_of_keys:
        print("Hashing value: ", list_of_list_index[list_of_keys.index(value)].get_key_value())
        list_index = Hash(value, 0, len(list_of_keys) - 1).get_key_value()
        if list_of_list_index[list_index]:
            print("Collision detected")
        else:
            list_of_list_index[list_index] = value
    print("After: " + str(list_of_list_index))
```

```
Python 3.8.5 Shell
Python 3.8.5 (tags/v3.8.5:00f0b60, Jul 20 2020, 13:03:00) [AMD64] on win32
Type "help", "copyright", "credits()" or "license()" for more information.
>>>
===== RESTART: F:\C++ AND PRACTICAL TA DE.py =====
Before : [None, None, None, None]
Collision detected
Collision detected
After : [None, 1, None, 23]
>>>
```

Practical 7(b)

Aim: Implement the following for Hashing:

Write a program to implement the concept of linear probing.

Theory:

Linear probing is a scheme in computer programming for resolving collisions in hash tables, data structures for maintaining a collection of key–value pairs and looking up the value

associated with a given key. Along with quadratic probing and double hashing, linear probing is a form of open addressing.

```
7b.py - C:/Users/valen/Documents/7b.py (3.7.8)
File Edit Format Run Options Window Help

size_list = 6

def hash_function(val):
    global size_list
    return val*size_list

def map_hash_function(hash_return_values):
    return hash_return_values

def create_hash_table(list_values,main_list):
    for values in list_values:
        hash_return_values = hash_function(values)
        list_index = map_hash_function(hash_return_values)
        if main_list[list_index]:
            print("collision detected")
            linear_probing(list_index,values,main_list)
        else:
            main_list[list_index]=values

def linear_probing(list_index,value,main_list):
    global size_list
    list_full = False
    old_list_index=list_index
    if list_index == size_list - 1:
        list_index = 0
    else:
        list_index += 1

    while main_list[list_index]:
        if list_index+1 == size_list:
            list_index = 0
        else:
            list_index += 1
        if list_index == old_list_index:
            list_full = True
            break
    if list_full == True:
        print("list was full. could not saved")
```

Code and output:

```
Python 3.7.8 Shell
File Edit Shell Debug Options Window Help

Python 3.7.8 (tags/v3.7.8:4b47a5b0a, Jun 28 2020, 08:53:44) [MSC v.1916 64 bit
(AMD64)] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>>
===== RESTART: C:/Users/valen/Documents/7b.py =====
[None, None, None, None, None, None]
collision detected
[6, 1, 8, 3, None, 5]
list found 5
>>> |
```



Practical 8

Aim: Write a program for inorder, postorder and preorder traversal of tree.

Theory:

- Inorder: In case of binary search trees (BST), Inorder traversal gives nodes in non-decreasing order. To get nodes of BST in non-increasing order, a variation of Inorder traversal where Inorder traversal is reversed can be used.
- Preorder: Preorder traversal is used to create a copy of the tree. Preorder traversal is also used to get prefix expression on of an expression tree.
- Postorder: Postorder traversal is also useful to get the postfix expression of an expression tree.

Code and output:

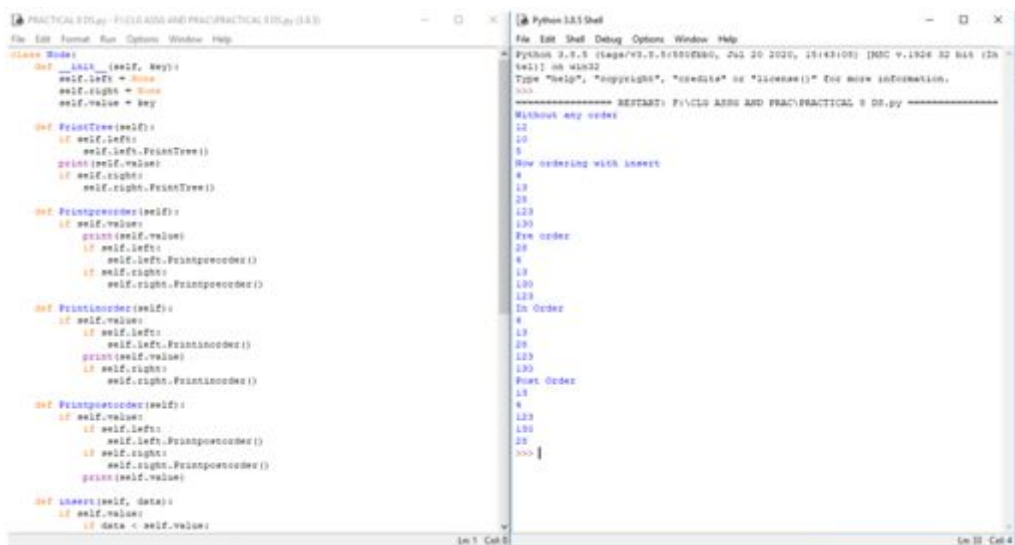

The screenshot displays a Python IDE with two windows. The left window, titled 'PRACTICAL 8 DS.py - F:\C++ AND PRACTICAL 8 DS.py (3.8.5)', contains the following code:

```
class Node:
    def __init__(self, key):
        self.left = None
        self.right = None
        self.value = key

    def PrintTree(self):
        if self.left:
            self.left.PrintTree()
        print(self.value)
        if self.right:
            self.right.PrintTree()

    def Printpreorder(self):
        if self.value:
            print(self.value)
            if self.left:
                self.left.Printpreorder()
            if self.right:
                self.right.Printpreorder()

    def PrintInorder(self):
        if self.value:
            if self.left:
                self.left.PrintInorder()
            print(self.value)
            if self.right:
                self.right.PrintInorder()

    def Printpostorder(self):
        if self.value:
            if self.left:
                self.left.Printpostorder()
            if self.right:
                self.right.Printpostorder()
            print(self.value)

    def Insert(self, data):
        if data < self.value:
```

The right window, titled 'Python 3.8.5 Shell', shows the output of the program:

```
Python 3.8.5 (tags/v3.8.5:505f880, Jul 20 2020, 15:43:00) [AMD64] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>>
===== RESTART: F:\C++ AND PRACTICAL 8 DS.py =====
Without any codes
12
10
5
Now ordering with Insert
4
12
20
120
120
Pre order
20
4
12
120
120
In Order
4
12
20
120
120
Post Order
12
4
120
120
20
>>>
```

