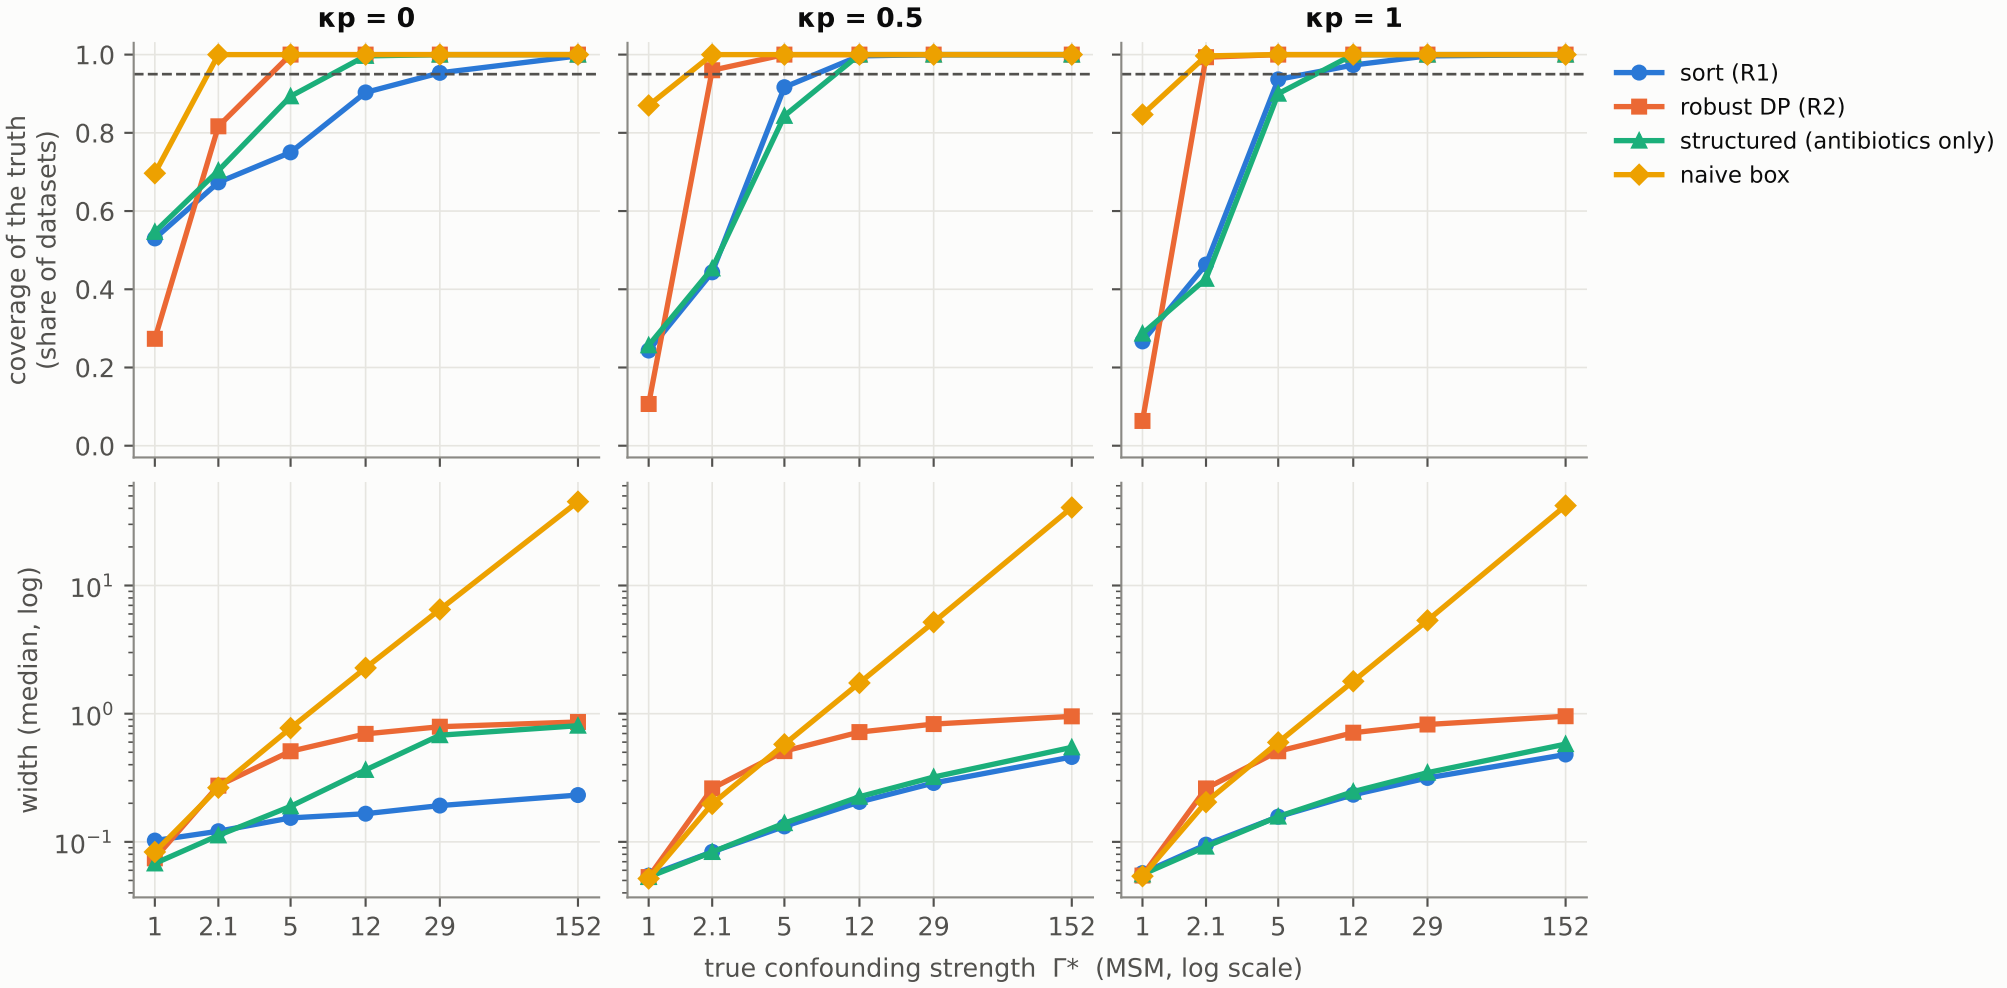
R1, n = 2,000: sensitivity intervals at Γ = Γ* (protocol, withhold, always)
κp = 0
κp = 0.5
κp = 1
coverage of the truth
(share of datasets)
1.0
0.8
0.6
0.4
0.2
0.0
width (median, log)
10^1
10^0
10^{-1}
1
2.1
5
12
29
152
true confounding strength Γ* (MSM, log scale)
sort (R1)
robust DP (R2)
structured (antibiotics only)
naive box