



🏠 / Design Patterns / Structural patterns

Bridge Design Pattern

Intent


- Decouple an abstraction from its implementation so that the two can vary independently.
- Publish interface in an inheritance hierarchy, and bury implementation in its own inheritance hierarchy.
- Beyond encapsulation, to insulation

Problem


"Hardening of the software arteries" has occurred by using subclassing of an abstract base class to provide alternative implementations. This locks in compile-time binding between interface and implementation. The abstraction and implementation cannot be independently extended or composed.

Motivation

Consider the domain of "thread scheduling".

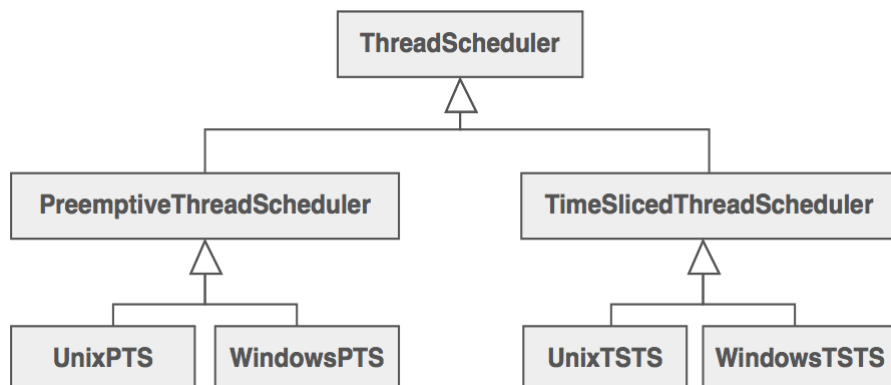


There are two types of thread schedulers, and two types of operating systems or "platforms". Given this approach to specialization, we have to define a class for each permutation of these two dimensions. If we add a new platform (say ... Java's Virtual Machine), what would our hierarchy look like?

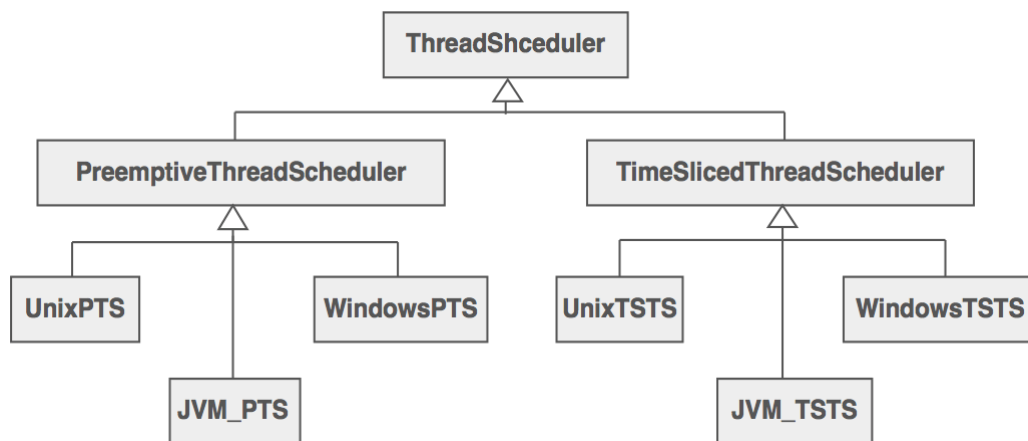

What if we had three kinds of thread schedulers, and four kinds of platforms? What if we had five kinds of thread schedulers, and ten kinds of platforms? The number of classes we would have to define is the product of the number of scheduling schemes and the number of platforms.

The Bridge design pattern proposes **refactoring this exponentially explosive inheritance hierarchy into two orthogonal hierarchies** – one for platform-independent abstractions, and the other for **platform-dependent implementations.**

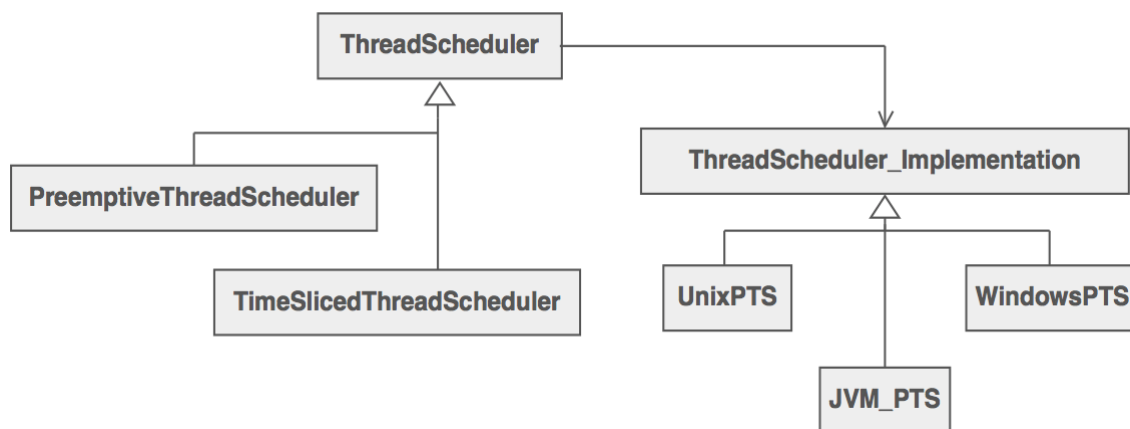

Discussion

Decompose the component's interface and implementation into orthogonal class hierarchies. The interface class contains a pointer to the abstract implementation class. This pointer is initialized with an instance of a concrete implementation class, but all subsequent interaction from the

interface class to the implementation class is limited to the abstraction maintained in the implementation base class. The client interacts with the interface class, and it in turn "delegates" all requests to the implementation class.

The interface object is the "handle" known and used by the client; while the implementation object, or "body", is safely encapsulated to ensure that it may continue to evolve, or be entirely replaced (or shared at run-time).

Use the Bridge pattern when:

- you want run-time binding of the implementation,
- you have a proliferation of classes resulting from a coupled interface and numerous implementations,
- you want to share an implementation among multiple objects,
- you need to map orthogonal class hierarchies.

Consequences include:


- decoupling the object's interface,
- improved extensibility (you can extend (i.e. subclass) the abstraction and implementation hierarchies independently),
- hiding details from clients.

Bridge is a synonym for the "handle/body" idiom. This is a design mechanism that encapsulates an implementation class inside of an interface class. The former is the body, and the latter is the handle. The handle is viewed by the user as the actual class, but the work is done in the body. "The handle/body class idiom may be used to decompose a complex abstraction into smaller, more manageable classes. The idiom may reflect the sharing of a single resource by multiple classes that control access to it (e.g. reference counting)."

Structure


The Client doesn't want to deal with platform-dependent details. The Bridge pattern encapsulates this complexity behind an abstraction "wrapper".

Bridge emphasizes identifying and decoupling "interface" abstraction from "implementation" abstraction.

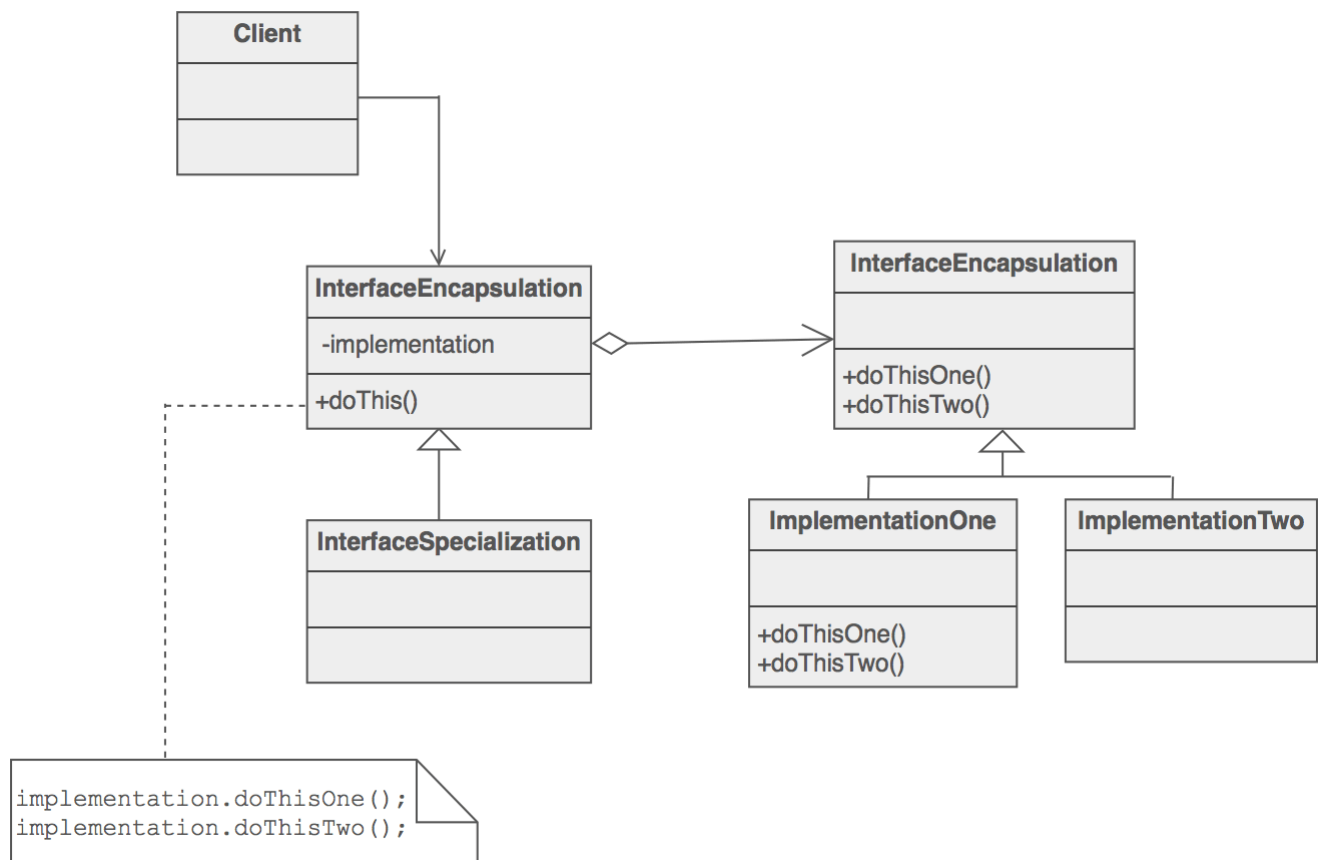

Example

The Bridge pattern decouples an abstraction from its implementation, so that the two can vary independently. A household switch controlling lights, ceiling fans, etc. is an example of the Bridge. The purpose of the switch is to turn a device on or off. The actual switch can be implemented as a pull chain, simple two position switch, or a variety of dimmer switches.

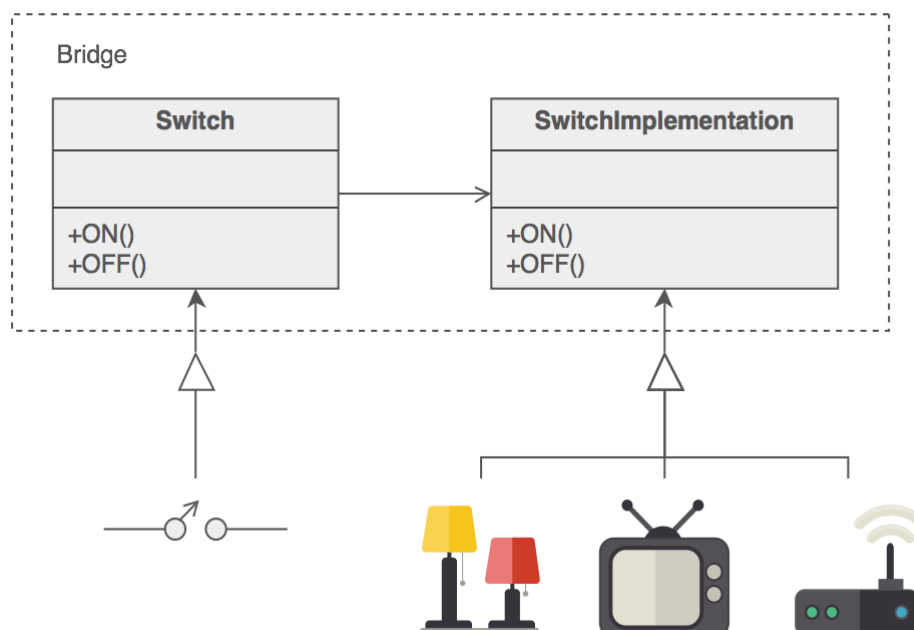

Check list

1. Decide if two orthogonal dimensions exist in the domain. These independent concepts could be: abstraction/platform, or domain/infrastructure, or front-end/back-end, or interface/implementation.
2. Design the separation of concerns: what does the client want, and what do the platforms provide.
3. Design a platform-oriented interface that is minimal, necessary, and sufficient. Its goal is to decouple the abstraction from the platform.
4. Define a derived class of that interface for each platform.
5. Create the abstraction base class that "has a" platform object and delegates the platform-oriented functionality to it.
6. Define specializations of the abstraction class if desired.

Rules of thumb

- Adapter makes things work after they're designed; Bridge makes them work before they are.
- Bridge is designed up-front to let the abstraction and the implementation vary independently. Adapter is retrofitted to make unrelated classes work together.
- State, Strategy, Bridge (and to some degree Adapter) have similar solution structures. They all share elements of the "handle/body" idiom. They differ in intent - that is, they solve different problems.
- The structure of State and Bridge are identical (except that Bridge admits hierarchies of envelope classes, whereas State allows only one). The two patterns use the same structure to solve different problems: State allows an object's behavior to change along with its state, while Bridge's intent is to decouple an abstraction from its implementation so that the two can vary independently.
- If interface classes delegate the creation of their implementation classes (instead of creating/coupling themselves directly), then the design usually uses the Abstract Factory pattern to create the implementation objects.

Read next

This article is taken from our book **Design Patterns Explained Simply**.

All of the design patterns are compiled there. The book is written in clear, simple language that makes it easy to read and understand (just like this article).

We distribute it in PDF & EPUB formats so you can get it onto your iPad, Kindle, or other portable device immediately after your purchase.

♥ Learn more



Code examples

Java	Bridge in Java	Bridge in Java	Bridge in Java
C++	Bridge in C++		
PHP	Bridge in PHP		
Python	Bridge in Python		

READ NEXT

Composite



RETURN

Design Patterns
AntiPatterns
Refactoring
UML

My account
Forum
Contact us
About us

