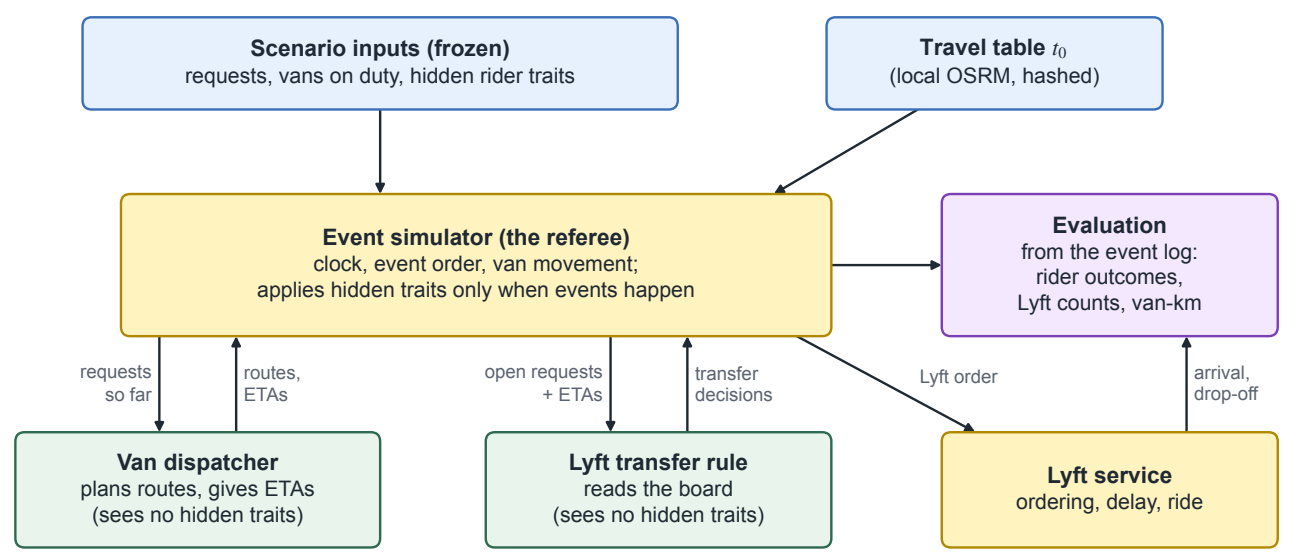
Scenario inputs (frozen)
requests, vans on duty, hidden rider traits
Travel table t_0
(local OSRM, hashed)
Event simulator (the referee)
clock, event order, van movement;
applies hidden traits only when events happen
Evaluation
from the event log:
rider outcomes,
Lyft counts, van-km
requests
so far
routes,
ETAs
open requests
+ ETAs
transfer
decisions
Lyft order
arrival,
drop-off
Van dispatcher
plans routes, gives ETAs
(sees no hidden traits)
Lyft transfer rule
reads the board
(sees no hidden traits)
Lyft service
ordering, delay, ride