


$$\psi_{j,k}(x_j) = \text{MexicanHat}\left(\frac{x_j - \mu_{j,k}}{\gamma_{j,k}}\right), \quad y_k = \sum_j w_{j,k} \psi_{j,k}(x_j)$$

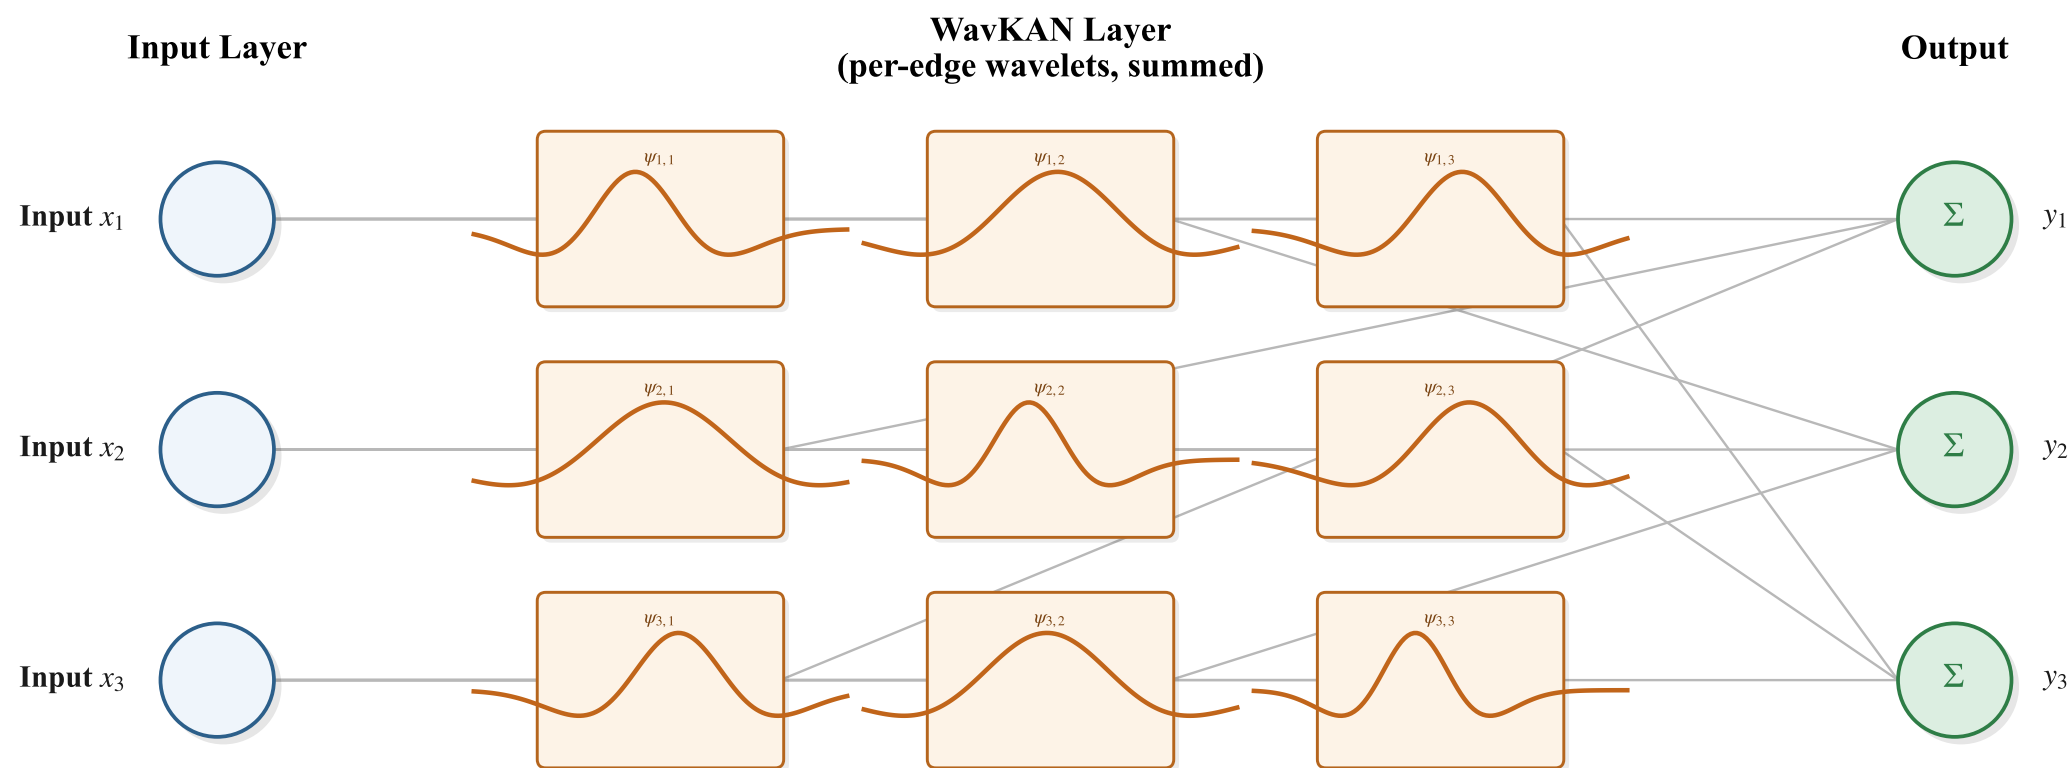

Unlike an MLP, the learnable function sits on every edge (j,k) , not on the node --- each edge learns its own $(\mu_{j,k}, \gamma_{j,k})$.