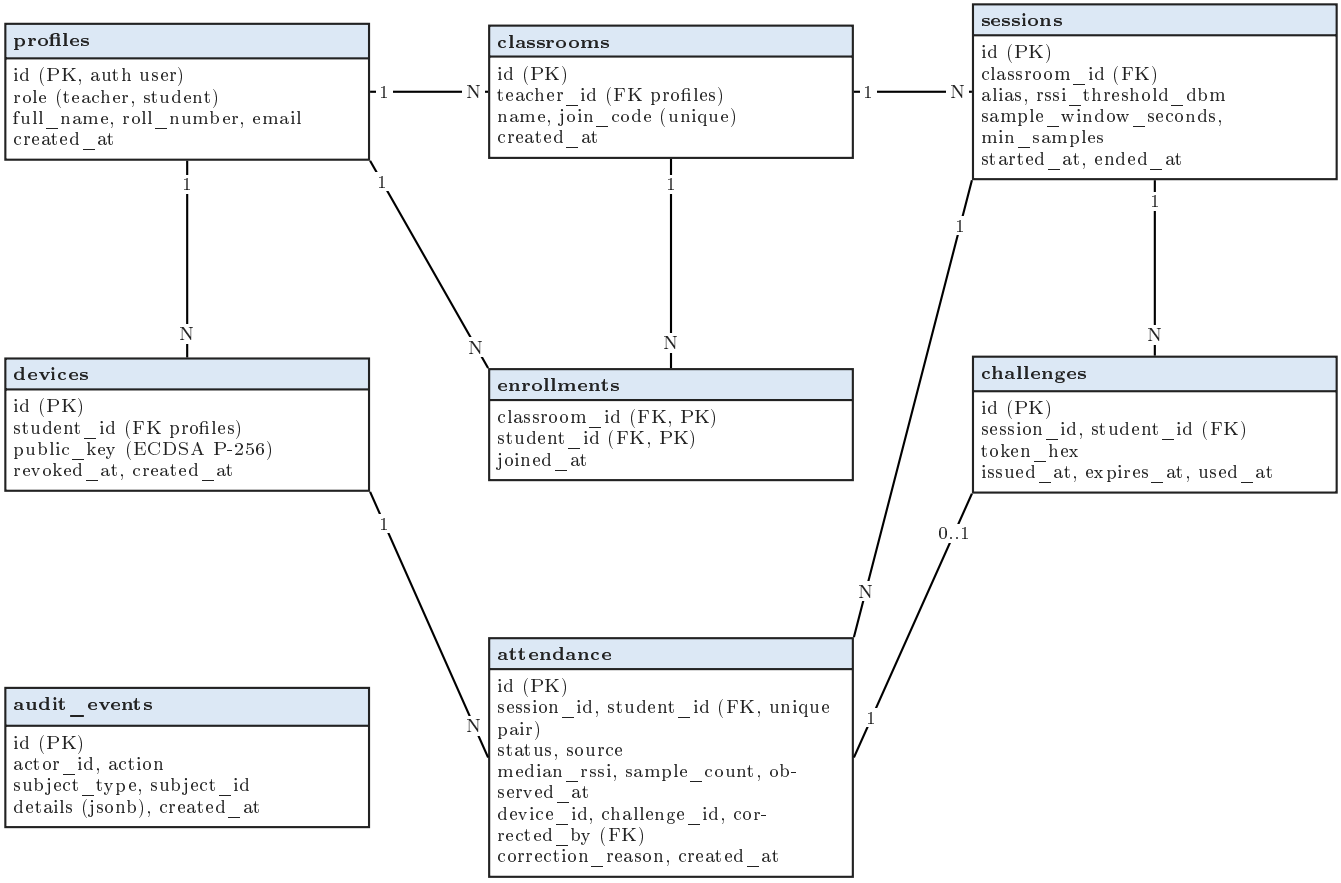
profiles
id (PK, auth user)
role (teacher, student)
full_name, roll_number, email
created_at
classrooms
id (PK)
teacher_id (FK profiles)
name, join_code (unique)
created_at
sessions
id (PK)
classroom_id (FK)
alias, rssi_threshold_dbm
sample_window_seconds,
min_samples
started_at, ended_at
devices
id (PK)
student_id (FK profiles)
public_key (ECDSA P-256)
revoked_at, created_at
enrollments
classroom_id (FK, PK)
student_id (FK, PK)
joined_at
challenges
id (PK)
session_id, student_id (FK)
token_hex
issued_at, expires_at, used_at
attendance
id (PK)
session_id, student_id (FK, unique
pair)
status, source
median_rssi, sample_count, ob-
served_at
device_id, challenge_id, cor-
rected_by (FK)
correction_reason, created_at
audit_events
id (PK)
actor_id, action
subject_type, subject_id
details (jsonb), created_at
audit_events holds no foreign keys,
so records survive deletes.