


GLOBAL OPERATIVE DATASET

EDA REPORT

Dataset Shape	(100000, 12)
Target / Main Numerical Attribute	mission_count
Numerical Features	1
Categorical Features	11
Missing Values	0
Duplicate Rows	0
Average Mission Count	124.99
Minimum Mission Count	0
Maximum Mission Count	250


The Global Operative Dataset was loaded and explored using Pandas. The dataset contains 100,000 records and 12 attributes. It includes 1 numerical attribute, mission_count, and 11 categorical attributes. No missing values or duplicate rows were found.

Gender Distribution

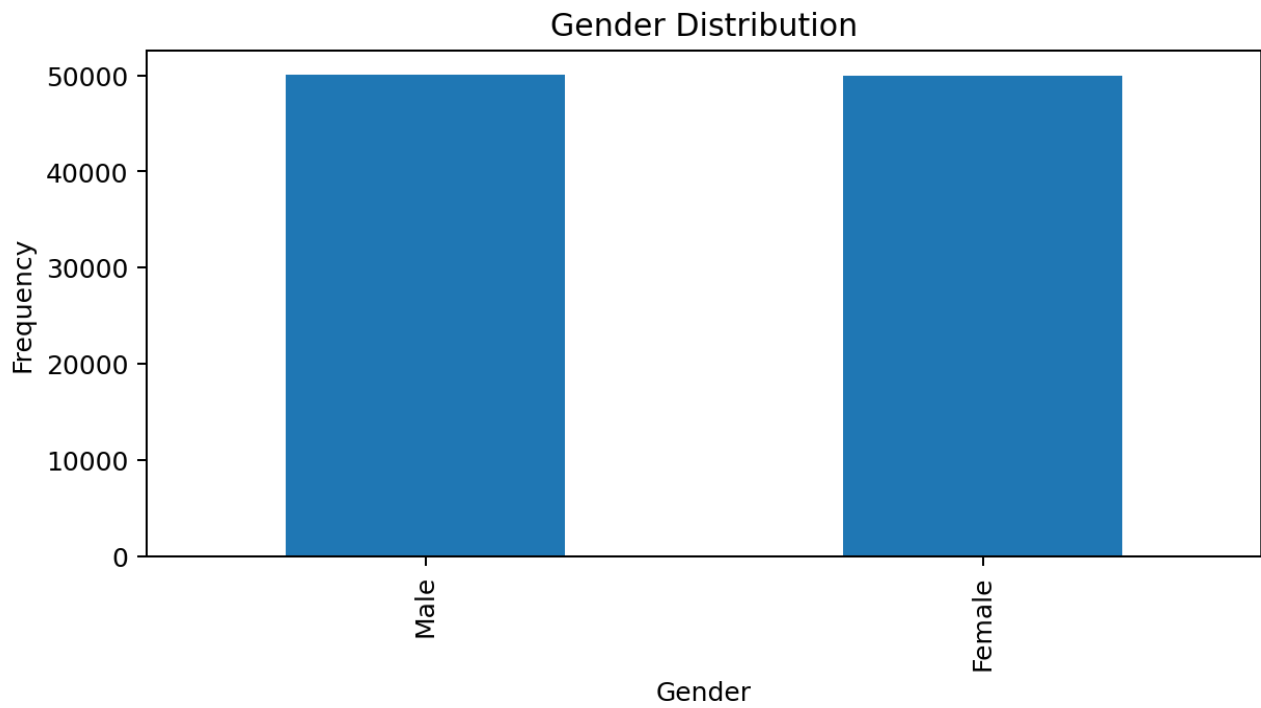


The gender distribution is nearly balanced, with 50,021 male and 49,979 female records.

Status Distribution

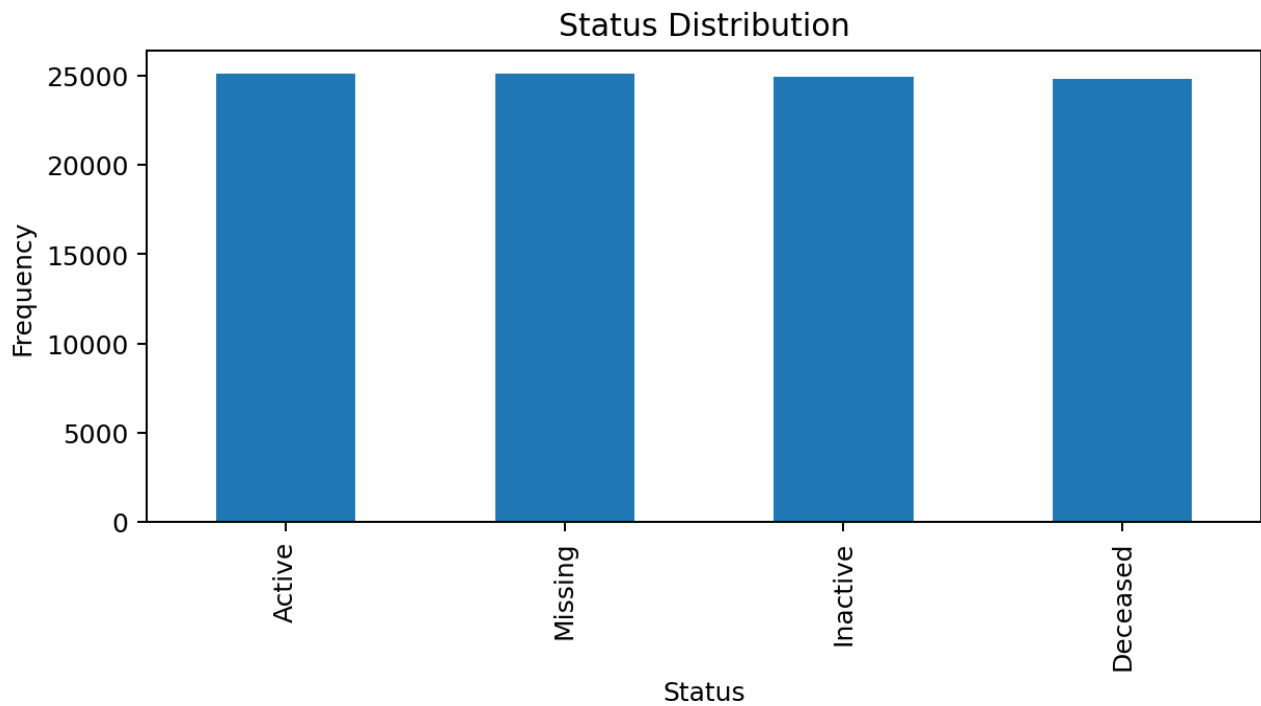


The status categories are distributed fairly evenly across Active, Inactive, Missing, and Deceased records.

Affiliation Distribution

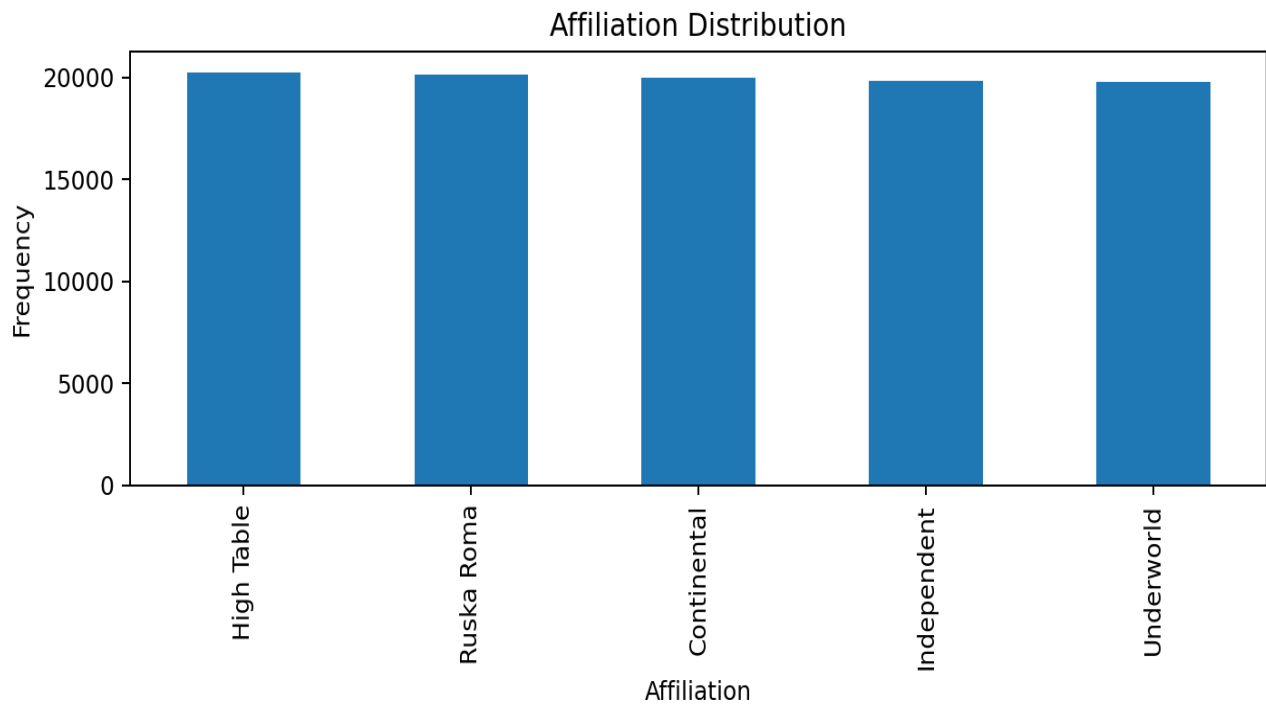


The affiliation counts are relatively balanced across High Table, Ruska Roma, Continental, Independent, and Underworld categories.

Rank Distribution

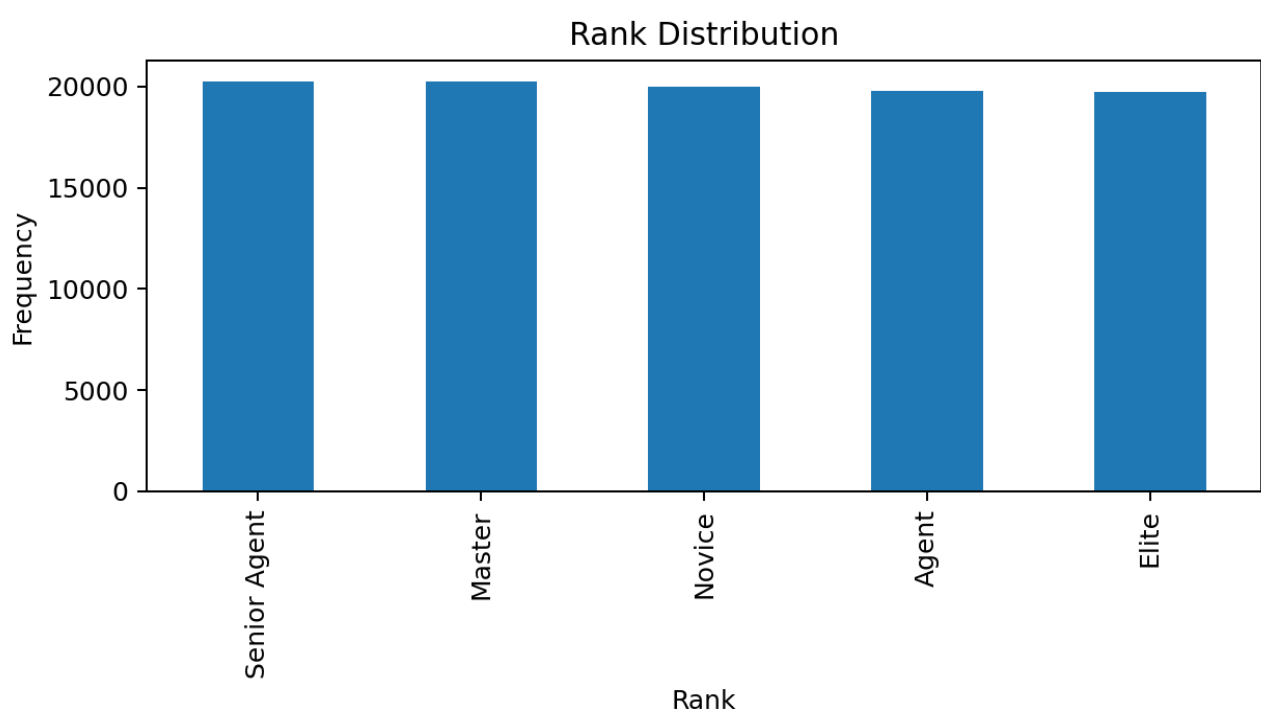


The rank distribution is broadly balanced across Novice, Agent, Senior Agent, Elite, and Master categories.

Distribution of mission_count

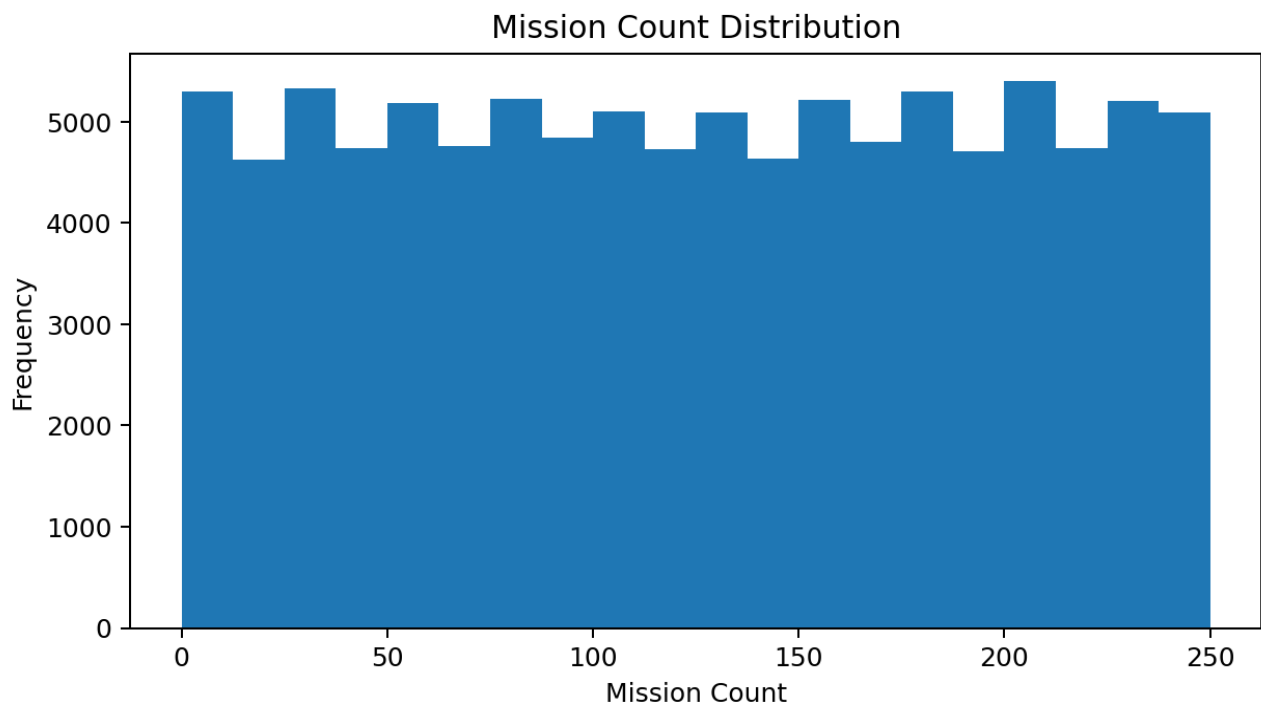


The mission_count values range from 0 to 250, with an average of 124.99 missions and a median of 125.

Average Missions by Rank

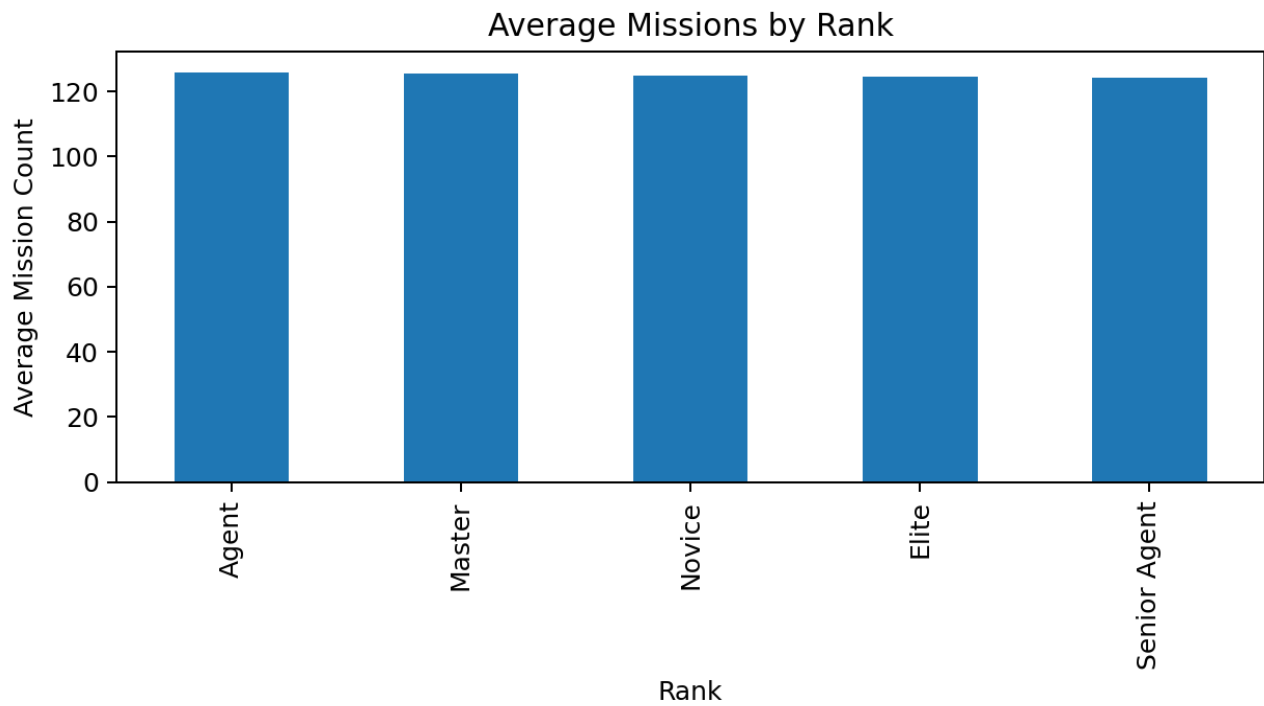


Average mission activity was compared across ranks. The differences are small because mission counts were generated across the complete operative population.

Average Missions by Location

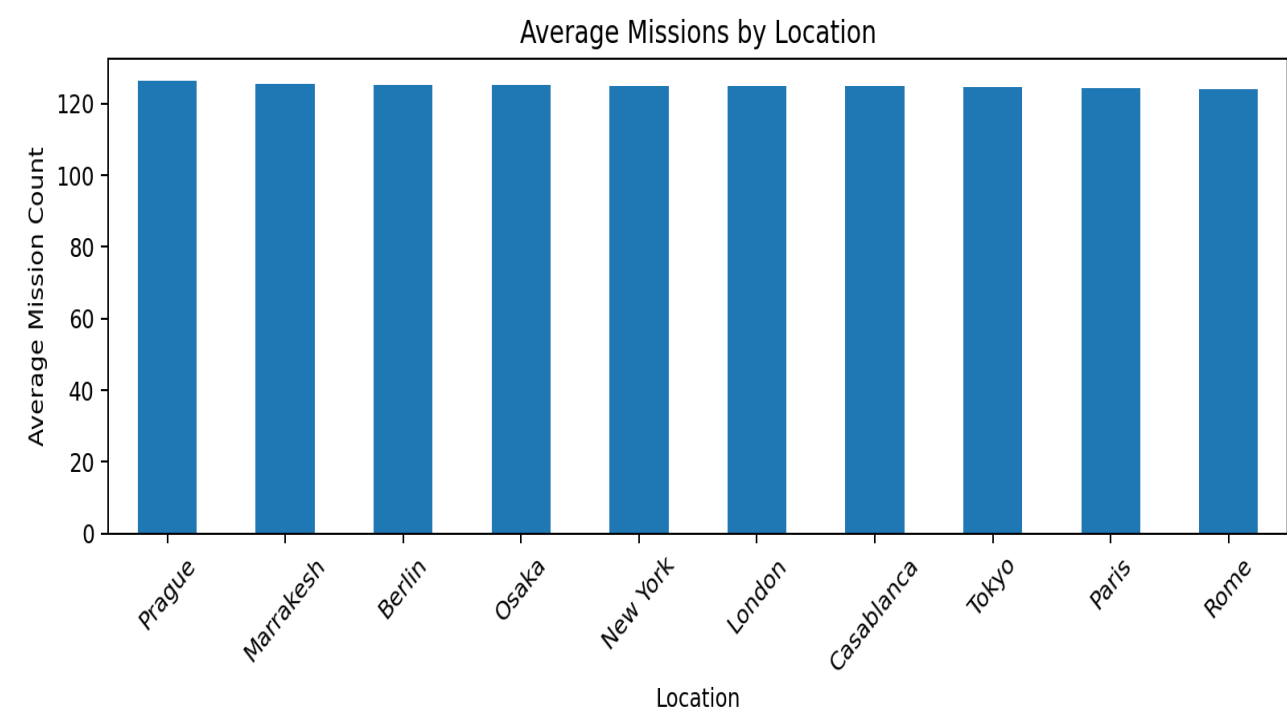


Average mission activity was compared across the operational locations. The values are close to each other, indicating no major location-based difference in the synthetic data.

Average Missions by Faction

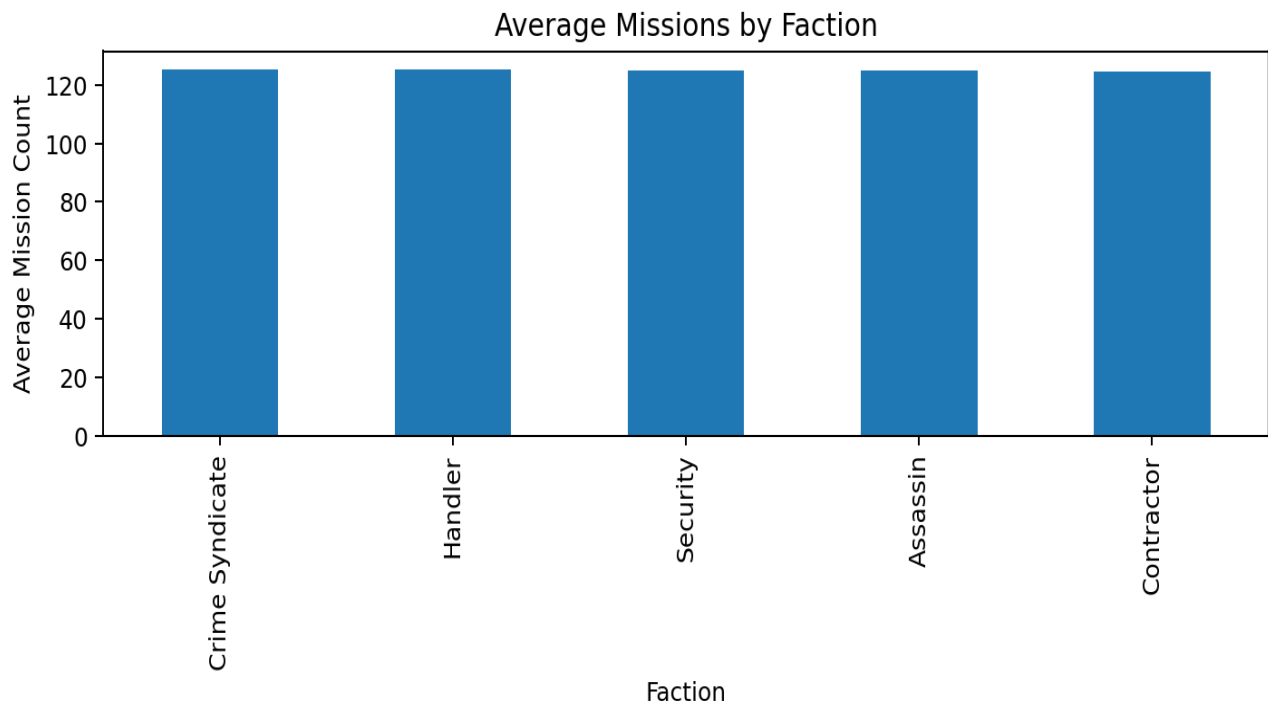


Average mission counts were compared across factions. The faction averages remain relatively close because mission counts are broadly distributed.

Loyalty Distribution

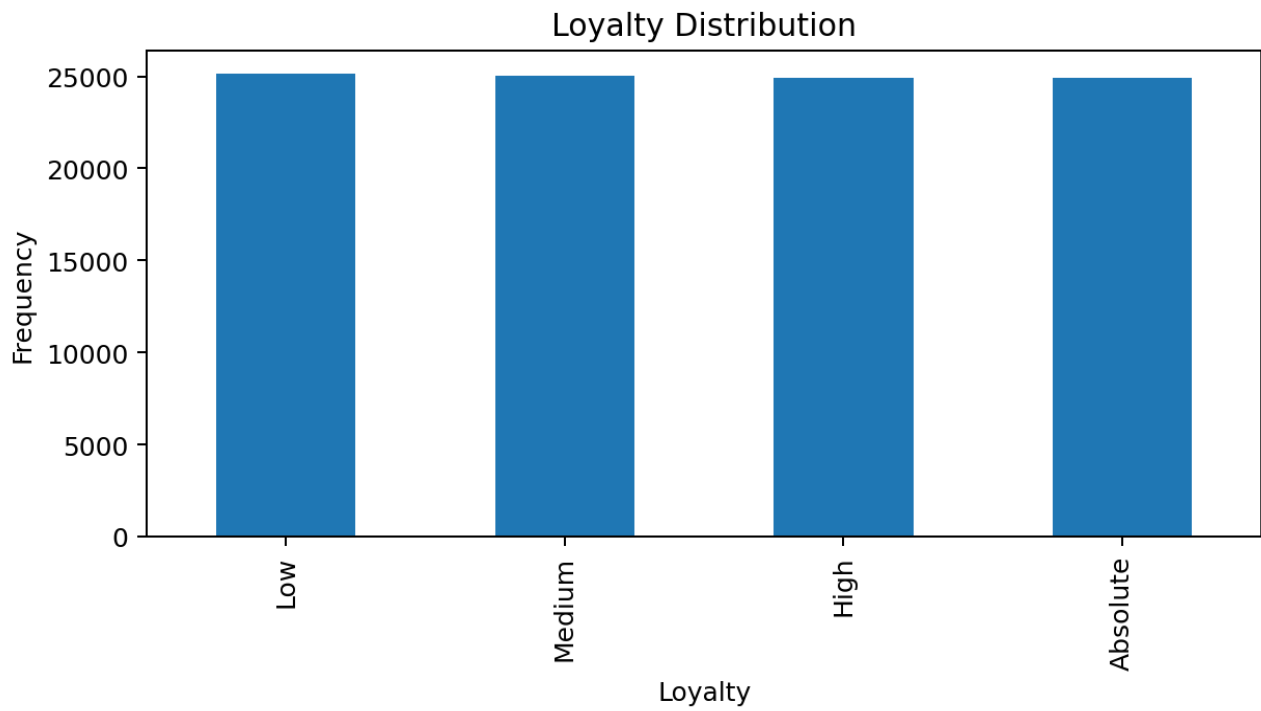


The loyalty categories Low, Medium, High, and Absolute are distributed almost evenly across the dataset.

Weapon Distribution

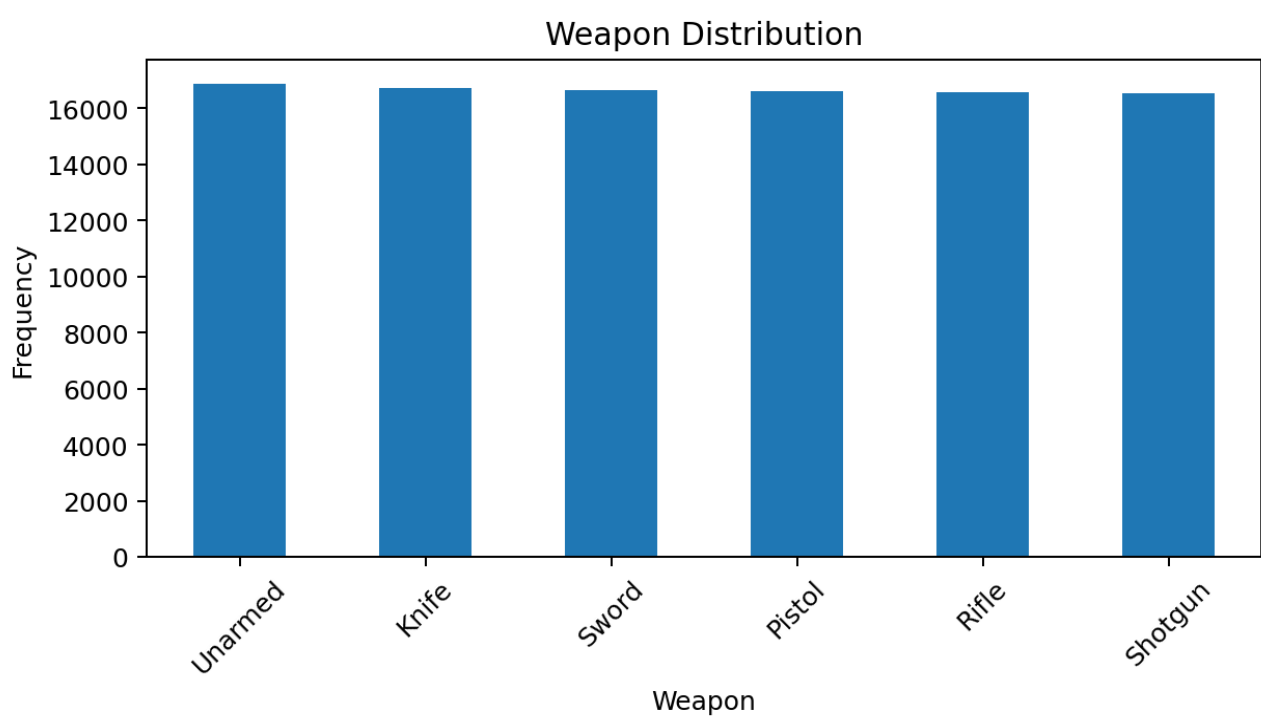


The six weapon categories show a broadly balanced distribution across the operative records.

Rank vs Loyalty

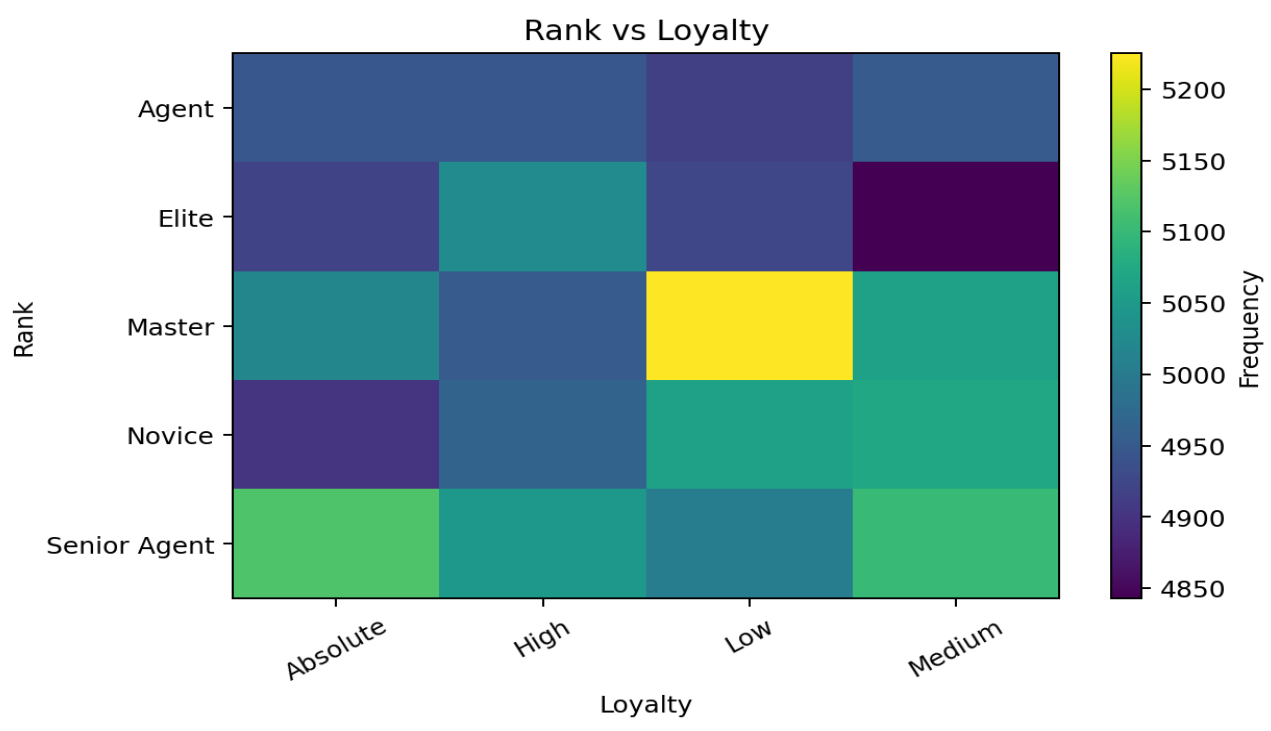


The cross-tabulation compares loyalty levels across ranks and helps identify the distribution of loyalty categories within each rank.

Faction vs Weapon

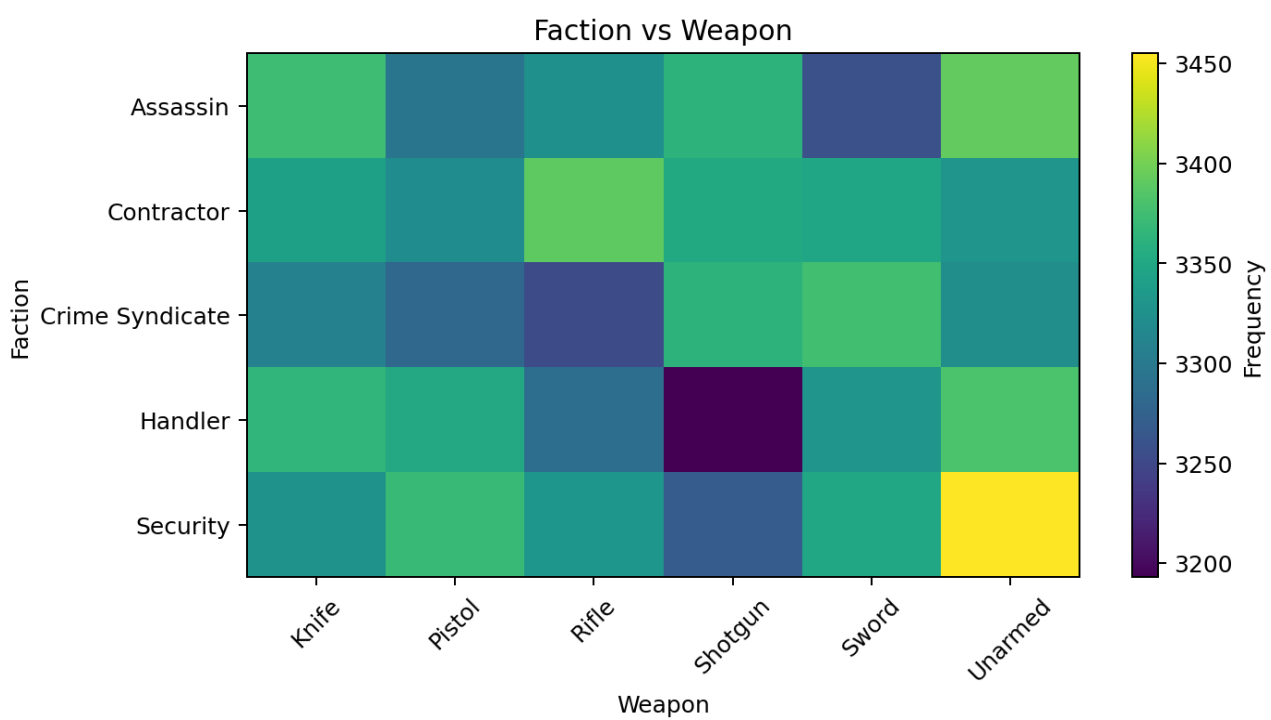


The cross-tabulation compares weapon usage across factions and provides a visual view of the categorical relationship.

Top 10 Operatives by Mission Count

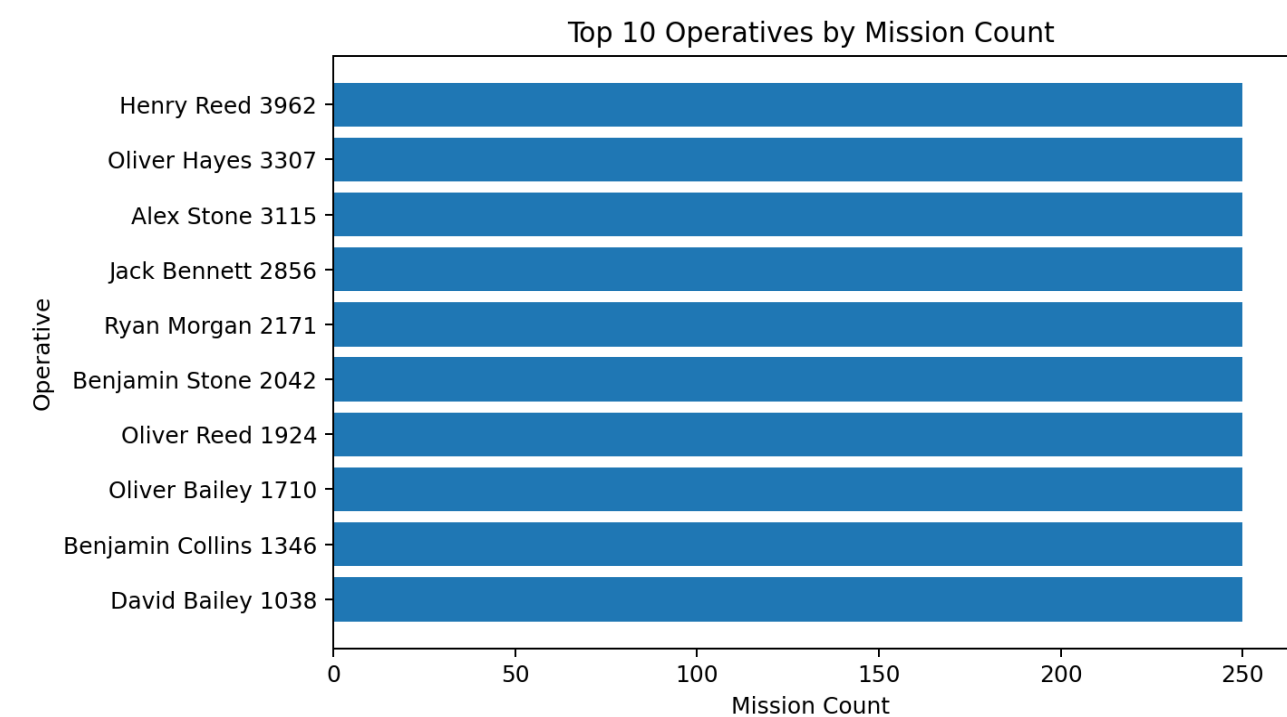

The top ten records were identified by sorting mission_count in descending order. These operatives have the highest recorded mission activity in the dataset.

Role Distribution

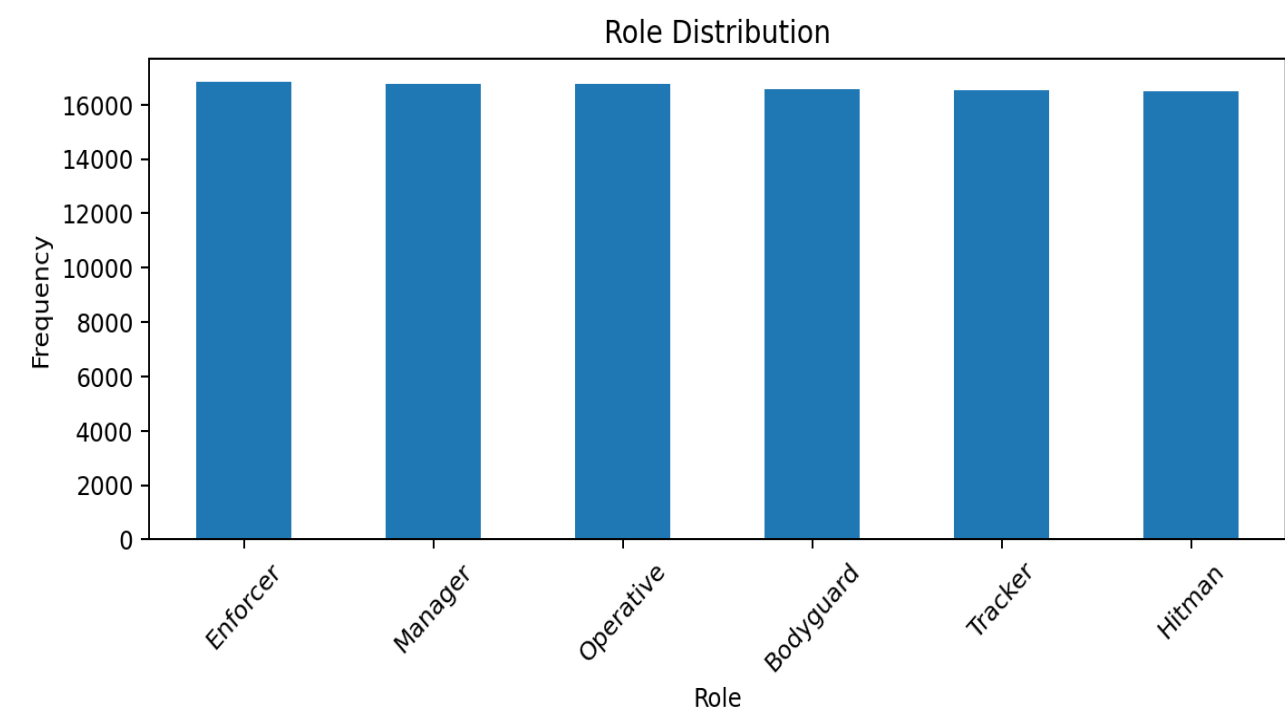

The six roles are distributed relatively evenly, showing representation across Enforcer, Manager, Operative, Bodyguard, Tracker, and Hitman categories.

FINAL OBSERVATIONS

- The Global Operative Dataset contains 100,000 records and 12 attributes.
- The dataset has 1 numerical feature and 11 categorical features.
- No missing values and 0 duplicate rows were identified.
- mission_count ranges from 0 to 250, with a mean of 124.99 and median of 125.
- Categorical distributions for gender, status, affiliation, rank, loyalty, weapons, roles, and emotions are broadly balanced.
- Sorting and filtering can be used to identify highly active operatives and other specific subsets.
- Group-based analysis allows mission activity to be compared by rank, location, and faction.
- Cross-tabulation provides additional insight into relationships such as rank versus loyalty and faction versus weapon.
- The EDA successfully identified the structure, distributions, and basic relationships within the Global Operative Dataset.

The Global Operative Dataset was successfully loaded, explored, analyzed, and visualized using Pandas and Matplotlib. The resulting EDA provides a clear understanding of the dataset and prepares it for further data-analysis or machine-learning experiments.