


countdown_mc


Corruption: lowercase choice | Mode: deterministic | Train: 1,024 | Validation: 256 | Example seed: 0

Clean demonstrations; clean reference answers

Best validation accuracy

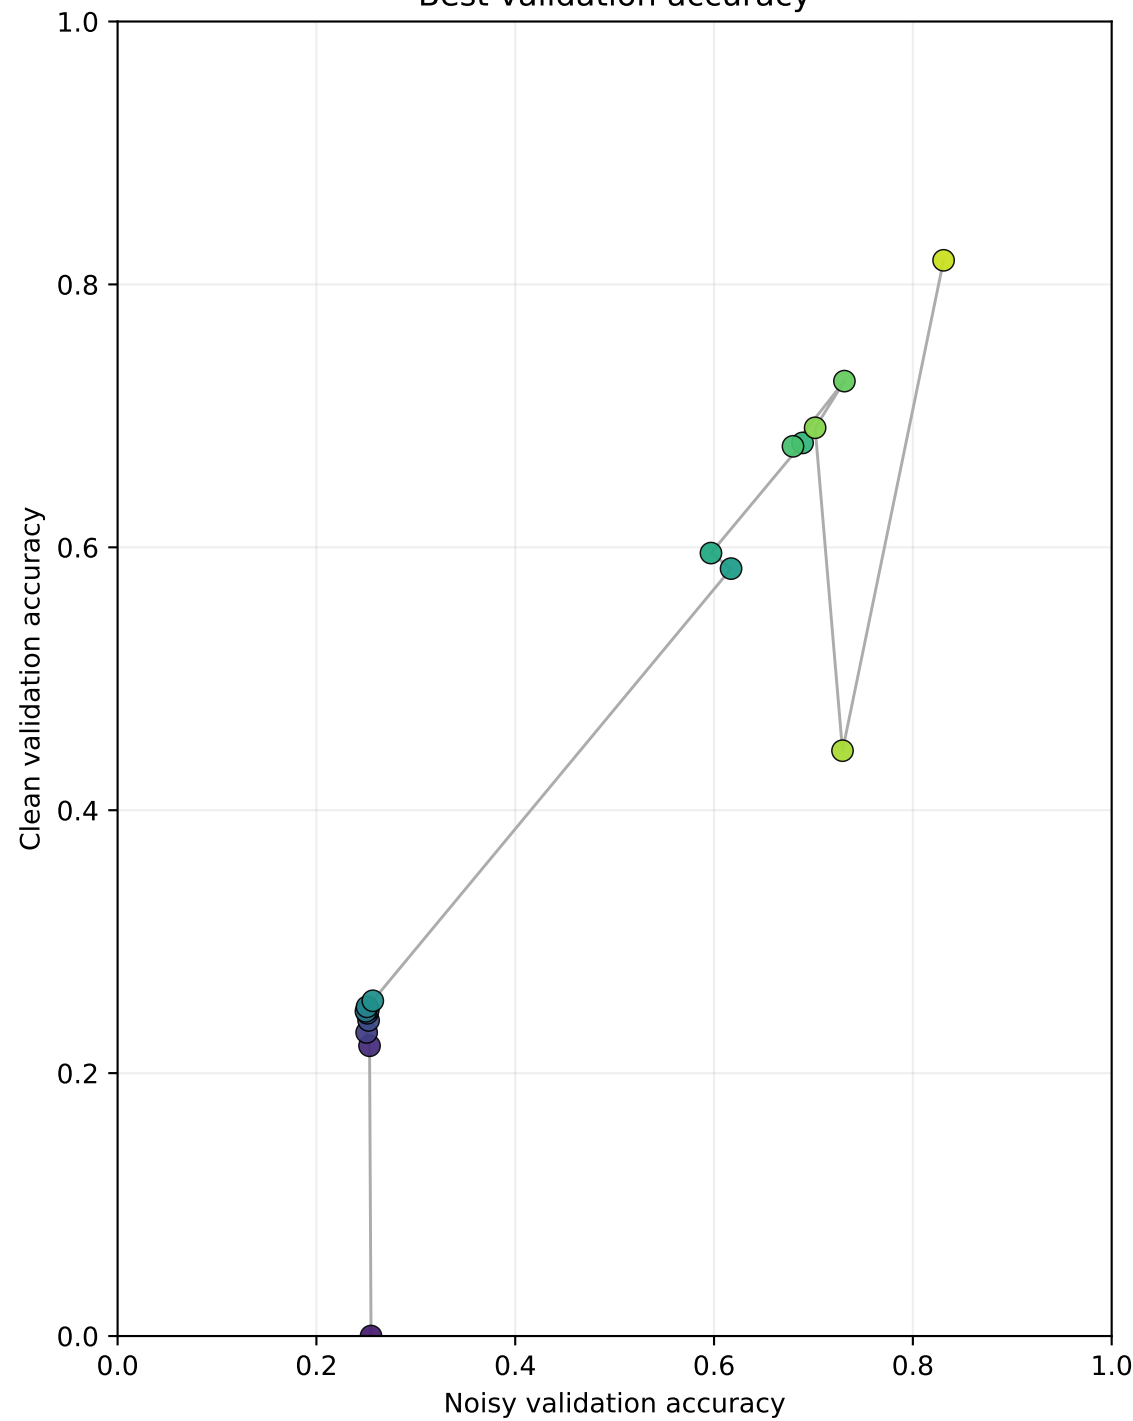

Clean validation during fine-tuning

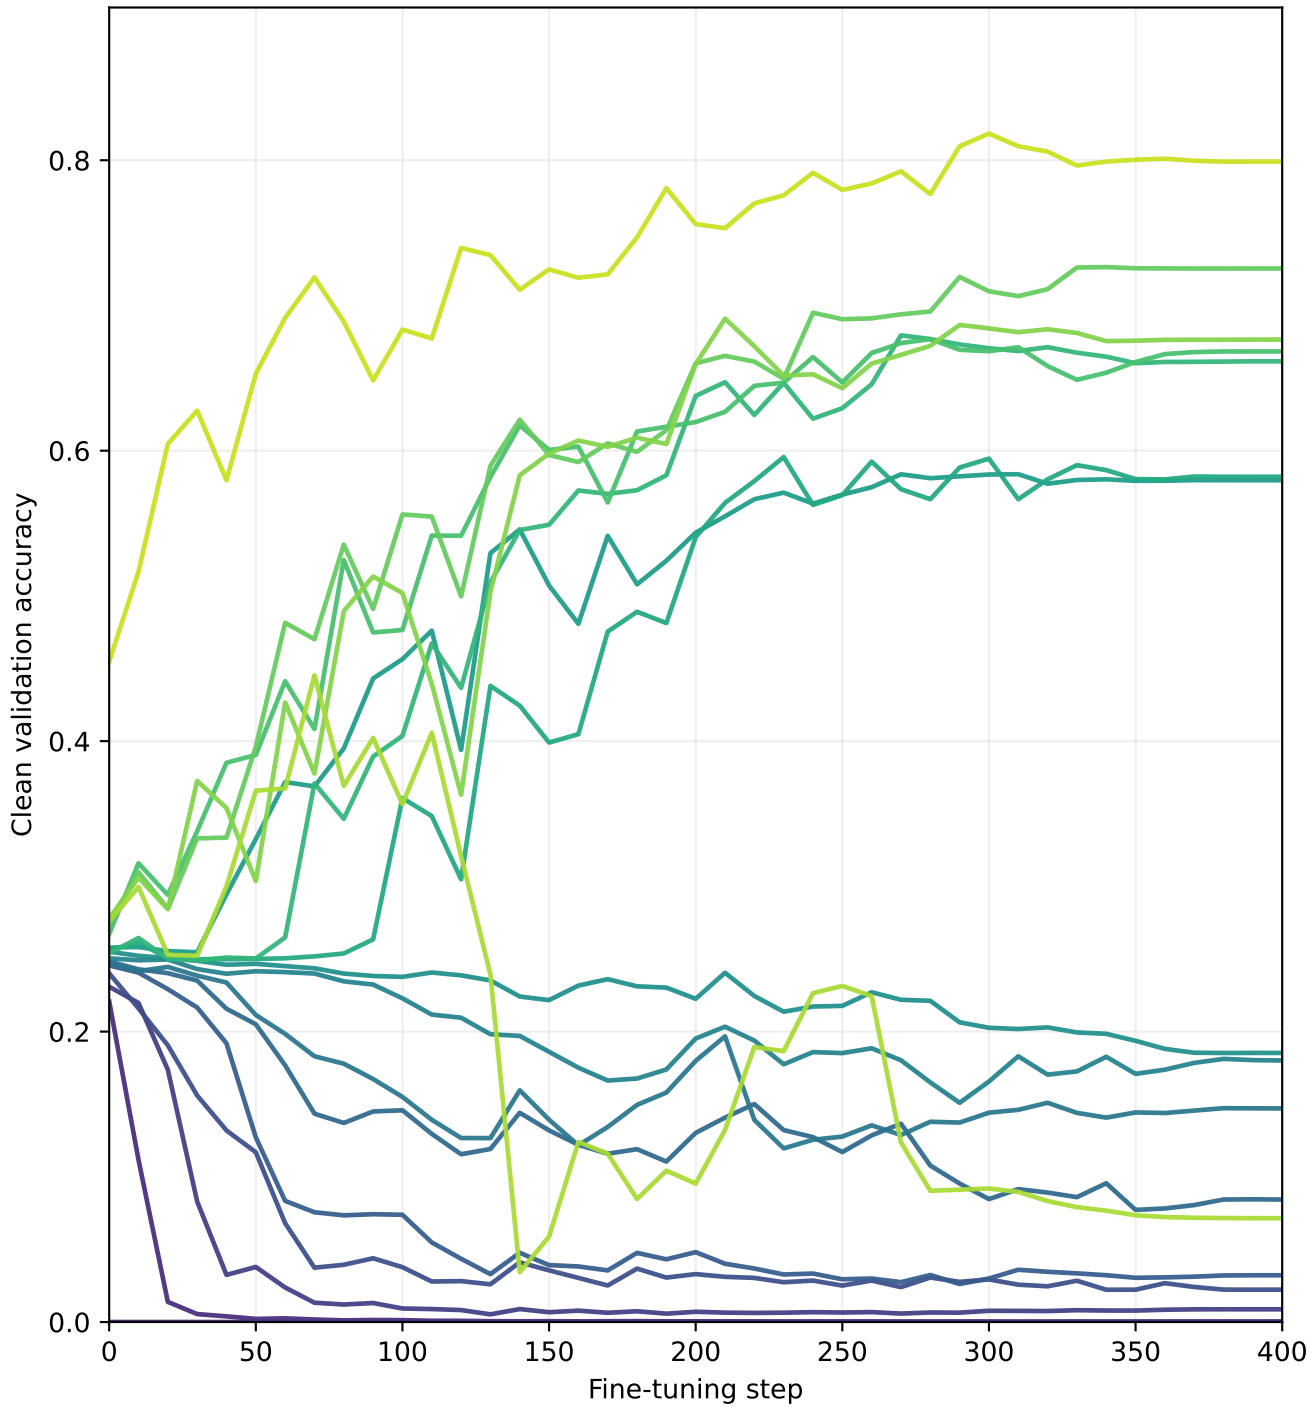

Training example

Input
Numbers: 1, 4, 3, 1
Target: 7
A. $((4 - 1) * 1) / 3$
B. $((4 / 1) + 1) * 3$
C. $4 + (1 + (3 - 1))$
D. $((1 + 1) * 4) - 3$

Clean answer: C
Training answer: c

Clean validation example (both y-axes)

Input
Numbers: 3, 1, 3, 5
Target: 5
A. $((1 * (3 + 5)) - 3)$
B. $(1 + (3 - (5 - 3)))$
C. $((3 * (5 + 3)) / 1)$
D. $((5 * 3) + 1) - 3$

Validation answer: A

Noisy validation example (scatter x-axis)

Input
Numbers: 3, 1, 3, 5
Target: 5
A. $((1 * (3 + 5)) - 3)$
B. $(1 + (3 - (5 - 3)))$
C. $((3 * (5 + 3)) / 1)$
D. $((5 * 3) + 1) - 3$

Noisy validation answer: a

