


Visa Token Service

Technical Specifications Guide for Issuers, Version 5.0

Effective: 21 July 2023

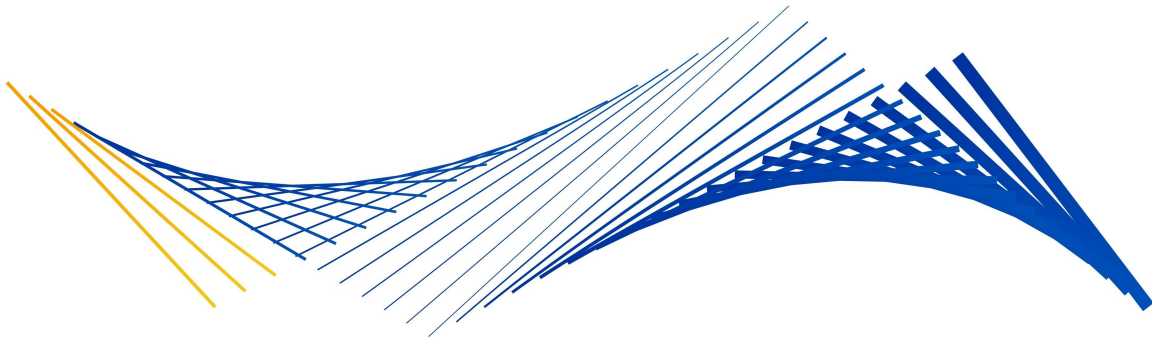

Important Note on Confidentiality and Copyright

The Visa Confidential label signifies that the information in this document is confidential and proprietary to Visa and is intended for use only by Visa Clients subject to the confidentiality restrictions in Visa Core Rules and Visa Product and Service Rules, non-Client Third Party Processors that have an executed and valid Exhibit K on file with Visa, and other third parties that have a current nondisclosure agreement (NDA) or other agreement with Visa that covers disclosure and use of the information contained herein and the provision of any feedback to Visa. This document is protected by copyright restricting its use, copying, distribution, and decompilation. No part of this document may be reproduced in any form by any means without prior written authorization of Visa. Visa and other trademarks are registered trademarks of Visa International Service Association, and are used under license by Visa. All other product names mentioned herein are the trademarks of their respective owners.

THIS PUBLICATION COULD INCLUDE TECHNICAL INACCURACIES OR TYPOGRAPHICAL ERRORS. CHANGES ARE PERIODICALLY ADDED TO THE INFORMATION HEREIN: THESE CHANGES WILL BE INCORPORATED IN NEW EDITIONS OF THE PUBLICATION. VISA MAY MAKE IMPROVEMENTS AND/OR CHANGES IN THE PRODUCT(S) AND/OR THE PROGRAM(S) DESCRIBED IN THIS PUBLICATION AT ANY TIME.

THIS PUBLICATION IS PROVIDED ON AN "AS IS, WHERE IS" BASIS, "WITH ALL FAULTS" KNOWN AND UNKNOWN. THIS PUBLICATION COULD INCLUDE TECHNICAL INACCURACIES OR TYPOGRAPHICAL ERRORS. CHANGES ARE PERIODICALLY ADDED TO THE INFORMATION HEREIN: THESE CHANGES WILL BE INCORPORATED IN NEW EDITIONS OF THE PUBLICATION. VISA MAY MAKE IMPROVEMENTS AND/OR CHANGES IN THE PRODUCT(S) AND/OR THE PROGRAM(S) DESCRIBED IN THIS PUBLICATION AT ANY TIME. WHERE POTENTIAL FUTURE FUNCTIONALITY IS HIGHLIGHTED, VISA DOES NOT PROVIDE ANY WARRANTY ON WHETHER SUCH FUNCTIONALITY WILL BE AVAILABLE OR IF IT WILL BE DELIVERED IN ANY PARTICULAR. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, VISA EXPLICITLY DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT.

Contents

About This Guide

Audience.	1
Document Organization	2
Key Terms	3
Table Legends	4
Related Publications.	5
Related Publications: VisaNet Business Enhancements Global Technical Letter and Implementation Guide	6
Summary of Impacts	11
For More Information	12
Summary of Changes	12

Chapter 1 • Visa Token Service Overview

Benefits of the Visa Token Service.	1-1
Features of the Visa Token Service	1-1
Using the Visa Token Service	1-2

Chapter 2 • Provisioning Messages for the Visa Token Service

0100/0110 Account Verification Request and Response Messages	2-1
--	-----

0100/0110 Token Activation Request and Response Messages	2-1
Secure Element Mobile Device Provisioning Messages	2-2
Required Secure Element Mobile Device Provisioning Messages.	2-2
Step-Up Authentication Requirements for SE Tokens	2-2
Issuer Response to Provisioning Advices	2-2
Delivery of 0620/0630 Issuer Token Notification Advice Messages	2-2
0600 Issuer Token Notification Online Request Messages for Message Reason Codes 3700 and 3711	2-3
Host Card Emulation Mobile Device Provisioning Messages	2-3
Required Host Card Emulation Mobile Device Provisioning Messages.	2-3
Step-Up Authentication Requirements for HCE Tokens	2-4
Issuer Response to Provisioning Advices	2-4
Delivery of 0620/0630 Issuer Token Notification Advice Messages	2-4
0600 Issuer Token Notification Online Request Messages for Message Reason Codes 3700 and 3711	2-4
Card-on-File/E-Commerce Provisioning Messages	2-4
Required Card-on-File/E-Commerce Provisioning Messages	2-4
Delivery of 0620/0630 Issuer Token Notification Advice Messages	2-5
0600 Issuer Token Notification Online Request Messages for Message Reason Code 3700	2-5
E-Commerce Enabler Provisioning Messages.	2-5
Required E-Commerce Enabler Provisioning Messages	2-5
Delivery of 0620/0630 Issuer Token Notification Advice Messages	2-5
0600 Issuer Token Notification Online Request Messages for Message Reason Code 3700	2-5
Magnetic Secure Transmission Provisioning Messages	2-6

I Chapter 3 • Cloud Token Framework

Device Binding	3-1
Consumer Authentication.	3-2

Issuer Step-Up Capabilities	3-2
Required Device Binding Messages	3-2
Device Binding Message Reason Codes	3-4
Device Binding Tags.	3-5
Token for Token Provisioning	3-8

Chapter 4 • Payments Processing for Visa Token Service Transactions

Secure Element Mobile Device	4-1
Secure Element Mobile Device V.I.P. Processing	4-1
Full Chip Data	4-1
Early Chip Data.	4-2
iCVV Convert Service	4-3
Token Convert	4-4
Secure Element Mobile Device BASE II Token Transaction Processing	4-5
Host Card Emulation Mobile Device	4-7
Host Card Emulation Mobile Device V.I.P. Processing	4-7
Full Chip Data	4-7
Early Chip Data.	4-8
iCVV Convert Service	4-9
Token Convert	4-10
Magnetic Secure Transmission Convert	4-11
Cardholder Validation Processing for Step-Up Authentication Method for Cloud-Based Payment Transactions for Host Card Emulation Mobile Devices	4-12
Host Card Emulation Mobile Device BASE II Token Transaction Processing	4-12
Card-on-File/E-Commerce	4-13
Card-on-File/E-Commerce V.I.P. Processing	4-13
Card-on-File/E-Commerce BASE II Token Transaction Processing	4-14
Application-Based E-Commerce	4-15

Application-Based E-Commerce V.I.P. Processing	4-15
Application-Based E-Commerce from a Secure Element Mobile Device	4-16
V.I.P. Processing for Application-Based E-Commerce Transactions Initiated from an SE Mobile Device	4-16
BASE II Processing for Application-Based E-Commerce Transactions Initiated from an SE Mobile Device	4-16
Application-Based E-Commerce from a Host Card Emulation Mobile Device	4-16
V.I.P. Processing for Application-Based E-Commerce Transactions Initiated from an HCE Mobile Device	4-16
BASE II Processing for Application-Based E-Commerce Transactions Initiated from an HCE Mobile Device	4-17
E-Commerce Enabler	4-18
V.I.P. Processing	4-18
BASE II Processing	4-19
Magnetic Secure Transmission	4-20
V.I.P. Processing	4-20
Merchant-Initiated Transactions	4-21
V.I.P. Processing	4-21
Field 22	4-21
Field 54	4-21
Field 60.10	4-22
Field 63.3	4-22
Field 125, Usage 2	4-24
Field 126.13	4-24
BASE II Processing	4-24
Edit Package	4-25
PC Edit Package for Windows	4-25
Edit Package Reports	4-26
SMS Raw Data.	4-27

Merchant-Initiated Transactions	4-27
Exception Item Processing	4-29
Visa Resolve Online	4-29

Chapter 5 • Lifecycle Management for the Visa Token Service

Secure Element Mobile Device	5-1
Host Card Emulation Mobile Device	5-2
Card-on-File/E-Commerce	5-2
Visa Account Updater Suite	5-3
Application-Based E-Commerce	5-3
E-Commerce Enabler	5-3
Magnetic Secure Transmission	5-4

Chapter 6 • Token Bulk Files

TC 33 Token Provisioning Results Record	6-1
TC 33 Token Device Binding Results Record	6-1
TC 33 Token Requestor ID Report Record	6-1
File Delivery Options	6-2

Chapter 7 • Visa Token Service Testing Overview

Appendix A • Secure Element Mobile Devices

0302/0312 Token Maintenance File Message for Secure Element Mobile Devices	A-2
0302/0312 Primary Account Number Maintenance File Message for Secure Element Mobile Devices	A-8
0302/0312 Token File Inquiry Message	A-13
0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID.	A-14
0302/0312 Token File Inquiry Message—Token Detail for Secure Element Mobile Device	A-20

0302/0312 Issuer Payment Account Reference Inquiry and Response Messages . . .	A-26
0302/0312 Issuer Personalization Lifecycle Message	A-30
0600/0610 Issuer Token Notification Messages for Message Reason Codes 3700 and 3711	A-36
0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3700, 3701, 3702, 3703, and 3711.	A-52
0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3712 and 3714	A-71
0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3713	A-77
0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3720 and 3721.	A-83
0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3730	A-88
Full Chip Token Payment Messages	A-93
V.I.P. Full Chip Data for NFC Visa Contactless Messages	A-93
0100/0110 and 0120/0130 POS Authorization Messages for Full Chip Data Processing	A-95
0100/0110 Preauthorization POS Full Financial Messages for Full Chip Data Processing	A-111
0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data Processing	A-124
0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data Processing	A-140
0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Full Chip Data Processing	A-148
0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Full Chip Data Processing	A-152
Early Chip Token Payment Messages.	A-156
0100/0110 and 0120/0130 POS Authorization Messages for Early Chip Data Processing	A-158
0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data Processing	A-171
0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data Processing	A-179

0400/0410 and 0420/0430 POS Authorization Reversal Messages for Early Chip Data Processing	A-184
0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Early Chip Data Processing	A-188
0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Early Chip Data Processing	A-192
iCVV Convert Token Payment Messages	A-196
0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service Processing	A-198
0100/0110 Preauthorization POS Full Financial Messages for iCVV Convert Service Processing	A-211
0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service Processing	A-219
0220/0230 Preauthorization Completion POS Full Financial Messages for iCVV Convert Service Processing	A-229
0400/0410 and 0420/0430 POS Authorization Reversal Messages for iCVV Convert Service Processing	A-234
0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for iCVV Convert Service Processing	A-237
0400/0410 and 0420/0430 POS Full Financial Reversal Messages for iCVV Convert Service Processing	A-241
Token Convert Payment Messages	A-245
0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service NFC Visa Contactless Processing	A-246
0100/0110 Preauthorization POS Messages for Token Convert Service NFC Visa Contactless Processing	A-260
0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service NFC Visa Contactless Processing	A-270
0220/0230 Preauthorization Completion POS Full Financial Messages for Token Convert Service NFC Visa Contactless Processing	A-281
0400/0410 and 0420/0430 POS Authorization Reversal Messages for Token Convert Service NFC Visa Contactless Processing	A-286
0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Token Convert Service NFC Visa Contactless Processing	A-290
0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service NFC Visa Contactless Processing	A-294

Appendix B • Host Card Emulation Mobile Device

0302/0312 Token Maintenance File Message for Host Card Emulation Mobile Device.	B-2
0302/0312 Primary Account Number Maintenance File Message for Host Card Emulation Mobile Devices	B-8
0302/0312 Token File Inquiry Message	B-13
0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID.	B-14
0302/0312 Token File Inquiry Message—Token Detail for Host Card Emulation Mobile Devices.	B-20
0302/0312 Issuer Payment Account Reference Inquiry and Response Messages . . .	B-26
0302/0312 Issuer Personalization Lifecycle Message	B-30
0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711	B-36
0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3700, 3701, 3702, 3703, and 3711.	B-53
0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3712 and 3714	B-77
0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3713	B-83
0620/0630 Issuer Token Notification Advice Messages for Message Reason Code 3715	B-88
0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3720 and 3721.	B-94
Full Chip Token Payment Messages	B-99
V.I.P. Full Chip Data for NFC Visa Contactless Messages	B-99
0100/0110 and 0120/0130 POS Authorization Messages for Full Chip Data Processing	B-101
0100/0110 Preauthorization POS Full Financial Messages for Full Chip Data Processing	B-128
0100/0110 and 0120/0130 POS Authorization Full Chip Data Processing with QR Code	B-142
0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data Processing	B-149

0200/0210 and 0220/0230 POS Authorization Full Chip Data Processing with QR Code	B-163
0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data Processing	B-173
0400/0410 and 0420/0430 POS Authorization Reversal Messages for Full Chip Data Processing	B-181
0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Full Chip Data Processing	B-186
0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Full Chip Data Processing	B-191
Early Chip Token Payment Messages.	B-196
0100/0110 and 0120/0130 POS Authorization Messages for Early Chip Data Processing	B-198
0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data Processing	B-223
0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data Processing	B-233
0400/0410 and 0420/0430 POS Authorization Reversal Messages for Early Chip Data Processing	B-238
0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Early Chip Data Processing	B-242
0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Early Chip Data Processing	B-246
iCVV Convert Token Payment Messages	B-251
0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service Processing	B-253
0100/0110 Preauthorization POS Full Financial Messages for iCVV Convert Service Processing	B-275
0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service Processing	B-284
0220/0230 Preauthorization Completion POS Full Financial Messages for iCVV Convert Service Processing	B-296
0400/0410 and 0420/0430 POS Authorization Reversal Messages for iCVV Convert Service Processing	B-301
0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for iCVV Convert Service Processing	B-306

0400/0410 and 0420/0430 POS Full Financial Reversal Messages for iCVV Convert Service Processing	B-310
Token Convert Payment Messages	B-315
0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service NFC Visa Contactless Processing	B-316
0100/0110 Preauthorization POS Messages for Token Convert Service NFC Visa Contactless Processing	B-339
0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service NFC Visa Contactless Processing	B-351
0220/0230 Preauthorization Completion POS Full Financial Messages for Token Convert Service NFC Visa Contactless Processing	B-361
0400/0410 and 0420/0430 POS Authorization Reversal Messages for Token Convert Service NFC Visa Contactless Processing	B-366
0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Token Convert Service NFC Visa Contactless Processing	B-371
0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service NFC Visa Contactless Processing	B-375

Appendix C • Card-on-File/E-Commerce

0302/0312 Token Maintenance File Message.	C-2
0302/0312 Primary Account Number Maintenance File Message for Card-on-File and E-Commerce	C-9
0302/0312 Token File Inquiry Message	C-14
0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID.	C-15
0302/0312 Token File Inquiry Message—Token Detail for Card-on-File and E-Commerce.	C-21
0302/0312 Issuer Payment Account Reference Inquiry and Response Messages . . .	C-26
0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700	C-29
0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3700, 3701, 3702, and 3703	C-40
0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3716	C-54
0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3720 and 3721.	C-59

Token Payment Messages for Card-on-File and E-Commerce	C-63
0100/0110 and 0120/0130 Authorization Messages for Card-on-File and E-Commerce.	C-64
0100/0110 and 0120/0130 Preauthorization Messages for Card-on-File and E-Commerce.	C-75
0200/0210 and 0220/0230 Full Financial Messages for Card-on-File and E-Commerce.	C-79
0220/0230 Preauthorization Completion Full Financial Messages for Card-on-File and E-Commerce	C-89
0400/0410 and 0420/0430 Authorization Reversal Messages for Card-on-File and E-Commerce	C-93
0400/0410 and 0420/0430 Preauthorization Reversal Messages for Card-on-File and E-Commerce	C-98
0400/0410 and 0420/0430 Full Financial Reversal Messages for Card-on-File and E-Commerce	C-102

Appendix D • Magnetic Secure Transmission

0100/0110 and 0120/0130 POS Authorization Messages for Cloud-Based Payment with Magnetic Secure Transmission	D-2
0100/0110 Preauthorization POS Messages for Cloud-Based Payment with Magnetic Secure Transmission.	D-9
0200/0210 and 0220/0230 POS Full Financial Messages for Cloud-Based Payment with Magnetic Secure Transmission	D-16
0220/0230 Preauthorization Completion POS Full Financial Messages for Cloud-Based Payment with Magnetic Secure Transmission.	D-23
0400/0410 and 0420/0430 POS Authorization Reversal Messages for Cloud-Based Payment with Magnetic Secure Transmission.	D-25
0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Cloud-Based Payment with Magnetic Secure Transmission.	D-27
0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Cloud-Based Payment with Magnetic Secure Transmission.	D-29

Appendix E • E-Commerce Enabler

0302/0312 Token Maintenance File Message.	E-2
0302/0312 Primary Account Number Maintenance File Message for E-Commerce Enabler	E-8

0302/0312 Token File Inquiry Message	E-12
0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID.	E-13
0302/0312 Token File Inquiry Message—Token Detail for E-Commerce Enabler.	E-19
0302/0312 Issuer Payment Account Reference Inquiry and Response Messages . . .	E-24
0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700	E-28
0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3700, 3701, 3702, and 3703	E-38
0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3716	E-50
0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3720 and 3721.	E-55
E-Commerce Enabler Token Payment Messages.	E-59
0100/0110 and 0120/0130 Authorization Messages for E-Commerce Enabler.	E-60
0100/0110 and 0120/0130 Preauthorization Messages for E-Commerce Enabler.	E-69
0200/0210 and 0220/0230 Full Financial Messages for E-Commerce Enabler.	E-73
0220/0230 Preauthorization Completion Full Financial Messages for E-Commerce Enabler.	E-82
0400/0410 and 0420/0430 Authorization Reversal Messages for E-Commerce Enabler.	E-86
0400/0410 and 0420/0430 Preauthorization Reversal Messages for E-Commerce Enabler.	E-90
0400/0410 and 0420/0430 Full Financial Reversal Messages for E-Commerce Enabler.	E-94

I Appendix F • Device Binding Transactions

0100/0110 Device Binding Request Messages for Device Binding	F-2
0120/0130 STIP Advice Messages for Device Binding.	F-16
0302/0312 Token Maintenance File Message.	F-30
0620/0630 Issuer Device Binding Notification Advice Messages for Device Binding . .	F-36

Appendix G • BASE II Data Records

BASE II Draft Data Transactions—TC x5, TC x6, TC x7	G-1
TCR 0	G-1
TCR 1—Additional Data	G-2
TCR 4—Supplemental Financial Data	G-3
TCR 4—Supplemental Financial and Promotion Data	G-3
TCR 5—Payment Service Data	G-4
TC 33—BASE II Clearing and Settlement Advice Record	G-4
TC 40—Fraud Advice Transaction	G-5
TC 48—BASE I Advice Record	G-6
TC 50—Text Messages Transactions	G-6

Appendix H • 0100/0110 Account Verification Request and Response Messages

0100/0110 Account Verification Request and Response and 0120/0130 STIP Advice Messages	H-2
--	-----

Appendix I • 0100/0110 Token Activation Request and Response Messages

0100/0110 Token Activation Request and Response Messages	I-2
--	-----

Appendix J • New Token Requestor ID Assignments Reports

New Token Requestor ID Assignments	J-1
TC 33—New Token Requestor ID Assignments	J-1
TC 33, TCR 0—Token Requestor ID Report Record	J-1
Delimited Text File for New Token Requestor ID Assignments	J-3
File Layout for the Delimited Text File Format	J-3

Appendix K • Edit Package

Edit Package ARDEF Changes	K-1
ARDEF Value Table Detail Record Layout	K-1

ARDEF Extract File Layout.	K-2
ARDEF Table Override Part 2 Layout	K-2
Combined (ID & ARD) Extract Table Layout	K-2

Appendix L • SMS Raw Data

SMS Raw Data.	L-1
Financial Transaction Record 1.1—V22201.	L-1
Financial Transaction Record 2—V22210	L-2
E-Commerce 3-D Secure Record—V22227	L-2
Financial Transaction Fee Record—V22261	L-3
Administrative Message 1 Transaction Record—V22400.	L-3
Financial Transaction Fee Record—V23210	L-3

Appendix M • Merchant Initiated Transactions

Resubmission Transaction.	M-3
0100/0110 Authorization and 0120/0130 STIP Advice Messages for Resubmission Transaction	M-4
0200/0210 and 0220/0230 POS Full Financial Messages for Resubmission Transaction	M-7
Delayed Charges and Reauthorization Transaction.	M-9
0100/0110 Authorization and 0120/0130 STIP Advice Messages for Delayed Charges and Reauthorization Transaction	M-10
0200/0210 and 0220/0230 POS Full Financial Messages for Delayed Charges and Reauthorization Transaction	M-13
No Show Transaction	M-15
0100/0110 Authorization and 0120/0130 STIP Advice Messages for No Show Transaction	M-16
0200/0210 and 0220/0230 POS Full Financial Messages for No Show Transaction	M-19
Recurring Transaction	M-21
0100/0110 Authorization and 0120/0130 STIP Advice Messages for Recurring Transaction	M-22

0200/0210 and 0220/0230 POS Full Financial Messages for Recurring Transaction	M-26
Installment Transaction.	M-29
0100/0110 Authorization and 0120/0130 STIP Advice Messages for Installment Transaction	M-30
0200/0210 and 0220/0230 POS Full Financial Messages for Installment Transaction	M-33
Unscheduled Stored Credential Transaction	M-36
0100/0110 Authorization and 0120/0130 STIP Advice Messages for Unscheduled Stored Credential Transaction	M-37
0200/0210 and 0220/0230 POS Full Financial Messages for Unscheduled Stored Credential Transaction	M-40
Credential on File Card-Not-Present Transaction	M-42
0100/0110 Authorization and 0120/0130 STIP Advice Messages for Credential-on-File Card-Not-Present Transaction	M-43
0200/0210 and 0220/0230 POS Full Financial Messages for Credential-on-File Card-Not-Present Transaction	M-45
Credential on File Card-Present Transaction	M-47
0100/0110 Authorization and 0120/0130 STIP Advice Messages for Credential-on-File Card-Present Transaction	M-48
0200/0210 and 0220/0230 POS Full Financial Messages for Credential-on-File Card-Present Transaction	M-50
Estimated or Initial Authorization Card-Not-Present Transaction.	M-52
0100/0110 Authorization and 0120/0130 STIP Advice Messages for Estimated or Initial Authorization Card-Not-Present Transaction	M-53
Estimated or Initial Authorization Card-Present Transaction	M-55
0100/0110 Authorization and 0120/0130 STIP Advice Messages for Estimated or Initial Authorization Card-Present Transaction	M-56
Incremental Authorization for Non-CPS and Non-U.S. CPS Card-Not-Present Transaction	M-58
0100/0110 Authorization and 0120/0130 STIP Advice Messages for Incremental Authorization Card-Not-Present Transaction	M-59
Incremental Authorization for Non-CPS and Non-U.S. CPS Card-Present Transaction	M-63

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Incremental Authorization Card-Present Transaction	M-64
Incremental Authorization for U.S. CPS Card-Not-Present Transaction.	M-68
0100/0110 Authorization and 0120/0130 STIP Advice Messages for Incremental Authorization Card-Not-Present Transaction	M-69
Incremental Authorization for U.S. CPS Card-Present Transaction	M-75
0100/0110 Authorization and 0120/0130 STIP Advice Messages for Incremental Authorization Card-Not-Present Transaction	M-76

About This Guide

The *Visa Token Service Technical Specifications Guide for Issuers* is intended to provide Visa issuers and issuer processors with the information related to the technical requirements, message specifications, and testing overview for the Visa Token Service.

This guide can be used as the source of technical details required for issuers to implement and support token payment transactions in the VisaNet System. Issuers and issuer processors should use this specification guide in conjunction with the supporting related documents for online processing, clearing and settlement, reporting, and back office processing. For a list of documents, refer to the [Related Publications](#) and [Related Publications: VisaNet Business Enhancements Global Technical Letter and Implementation Guide](#).

In addition, issuers and issuer processors must be aware that the information provided in this document consists of changes up through the October 2022 and January 2023 release as described in the [Summary of Changes](#).

Audience

The technical information and details in this guide are intended for issuers and issuer processors that are managing and executing the implementation and system development tasks for the participation requirements in transaction, record, and file processing for the Visa Token Service.

Effective with version 4.0 of the *Visa Token Service Technical Specifications Guide for Issuers*, processing specific to the Europe region was integrated into this guide. However, additional updates to support the Europe region may be required, and will be included in subsequent versions of the *Visa Token Service Technical Specifications Guide for Issuers*.

Document Organization

This document is organized into the following chapters and appendixes:

Chapter 1, Visa Token Service Overview—This chapter provides an overview of the Visa Token Service that is available for issuers and issuer processors.

Chapter 2, Provisioning Messages for the Visa Token Service—This chapter provides information for support of Visa Token Service issuers to support token provisioning for secure element (SE) and host card emulation (HCE) mobile devices, card-on-file/e-commerce, application-based e-commerce, magnetic secure transmission, and e-commerce enabler.

Chapter 3, Cloud Token Framework—This chapter provides information for the support of Visa Token Service issuers to support the Cloud Token Framework, including device binding, consumer authentication, issuer step-up capabilities, and token for token provisioning.

Chapter 4, Payments Processing for Visa Token Service Transactions—This chapter provides high-level information for support of Visa Token Service issuers to support payment and transaction processing for secure element (SE) and host card emulation (HCE) mobile devices, card-on-file/e-commerce, application-based e-commerce, magnetic secure transmission, and e-commerce enabler.

Chapter 5, Lifecycle Management for the Visa Token Service—This chapter provides information on the system and message requirements for issuers and issuer processors to implement lifecycle management strategies for their PAN-to-token mapping status changes.

Chapter 6, Token Bulk Files—This chapter provides a high-level overview of the processing option with the use of bulk files that issuers and issuer processors can choose to implement to support token provisioning and lifecycle management.

Chapter 7, Visa Token Service Testing Overview—This chapter provides a high-level overview of the testing requirements and process required for a new Visa Token Service implementation.

Appendix A, Secure Element Mobile Device—This appendix contains the technical message requirements, key fields, and values for processing Visa Token Service transactions for secure element (SE) mobile device messages.

Appendix B, Host Card Emulation Mobile Device—This appendix contains the technical message requirements, key fields, and values for processing Visa Token Service transactions for host card emulation (HCE) mobile device messages.

Appendix C, Card-on-File/E-Commerce—This appendix contains the technical message requirements, key fields, and values for processing Visa Token Service transactions for card-on-file and e-commerce messages.

Appendix D, Magnetic Secure Transmission—This appendix contains the technical message requirements, key fields, and values for processing Visa Token Service transactions for magnetic secure transmission (MST) messages.

Appendix E, E-Commerce Enabler—This appendix contains the technical message requirements, key fields, and values for processing Visa Token Service transactions for e-commerce enabler messages.

Appendix F, Device Binding Transactions—This appendix contains the technical message requirements, key fields, and values for processing Visa Token Service transactions for device binding messages.

Appendix G, BASE II Data Records—This appendix contains the technical record layouts, key fields, and values for BASE II Data transactions for Visa Token Service processing.

Appendix H, 0100/0110 Account Verification Request and Response Messages—This appendix contains the technical message layout, key fields, and values for Account verification processing for the Visa Token Service.

Appendix I, 0100/0110 Token Activation Request and Response Messages—This appendix contains the technical message layout, key fields, and values for token activation processing for the Visa Token Service.

Appendix J, TC 33 New Token Requestor ID Assignments Reports—This appendix contains the BASE II TC 33 record message layout, key fields, and values for issuers to automatically obtain information on new token requestor identifier (ID) assignments.

Appendix K, Edit Package—This appendix contains the Edit Package record layout, key fields, and values to support the Visa Token Service. These fields and values are applicable to all token types.

Appendix L, SMS Raw Data—This appendix contains the SMS Raw Data fields and positions to support the Visa Token Service. These fields and values are applicable to all token types.

Appendix M, Merchant Initiated Transactions—This appendix contains the technical message requirements, key fields, and values for processing Visa Token Service transactions for merchant-initiated transactions.

Key Terms

The following table provides the key terms that are used in this guide.

Table A **Key Terms**

Document Convention	Purpose In This Guide
boldface	Used to call attention to values in text and tables, or used for emphasis.
Issuer	Identifies a Visa Token Service participant, either an issuer or an issuer processor.
IMPORTANT	Indicates important information in the text.
<i>italics</i>	Sets off document titles, emphasis, variables, or text after a NOTE.
NOTE	Provides more information about the preceding topic.
REFERENCE	Refers to other documents or other articles within a document.
Regional Account Manager	Visa staff person whom issuers contact for assistance.
Regional Client Support Representative	This is your organization's primary regional contact for VisaNet systems support.
Regional Testing Representative	This is your organization's regional contact for testing support.

Table Legends

The tables in this section list the codes for V.I.P. message formats, and format keys for V.I.P. and BASE II fields and positions used throughout this book.

The following table lists the codes used in V.I.P. message layout tables.

Table B V.I.P. Message Format Table Legend

Code	Description
C	Conditional—The field or value is present under certain conditions.
C+	The field or value is conditionally added by V.I.P. at the VIC.
C–	The field or value is conditionally removed by V.I.P. at the VIC.
M	Mandatory—The field or value must be present in the message.
M+	The field or value is always added by V.I.P. at the VIC.
O	Optional—The presence of field or value in the message is up to the message initiator of the recipient.
Blank	The field or value must not be present in the message in that stage of its journey.
>	V.I.P. passes the field or value with the message, no V.I.P. action other than possible field editing.
–	The field or value is always removed by V.I.P. at the VIC.

The following table lists format keys used in tables that provide field and position information, and in message and record layouts.

Table C General Table Legend

Code	Description
A	Alphabetic
AN	Alphanumeric allowed, no special characters
ANS	Alphanumeric allowed, including special characters
ASCII	American standard code for information interchange
B	Binary value
BCD	Numeric, 4-bit BCD = Unsigned packed
DX	Display hexadecimal
EBCDIC	Extended binary coded decimal interchange code
N	Numeric
UN	Unpacked numeric

Related Publications

The following table contains additional technical and system processing information related to the Visa Token Service. The audience includes issuers.

Table D Visa Token Service Related Documents

Title and Description
Visa Token Service manuals: • <i>EMV Payment Tokenisation Specification—Technical Framework</i> • <i>Visa Token Service Description</i> • <i>Visa Cloud-Based Payments Program Minimum Requirements and Guidelines</i> • <i>Visa Cloud-Based Payments Program Description</i> • <i>Visa Cloud-Based Payments Contactless Specifications</i> • <i>Visa Contactless Payment Specification (VCPS)</i> • <i>Visa Smart Debit / Credit (VSDC) Contact and Contactless—Issuer Implementation Guide</i> • <i>Visa Ready Program for Cloud-Based Payments Program Guide Security Requirements and Evaluation Guidance for Mobile Applications—Visa Digital Solutions EMV®</i> • <i>Visa Token Life Cycle Management (TLCM)—User Guide</i>
V.I.P. System manuals: • <i>BASE I Processing Specifications</i> • <i>VisaNet Authorization-Only Online Messages Technical Specifications</i> • <i>Full Service POS Online Messages Technical Specifications</i> • <i>V.I.P. System Reports</i> • <i>Full Service POS Online Messages Processing Specifications</i>
BASE II system manuals: • <i>BASE II Clearing Data Codes</i> • <i>BASE II Clearing Edit Package Run Control Options Quick Reference Release 4</i> • <i>BASE II Clearing PC Edit Package for Windows User Guide Release 4</i> • <i>BASE II Clearing Edit Package Messages Reference Guide Release 4</i> • <i>BASE II Clearing Edit Package Operations Guide Release 4</i> • <i>BASE II Clearing Edit Package Reports Reference Guide Release 4</i> • <i>Dynamic Update Facility (DUF) User Guide</i> • <i>BASE II Clearing Interchange Formats, TC 01 to TC 49</i> • <i>BASE II Clearing Interchange Formats, TC 50 to TC 92</i> • <i>BASE II Clearing Services</i>
Visa Core Rules and Visa Product and Service Rules documentation: • <i>Visa Rules</i> • <i>Visa Product Brand Standards</i> • <i>Payment Technology Standards Manual</i>

Related Publications: VisaNet Business Enhancements Global Technical Letter and Implementation Guide

The following table contains additional technical and system processing information related to the Visa Token Service. The audience includes issuers.

Table E **Visa Token Service-Related Articles in the VisaNet Business Enhancements Global Technical Letter and Implementation Guide**

Title and Description
<i>April 2014 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i> - Article 1.1, Mandatory Changes for Visa Resolve Online - Article 2.7, Changes to the Edit Package ARDEF Table - Article 3.6, New SMS Raw Data Record for Token Data Elements - Article 4.1, New Visa Network Token Service - Article 4.2, Optional Changes for Visa Resolve Online - Article 11.1.1, U.S. Mandate for Support of Payment Token Standard Fields <i>October 2014 VisaNet Business Enhancements Global Technical Letter and Implementation Guide:</i> <i>April 2015 VisaNet Business Enhancements Global Technical Letter and Implementation Guide:</i>
<i>October 2014 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i> - Article 2.6, Changes to the ARDEF Table - Article 3.1, Changes to Support the Payment Token Framework Fields and Visa Network Token Service for Interlink Messages - Article 3.6, Changes to the Visa Payment Token Framework - Article 5.3, Introduction of the Payment Token Framework Fields in AP, Canada, CEMEA, and LAC - Article 11.3.1, U.S. Mandate for Support of Payment Token Fields in Interlink Messages - Article 11.4.5, Changes to the Visa Network Token Service to Support Visa On-Behalf-Of Issuer Provisioning
<i>April 2015 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i> - Article 4.1, Visa Token Service Lightweight Implementation Option for Issuers Supporting Secure Element Mobile Devices - Article 4.2, Visa Token Service for Acquirers - Article 4.4, Visa Token Service Lightweight Implementation Option for Issuers Supporting Host Card Emulation Mobile Devices - Article 5.1, Visa Token Service Full Implementation Option for Issuers Supporting Secure Element Mobile Devices - Article 5.3, Visa Token Service Full Implementation Option for Issuers Supporting Host Card Emulation Mobile Devices - Article 9.4.3, Visa Europe Payment Token Service for Issuers
<i>October 2015 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i> - Article 3.1, Changes to the Visa Token Service for Secure Element Mobile Devices - Article 3.2, Changes to the Visa Token Service for Cloud-Based Payment Token Transactions for Host Card Emulation Mobile Devices - Article 3.17, Changes to the Visa Token Service to Support E-Commerce and Card-on-File Tokenization for Issuers - Article 3.18, Changes to the Visa Token Service to Support Application-Based E-Commerce Transactions From Host Card Emulation Mobile Devices for Issuers - Article 4.3, Changes to Visa Token Service Provisioning Messages for Secure Element Mobile Devices - Article 4.4, Changes to Visa Token Service Provisioning Messages for Host Card Emulation Mobile Devices

Table E Visa Token Service-Related Articles in the VisaNet Business Enhancements Global Technical Letter and Implementation Guide (cont'd.)

Title and Description
<i>October 2015 VisaNet Business Enhancements Global Technical Letter and Implementation Guide (cont'd.)</i>
- Article 4.7, New Issuer TC 33 Record for Token Provisioning - Article 4.8, Visa Token Service Issuer Stand-In Processing Option for Host Card Emulation Active Account Management - Article 6.2.2, Support of Payment Token Data Fields for Issuers in Singapore, Hong Kong, Macau, and Malaysia - Article 6.5.1, Payment Token Processing for Issuers in the Asia Pacific Region - Article 8.2.2, Support of Payment Token Data Fields for Issuers in the United Arab Emirates - Article 9.3.3, Enhancements to the Visa Europe Payment Token Service for Issuers - Article 11.3.1, Changes to the Visa Token Service to Support E-Commerce and Card-on-File Tokenization for U.S. Issuers - Article 11.3.2, Changes to the Visa Token Service to Support Application-Based E-Commerce Transactions From Host Card Emulation Mobile Devices for U.S. Issuers - Article 11.3.5, Changes to the Visa Token Service for Cloud-Based Payment Token Transactions With Magnetic Secure Transmission for Issuers
<i>April 2016 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i>
- Article 2.2, Changes to Enforce Authorization Code Processing for Payment Token Transactions - Article 3.1, Changes to Visa Token Service Commercial Transaction Processing for Acquirers - Article 3.2, Changes to Visa Token Service for Visa Commercial Issuers Supporting Secure Element Mobile Devices - Article 3.3, Changes to Visa Token Service for Visa Commercial Issuers Supporting Host Card Emulation Mobile Devices - Article 3.4, Changes to the Visa Token Service to Support E-Commerce and Card-on-File Tokenization for Visa Commercial Issuers - Article 3.8, Changes to the Visa Token Service to Support New Token Type - Article 3.9, Changes to the Visa Token Service to Support Secure Element and Host Card Emulation Mobile Devices - Article 3.14, Changes to the Visa Token Service for Cloud-Based Payment Token Transactions with Magnetic Secure Transmission for Issuers - Article 8.2.2, Support of Payment Token Data Fields for Issuers in Georgia, Lebanon, Russia, South Africa, and Ukraine - Article 9.4.1, New Issuer TC 33 Record for Token Provisioning in Visa Europe - Article 9.5.2, Changes to Commercial Cards for the Visa Europe Payment Token Service
<i>October 2016 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i>
- Article 1.2, Alignment of Merchant-Initiated Transactions and Authorization Enhancements - Article 2.7, Changes to Edit Package - Article 3.1, New Payment Account Reference Number Field in Visa Token Service Messages and BASE I and V.I.P. Messages - Article 3.15, Additional Changes to the Visa Token Service - Article 4.1, New Set-Up Authentication Method for Cloud-Based Payment Transactions for Host Card Emulation Mobile Devices - Article 4.5, New Issuer Special Condition Codes in BASE I and V.I.P. Visa Token Service Provisioning and Token Inquiry File Response Messages - Article 11.3.2, Changes to Support New Secure Element Token Requestors

Table E Visa Token Service-Related Articles in the VisaNet Business Enhancements Global Technical Letter and Implementation Guide (cont'd.)

Title and Description
<i>April 2017 and July 2017 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i> • Article 2.6, Expansion of Incremental Authorization Processing • Article 2.14, Changes to Add Token Requestor ID • Article 2.16, Changes to Support Payment Account Reference in BASE II Draft Data Transactions • Article 3.1, Changes to the Visa Token Service • Article 3.13, Changes to the Visa Token Service for Token File Inquiry Messages • Article 4.1, Changes to Verified by Visa to Support New Version of 3-D Secure • Article 4.3, Changes to Support Pseudo Accounts for Commercial Cards • Article 4.6, Changes to the Visa Token Service for Provisioning Messages • Article 5.5, Merchant-Initiated Transaction Framework • Article 9.1.1, Support of Payment Token Data for Issuers in the Europe Region • Article 9.4.1, Changes to Support the Visa Token Service in the Europe Region • Article 10.2.1, Support of Payment Token Data Fields for Issuers in LAC • Article 11.4.1, Changes to the Visa Token Service POS Transactions With Visa Quick Response Code • Appendix F, Key Fields and Values for the Visa Token Service POS Transactions with Visa Quick Response Code
<i>October 2017 and January 2018 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i> • Article 3.2, Changes to the Visa Token Service to Support Account Funding and Original Credit Transactions • Article 3.3, Changes to the Visa Token Service for Credential-on-File and E-Commerce Token Activation Request Messages • Article 3.4, Support of Cardholder Verification Method in POS Transactions • Article 3.11, Changes to the Visa Token Service for the Personalization Data of Secure Element • Article 3.12, Changes to the Visa Token Service for Token Activation Request and Account Verification Service Request Messages • Article 3.13, Changes to CVV and iCVV Processing • Article 4.3, Changes to the Visa Token Service to Support Token Transactions With 3-D Secure • Article 4.8, Changes to Support Multicurrency Fields in Account Verification Service Request and Token Activation Request Messages • Article 9.2.1, Changes to Support the Token Requestor ID • Article 9.3.2, Changes to the Visa Token Service for Token File Inquiry Messages in the Europe Region • Article 9.3.3, Changes to Support the Visa Token Service in the Europe Region • Article 9.3.6, Changes to the Visa Token Service to Support Original Credit Transactions in the Europe Region • Article 9.3.7, Changes to the Visa Token Service to Support E-Commerce and Card-on-File Tokenization for Issuers • Article 9.4.1, Changes to the Visa Token Service for Provisioning Messages • Article 9.4.2, Introduction of Payment Account Reference Number in the Europe Region • Article 11.4.1, Changes to the Visa Token Service POS Transactions With Visa Quick Response Code • Article 11.4.2, Changes to the Visa Token Service to Support Token Transactions With 3-D Secure in the U.S. Region • Article 11.5.1, Changes to the Visa Token Service to Support Dynamic Token Verification Value in the U.S. Region

Table E Visa Token Service-Related Articles in the VisaNet Business Enhancements Global Technical Letter and Implementation Guide (cont'd.)

Title and Description
<i>October 2017 and January 2018 VisaNet Business Enhancements Global Technical Letter and Implementation Guide (cont'd.)</i> • Appendix E, Key Fields and Values for the Visa Token Service POS Transactions With Visa Quick Response Code • Appendix K, New BASE I and V.I.P. Token Advice Message
<i>April 2018 and July 2018 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i> • Article 2.6, Changes to Payment Account Reference for Non-Tokenized PANs • Article 3.4, New V.I.P. Field for Provisioning in the Visa Token Service • Article 3.5, Changes to Issuer Token Notification Messages for the Visa Token Service • Article 4.3, Changes to the Visa Token Service to Support Issuer Token Notification Advice Message for PAN and PAN Expiry Updates • Article 9.3.2, Mandate to Support E-Commerce and Card-on-File for the Visa Token Service Without the Presence of CVV2 for Issuers • Appendix D, Changes to V.I.P. 0620/0630 Issuer Token Notification Advice Messages for Primary Account Number and PAN Expiry Date Maintenance
<i>October 2018 and January 2019 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i> • Article 3.5, Changes to Token Provisioning for the Visa Token Service • Article 3.10, Changes to Token Expiry Date for E-Commerce/Card-on-File and E-Commerce Enabler Token Types • Article 3.13, Support of the Visa Token Service for Account Funding and Original Credit Transactions • Article 3.16, Changes to the Visa Token Service for Secure Element • Article 3.19, New Visa Token Service Basic Issuer Participation • Article 3.20, Changes to Support BASE II-Originated Original Credit Transactions for the Visa Token Service • Article 4.6, Changes to the Visa Token Service to Support Visa Digital Commerce Transactions • Article 4.9, Changes to the Visa Token Service to Support Contactless ATM Transactions • Article 4.10, New V.I.P. Payment Account Reference Inquiry Messages • Article 11.3.1, Changes to Address Verification Compressed Data for Token Activation Request Messages • Appendix C, Changes to V.I.P. 0620/0630 Issuer Token Notification Advice Message for E-Commerce/Card-on-File and E-Commerce Enabler Token Expiry Updates
<i>April 2019 and July 2019 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i> • Article 3.1, Changes to the Visa Token Service to Support Visa Digital Commerce Transactions • Article 3.10, Changes to the Visa Token Service to Support an Existing V.I.P. Field • Article 4.2, Changes to Visa Token Service Provisioning Messages • Article 4.6, Changes to the Visa Token Service to Support Issuer Personalization of Token Data • Article 4.15, Changes to the Visa Token Service to Support Enriched Data From Issuers • Article 4.18, Changes to the Visa Token Service to Support Visa Digital Commerce Transactions • Article 5.5, New Field 114 in TLV Format • Article 5.10, Visa Token Service Cloud Token Framework • Article 6.4.1, Expansion of the Visa Token Service POS Transactions With Visa Quick Response Code • Article 8.5.1, Requirements for Enabling Digital Commerce for Acquirers and Issuers in the CEMEA Region

Table E Visa Token Service-Related Articles in the VisaNet Business Enhancements Global Technical Letter and Implementation Guide (cont'd.)

Title and Description
<i>October 2019 and January 2020 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i> - Article 3.3, Changes to the Visa Token Service to Support Cloud Token Framework - Article 3.4, Changes to the Visa Token Service to Support an Existing V.I.P. Field - Article 3.5, Changes to the Visa Token Service to Support Token for Token Provisioning - Article 3.9, Changes to the Primary Account Number in TLV Field 123 - Article 3.10, Changes to Support the Visa Token Service for Issuer Lifecycle Messages - Article 3.17, Changes to Support an Increased Length for TLV Field 120 in V.I.P. - Article 3.18, Changes to the Visa Token Service to Support TC 33—Token Provisioning Results for Issuers - Article 5.8, Increase of File Size for ARDEF and Routing Tables - Article 5.12, Requirements for Token Authentication Verification Value and Dynamic Token Verification Value for Acquirers and Merchants - Article 5.13, Issuer Testing Required for Account Funding and Original Credit Transactions With the Visa Token Service - Article 6.4.1, Expansion of the Visa Token Service POS Transactions With Visa Quick Response Code - Article 8.5.1, Requirements for Enabling Digital Commerce for Acquirers and Issuers in the CEMEA Region - Article 8.5.2, Tokenization Requirements for Issuers in the CEMEA Region - Article 9.1.2, Changes to Support Visa Delegated Authentication - Article 11.3.1, Visa Token Service Basic Issuer Participation in the U.S. Region - Appendix D, New V.I.P. 0100/0120 Device Binding Request and 0620 Issuer Device Binding Notification Advice for E-Commerce/Card-on-File Token Device Binding - Appendix I, TC 33—Token Device Binding Results Record
<i>April 2020 and July 2020 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i> - Article 3.5, Changes to Token Provisioning for the Visa Token Service - Article 3.10, Changes to Token Expiry Date for E-Commerce/Card-on-File and E-Commerce Enabler Token Types - Article 3.13, Support of the Visa Token Service for Account Funding and Original Credit Transactions - Article 3.16, Changes to the Visa Token Service for Secure Element - Article 3.19, New Visa Token Service Basic Issuer Participation - Article 3.20, Changes to Support BASE II-Originated Original Credit Transactions for the Visa Token Service - Article 4.6, Changes to the Visa Token Service to Support Visa Digital Commerce Transactions - Article 4.9, Changes to the Visa Token Service to Support Contactless ATM Transactions - Article 4.10, New V.I.P. Payment Account Reference Inquiry Messages - Article 11.3.1, Changes to Address Verification Compressed Data for Token Activation Request Messages - Appendix C, Changes to V.I.P. 0620/0630 Issuer Token Notification Advice Message for E-Commerce/Card-on-File and E-Commerce Enabler Token Expiry Updates
<i>October 2020 and January 2021 VisaNet Business Enhancements Global Technical Letter and Implementation Guide</i> - Article 3.1, Changes to the Visa Token Service to Support Cloud Token Framework - Article 3.2, Changes to Support the Identification of Token Requestor-Token Service Providers - Article 5.7, New Deferred Authorization Message Reason Code for Token Transactions

Table E Visa Token Service-Related Articles in the VisaNet Business Enhancements Global Technical Letter and Implementation Guide (cont'd.)

Title and Description

April 2021 and July 2021 VisaNet Business Enhancements Global Technical Letter and Implementation Guide

- Article 3.1, Clarification of Impacted Token File Inquiry Messages for Token Provisioning
- Article 4.6, Changes to Support New Token Requestor Identifier Assignments Reports
- Article 8.4.1, Option to Support E-Commerce Token Types for Issuers in the CEMEA Region

October 2021 and January 2022 VisaNet Business Enhancements Global Technical Letter and Implementation Guide

- Article 2.10, Changes to Support the Visa Secure Credential Framework
- Article 2.11, Changes to Support Token Assurance Method
- Article 3.1, Changes to SMS Raw Data
- Article 3.3, Changes to the Visa Token Service
- Article 3.12, Changes to Processing for a Token Return Reason Code in BASE II
- Article 4.1, Option to Support Visa Secure Credential Framework
- Article 5.7, Changes to Support the Digital Authentication Framework
- Article 11.2.5, Changes in Authorization Characteristics Indicator Processing for Token-Based E-Commerce Transactions

April 2022 and July 2022 VisaNet Business Enhancements Global Technical Letter and Implementation Guide

- Article 1.1, Support of Visa Secure Credential Framework
- Article 3.1, Changes to Support the Digital Authentication Framework
- Article 3.5, Changes to SMS Raw Data
- Article 3.10, E-Commerce Transactions Authenticated With a Device-Based Secure Element Token May Be Classified as a Secure Electronic Commerce Transaction
- Article 3.11, Expanded Token for Token Support
- Article 3.13, Changes to Support Token Solutions for Web Browser Auto Fill
- Article 5.4, Retirement of Visa Token Service BASE II TC 33 Notification Messages
- Article 5.9, Visa Documentation Revised to Include Credential Update Terminology
- Article 11.5.1, Changes in Authorization Characteristics Indicator Processing for Token-Based E-Commerce Transactions

October 2022 and January 2023 VisaNet Business Enhancements Global Technical Letter and Implementation Guide

- Article 2.2, Changes to Support Token Solutions for Web Browser Auto Fill
- Article 3.1, Changes to Support Additional Risk Information for Liability Shift of Secure Element Tokens
- Article 3.3, Changes to Token Life Cycle Management for Suspending and Resuming Tokens
- Article 3.5, Changes to Token Authentication for Account Funding Transactions
- Article 3.18, E-Commerce Transactions Authenticated With a Credential-On-File Token May Be Classified as a Secure Electronic Commerce Transaction
- Article 5.3, Retirement of Visa Token Service BASE II TC 33 Notification Messages
- Article 11.5.1, Changes in Authorization Characteristics Indicator Processing for Token-Based E-Commerce Transactions

Summary of Impacts

The technical, implementation, and testing information provided in this document consist of changes through the *October 2022 and January 2023 VisaNet Business Enhancements Global Technical Letter and Implementation Guide*.

For More Information

Visa staff is available to assist issuers during development and implementation of the Visa Token Service. For more information, issuers should contact their client support representative.

Summary of Changes

Since the *Visa Token Service Technical Specifications Guide for Issuers, Version 4.0* was published, technical changes have occurred that need to be incorporated into the document. Changes are marked with change bars. The changes in this version are related to articles up to the *October 2022 and January 2023 VisaNet Business Enhancements Global Technical Letter and Implementation Guide*, listed in the [Related Publications](#) and [Related Publications: VisaNet Business Enhancements Global Technical Letter and Implementation Guide](#).

NOTE

This guide does not include information about the Digital Authentication Framework. Requirements for the Digital Authentication Framework will be provided at a later date.

Visa Token Service Overview

1

Tokens are surrogate values that replace the cardholder primary account number (PAN) in payment transactions during transaction processing. The Visa Token Service supports payment token processing in authorization, capture, clearing, and exception processing. Use of tokens in these transactions helps protect against counterfeit, account misuse, and other forms of fraud in multiple transaction environments, including card-not-present, e-commerce, and hybrid transaction environments.

Benefits of the Visa Token Service

By participating in the Visa Token Service, issuers can:

- Help minimize card re-issuance, thereby reducing the cost of fraud
- Help reduce the risk of data exposure after a merchant data breach
- Help increase account security by replacing primary account numbers with tokens on mobile devices, in cloud-based mobile apps, and for online e-commerce purchases
- Issue multiple tokens for a single primary account, with each token tied to a specific mobile device or service
- Reissue tokens tied to a lost or stolen device without changing the consumer's primary account number or reissuing a plastic card
- Process and route transactions as traditional card payments

Features of the Visa Token Service

The Visa Token Service provides:

- Service enrollment, which enrolls and configures service configuration parameters for participation in the Visa Token Service
- Token provisioning, which delivers tokens to authorized internet-connected devices and mobile phones for payment
- Visa Card Metadata Manager, which manages the card data and art presented to consumers
- Visa Token Life Cycle Management, which suspends, resumes, and/or deletes tokens from the token vault and on devices, and manages the tokens throughout their lifecycle for issuers

- Visa Token Vault, which stores tokens in a secure digital vault, links them to the cardholder's PAN for secure payment processing, and protects them via domain restriction controls
- Visa Risk Manager, which allows provisioning decisions to be made based on risk rules
- Payments processing based on existing International Organization for Standardization (ISO) standards, which allows tokenized transactions to be processed and routed as traditional card payments

Using the Visa Token Service

To enable tokenization for payment accounts, issuers need to integrate into the Visa Token Service. They must define product eligibility, set up token BINs, and establish token service configurations. Visa has developed several online applications to assist issuers with enrollment and implementation. Contact your regional client support representative for more information about the setup and business requirements for participation in the Visa Token Service.

Provisioning Messages for the Visa Token Service 2

Visa Token Service provisions a token from the Visa Token Vault to a specific token requestor. Visa creates a token within the Visa Token Vault for the enrolled account and sends the token to the token requestor.

0100/0110 Account Verification Request and Response Messages

The 0100/0110 Account verification messages are standard account verification messages that validate cardholder address and account status. They are applicable to all token types and require no additional integration from issuers.

These messages are used in place of the 0100/0110 Token activation messages.

REFERENCE

Refer to [Appendix H, 0100/0110 Account Verification Request and Response Messages](#) for the message layouts and field attributes.

0100/0110 Token Activation Request and Response Messages

The 0100/0110 Token activation messages are optional provisioning messages that request token issuance from the issuer. They are applicable across all token types and require additional integration from issuers.

Issuers will need to support Field 125, Usage 2—Supporting Information (TLV Format) to receive the 0100 Token activation messages.

These messages are used in place of the 0100/0110 Account verification messages.

REFERENCE

Refer to [Appendix I, 0100/0110 Token Activation Request and Response Messages](#) for the message layouts and field attributes.

Secure Element Mobile Device Provisioning Messages

Issuers that participate in the Visa Token Service and support token provisioning from secure element (SE) mobile devices must support certain provisioning messages and be aware of certain conditional behaviors.

Required Secure Element Mobile Device Provisioning Messages

Issuers that participate in the Visa Token Service and support token provisioning from secure element (SE) mobile devices must support these provisioning messages:

- 0100/0110 Account verification messages
- 0120/0130 STIP advice messages
- 0620/0630 Issuer token notification advice messages for these message reason codes:
 - **3700** (Token create)
 - **3711** (Device provisioning result)
 - **3712** (OTP verification result)
 - **3713** (Call center activation)
 - **3714** (Mobile banking app activation)

REFERENCE

For the message layout and field attributes of the provisioning messages for secure element (SE) mobile devices, refer to:

- [Appendix H, 0100/0110 Account Verification Request and Response Messages](#)
- [Table A-8, 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711](#)
- [Table A-9, 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714](#)
- [Table A-10, 0620/0630 Issuer Token Notification Advice for Message Reason Code 3713](#)

Step-Up Authentication Requirements for SE Tokens

The 0100/0110 Account verification messages are used as standard implementation provisioning messages for issuers. These messages will not be sent if Visa Risk Manager (VRM) determines that a step-up authentication is required.

Issuer Response to Provisioning Advices

It is mandatory for V.I.P. Full Service issuers to respond to all provisioning advices.

It is not mandatory for V.I.P. Authorization Only issuers to respond to all provisioning advices, however, Visa strongly recommends that issuers respond to all provisioning advices.

Delivery of 0620/0630 Issuer Token Notification Advice Messages

The 0620/0630 Issuer token notification advice messages are not delivered in real time. These messages will be delivered as soon as possible.

0600 Issuer Token Notification Online Request Messages for Message Reason Codes 3700 and 3711

Issuers can choose to receive the 0600 Issuer token notification online request message instead of the 0620 Issuer token notification advice message for message reason codes **3700** and **3711**. However, issuers that fail to respond to the 0600 Issuer token notification online request will receive the 0620 Issuer token notification advice message for message reason codes **3700** and **3711**.

REFERENCE

For the message layout and field attributes of the 0600/0610 Issuer token notification online messages for SE mobile devices, refer to [Table A-7, 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711](#).

Host Card Emulation Mobile Device Provisioning Messages

Issuers that participate in the Visa Token Service and support token provisioning from host card emulation (HCE) mobile devices must support certain provisioning messages and must be aware of certain conditional behaviors. These messages and behaviors also apply to magnetic secure transmission (MST) provisioned in HCE mobile devices.

Required Host Card Emulation Mobile Device Provisioning Messages

Issuers that participate in the Visa Token Service and support token provisioning from host card emulation (HCE) mobile devices must support these provisioning messages:

- 0100/0110 Account verification messages
- 0120/0130 STIP advice messages
- 0620/0630 Issuer token notification advice message for the following message reason codes:
 - **3700** (Token create)
 - **3711** (Device provisioning result)
 - **3712** (OTP verification result)
 - **3713** (Call center activation)
 - **3714** (Mobile banking app activation)
 - **3715** (Replenishment confirmation of limited-use keys)

REFERENCE

For the message layout and field attributes of the provisioning messages for host card emulation (HCE) mobile devices, refer to:

- [Appendix H, 0100/0110 Account Verification Request and Response Messages](#)
- [Table B-8, 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711](#)
- [Table B-9, 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714](#)
- [Table B-10, 0620/0630 Issuer Token Notification Advice for Message Reason Code 3713](#)

Step-Up Authentication Requirements for HCE Tokens

HCE issuers must contact their regional client support representative to obtain specific requirements for Visa Risk Manager step-up authentication.

Issuer Response to Provisioning Advices

It is mandatory for V.I.P. Full Service issuers to respond to all provisioning advices.

It is not mandatory for V.I.P. Authorization Only issuers to respond to all provisioning advices, however, Visa strongly recommends that issuers respond to all provisioning advices.

Delivery of 0620/0630 Issuer Token Notification Advice Messages

The 0620/0630 Issuer token notification advice messages are not delivered in real time. These messages will be delivered as soon as possible.

0600 Issuer Token Notification Online Request Messages for Message Reason Codes 3700 and 3711

Issuers can choose to receive the 0600 Issuer token notification online request message instead of the 0620 Issuer token notification advice message for message reason codes **3700** and **3711**. However, issuers that fail to respond to the 0600 Issuer token notification online request will receive the 0620 Issuer token notification advice message for message reason codes **3700** and **3711**.

REFERENCE

For the message layout and field attributes of the 0600/0610 Issuer token notification online messages for HCE mobile devices, refer to [Table B-7, 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711](#).

Card-on-File/E-Commerce Provisioning Messages

Issuers that participate in the Visa Token Service and support token provisioning for card-on-file and e-commerce must support certain provisioning messages and must be aware of certain conditional behaviors.

Required Card-on-File/E-Commerce Provisioning Messages

Issuers that participate in the Visa Token Service and support token provisioning for card-on-file and e-commerce must support the these provisioning messages:

- 0100/0110 Account verification messages
- 0620/0630 Issuer token notification advice message for the message reason code **3700** (Token create)

REFERENCE

For the message layout and field attributes of the provisioning messages for card-on-file and e-commerce, refer to the following:

- [Appendix H, 0100/0110 Account Verification Request and Response Messages](#)
- [Table C-7, 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703](#)

Delivery of 0620/0630 Issuer Token Notification Advice Messages

The 0620/0630 Issuer token notification advice messages are not delivered in real time. These messages will be delivered as soon as possible.

0600 Issuer Token Notification Online Request Messages for Message Reason Code 3700

Issuers can choose to receive the 0600 Issuer token notification online request message instead of the 0620 Issuer token notification advice message for message reason code **3700**. However, issuers that fail to respond to the 0600 Issuer token notification online request will receive the 0620 Issuer token notification advice message for message reason code **3700**.

REFERENCE

For the message layout and field attributes of the 0600/0610 Issuer token notification online message for card-on-file and e-commerce, refer to [Table C-6, 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700](#).

E-Commerce Enabler Provisioning Messages

Issuers that participate in the Visa Token Service and support token provisioning for e-commerce enabler must support certain provisioning messages and must be aware of certain conditional behaviors.

Required E-Commerce Enabler Provisioning Messages

Issuers that participate in the Visa Token Service and support token provisioning for e-commerce enabler must support these provisioning messages:

- 0100/0110 Account verification messages
- 0620/0630 Issuer token notification advice message for message reason code **3700** (Token create)

REFERENCE

For the message layout and field attributes of the provisioning messages for e-commerce enabler, refer to the following:

- [Appendix H, 0100/0110 Account Verification Request and Response Messages](#)
- [Table E-6, 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700](#)

Delivery of 0620/0630 Issuer Token Notification Advice Messages

The 0620/0630 Issuer token notification advice messages are not delivered in real time. These messages will be delivered as soon as possible.

0600 Issuer Token Notification Online Request Messages for Message Reason Code 3700

Issuers can choose to receive the 0600 Issuer token notification online request message instead of the 0620 Issuer token notification advice message for message reason code **3700**. However, issuers that fail to respond to the 0600 Issuer token notification online

request will receive the 0620 Issuer token notification advice message for message reason code **3700**.

REFERENCE

For the message layout and content of the 0600/0610 Issuer token notification online message for e-commerce enabler, refer to [Table E-6, 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700](#).

Magnetic Secure Transmission Provisioning Messages

Magnetic secure transmission (MST) cannot be provisioned by itself. Host card emulation (HCE) provisioning messages will apply to MST provisioned in HCE mobile devices.

Issuers can optionally make changes to support MST. Otherwise, they can participate in MST convert service.

REFERENCE

For the message layout and field attributes of the provisioning messages for magnetic secure transmission (MST) provisioned in host card emulation (HCE) mobile devices, refer to [Host Card Emulation Mobile Device Provisioning Messages](#).

Cloud Token Framework

3

Effective with the October 2020 release, Visa enabled the Cloud Token Framework capabilities for all issuers that participate in the Visa Token Service. The Cloud Token Framework provides device binding, consumer authentication, and issuer step-up capabilities for e-commerce/card-on-file and e-commerce enabler token types.

NOTE

Existing token provisioning methods for e-commerce/card-on-file and e-commerce enabler token types are not impacted by the Cloud Token Framework.

*The Cloud Token Framework does not impact the 0100 Token activation request and 0620 Issuer token notification advice messages with message reason codes **3700** (Token create) and **3711** (Device provisioning result).*

Device Binding

Device binding enables e-commerce/card-on-file and e-commerce enabler tokens provisioned to the consumer's account to be bound to multiple trusted devices. Issuers can perform risk-based verification of the cardholder and optionally challenge the cardholder for step-up authentication to confirm the binding of the cardholder and token to that specific device. Subsequent card-not-present transactions from trusted devices will have device data elements and multi-factor authentication data, enabling issuers to perform strong cardholder verification, improve authorization approvals, mitigate fraud, and improve their overall token management.

With device binding, issuers will receive device binding requests that will include device data in existing fields.

Once cardholder authentication is successfully completed, device binding association will be established. Both the issuer and token requestor will be notified of the device binding completion. The token will be considered bound to a trusted device for future card-not-present transaction processing.

Issuers will be able to perform an inquiry with Visa to determine the various trusted devices associated with a token. They will also be able to request that a device binding be removed.

Consumer Authentication

With consumer authentication, token requestors can provide two-factor authentication and optional device data to be included in the transaction. The Cloud Token Framework also supports the Visa Delegated Authentication Program, strong customer authentication (SCA), and dynamic linking for token-based e-commerce transactions to help satisfy the Payments Service Directive 2/Regulatory Technical Standards (PSD2/RTS) SCA regulations in the Europe region.

NOTE

Delegated authentication is supported across all device and e-commerce/card-on-file token types.

Token requestors can request cardholder step-up authentication for any already provisioned e-commerce/card-on-file and e-commerce enabler tokens. Token requestors may request cardholder step-up authentication at any time whether or not a device binding request has been performed to explicitly establish that the token requestor's consumer is the issuer's cardholder.

Issuers will be able to perform a risk-based verification of the cardholder at the time of device binding. Cardholders can be optionally challenged using the existing step-up methods.

Subsequent card-not-present transactions may include device data, as well as multi-factor authentication data. In the Europe region, additional data to support dynamic linking and SCA exemptions will be available.

Issuer Step-Up Capabilities

With issuer step-up capabilities, token requestors can request that an issuer perform a challenge of the consumer to explicitly establish that the token requestor's consumer is the issuer's cardholder.

Issuers will be able to perform a risk-based verification of the cardholder at the time of device binding. Cardholders can be optionally challenged using the existing step-up methods.

With issuer step-up capabilities, issuers will be able to challenge the cardholder with existing step-up methods to perform explicit cardholder verification requested by the token requestor or to enable trusted listing enrollment

NOTE

Effective with the October 2020 release, Visa enabled the Cloud Token Framework capabilities for all issuers that participate in the Visa Token Service.

Required Device Binding Messages

Issuers that participate in the Visa Token Service for e-commerce/card-on-file tokens, e-commerce enabler tokens, or both and support:

- 0100 Token activation request messages for token provisioning must support the following:
 - 0100/0110 Device binding request and response
 - 0120/0130 Device binding advice and response messages Message reason code value of **3740** (Device binding) in Field 63.3

- Tags and values for device data in Field 123, Usage 2—Verification & Token Data (TLV Format), Dataset ID 68—Token Data
- 0302 Token maintenance file messages for acknowledging token provisioning step-up authentication results must support the following:
 - Tag 80—Bound Device Index in the existing TLV Field 123, Usage 2, Dataset ID 68 during the processing of step-up authentication for device binding
 - The following message reason code values in Field 63.3 during the processing of step-up authentication for device binding and cardholder verification:
 - **3743** (Call center step up - device binding)
 - **3744** (Mobile banking app step up - device binding)
 - **3753** (Call center step up - cardholder verification)
 - **3754** (Mobile banking app step up - cardholder verification)

REFERENCE

Refer to [Table 3-1](#) for more information about the message reason code values.

- 0620 Issuer token notification advice messages for token provisioning must support the following:
 - 0620/0630 Issuer device binding notification advice and response messages
 - Tag 80—Bound Device Index in the existing TLV Field 123, Usage 2, Dataset ID 68 during the processing of step-up authentication for device binding
 - The following message reason code values in Field 63.3 when device binding, device binding removal, and cardholder verification is performed:
 - **3741** (Device binding results)
 - **3742** (OTP verification result - device binding)
 - **3743** (Call center step up - device binding)
 - **3744** (Mobile banking app step up - device binding)
 - **3745** (Device binding removed)
 - **3751** (Cardholder verification results)
 - **3752** (OTP verification result - cardholder verification)
 - **3753** (Call center step up - cardholder verification)
 - **3754** (Mobile banking app step up - cardholder verification)

REFERENCE

Refer to [Table 3-1](#) for more information about the message reason code values.

Issuers that participate in the Visa Token Service and support the Cloud Token Framework for e-commerce/card-on-file and e-commerce enabler token types must support these device binding messages:

- 0100/0110 Device binding request and response
- 0120/0130 Device binding advice and response messages
- 0302/0312 Token Maintenance File Request and Response
- 0620/0630 Issuer Device Binding Notification Advice and Response

REFERENCE

For the message layout and field attributes of the device binding messages, refer to [Appendix F, Device Binding Transactions](#).

NOTE

Issuers that receive 0100 Account verification request messages during token provisioning will not receive an 0100 Account verification message for device binding.

Issuers that receive 0100 Token activation request messages for SE and HCE tokens, but receive 0100 Account verification messages for e-commerce/card-on-file and e-commerce enabler tokens, will receive the 0100 Device binding request message during device binding processing for e-commerce token types.

Issuers that receive the 0620 Issuer token notification advice messages during token provisioning and lifecycle management will receive the 0620 Issuer device binding notification advice message during device binding, device binding removal, and cardholder verification processing.

Device Binding Message Reason Codes

The following table shows the message reason code values that apply to device binding and cardholder verification.

Table 3–1: Message Reason Code Values for Device Binding and Cardholder Verification

Usage	Code	Description	Applicable Transactions	Comment
Device Binding	3741	Device binding results	0620 Issuer device binding notification advice	This code is used to notify issuers when a device binding without step-up authentication is completed.
	3742	OTP verification result - device binding	0620 Issuer device binding notification advice	This code is used to notify issuers when a device binding with step-up authentication via short message system (SMS) or email is completed.
	3743	Call center step up - device binding	0302 Token maintenance file	This code is used by the issuer to notify Visa when a device binding step-up authentication via the issuer's call center is complete. Additionally, this code is used by Visa to notify the issuer when the device binding is completed.
			0620 Issuer device binding notification advice	
	3744	Mobile banking app step up - device binding	0302 Token maintenance file	This code is used by the issuer to notify Visa when a device binding step-up authentication via the issuer's mobile banking app is complete. Additionally, this code is used by Visa to notify the issuer when the device binding is completed.
			0620 Issuer device binding notification advice	
	3745	Device binding removed	0620 Issuer device binding notification advice	This code is used to notify issuers when a request to remove device binding from a token is completed.

Table 3–1: Message Reason Code Values for Device Binding and Cardholder Verification (cont'd.)

Usage	Code	Description	Applicable Transactions	Comment
Cardholder Verification	3751	Cardholder verification results	0620 Issuer device binding notification advice	This code is used to notify issuers when a cardholder verification without step-up authentication is completed.
	3752	OTP verification result - cardholder verification	0620 Issuer device binding notification advice	This code is used to notify issuers when a cardholder verification is performed and step-up authentication via SMS or email is completed.
	3753	Call center step up - cardholder verification	0620 Issuer device binding notification advice	This code is used by the issuer to notify Visa when a cardholder verification step-up authentication via the issuer's call center is complete. Additionally, this code is used by Visa to notify the issuer when the cardholder verification is completed.
	3754	Mobile banking app step up - cardholder verification	0302 Token maintenance file 0620 Issuer device binding notification advice	This code is used by the issuer to notify Visa when a cardholder verification step-up authentication via the issuer's mobile banking app is complete. Additionally, this code is used by Visa to notify the issuer when the cardholder verification is completed.

Device Binding Tags

The following table shows the tags that contain the device and authentication data. Any or all of the tags may be present for token-based e-commerce authorization transactions for all token types. When a device ID is validated for an authorization transaction originated from a trusted device, Tag 80—Bound Device Index will be present

in token-based e-commerce authorization transactions for e-commerce/card-on-file and e-commerce enabler tokens.

Table 3–2: Tags in TLV Field 123, Usage 2, Dataset ID 68

Tag	Value	Attributes	Contents	Applicable Transactions
80	Bound Device Index	1 byte, binary	This field contains the index number from the Visa database where the device ID is stored. The value will be a one-byte hexadecimal value in the range of 01–63 (Decimal 1–99). NOTE <i>Bound device index is only applicable for transactions with e-commerce/card-on-file and e-commerce enabler token types. This tag contains a zero value for transactions with secure element and cloud-based payment token types.</i>	0100 Device Binding Request
				0120 Device Binding STIP Advice
				0302 Token maintenance file
				0620 Issuer device binding notification advice
81	Token User Identifier	Variable; up to 11 characters, N	This field contains a unique value that identifies the token user. The token user is an entity that initiates the payment request. This tag is applicable for e-commerce transactions for device and e-commerce/card-on-file token types. In the Europe region, the token user identifier may be used to support dynamic linking requirements of PSD2/RTS.	0100 Device Binding Request
				0120 Device Binding STIP Advice
82	Token User Application Type	1 byte, binary	This field contains the application type of the token user. This entity can be the merchant, a marketplace, or a check out host. The application type is one of the following valid values: • 00 (Unknown) • 01 (Web) • 02 (Mobile web) • 03 (Mobile application) • 04 (Marketplace application) • 05 (Voice application) • 06 (Biometric application) • 07–FF (Reserved)	0100 Device Binding Request
				0120 Device Binding STIP Advice

Table 3–2: Tags in TLV Field 123, Usage 2, Dataset ID 68 (cont'd.)

Tag	Value	Attributes	Contents	Applicable Transactions
83	Token Authentication Factor A	1 byte, binary	This field contains an authentication factor used by token requestors and merchants to authenticate the cardholder at the time of the transaction. For token processing, this information will be provided at the time of cryptogram generation and will be provided to issuers during transaction processing. This tag is applicable for e-commerce transactions for device and e-commerce/card-on-file token types. In the Europe region, authentication factors may be used to support the SCA requirements of PSD2/RTS.	0100 Device Binding Request
				0120 Device Binding STIP Advice
84	Token Authentication Factor B	1 byte, binary	This field contains an authentication factor used by token requestors and merchants to authenticate the cardholder at the time of the transaction. For token processing, this information will be provided at the time of cryptogram generation and will be provided to issuers during transaction processing. This tag is applicable for e-commerce transactions for device and e-commerce/card-on-file token types. In the Europe region, authentication factors may be used to support the SCA requirements of PSD2/RTS.	0100 Authorization Request
				0120 Authorization STIP Advice
				0200 Full Financial Request
				0220 Full Financial STIP Advice

Table 3–2: Tags in TLV Field 123, Usage 2, Dataset ID 68 (cont'd.)

Tag	Value	Attributes	Contents	Applicable Transactions
85	Token Authentication Amount	3 byte, binary	This field contains the payment amount made visible by the token requestor to the consumer at the time of purchase. This information can be used for dynamic linking. This tag is applicable for e-commerce transactions for device and e-commerce/card-on-file token types. In the Europe region, token user identifier may be used to support dynamic linking requirements of PSD2/RTS. NOTE <i>This amount is the seven right-most digits of the payment amount, excluding the minor units, converted from decimal digits to binary. The applicable number of minor units excluded is specified by the currency code in Field 49—Currency Code, Transaction.</i>	0100 Authorization Request
				0120 Authorization STIP Advice
				0200 Full Financial Request
				0220 Full Financial STIP Advice

NOTE

Bound device index is only applicable for e-commerce/card-on-file and e-commerce enabler token transactions. This tag will not be present for secure element and cloud-based payment token types.

All the new tags shown in the previous table may also be present in application-based e-commerce transactions for secure element and cloud-based payment token types.

Token for Token Provisioning

With the Cloud Token Framework, token for token provisioning will be available for the e-commerce (ECOM) and card-on-file (COF) token types to allow a token requestor and/or merchant to use an existing device-bound token to create a new ECOM/COF token.

Issuers that support enriched token activation request messages will receive data about the original token used for the token for token provisioning. Standard step-up processing for the authentication of the cardholder will be available for token for token provisioning.

Cloud Token Framework token for token provisioning will have the following characteristics:

- New token requested is a ECOM/COF token type of **01** (ECOM/COF (e-commerce/card on file)) or **05** (E-commerce enabler)
- Original token is a device-bound token type of **02** (Secure element) or **03** (Cloud-based payment)
- Original token is in an active state
- Original token expiration date is not expired
- Existing token requestor and issuer token participation for ECOM/COF tokens apply
- Existing Visa Risk Manager (VRM) token authentication rules for token provisioning requests apply
- Existing step-up processing logic will be available

The following table shows source token types that can be used to request a new token and the types of new tokens that can be requested.

Table 3-3: Source Token Types for Requesting a New Token

Source Token Type	Destination (New) Token Type
01 (ECOM/COF (e-commerce/card-on-file))	01 (ECOM/COF (e-commerce/card-on-file))
	05 (E-commerce enabler)
02 (SE (secure element))	01 (ECOM/COF (e-commerce/card-on-file))
	05 (E-commerce enabler)
03 (CBP (cloud-based payment))	01 (ECOM/COF (e-commerce/card-on-file))
	05 (E-commerce enabler)
05 (E-commerce enabler)	01 (ECOM/COF (e-commerce/card-on-file))
	05 (E-commerce enabler)

IMPORTANT

Token requestors must implement the token for token service and provision new e-commerce tokens from existing device tokens before token for token provisioning can occur.

THIS PAGE INTENTIONALLY LEFT BLANK.

Payments Processing for Visa Token Service Transactions **4**

To participate in the Visa Token Service, issuers must support certain V.I.P. POS authorization and full financial messages and BASE II processing. The processing requirements are based on the types of tokens that the issuer supports and their processing capability.

Secure Element Mobile Device

Issuers that participate in the Visa Token Service and support payments processing from secure element (SE) mobile devices must support V.I.P. POS and BASE II processing.

Secure Element Mobile Device V.I.P. Processing

Issuers that participate in the Visa Token Service and support payments processing from secure element (SE) mobile devices must support the authorization and full financial messages for any of following, depending on the issuer's processing capability:

- Full chip data
- Early chip data
- iCVV convert service
- Token convert

Full Chip Data

Issuers must be aware of the V.I.P. processing of full chip data for Visa payWave near field communication (NFC) POS transactions with a token from SE mobile devices that will include specific data processing.

Issuers must support the changes to either Field 55 or Field 134 (Field 135—Format 1, Standard Format), depending on issuer participation.

Full chip issuers that support SE mobile devices will receive POS transactions from qVSDC terminals or MSD terminals for issuers that support MSD.

Table 4–1: POS Transactions for Full Chip Issuers

Applies To		Field	Field Name
MSD	qVSDC		
Y	Y	22	POS Entry Mode
Y	Y	23	Card Sequence Number
Y	Y	35	Track 2 Data
Y	Y	39	Response Code
Y	N	44.5	CVV/iCVV Results Code ¹
N	Y	44.8	Card Authentication Results Code
N	Y	55, Usage 1	VSDC Chip Data
Y	Y	60.2	Terminal Entry Capability
Y	Y	60.6	Chip Transaction Indicator
Y	Y	63.4	STIP/Switch Reason Code
Y	Y	123, Usage 2, Dataset ID 68, Tag 01	Token
Y	Y	123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method
Y	Y	123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID
Y	Y	123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date
Y	Y	123, Usage 2, Dataset ID 68, Tag 07	Token Type
N	Y	134, Format 1	Standard Format

1. This field contains the cryptogram validation result.

REFERENCE

For the message layouts and field attributes for full chip data on secure element (SE) mobile devices, refer to [Full Chip Token Payment Messages](#).

Early Chip Data

Issuers must be aware of the V.I.P. processing of early chip data for Visa payWave NFC POS transactions with a token from SE mobile devices that will include specific

data processing. Early chip issuers that support SE mobile devices will receive POS transactions from qVSDC terminals or MSD terminals for issuers that support MSD.

Table 4–2: POS Transactions for Early Chip Issuers

Applies To		Field	Field Name
MSD	qVSDC		
Y	Y	22	POS Entry Mode
Y	Y	35	Track 2 Data
Y	Y	39	Response Code
Y	Y	44.5	CVV/iCVV Results Code ¹
Y	Y	60.2	Terminal Entry Capability
Y	Y	60.6	Chip Transaction Indicator
Y	Y	63.4	STIP/Switch Reason Code
Y	Y	123, Usage 2, Dataset ID 68, Tag 01	Token
Y	Y	123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Level
Y	Y	123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID
Y	Y	123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date
Y	Y	123, Usage 2, Dataset ID 68, Tag 07	Token Type

1. This field contains the cryptogram validation result.

REFERENCE

For the message layouts and field attributes for early chip data on secure element (SE) mobile devices, refer to [Early Chip Token Payment Messages](#).

iCVV Convert Service

Issuers must be aware of the V.I.P. processing of iCVV Convert Service data requirements for Visa payWave NFC POS transactions with a token from SE mobile devices that will include specific data processing. iCVV Convert Service issuers that support SE mobile

devices will receive POS transactions from qVSDC terminals or MSD terminals for issuers that support MSD.

Table 4-3: POS Transactions for iCVV Convert Issuers

Applies To		Field	Field Name
MSD	qVSDC		
Y	Y	22	POS Entry Mode
Y	Y	35	Track 2 Data
Y	Y	39	Response Code
Y	N	44.5	CVV/iCVV Results Code ¹
Y	Y	60.2	Terminal Entry Capability
Y	Y	60.6	Chip Transaction Indicator
Y	Y	63.4	STIP/Switch Reason Code
Y	Y	123, Usage 2, Dataset ID 68, Tag 01	Token
Y	Y	123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method
Y	Y	123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID
Y	Y	123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date
Y	Y	123, Usage 2, Dataset ID 68, Tag 07	Token Type

1. This field contains the cryptogram validation result.

REFERENCE

For the message layouts and field attributes for iCVV convert on secure element (SE) mobile devices, refer to [iCVV Convert Token Payment Messages](#).

Token Convert

Issuers must be aware of the V.I.P. processing of Token Convert for Visa payWave NFC POS transactions with a token from SE mobile devices that will include specific data

processing. Token Convert issuers that support SE mobile device will receive POS transactions from qVSDC terminals or MSD terminals for issuers that support MSD.

Table 4–4: POS Transactions for Token Convert Issuers

Applies To		Field Number	Field Name
MSD	qVSDC		
Y	Y	22	POS Entry Mode
Y	Y	35	Track 2 Data
Y	Y	39	Response Code
Y	N	44.5	CVV/iCVV Results Code ¹
Y	Y	60.2	Terminal Entry Capability
Y	Y	60.6	Chip Transaction Indicator
Y	Y	63.4	STIP/Switch Reason Code
Y	Y	123, Usage 2, Dataset ID 68, Tag 01	Token
Y	Y	123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method
Y	Y	123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID
Y	Y	123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date
Y	Y	123, Usage 2, Dataset ID 68, Tag 07	Token Type

1. This field contains the cryptogram validation result.

REFERENCE

For the message layouts and field attributes for token convert on secure element (SE) mobile devices, refer to [Token Convert Payment Messages](#).

Issuers that choose to use Token Convert must be aware that Visa will drop certain fields from V.I.P. messages prior to forwarding the message to the issuer. Visa will drop the fields from Visa card (networks 0002 and 0003) and non-Visa card (network 0003) transactions when the acquirer sends them in V.I.P. messages. They are:

- Field 23—Card Sequence Number
- Field 44.8—Card Authentication Results Code
- Field 55—Integrated Circuit Card (ICC)-Related Data, or the third bitmap, depending on the issuer participation in either Field 55 or third bitmap
- Field 60.3—Chip Condition Code
- Field 60.7—Chip Card Authentication Reliability Indicator

Secure Element Mobile Device BASE II Token Transaction Processing

Issuers that choose to implement the Visa Token Service must confirm successful processing of clearing drafts and exception items.

Visa will support BASE II processing of ATM, account funding, original credit, and POS transactions, as appropriate:

- Draft Data, TC x5, TC x6, and TC x7, TCR 0
- Draft Data, TC x5, TC x6, and TC x7, TCR 1
- Draft Data, TC x5, TC x6, and TC x7, TCR 4
- Draft Data, TC x5, TC x6, and TC x7, TCR 5

REFERENCE

For information on the token fields for the BASE II Draft Data records, refer to [Appendix G, BASE II Data Records](#).

Host Card Emulation Mobile Device

Issuers that participate in the Visa Token Service and support payments processing from host card emulation (HCE) mobile devices must support V.I.P. POS and BASE II processing.

Host Card Emulation Mobile Device V.I.P. Processing

Issuers that participate in the Visa Token Service and support payments processing from host card emulation (HCE) mobile devices must support the authorization and full financial messages for any of following, depending on the issuer's processing capability:

- Full chip data
- Early chip data
- iCVV convert service
- Token convert

Full Chip Data

Issuers must be aware of the V.I.P. processing of full chip data for Visa payWave NFC POS transactions with a token that will include specific data processing. Issuers must support the changes for issuer participation. Full chip issuers that support HCE mobile devices will receive POS transactions from qVSDC terminals or MSD terminals for issuers that support MSD.

Table 4–5: POS Transactions for Full Chip Issuers

Applies To		Field	Field Name
MSD	qVSDC		
Y	Y	22	POS Entry Mode
Y	Y	23	Card Sequence Number
Y	Y	35	Track 2 Data
Y	Y	39	Response Code
Y	N	44.5	CVV/iCVV Results Code ¹
N	Y	44.8	Card Authentication Results Code
N	Y	55	Integrated Circuit Card (ICC)-Related Data
N	Y	55, Usage 1	VSDC Chip Data
Y	Y	60.2	Terminal Entry Capability
Y	Y	60.6	Chip Transaction Indicator
Y	Y	63.4	STIP/Switch Reason Code
Y	Y	123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result
Y	Y	123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live
Y	Y	123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions

1. This field contains the cryptogram validation result.

Table 4–5: POS Transactions for Full Chip Issuers (cont'd.)

Applies To		Field	Field Name
MSD	qVSDC		
Y	Y	123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount
Y	Y	123, Usage 2, Dataset ID 68, Tag 01	Token
Y	Y	123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method
Y	Y	123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID
Y	Y	123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date
Y	Y	123, Usage 2, Dataset ID 68, Tag 07	Token Type

1. This field contains the cryptogram validation result.

REFERENCE

For the message layouts and field attributes for full chip data on host card emulation (HCE) mobile devices, refer to [Full Chip Token Payment Messages](#).

Early Chip Data

Issuers must be aware of the V.I.P. processing of early chip data for Visa payWave NFC POS transactions with a token that will include specific data processing. Early chip issuers that support HCE mobile devices will receive POS transactions from qVSDC terminals or MSD terminals for issuers that support MSD.

Table 4–6: POS Transactions for Early Chip Issuers

Applies To		Field	Field Name
MSD	qVSDC		
Y	Y	22	POS Entry Mode
Y	Y	35	Track 2 Data
Y	Y	39	Response Code
Y	Y	44.5	CVV/iCVV Results Code ¹
Y	Y	60.2	Terminal Entry Capability
Y	Y	60.6	Chip Transaction Indicator
Y	Y	63.4	STIP/Switch Reason Code
Y	Y	123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result

1. This field contains the cryptogram validation result.

Table 4–6: POS Transactions for Early Chip Issuers (cont'd.)

Applies To		Field	Field Name
MSD	qVSDC		
Y	Y	123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live
Y	Y	123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions
Y	Y	123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount
Y	Y	123, Usage 2, Dataset ID 68, Tag 01	Token
Y	Y	123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method
Y	Y	123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID
Y	Y	123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date
Y	Y	123, Usage 2, Dataset ID 68, Tag 07	Token Type

1. This field contains the cryptogram validation result.

REFERENCE

For the message layouts and field attributes for early chip data on host card emulation (HCE) mobile devices, refer to [Early Chip Token Payment Messages](#).

iCVV Convert Service

Issuers must be aware of the V.I.P. processing of iCVV Convert data for Visa payWave NFC POS transactions with a token that will include specific data processing. iCVV Convert Service issuers that support HCE mobile devices will receive POS transactions from qVSDC terminals or MSD terminals for issuers that support MSD.

Table 4–7: POS Transactions for iCVV Convert Issuers

Applies To		Field	Field Name
MSD	qVSDC		
Y	Y	22	POS Entry Mode
Y	Y	35	Track 2 Data
Y	Y	39	Response Code
Y	N	44.5	CVV/iCVV Results Code ¹
Y	Y	60.2	Terminal Entry Capability
Y	Y	60.6	Chip Transaction Indicator
Y	Y	63.4	STIP/Switch Reason Code

1. This field contains the cryptogram validation result.

Table 4–7: POS Transactions for iCVV Convert Issuers (cont'd.)

Applies To		Field	Field Name
MSD	qVSDC		
Y	Y	123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result
Y	Y	123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live
Y	Y	123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions
Y	Y	123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount
Y	Y	123, Usage 2, Dataset ID 68, Tag 01	Token
Y	Y	123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method
Y	Y	123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID
Y	Y	123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date
Y	Y	123, Usage 2, Dataset ID 68, Tag 07	Token Type

1. This field contains the cryptogram validation result.

REFERENCE

For the message layouts and field attributes for iCVV convert on host card emulation (HCE) mobile devices, refer to [iCVV Convert Token Payment Messages](#).

Token Convert

Issuers must be aware of the V.I.P. processing of Token Convert for Visa payWave NFC POS transactions with a token that will include specific data processing. Token Convert issuers that support HCE mobile device will receive POS transactions from qVSDC terminals or MSD terminals for issuers that support MSD.

Table 4–8: POS Transactions for Token Convert Issuers

Applies To		Field Number	Field Name
MSD	qVSDC		
Y	Y	22	POS Entry Mode
Y	Y	35	Track 2 Data
Y	Y	39	Response Code
Y	N	44.5	CVV/iCVV Results Code ¹
Y	Y	60.2	Terminal Entry Capability

1. This field contains the cryptogram validation result.

Table 4–8: POS Transactions for Token Convert Issuers (cont'd.)

Applies To		Field Number	Field Name
MSD	qVSDC		
Y	Y	60.6	Chip Transaction Indicator
Y	Y	63.4	STIP/Switch Reason Code
Y	Y	123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result
Y	Y	123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live
Y	Y	123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions
Y	Y	123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount
Y	Y	123, Usage 2, Dataset ID 68, Tag 01	Token
Y	Y	123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method
Y	Y	123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID
Y	Y	123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date
Y	Y	123, Usage 2, Dataset ID 68, Tag 07	Token Type

1. This field contains the cryptogram validation result.

REFERENCE

For the message layouts and field attributes for token convert on host card emulation (HCE) mobile devices, refer to [Token Convert Payment Messages](#).

Issuers that choose to use Token Convert must be aware that Visa will drop certain fields from V.I.P. messages prior to forwarding the message to the issuer. Visa will drop the fields from Visa card (networks 0002 and 0003) and non-Visa card (network 0003) transactions when the acquirer sends them in V.I.P. messages. They are:

- Field 23—Card Sequence Number
- Field 44.8—Card Authentication Results Code
- Field 55—Integrated Circuit Card (ICC)-Related Data
- Field 60.3—Chip Condition Code
- Field 60.7—Chip Card Authentication Reliability Indicator

Magnetic Secure Transmission Convert

Issuers can optionally make changes to support magnetic secure transmission (MST). Otherwise, they can participate in the MST convert service.

Issuers that participate in the MST convert must support the following POS authorization and full financial messages:

- 0100/0110 and 0120/0130 POS Authorization messages

- 0100/0110 Preauthorization POS messages
- 0200/0210 and 0220/0230 POS Full financial messages
- 0220/0230 Preauthorization completion POS full financial messages
- 0400/0410 and 0420/0430 POS Authorization reversal messages
- 0400/0410 and 0420/0430 POS Preauthorization reversal messages
- 0400/0410 and 0420/0430 POS Full financial reversal messages

REFERENCE

For the message layouts and field attributes for MST convert, refer to [Appendix D, Magnetic Secure Transmission](#).

Cardholder Validation Processing for Step-Up Authentication Method for Cloud-Based Payment Transactions for Host Card Emulation Mobile Devices

Issuers that select the step-up authentication method must be able to identify the Visa-generated 0100 Authorization request message. Upon receipt of the message, issuers must be able to post and display the access code on the cardholder's account. The cardholder will log in to the banking website and retrieve the access code.

The cardholder will enter the access code retrieved from the banking website into the digital wallet provider's application. The digital wallet provider will send the access code to Visa for validation.

After the access code is successfully validated, Visa will notify the issuer of the successful token activation in an 0620 Issuer token notification advice with message reason code **3713** (Call center activation). Visa will activate the token and will send an activation message to the digital wallet provider.

Host Card Emulation Mobile Device BASE II Token Transaction Processing

Issuers that choose to implement the Visa Token Service must confirm successful processing of clearing drafts and exception items.

Visa will support BASE II processing of ATM, account funding, original credit, and POS transactions, as appropriate:

- Draft Data, TC x5, TC x6, and TC x7, TCR 0
- Draft Data, TC x5, TC x6, and TC x7, TCR 1
- Draft Data, TC x5, TC x6, and TC x7, TCR 4
- Draft Data, TC x5, TC x6, and TC x7, TCR 5

REFERENCE

For information on the token fields for the BASE II Draft Data records, refer to [Appendix G, BASE II Data Records](#).

Card-on-File/E-Commerce

Issuers that participate in the Visa Token Service and support card-on-file/e-commerce payments processing must support V.I.P. POS and BASE II processing.

Card-on-File/E-Commerce V.I.P. Processing

Issuers must be aware of the V.I.P. processing of card-on-file/e-commerce transactions with a token that will include specific data processing. Issuers that participate in card-on-file/e-commerce processing must support certain fields.

Table 4-9: POS Transactions for Card-on-File/E-Commerce

Field Number	Field Name
22	POS Entry Mode
44.13	CAVV Results Code
60.6	Chip Transaction Indicator
60.8	Mail/Phone/Electronic Commerce and Payment Indicator
63.6	Chargeback Reduction/BASE II Flags, position 4 Mail/Phone/Electronic Commerce (MOTO/ECI) and Payment Indicator
123, Usage 2, Dataset ID 67, Tag 08	Token Verification Result Code
123, Usage 2, Dataset ID 68, Tag 01	Token
123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method
123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID
123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date
123, Usage 2, Dataset ID 68, Tag 07	Token Type
126.9	CAVV Data, Usage 3: 3-D Secure CAVV, Revised Format
126.20	3-D Secure Indicator

Issuers that participate in card-on-file/e-commerce processing must support the following POS authorization and full financial messages:

- 0100/0110 and 0120/0130 POS Authorization messages
- 0100/0110 Preauthorization POS Messages
- 0200/0210 and 0220/0230 POS Full financial messages
- 0220/0230 Preauthorization completion POS Full financial messages
- 0400/0410 and 0420/0430 POS Authorization reversal messages
- 0400/0410 and 0420/0430 POS Preauthorization reversal messages
- 0400/0410 and 0420/0430 POS Full financial reversal messages

REFERENCE

For the message layouts and field attributes for card-on-file and e-commerce, refer to [Token Payment Messages for Card-on-File and E-Commerce](#).

Card-on-File/E-Commerce BASE II Token Transaction Processing

Issuers that choose to implement the Visa Token Service must confirm successful processing of clearing drafts and exception items.

Issuers will receive the value of **5** (Authenticated security transaction) or the value of **7** (Non-authenticated security transaction) in BASE II Draft Data, TCR 1, position 116, Mail/Phone/Electronic Commerce and Payment Indicator in POS transactions that were processed using the Visa Token Service for card-on-file/e-commerce.

Visa will support BASE II processing of AFT, OCT and POS transactions, as appropriate:

- Draft Data, TC x5 and TC x6, TCR 0
- Draft Data, TC x5 and TC x6, TCR 1
- Draft Data, TC x5 and TC x6, TCR 4
- Draft Data, TC x5 and TC x6, TCR 5

REFERENCE

For information on the token fields for the BASE II Draft Data records, refer to [Appendix G, BASE II Data Records](#).

Application-Based E-Commerce

Issuers that participate in the Visa Token Service and support application-based e-commerce payments processing must support V.I.P. POS and BASE II processing.

Application-Based E-Commerce V.I.P. Processing

Issuers must be aware of the V.I.P. processing of application-based e-commerce transactions with a token that will include specific data processing. Issuers that participate in application-based e-commerce processing must support certain fields.

Issuers must be aware that application-based e-commerce transactions will use the 3-D Secure fields.

Table 4–10: POS Transactions for Application-Based E-Commerce

Field Number	Field Name
22	POS Entry Mode
44.13	CAVV Results Code
60.6	Chip Transaction Indicator
60.8	Mail/Phone/Electronic Commerce and Payment Indicator
63.6	Chargeback Reduction/BASE II Flags, position 4 Mail/Phone/Electronic Commerce (MOTO/ECI) and Payment Indicator
123, Usage 2, Dataset ID 67, Tag 08	Token Verification Result Code
123, Usage 2, Dataset ID 68, Tag 01	Token
123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method
123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID
123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date
123, Usage 2, Dataset ID 68, Tag 07	Token Type
126.9	CAVV Data, Usage 3: 3-D Secure CAVV, Revised Format

Issuers that participate in application-based e-commerce must be able to support processing of POS authorization and full financial messages.

REFERENCE

For the message layouts and field attributes that will apply to application-based e-commerce transactions, refer to [Appendix E, E-Commerce Enabler](#).

Application-Based E-Commerce from a Secure Element Mobile Device

This section provides information for application-based e-commerce from secure element (SE) mobile devices.

Issuers must be able to support the V.I.P. POS authorization and full financial processing that will apply to application-based e-commerce transactions initiated from secure element (SE) mobile device.

V.I.P. Processing for Application-Based E-Commerce Transactions Initiated from an SE Mobile Device

Issuers must be able to support the V.I.P. POS authorization and full financial processing that will apply to application-based e-commerce transactions initiated from a secure element (SE) mobile device.

Issuers will receive either the value of **05** (Authenticated security transaction) or the value of **07** (Non-authenticated security transaction) in Field 60.8 and either the value of **5** (Authenticated security transaction) or the value of **7** (Non-authenticated security transactions) in Field 63.6, position 4 for application-based e-commerce SE payment token transactions.

BASE II Processing for Application-Based E-Commerce Transactions Initiated from an SE Mobile Device

Issuers that choose to implement the Visa Token Service for application-based e-commerce for SE mobile device must be able to support clearing drafts and exception items.

Issuers must be aware that BASE II Draft Data, TC 05, TC 06, TC 25, and TC 26, TCR 1, position 116, Mail/Phone/Electronic Commerce and Payment Indicator contains the value of **5** (Authenticated security transaction) or the value of **7** (Non-authenticated security transaction) for interregional application-based e-commerce SE payment token transactions.

REFERENCE

For information on the token fields for the BASE II Draft Data records, refer to [Appendix G, BASE II Data Records](#).

Application-Based E-Commerce from a Host Card Emulation Mobile Device

This section provides information for application-based e-commerce transactions from host card emulation (HCE) mobile devices.

V.I.P. Processing for Application-Based E-Commerce Transactions Initiated from an HCE Mobile Device

Issuers must be able to support the V.I.P. POS authorization and full financial processing that will apply to application-based e-commerce transactions initiated from host card emulation (HCE) mobile device.

Issuers will receive either the MOTO/ECI value of **05** (Authenticated security transaction) or the MOTO/ECI value of **07** (Non-authenticated security transaction) in Field 60.8 and the value of **5** (Authenticated security transaction) or the value of **7** (Non-authenticated

security transactions) in Field 63.6, position 4 for application-based e-commerce HCE payment token transactions.

BASE II Processing for Application-Based E-Commerce Transactions Initiated from an HCE Mobile Device

Issuers that choose to implement the Visa Token Service for application-based e-commerce for HCE mobile device must be able to support clearing drafts and exception items.

Issuers will receive the value of **5** (Authenticated security transaction) or the value of **7** (Non-authenticated security transaction) in BASE II Draft Data, TCR 1, position 116, Mail/Phone/Electronic Commerce and Payment Indicator in POS transactions that were processed using the Visa Token Service for application-based e-commerce transactions initiated from HCE mobile devices.

REFERENCE

For information on the token fields for the BASE II Draft Data records, refer to [Appendix G, BASE II Data Records](#).

E-Commerce Enabler

This section provides information for e-commerce enabler.

V.I.P. Processing

Issuers must be aware of the V.I.P. processing of e-commerce enabler transactions with a token that will include specific data processing. Issuers that participate in e-commerce enabler processing must support the fields listed in the following table.

Table 4–11: POS Transactions for E-Commerce Enabler

Field Number	Field Name
22	POS Entry Mode
44.13	CAVV Results Code
60.6	Chip Transaction Indicator
60.8	Mail/Phone/Electronic Commerce and Payment Indicator
63.6	Chargeback Reduction/BASE II Flags, position 4 Mail/Phone/Electronic Commerce (MOTO/ECI) and Payment Indicator
123, Usage 2, Dataset ID 67, Tag 08	Token Verification Result Code
123, Usage 2, Dataset ID 68, Tag 01	Token
123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method
123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID
123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date
123, Usage 2, Dataset ID 68, Tag 07	Token Type
126.9	CAVV Data, Usage 3: 3-D Secure CAVV, Revised Format
126.20	3-D Secure Indicator

Issuers that participate in e-commerce enabler must support the following POS authorization and full financial messages:

- 0100/0110 and 0120/0130 POS Authorization messages
- 0100/0110 Preauthorization POS Messages
- 0200/0210 and 0220/0230 POS Full financial messages
- 0220/0230 Preauthorization completion POS Full financial messages
- 0400/0410 and 0420/0430 POS Authorization reversal messages
- 0400/0410 and 0420/0430 POS Preauthorization reversal messages
- 0400/0410 and 0420/0430 POS Full financial reversal messages

REFERENCE

For the message layouts and field attributes for e-commerce enabler, refer to [E-Commerce Enabler Token Payment Messages](#).

BASE II Processing

I Issuers will receive the value of **5** (Authenticated security transaction) or the value of **7** (Non-authenticated security transaction) in BASE II Draft Data, TCR 1, position 116, Mail/Phone/Electronic Commerce and Payment Indicator in POS transactions that were processed using the Visa Token Service for e-commerce enabler.

REFERENCE

For information on the token fields for the BASE II data records, refer to [Appendix G, BASE II Data Records](#).

Magnetic Secure Transmission

This section provides information for magnetic secure transmission (MST).

V.I.P. Processing

Issuers must be aware of the V.I.P. processing of MST transactions with a token that will include specific data processing. Issuers that participate in MST processing must support the fields listed in the following table.

Table 4-12: POS Transactions for Magnetic Secure Transmission

Field	Field Name
22	POS Entry Mode
35	Track 2 Data
39	Response Code
44.5	CVV/iCVV Results Code ¹
60.2	Terminal Entry Capability
60.6	Chip Transaction Indicator
63.4	STIP/Switch Reason Code
123, Usage 2, Dataset ID 68, Tag 01	Token
123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method
123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID
123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date
123, Usage 2, Dataset ID 68, Tag 07	Token Type

¹ This field contains the cryptogram validation result.

Issuers that participate in cloud-based payment with magnetic secure transmission (MST) must support the following POS authorization and full financial messages:

- 0100/0110 and 0120/0130 POS Authorization messages
- 0100/0110 Preauthorization POS Messages
- 0200/0210 and 0220/0230 POS Full financial messages
- 0220/0230 Preauthorization completion POS Full financial messages
- 0400/0410 and 0420/0430 POS Authorization reversal messages
- 0400/0410 and 0420/0430 POS Preauthorization reversal messages
- 0400/0410 and 0420/0430 POS Full financial reversal messages

REFERENCE

For the message layouts and field attributes for magnetic secure transmission, refer to [Appendix D, Magnetic Secure Transmission](#).

Merchant-Initiated Transactions

This section provides information on merchant-initiated transactions.

V.I.P. Processing

Issuers must support the identification and lifecycle tracking of merchant-initiated transactions, as described.

REFERENCE

For the message layouts and field attributes for merchant-initiated transactions, refer to [Appendix M, Merchant Initiated Transactions](#).

Field 22

The value of **10** (Credential on file: Merchant initiates transaction for cardholder using credentials stored on file) in Field 22—Point-of-Service Entry Mode Code, positions 1–2, PAN and Date Entry Mode, identifies transactions initiated with stored credentials.

The value is supported on 0100 Authorization, 0120 Advice, 0200 Full financial, 0220 Advice, 0220 Adjustments, 0400 Reversal, 0420 Reversal advice, and 9240 and 9242 Collection only messages.

Field 54

The amount type **43** (Total cumulative amount) in Field 54—Additional Amounts reflects the total cumulative amount for incremental authorization transactions.

The amount type is supported for incremental 0100 Authorization and 0120 Advice messages.

Table 4-13: Total Cumulative Amount Type Layout

Position	Name	Valid Value
1–2	Account Type	This field may contain any valid value. REFERENCE <i>For valid account type values, refer to:</i> • VisaNet Authorization-Only Online Messages Technical Specifications • Full Service POS Online Messages Technical Specifications
3–4	Amount Type	This field contains the value of 43 (Total cumulative amount).
5–7	Currency Code	This field contains the currency code from Field 49—Currency Code, Transaction of the request message. NOTE <i>If the currency code value in positions 5–7 does not match the transaction currency code in Field 49, V.I.P. will reject the message with the reject code 0150 (Invalid value).</i>
8	Amount, Sign	This field contains one of the following valid values: • C (Positive balance) • D (Negative balance)
9–20	Amount	This field contains the total cumulative amount for a series of incremental authorization transactions.

NOTE

When the total cumulative amount type is submitted in Field 54 in a request message for a transaction type other than incremental, V.I.P. will remove Field 54 before processing the request message and forwarding the request to the issuer. The estimated authorization indicator values will be supported in Field 60.10 for 0100 Authorization, 0120 Advice, 0400 Reversal, and 0420 Reversal advice messages.

Field 60.10

The estimated authorization indicator in Field 60.10—Additional Authorization Indicators is used to advise issuers that an authorization request contains an authorization amount that is only an estimate of the final transaction amount.

Table 4–14: Additional Authorization Indicator Values

Value	Description	Comments
0	Not applicable	This value is used when indicators are not set in the current transaction or when the field is not applicable to the current transaction.
1	Terminal accepts partial authorization responses	This value is used to advise the issuer that the terminal can support partial authorization responses and that the authorization amount is not an estimate.
2	Estimated amount	This value is used to advise the issuer that the authorization amount is an estimate and that the terminal does not support partial authorization responses.
3	Estimated amount and terminal accepts partial authorization responses	This value is used to advise the issuer that the terminal can support partial authorization responses and that the authorization amount is an estimate.

Field 63.3

The message reason code values in Field 63.3—Message Reason Code identify merchant-initiated transactions. The values will identify the type of merchant-initiated transactions.

The message reason code values are supported for 0100 Authorization, 0120 Advice, 0200 Full financial, and 0220 Advice messages.

Table 4–15: Message Reason Code Values

Message Reason Code Values	Description
3900	Incremental authorization
3901	Resubmission
3902	Delayed charges
3903	Reauthorization

1. Use of message reason code **3904** is restricted to certain merchant category codes (MCCs). Refer to the Visa Rules for more information.

Table 4–15: Message Reason Code Values (cont'd.)

Message Reason Code Values	Description
3904 ¹	No show

1. Use of message reason code **3904** is restricted to certain merchant category codes (MCCs). Refer to the Visa Rules for more information.

IMPORTANT

Visa will reject the following messages with the reject code 0114 (Invalid value):

- **Original transaction request messages that do not contain a merchant-initiated transaction message reason code in Field 63.3. This includes, but is not limited to, 0100 Authorization, 0200 Purchase, and 0200 Merchandise return request messages.**
- **Requests sent with any value in Field 63.3 and one of these values in Field 126.13:**
 - **C (Credential on file)**

NOTE

*The value of **C** indicates that the message is used for an unscheduled card-on-file transaction.*

- **I (Indicates that the message is for installment payment)**
- **R (Indicates that the cardholder and merchant have agreed to periodic billing for goods and services, such as utility bills and magazines)**

NOTE

*Field 22—Point-of-Service Entry Mode Code contains the value of **10** (Credential on file: Merchant initiates transaction for cardholder using credentials stored on file) for all of these messages.*

Merchants and acquirers must also use the value of C to indicate that they are storing the cardholder's payment credential for the first time. Prior to storing the cardholder's credentials for the first time, Field 22 contains the value of 01 (Manual (key entry)).

NOTE

The following merchant-initiated transactions initiated with a payment token will be allowed on tokens in an active, suspended, or deactivated state:

- **3901** (Resubmission)
- **3902** (Delayed charges)
- **3903** (Reauthorization)
- **3904** (No show)

Issuers should not decline these merchant-initiated transaction types simply because the payment token is in a suspended or deactivated state.

Transactions initiated with a payment token that is no longer in the Visa system will be declined by V.I.P. in stand-in processing (STIP).

Field 125, Usage 2

Field 125, Usage 2—Supporting Information (TLV Format), Dataset ID 03—Additional Original Data Elements, Tag 03— Original Transaction Identifier will be populated with the transaction identifier from the original transaction or the previous authorization in a series of merchant-initiated transactions. The original transaction identifier tag will be supported for 0100 Authorization, 0120 Advice, 0200 Full financial, and 0220 Advice messages.

TLV Field 125, Usage 2, Dataset ID 03, Tag 03 will be populated with the transaction identifier from the original transaction in the merchant-initiated transactions that are initiated because of an industry-specific business practice. For merchant-initiated transactions that are initiated because of standing instructions provided by the consumer in the initial transaction, the transaction identifier of the most recent or previous authorization may be used as a replacement of the original transaction identifier.

NOTE

Issuers may optionally support receipt of TLV Field 125, Usage 2—Supporting Information (TLV Format) in request messages. Issuers that do not support receipt of TLV Field 125, Usage 2 will not receive the original transaction identifier in merchant-initiated transaction request messages. The one exception to this is incremental transactions where the original transaction identifier will continue to be populated in Field 62.2—Transaction Identifier (Bitmap Format) of request messages sent to issuers.

Field 126.13

The value of **C** (Credential on file) in Field 126.13—POS Environment identifies transactions where the cardholder credentials are being placed on file for the first time. The credential on file indicator value will be supported for 0100 Authorization, 0120 Advice, 0200 Full financial, 0220 Advice, 0400 Reversal, and 0420 Reversal advice messages.

The value of **C** in Field 126.13, when sent with the original transaction identifier in either Field 62.2 or TLV Field 125, Usage 2, identifies a request message as unscheduled stored credential transactions.

IMPORTANT

When a request is sent with both Field 126.13 and Field 63.3 present, the request will be rejected with the reject code 0114 (Invalid value).

BASE II Processing

Issuers must support the point-of-service (POS) entry mode value of **10** (Credential on file) in the following transactions:

- Draft Data, TC x5 and TC x6, TCR 0, positions 162–163, POS Entry Mode
- TC 57, Data Capture, Advice, TCR 0—Transaction Detail, positions 152–153
- TC 59, Interface Transaction Advice, TCR 0—Non-Visa Transaction Detail, positions 158–159, POS Entry Mode

Edit Package

Issuers that participate in the Visa Token Service must support the Edit Package layouts for token processing.

IMPORTANT

Endpoints that participate in the Visa Token Service and use the mainframe Edit Package must be prepared for a higher volume of TC 54 ARDEF Table file updates and longer run times than usual. Endpoints should ensure that these files are monitored and that adequate space is available.

REFERENCE

For information on the ARDEF layouts, refer to:

- [Edit Package ARDEF Changes](#)
- BASE II Clearing Edit Package Operations Guide Release 4

Visa implemented changes in Edit Package to reject Draft Data, TC 05 purchase token transactions and TC 25 reversal transactions that contain an invalid authorization code in TCR 0, positions 152–157, Authorization Code.

The following table lists the Edit Package processing rule that will apply to payment token transactions that contain invalid authorization code values.

Table 4–16: Processing of Authorization Code for Payment Token Transactions

Condition	Processing Rule
The Authorization Code field for approved payment token transactions contains one of the following invalid authorization code values: • 00000 (all zeros in the last five positions of the six-digit field) • ^^^^^ (all spaces in the last five positions of the six-digit field) • X (X in the last position of the six-digit field) • 0000^ (four zeros followed by a space in the last five positions of the six-digit field) • 0000N (four zeros followed by N in the last five positions of the six-digit field) • 0000Y (four zeros followed by Y in the last five positions of the six-digit field) • 0000P (four zeros followed by P in the last five positions of the six-digit field) • SVC (SVC in the first three positions of the six-digit field)	Purchase transactions and reversals for approved payment token transactions will be rejected with reject code V0195 (Authorization code is invalid).

PC Edit Package for Windows

Issuers that participate in the Visa Token Service must support the token indicator field in the ARDEF Table Overrides screen for the PC Edit Package for Windows with these values:

- **No** (Not a token ARDEF range)
- **Yes** (Token ARDEF range)

IMPORTANT

Endpoints that participate in the Visa Token Service and use the PC Edit Package for Windows must be prepared for a higher volume of TC 54 ARDEF Table file updates and longer run times than usual. Endpoints should ensure that these files are monitored and that adequate space is available.

REFERENCE

For information on PC Edit Package for Windows, refer to BASE II Clearing PC Edit Package for Windows User Guide Release 4.

Edit Package Reports

Issuers that participate in the Visa Token Service must support the token indicator field in the following Edit Package reports:

- EP-302 Account Range Table Report (Formatted)
- EP-302 Account Range Table Report (Dump)

The following formatted reports reflect the transaction layout and values, including token assurance method, additional token response information, and PAN token, for the outgoing and incoming files:

- EP-100A Validation Exception Report (Detail)
- EP-204A Returned Item Report
- EP-206A CRS Returned Item
- EP-704 Reclassification Advice
- EP-705 Draft Data Transaction Reports
- EP-7x5, EP-7x6, and EP-7x7 Optional Transaction-Based Reports

NOTE

*The Additional Token Response field will appear in all EP-7x5, EP-7x6, and EP-7x7 series reports but only the EP-705, EP-706, EP-725, and EP-726 reports contains the value of **1**, indicating that the transaction contains a payment token.*

The EP-740 Fraud Advice Report reflect the transaction layout and values, including PAN token, for the outgoing and incoming files:

REFERENCE

For information on Edit Package Reports, refer to BASE II Clearing Edit Package Reports Reference Guide Release 4.

SMS Raw Data

Issuers that participate in the Visa Token Service, and receive SMS Raw Data, Version 2.2, must support the V22201 record and fields for the token data elements.

Issuers that receive SMS Raw Data, Version 2.2, and participate in payment token processing that includes support of Field 123, Usage 2, Dataset ID 68 must modify their systems to receive the token data elements, including the token, token assurance method, and token requestor ID.

NOTE

There are no changes to the SMS Raw Data, Version 2.3 record layouts. Issuers will continue to receive the cardholder PAN on the issuer SMS reports.

The following table contains the SMS Raw Data records with PAN or token information.

Table 4-17: SMS Raw Data and SMS Reports

Record	Field	Position	Format	Length
V22200—Financial Transaction Record	Card Number	97–115	AN	19
V22201—Financial Transaction Record	PAN Token	7–25		
V22300—Financial Maintenance Transaction Record	Card Number	41–59		
V22310—File Maintenance—Address Verification File Update	Card Number	41–59		
V22400—Administrative Message 1 Transaction Record	Card Number	89–107		
V22600—Advice Notification Transaction Record/Interlink-Specific	Card Number	90–108		
V23200—Financial Transaction Record	Card Number	64–82		

REFERENCE

For information on SMS Raw Data, refer to:

- [Appendix L, SMS Raw Data](#)
- VisaNet Settlement Service (VSS) User Guide, Volume 2, Reports

Merchant-Initiated Transactions

The POS entry mode value of **10** (Credential on file) in Field 22 will be present in the following records:

- V22220 record, in the POS Entry Mode field, positions 9–11
- V23202 record, in the POS Entry Mode field, positions 9–11

The total cumulative amount in Field 54 will be present in the following records:

- V22226 record, in the Field 54 Original Amount — Clearing Currency field, positions 14–25 and in the Auto Substantiation Amount Type field, positions 26–27
- V22276 record, in the Money Transfer Foreign Exchange Fee field, positions 7–14

The message reason codes in Field 63.3 that are used to identify merchant-initiated transactions will be present in the following records:

- V22210 record, in the Message Reason Code field, positions 50–53
- V22400 record, in the Message Reason Code field, positions 85–88
- V23200 record, in the Message Reason Code field, positions 60–63

The POS environment value of **C** (Credential on file) in Field 126.13 will be present in the V22220 record, in the Recurring Payment Indicator Flag field, position 130.

Exception Item Processing

Issuers must retain and return the cardholder PAN in the Account Number field and the token values in the token fields. Issuers must submit them in disputes, dispute responses, and reversals of these transactions if the token fields are present in the originals.

NOTE

Visa Resolve Online (VROL) is available to facilitate exception processing. For more information, contact your regional client support representative.

Visa Resolve Online

Issuers that participate in the Visa Token Service and use the System Interface (SI) must support the VROL XML schema and naming conventions.

The following table shows the mandatory and optional VROL features that are available in BSI or RTSI for Visa Token Service issuers.

Table 4–18: BSI and RTSI

Element/Concept	Description	BSI	RTSI
Mandatory for the Visa Token Service	Issuers must provide the token in addition to the card/account number in case actions uploaded through Bulk SI or RTSI for tokenized transactions. Bulk SI and RTSI issuers receive a token element along with the card/account number through the Bulk SI or RTSI for downloaded case actions on tokenized transaction disputes.	Y	Y
Optional for Transaction Inquiry	When tokenized transactions are included in transaction inquiry results (summary and detail), the results will include both card/account number and token to issuers. The network token field for tokenized transactions was added to the Transaction Details response.	N	Y

THIS PAGE INTENTIONALLY LEFT BLANK.

Lifecycle Management for the Visa Token Service

5

This chapter contains the lifecycle messages to allow issuers to support and manage lifecycle events for payment tokens.

Secure Element Mobile Device

Issuers that participate in the Visa Token Service and support lifecycle management for secure element (SE) mobile devices must support these messages:

- 0302/0312 Token maintenance file
- 0302/0312 PAN maintenance file
 - **3720** (PAN expiry update)
 - **3721** (PAN update)
- 0302/0312 Token file inquiry
 - 0302/0312 Token file inquiry message—List all tokens for PAN or PAN reference ID
 - 0302/0312 Token file inquiry message—Token detail for secure element mobile devices
- 0620/0630 Issuer token notification advice message for the message reason codes:
 - **3701** (Token deactivate)
 - **3702** (Token suspend)
 - **3703** (Token resume)

REFERENCE

For the message layout and field attributes of the lifecycle management messages for SE mobile devices, refer to:

- [0302/0312 Token Maintenance File Message for Secure Element Mobile Devices](#)
- [0302/0312 Primary Account Number Maintenance File Message for Secure Element Mobile Devices](#)
- [0302/0312 Token File Inquiry Message](#)
- [0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3700, 3701, 3702, 3703, and 3711](#)

Host Card Emulation Mobile Device

Issuers that participate in the Visa Token Service and support lifecycle management for host card emulation (HCE) mobile devices must support these messages:

- 0302/0312 Token maintenance file
- 0302/0312 PAN maintenance file
 - **3720** (PAN expiry update)
 - **3721** (PAN update)
- 0302/0312 Token file inquiry
 - 0302/0312 Token file inquiry message—List all tokens for PAN or PAN reference ID
 - 0302/0312 Token file inquiry message—Token detail for host card emulation mobile devices
- 0620/0630 Issuer token notification advice message for the message reason codes:
 - **3701** (Token deactivate)
 - **3702** (Token suspend)
 - **3703** (Token resume)
 - **3715** (Replenishment confirmation of limited use keys)

The 0620/0630 Issuer token notification advice message is optional for message reason codes **3701**, **3702**, and **3703**. It is required for message reason code **3715**.

NOTE

Host Card Emulation (HCE) lifecycle management messages will apply to magnetic secure transmission (MST) initiated from HCE mobile devices.

REFERENCE

For the message layout and field attributes of the lifecycle management messages for HCE mobile devices, refer to:

- [0302/0312 Token Maintenance File Message for Host Card Emulation Mobile Device](#)
- [0302/0312 Token File Inquiry Message](#)
- [0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3700, 3701, 3702, 3703, and 3711](#)
- [0620/0630 Issuer Token Notification Advice Messages for Message Reason Code 3715](#)

Card-on-File/E-Commerce

Issuers that participate in the Visa Token Service and support lifecycle management for card-on-file and e-commerce must support these messages:

- 0302/0312 Token maintenance file
- 0302/0312 PAN maintenance file
 - **3716** (Token expiry update)
 - **3720** (PAN expiry update)
 - **3721** (PAN update)
- 0620/0630 Issuer token notification advice message for the message reason codes:
 - **3701** (Token deactivate)

- **3702** (Token suspend)
- **3703** (Token resume)

REFERENCE

For the message layout and content of the lifecycle management messages for card-on-file and e-commerce, refer to:

- [0302/0312 Token Maintenance File Message](#)
- [0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3700, 3701, 3702, and 3703](#)

Visa Account Updater Suite

The Visa Account Updater Suite (VAUS) is a suite of solutions that provide e-commerce and card-on-file credential updates across PANs and network tokens. There are three optional services within VAUS. They are Visa Account Updater (VAU), Real Time Visa Account Updater, and Visa Digital Credential Updater (VDCU).

VDCU is a value-added service that complements the Visa Token Service by helping to ensure token credentials are updated when the underlying PAN or token status changes. These events include:

- Account number changes
- Expiration date changes
- Token status: suspend, delete and resume

NOTE

There is no impact to issuer implementation of lifecycle management.

Application-Based E-Commerce

Issuers that participate in the Visa Token Service and support lifecycle management for application-based e-commerce from SE and HCE mobile devices must support the these messages:

- 0620/0630 Issuer token notification advice message for the message reason codes:
 - **3701** (Token deactivate)
 - **3702** (Token suspend)
 - **3703** (Token resume)

REFERENCE

For the message layout and content of the lifecycle management messages for application-based e-commerce, refer to [Appendix E, E-Commerce Enabler](#).

E-Commerce Enabler

Issuers that participate in the Visa Token Service and support lifecycle management for e-commerce enabler must support these messages:

- 0302/0312 Token maintenance file
- 0302/0312 PAN maintenance file
 - **3716** (Token expiry update)
 - **3720** (PAN expiry update)

- **3721** (PAN update)
- 0620/0630 Issuer token notification advice message for the message reason codes:
 - **3701** (Token deactivate)
 - **3702** (Token suspend)
 - **3703** (Token resume)

REFERENCE

For the message layout and content of the lifecycle management messages for e-commerce enabler, refer to:

- [0302/0312 Token Maintenance File Message](#)
- [0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3700, 3701, 3702, and 3703](#)

Magnetic Secure Transmission

There are no lifecycle management messages available for magnetic secure transmission (MST) by itself. Host card emulation (HCE) lifecycle management messages will apply to MST initiated from HCE mobile devices.

REFERENCE

For the message layout and field attributes of the lifecycle management messages for MST initiated from HCE mobile devices, refer to:

- [0302/0312 Token Maintenance File Message for Host Card Emulation Mobile Device](#)
- [0302/0312 Token File Inquiry Message](#)
- [0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3700, 3701, 3702, 3703, and 3711](#)
- [0620/0630 Issuer Token Notification Advice Messages for Message Reason Code 3715](#)

TC 33 Token Provisioning Results Record

Effective 30 April 2023, Visa has retired the TC 33—Token Provisioning Results Record.

REFERENCE

For more information, refer to the following article and announcement:

- *Article 5.4, Retirement of Visa Token Service BASE II TC 33 Notification Messages in the October 2023 and January 2024 VisaNet Business Enhancements Global Technical Letter and Implementation Guide Effective: 15 June 2023*
- *Visa Token Service BASE II TC 33 Notification Messages Will Be Discontinued (A111340) in the Visa Business News, dated 2 September 2021*

TC 33 Token Device Binding Results Record

Effective 30 April 2023, Visa has retired the TC 33—Token Device Binding Results Record.

REFERENCE

For more information, refer to the following article and announcement:

- *Article 5.4, Retirement of Visa Token Service BASE II TC 33 Notification Messages in the October 2023 and January 2024 VisaNet Business Enhancements Global Technical Letter and Implementation Guide Effective: 15 June 2023*
- *Visa Token Service BASE II TC 33 Notification Messages Will Be Discontinued (A111340) in the Visa Business News, dated 2 September 2021*

TC 33 Token Requestor ID Report Record

Visa has implemented an optional report that issuers can use to receive new token requestor ID assignments through their VisaNet connection. Issuers can use their VisaNet connection to automatically receive token requestor information in delimited text file or TC 33 transaction formats.

The data will be available to issuers that choose to subscribe to the TC 33 record.

The new token requestor ID assignments reports are delivered daily. The reports contain token requestor ID assignments new on that day for the following token requestor types:

- Digital wallet provider - third party
- Third party, merchant of record
- Payment service provider

The BASE II TC 33 Token Requestor ID Report is composed of the TCR 0—Token Requestor ID Report Record.

REFERENCE

For details regarding the record layout that supports the TC 33 Token Requestor ID Report, refer to [Appendix J, New Token Requestor ID Assignments Reports](#).

File Delivery Options

The TC 33 Token Requestor ID Report Record can be delivered on the following platforms via:

- Direct Exchange Visa Open File Delivery (Visa OFD)
- Extended Access Server (EA Server)

The issuer TC 33 records can be delivered in their existing UNDIF file delivery or as a separate BASE II customized file delivery. Split routing and expedited delivery are available for customized file delivery.

Contact your regional client support representative for more information.

NOTE

Issuers can choose to receive new token requestor ID assignments in a delimited text file that uses a pipe character (|) to separate values. The delimited text file will be delivered through Visa OFD or VFES. For details regarding the record layout that supports the delimited Token Requestor ID Report, refer to [Delimited Text File for New Token Requestor ID Assignments](#).

Visa Token Service Testing Overview 7

Issuers are required to complete attended testing with the Visa Global Client Testing team to participate in the Visa Token Service.

Attended testing is typically performed using the end-to-end payment flow. The key messages between Visa and the issuer are:

- Authorizations and supported transaction sets, tested to ensure that issuers support the messages, fields, and values required for token transactions.
- Clearing and settlement, tested to ensure that clearing records, including token data, are accurately sent.
- Exception processing, tested to confirm that exception processing for tokens is submitted and routed properly.

Contact your regional client support representative to initiate testing activities.

REFERENCE

For more information, refer to the VisaNet Testing Guide.

THIS PAGE INTENTIONALLY LEFT BLANK.

Secure Element Mobile Devices

A

This appendix includes the following message layouts for secure element (SE) mobile devices:

- 0302/0312 Token maintenance file messages
- 0302/0312 Primary account number (PAN) maintenance file messages
- 0302/0312 Token file inquiry messages
- 0302/0312 Issuer Payment Account Reference Inquiry messages
- 0302/0312 Issuer Personalization Lifecycle Message
- 0600/0610 Issuer token notification messages for message reason codes **3700** and **3711**
- 0620/0630 Issuer token notification advice messages for message reason codes **3700, 3701, 3702, 3703, 3711**
- 0620/0630 Issuer token notification advice messages for message reason codes **3712** and **3714**
- 0620/0630 Issuer token notification advice messages for message reason code **3713**
- 0620/0630 Issuer token notification advice messages for message reason code **3720** and **3721**
- 0620/0630 Issuer token notification advice messages for message reason code **3730**
- V.I.P. POS authorization and full financial messages to support the following for NFC Visa Contactless for the Visa Token Service for secure element (SE) mobile device:
 - Full chip data
 - Early chip data
 - iCVV convert
 - Token convert

0302/0312 Token Maintenance File Message for Secure Element Mobile Devices

The following table shows the message layout and contents of the 0302/0312 Token maintenance file message to support Visa Token Service transactions for secure element (SE) mobile devices.

Table A-1: 0302/0312 Token Maintenance File Message for SE Mobile Devices

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	C	This field contains the number identifying the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time of the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	C	C	This field contains the PAN expiration date which is currently the same as the token expiration date.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field is currently included in standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports and/or files that will include the message.

Table A-1: 0302/0312 Token Maintenance File Message for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C	The 0312 message contains Field 48, Usage 1b with the reason for the update. REFERENCE <i>For more information about this tag, refer to the Full Service POS Online Messages Technical Specifications.</i>
48, Usage 2	Unformatted Text in Authorization/ Reversal Messages	Variable length, 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C	C	The 0302 message must contain Field 48, Usage 2 with the reason for the update.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.

Table A-1: 0302/0312 Token Maintenance File Message for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa will populate the payment account reference in Tag 01 prior to sending the 0312 Token maintenance file response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	O	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C		This is an existing field with existing values to identify the request message. This field contains one of these values: • 3701 (Token deactivate) • 3702 (Token suspend) • 3703 (Token resume) • 3713 (Call center activation) NOTE <i>This field must be present in the 0302 message when one of these values is sent in the message.</i>
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 2 (Change).
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	C	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.

Table A–1: 0302/0312 Token Maintenance File Message for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of TK (Token).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field contains additional tracing information for proprietary use.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 03, Tag 05, Tag 06, Tag 07, and Tag 08.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	C	C	This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing. This tag is required in the 0302 message when Tag 05 is not present.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	C	C	This tag contains the token requestor ID.

Table A-1: 0302/0312 Token Maintenance File Message for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	C	C	This tag is required in the 0302 message when Tag 01 is not present. If this tag is present, Tag 03 must also be present.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm		C	This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes		C+	This tag is included in the response when the token is located. The value of 02 (SE) applies to SE tokens.
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte		C	This tag contains the status of the token. If the token sent in the request is invalid, this field will not be included in the response. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 125, Usage 2, Dataset ID 01	Token Device			C+	This dataset ID contains Tag 01, Tag 03, Tag 04, and Tag 05.

Table A-1: 0302/0312 Token Maintenance File Message for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
TLV 125, Usage 2, Dataset ID 01, Tag 01	Device Type	2 AN, EBCDIC, 2 bytes		C+	This tag contains the device type. REFERENCE <i>For a list of valid device types, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes		C+	This tag contains the device ID.
TLV 125, Usage 2, Dataset ID 01, Tag 04	Device Number	15 N, 15 bytes		C+	This tag contains the full phone number or partial phone number when available. This tag may be included in the response when the token is located.
TLV 125, Usage 2, Dataset ID 01, Tag 05	Device Name	16 ANS, EBCDIC, 16 bytes		C+	This tag may be included in the response when the token is located.

0302/0312 Primary Account Number Maintenance File Message for Secure Element Mobile Devices

The following table shows the message layout and contents of the 0302/0312 Primary account number (PAN) maintenance file message to support Visa Token Service transactions for secure element (SE) mobile devices.

This message is used for the following:

- PAN expiration date updates
- PAN replacement updates

Table A-2: 0302/0312 Primary Account Number Maintenance File Message for SE Mobile Devices

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the current (old) PAN for the new PAN replacement updates. NOTE <i>This field contains the current (old) PAN. TLV Field 127, Dataset ID 41, Tag 01 contains the new PAN.</i>
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time that the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field that is currently included in standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports and/or files that will include the message.

Table A-2: 0302/0312 Primary Account Number Maintenance File Message for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C+	The 0312 message contains Field 48, Usage 1b with the reason for the update. REFERENCE <i>For more information about this tag, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.

Table A-2: 0302/0312 Primary Account Number Maintenance File Message for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa will populate the payment account reference in Tag 01 prior to sending the 0312 PAN maintenance file response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes		C	This field must contain one of these values: 3720 (PAN expiry update) 3721 (PAN update) NOTE <i>This field contains reason code 3721 for messages that impact both PAN and PAN expiry updates.</i>
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 2 (Change).
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.

Table A-2: 0302/0312 Primary Account Number Maintenance File Message for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of PAN (Card data).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field contains additional tracing information for proprietary use.
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	O	C+	This tag is required in the 0302 request message when the primary account number in Field 2 is not present. When present in the request message, it will be returned in the 0312 response message.
TLV 127.PAN	PAN File Maintenance (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	M	M	This TLV field contains Dataset ID 41.
TLV 127.PAN, Dataset ID 41	PAN Update Data				This dataset ID contains Tag 01 and Tag 02.
TLV 127.PAN, Dataset ID 41, Tag 01	Replacement PAN	13–19 N, 4-bit BCD, 7–10 bytes	C	C	This field is required when the existing PAN is being replaced with a new PAN.

Table A-2: 0302/0312 Primary Account Number Maintenance File Message for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
TLV 127.PAN, Dataset ID 41, Tag 02	Replacement PAN Expiration Date	4 N, 4-bit BCD, 2 bytes format: yymm	M	M	This tag is required when Tag 01 contains a new PAN. It must contain the expiration date for the new PAN.

0302/0312 Token File Inquiry Message

Visa will implement the 0302/0312 Token file inquiry message to support Visa Token Service transactions for secure element (SE) mobile devices.

This section includes the following 0302/0312 messages:

- 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID
- 0302/0312 Token File Inquiry Message—Token Detail

0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID

The following table shows the message layout and content used to query the token vault for all tokens associated with a PAN or PAN reference ID. The 0312 response will include a list of up to nine tokens found for the PAN or PAN reference ID.

Table A-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	C+	This field contains the PAN to be used for the token inquiry. This field is required in the 0302 request message when the PAN reference ID field is not present. This tag will be present in the 0312 response when it is present in the request. When the PAN reference ID is used in the request in lieu of the PAN, this field will also be included in the response when the PAN reference ID is located.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time that the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm		C+	This field contains the PAN expiration date from the PAN file. Visa will insert the PAN expiration date in Field 14 in token inquiry messages prior to routing to the issuer.

Table A-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field is currently included in standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports and/or files that will include the message.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C+	This field may be present if an error occurs when the request is processed. When Field 39 contains the value of 06 (Error) in the 0312 response message, Field 48, Usage 1b contains a code that describes the reason for the error. REFERENCE <i>For more information about this tag, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table A-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa will populate the payment account reference in Tag 01 prior to sending the 0312 Token file inquiry response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes			This field will not be used in this message.
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 5 (Inquire).

Table A-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of TK (Token).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field may contain additional tracing information for proprietary use.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 07, Tag 08, Tag 0B, and Tag 01F35. NOTE <i>V.I.P. will return up to nine tokens associated with the PAN. Each token found will be included in a separate iteration of Dataset ID 68.</i>

Table A-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	C	C+	This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing. V.I.P. will return up to nine tokens associated with the PAN. Each token found will be included in a separate iteration of Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes		O	This tag, which is included in the response when the token is located, is used to support SE transactions. The value of 02 (SE) will apply to SE tokens.
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte		O	This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	C	C+	This tag is required in the 0302 request message when the primary account number in Field 2 is not present. When present in the request message, it will be returned in the 0312 response message. When one or more tokens are present for the PAN or PAN reference ID, only the first iteration of Dataset ID 68 contains this field.

Table A-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 01F35	Total Number of Tokens for Token Inquiry Criteria	4 N, 4-bit BCD, 2 bytes		O	This field and dataset ID with Tag 1F35 that contains the total token count based on the token inquiry criteria.
TLV 127	Inquiry Control Data (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	O	C	This TLV field contains Dataset ID 42.
TLV 127 Dataset ID 42	Inquiry Control Data		O	C	This dataset ID contains Tag 01.
TLV 127 Dataset ID 42, Tag 01	Starting Query Number	4 N, 4-bit BCD, 2 bytes	O	C	This tag contains the starting query number that the issuer wants to query. Issuers have the option to submit multiple 0302 Token file request messages in this field until the remainder of the tokens are sent in the 0312 Token file inquiry response message. If this tag is not sent in the 0302 Token file inquiry request, Visa will send the list of tokens matching any other requested criteria, beginning with the first token. This tag will not be sent in the 0312 Token file inquiry response if not sent in the 0302 Token file inquiry request.

0302/0312 Token File Inquiry Message—Token Detail for Secure Element Mobile Device

The following table shows the message layout and contents of the 0302/0312 Token file inquiry message used to retrieve details for a specific token. The 0312 response will include details for the specific token, if located, for transactions from secure element (SE) mobile devices.

Table A-4: 0302/0312 Token File Inquiry Message—Token Detail for SE Mobile Devices

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		C+	This field contains the PAN associated with the requested token. This field is not used in the 0302 request message. This field will be included in the 0312 response message when the requested token is located.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time that the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This is an existing field that is currently included in the standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports and/or files that will include the message.

Table A-4: 0302/0312 Token File Inquiry Message—Token Detail for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C+	This field may be present if an error occurs when the request is processed. When Field 39 contains the value of 06 in the 0312 response message, Field 48, Usage 1b contains a code that describes the reason for the error. REFERENCE <i>For more information about this tag, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.

Table A-4: 0302/0312 Token File Inquiry Message—Token Detail for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa will populate the payment account reference in Tag 01 prior to sending the 0312 Token file inquiry response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, unique Visa-generated transaction identifier (TID).
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 5 (Inquire).
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of TK (Token).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field may contain additional tracing information for proprietary use.
TLV 123, Usage 2, Dataset ID 67, Tag 07	Issuer Special Condition Code	2 AN, EBCDIC, 2 bytes		O	This tag contains an issuer-assigned value. Visa will populate the issuer special condition code in Tag 07 prior to sending the 0312 Token file inquiry response message.

Table A-4: 0302/0312 Token File Inquiry Message—Token Detail for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 10, Tag 11, and Tag 1E.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	C	C+	This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes		C+	This tag will be included in the response when the token is located. REFERENCE <i>For more information about this tag, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	C	C	This tag is required in the 0302 request message when the token reference ID in Field 123, Usage 2, Dataset ID 68, Tag 05 is present. This tag will be present in the 0312 response when it is present in the request. This tag will also be included in the response when the token is located.

Table A-4: 0302/0312 Token File Inquiry Message—Token Detail for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 10	Visa Token Score	2 N, 2 bytes		C+	The value indicates the degree of risk associated with the token. This is a two-digit numeric value from 01–99 .
TLV 123, Usage 2, Dataset ID 68, Tag 11	Visa Token Decisioning	2 AN, EBCDIC, 2 bytes		C+	This tag contains the results from the Token Provisioning service. This tag will carry the result of the token provisioning decision with one of these values: • 00 (Provision and activate) • 05 (Do not provision) • 85 (Provision inactive state — requires further consumer authentication before activation)
TLV 123, Usage 2, Dataset ID 68, Tag 1E	Token Activation Date/Time	12 N, 4-bit BCD, 6 bytes format: yymmddhhmmss		C+	This tag contains the token activation date and time.
TLV 125, Usage 2, Dataset ID 01, Tag 04	Device Number	15 N, 15 bytes		C+	This tag contains the full phone number or partial phone number when available. This tag may be included in the response when the token is located.
TLV 125, Usage 2, Dataset ID 02, Tag 05	Wallet Provider Device Score	2 N, 2 bytes		C+	This tag may be included in the response when the token is located. This tag contains the value of 1–5 , with 5 being the most trusted.
TLV 125, Usage 2, Dataset ID 02, Tag 06	Wallet Provider Account Score	2 N, 2 bytes		C+	This tag may be included in the response when the token is located. This tag contains the value of 1–5 , with 5 being the most trusted.

Table A-4: 0302/0312 Token File Inquiry Message—Token Detail for SE Mobile Devices (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
TLV 125, Usage 2, Dataset ID 02, Tag 07	Wallet Provider Reason Codes	30 ANS, EBCDIC, 30 bytes		C+	This tag may be included in the response when the token is located. It contains up to 15 wallet provider reason codes of 2 bytes each. REFERENCE <i>For a list of valid reason codes, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 02, Tag 08	PAN Source	2 N, 2 bytes		C+	This tag may be included in the response when the token is located with one of these values: • 01 (Key-entered) • 02 (On file) • 03 (Mobile banking app) • 04 (Token) • 05 (Chip dip) • 06 (Contactless tap)

0302/0312 Issuer Payment Account Reference Inquiry and Response Messages

The following table shows the V.I.P. message layout for issuer primary account reference inquiry and response messages.

Table A-5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	C	This field contains the PAN. NOTE <i>Both PAN and token must not be included in V.I.P. payment account reference inquiry messages.</i>
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to the Visa system.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field contains the month and day.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>

Table A-5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages (cont'd.)

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains a code that defines the response.
48, Usage 1b	Error Codes in 0310/0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C+	This field contains a code when Field 39 is 06 (Error).
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01 and Tag 02.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	This is field and tag that contains the payment account reference.
TLV 56, Dataset ID 01, Tag 02	Payment Account Reference Creation Date	5 N, 4-bit BCD, 5 bytes format: YYDDD		C+	This is a new tag in an existing field and dataset that contains the payment account reference creation date in Julian date format.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains the transaction identifier.

Table A-5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages (cont'd.)

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
63.1	Network ID	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
91	File Update Code	1 AN, EBCDIC 1 byte	M	M	This field contains 5 (Inquire).
92	File Security Code	2 AN, EBCDIC 2 byte	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains PAR (Payment Account Reference).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC 25 bytes max	O	C	This field contains additional tracing information.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.

Table A-5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages (cont'd.)

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	C	C	This tag contains the token that is used to replace the cardholder PAN. NOTE <i>Both PAN and token must not be included in V.I.P. Payment account reference inquiry messages.</i>

0302/0312 Issuer Personalization Lifecycle Message

The following table shows the V.I.P. message layout for issuer personalization lifecycle message.

Table A-6: 0302/0312 Issuer Personalization Lifecycle Message

Field Name and Number		Format	Issuer Personalization Lifecycle Message		Description
			0302	0312	
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time of the request.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	O	C	This field contains the year and the month that the card expires.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C	This field contains the month and day.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>

Table A-6: 0302/0312 Issuer Personalization Lifecycle Message (cont'd.)

Field Name and Number		Format	Issuer Personalization Lifecycle Message		Description
			0302	0312	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains a code that defines the disposition of the request. These values are valid for this message: • 00 (Good) • 06 (Error)
48, Usage 1b	Error Codes in 0310/0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C	This field contains a code when Field 39 is 06 (Error). REFERENCE <i>For more information about this tag, refer to the Full Service POS Online Messages Technical Specifications.</i>
48, Usage 2	Unformatted Text in Authorization/ Reversal Messages	Variable length, TLV format, 1 byte binary+ 255 binary and ANS, EBCDIC 256 bytes max	M	M	Position 1, Field Identifier This position is defined where byte 1 contains the length of five and byte 2 contains an * (asterisk). Positions 2–255, Text The positions in this field indicate the type of message. The value of 3704 (Device personalized data update and repersonalization) identifies the issuer personalization lifecycle message.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C	This dataset ID contains Tag 01.

Table A-6: 0302/0312 Issuer Personalization Lifecycle Message (cont'd.)

Field Name and Number		Format	Issuer Personalization Lifecycle Message		Description
			0302	0312	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C	Positions 1–4 These positions contain the BIN controller identifier, a four-character registered value assigned by EMVCo. Positions 5–29 These positions of this tag contain a 25-alphanumeric character uppercase unique value linked to a PAN. If a payment account reference (PAR) is associated with this token, V.I.P. will send the PAR in the response.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M	This field contains the Visa-generated transaction identifier (TID) that is unique for each original authorization and financial request.
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains the reason code for the message. The value of 3704 (Device personalized data update and repersonalization) identifies the issuer personalization lifecycle message. V.I.P. will drop this field in the response. NOTE <i>This field is optional when Field 91 contains the value of 5 (Inquire).</i>

Table A-6: 0302/0312 Issuer Personalization Lifecycle Message (cont'd.)

Field Name and Number		Format	Issuer Personalization Lifecycle Message		Description
			0302	0312	
91	File Update Code	1 AN, EBCDIC 1 byte	M	M	This field contains the type of change for token customer loyalty data and must contain one of these values: • 1 (Add) to add personalization data. This will add to any existing personalization data in the Visa Token Vault • 2 (Change) to change personalization data. This will replace any personalization data in the Visa Token Vault. • 3 (Delete) to delete personalization data. This will delete all previous personalization data in the Visa Token Vault. • 5 (Inquire) to inquire personalization data. This will return the existing personalization data in the Visa Token Vault. NOTE <i>The value of 4 (Replace) is not supported.</i>
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the file to be accessed and must contain TK (Token).
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 05, Tag 07, Tag 08, Tag 0B, Tag 1F37, and Tag 1F38.

Table A-6: 0302/0312 Issuer Personalization Lifecycle Message (cont'd.)

Field Name and Number		Format	Issuer Personalization Lifecycle Message		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M	M	This tag contains the token that is impacted by the lifecycle changes. NOTE <i>Both PAN and token must not be included in V.I.P. Payment account reference inquiry messages.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C		This tag contains the value that indicates the confidence level of the token to PAN/cardholder binding. If the token sent in the request is invalid, this field will not be included in the response. REFERENCE <i>For more information about this tag, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes		C	This tag contains the token requestor ID. If the token sent in the request is invalid, this field will not be included in the response.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes		C	This tag contains the token reference ID. If the token sent in the request is invalid, this field will not be included in the response.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes		C	This field contains the token type and must contain the value of 02 (Secure element). If the token sent in the request is invalid, this field will not be included in the response.

Table A-6: 0302/0312 Issuer Personalization Lifecycle Message (cont'd.)

Field Name and Number		Format	Issuer Personalization Lifecycle Message		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte		C	This tag contains the status of the token. If the token sent in the request is invalid, this field will not be included in the response. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes		C	This tag contains the unique reference identification that is generated by Visa for the card account number. If the token sent in the request is invalid, this field will not be included in the response.
TLV 123, Usage 2, Dataset ID 68, Tag 1F37	File Control Information (FCI)	128 AN, EBCDIC, 128 bytes	O	C	This is a new tag that contains the issuer specific EMV data. This tag is has a maximum length of 128 bytes. If this tag is received in the request, V.I.P. will send this tag in the response. Data sent in this tag will be ignored if Field 91 contains the value of 5.
TLV 123, Usage 2, Dataset ID 68, Tag 1F38	Issuer Application Data (IAD)	15 AN, EBCDIC, 15 bytes	O	C	This is a new tag that contains the issuer discretionary data (IDD) portion of CVN4x data. This tag has a maximum length of 15 bytes. The first byte is the format followed by 14 bytes of CVN4x issuer discretionary data. If this tag is received in the request, V.I.P. will send this tag in the response. Data sent in this tag will be ignored if Field 91 contains the value of 5.

0600/0610 Issuer Token Notification Messages for Message Reason Codes 3700 and 3711

The following table shows the message layout and content of the 0600/0610 Issuer token notification online request and response messages that support transactions from SE consumer mobile devices with the following reason codes:

- **3700** (Token create)
- **3711** (Device provisioning result)

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the PAN associated with the requested token.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	M				This field contains the year and the month after which the card expires.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	M		M		This field contains the month and day for which this message becomes part of a transaction's SMS settlement between the acquirer and issuer.

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		M		This field contains a Visa-assigned identifier.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	M	M	For the 0600 message, this field contains the response code of 00 (Good) or 85 (Conditional approval). For the 0610 response message, this field must contain the response code of 00.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C+		C+		This TLV field contains Dataset ID 01.

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 56, Dataset ID 01	Account Data		C+		C+		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	C+		C+		Visa will populate this tag prior to sending the 0600 Token notification request message to the issuer.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		Each 0600 message contains one of these values: 3700 (Token create) 3711 (Device provisioning result)
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the value 890 (Issuer token advice) to identify that this message is a token status notification message.

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	C				This field is used to specify that Field 127 contains terms and conditions data. This field contains the value of TERMS-CONDITIONS (Token Terms and Conditions). This field is used when Field 63.3 contained the message reason code 3700 when the token was created.
TLV 114	Domestic and Localized Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	O				This TLV field contains Dataset ID 70.
TLV 114, Dataset ID 70	Localized Data		O				This dataset ID contains Tag C0, Tag C1, Tag C2, Tag C3, Tag C4, and Tag C5.
TLV 114, Dataset ID 70, Tag C0	Language Code	3 AN, EBCDIC, 3 bytes	O				This tag contains the ISO 639-defined language code. This tag will be included when Field 63.3 contains the value of 3700.
TLV 114, Dataset ID 70, Tag C1	Data Encoding Format	20 AN, EBCDIC, 20 bytes max	O				This tag identifies how all tags except C0 and C1 are encoded in this data set. This tag will be included when Field 63.3 contains the value of 3700.

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 114, Dataset ID 70, Tag C2	Device Name	Binary, UTF-8, 400 bytes max	O				This tag contains the device name. This tag will be included when Field 63.3 contains the value of 3700. Length = 100 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114, Dataset ID 70, Tag C3	Cardholder Name	Binary, UTF-8, 1024 bytes max	O				This tag contains the cardholder name. This tag will be included when Field 63.3 contains the value of 3700. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 114, Dataset ID 70, Tag C4	Address	Binary, UTF-8, 1024 bytes max	O				This tag carries all address data. Each line of the address will be comma-separated and left-justified. This tag will be included when Field 63.3 contains the value of 3700. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114, Dataset ID 70, Tag C5	Zip Code	Binary, UTF-8, 64 bytes max	O				This tag contains the zip code. This tag will be included when Field 63.3 contains the value of 3700. Length = 16 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	O	C	This field contains additional proprietary tracking information used by the transaction originator. The information returned in the 0610 response message must be unaltered.

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 120	Auxiliary Transaction Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max					This TLV field contains Dataset ID 57.
TLV 120, Dataset ID 57	Wallet Parameters		C				This dataset ID contains Tag 0C and Tag 80.
TLV 120, Dataset ID 57, Tag 0C	Consumer Entry Mode	1 N, 4-bit BCD, 1 byte	C				This tag will indicate how the card information was entered on the device. Valid values are: • 1 (Key-entered) • 2 (Camera captured) • 3 (Unknown)
TLV 120, Dataset ID 57, Tag 80	Wallet Account Email Address Age	4 N, 4-bit BCD, 2 byte	C				This tag contains a value that represents the number of days between 0000–9999 that the email address has existed. When Field 63.3 contains the value of 3700 , this field may be present in the 0100 Token activation request, 0120 Token activation STIP advice, and the 0620 Token creation advice.
TLV 120, Dataset ID 58	Card Environment Data		C				This dataset ID contains Tag 81, Tag 82, Tag 83, Tag 84, Tag 85, and Tag 86.

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 120, Dataset ID 58, Tag 81	Original Token Assurance Method	2 AN, EBCDIC, 2 bytes	C				This tag contains the original token assurance method. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58, Tag 82	Original Token Requestor ID	11 N, 11 bytes	C				This tag contains the original token requestor ID. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58, Tag 83	Original Token Reference ID	32 AN, EBCDIC, 32 bytes	C				This tag contains the original token reference ID. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58, Tag 84	Original Token Type	2 AN, EBCDIC, 2 bytes	C				This field contains the token type of the source token used for provisioning a new token. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 120, Dataset ID 58, Tag 85	Original Device Type	2 AN, EBCDIC, 2 bytes	C				This field contains the device type of the source token used for provisioning a new token. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700.
TLV 120, Dataset ID 58, Tag 86	Original Device ID	48 ANS, EBCDIC, up to 48 bytes	C				This field contains the device ID of the source token used for provisioning a new token. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data						This dataset ID contains Tag D4.

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 123, Usage 2, Dataset ID 66, Tag D4	Cardholder Name	26 ANS, EBCDIC, 26 bytes	C				This field contains the cardholder name. It is present when Field 63.3 contains the value of 3700 . The value will be truncated if the length of the name is longer than 26 characters.
TLV 123, Usage 2, Dataset ID 67							This dataset ID contains Tag 07.
TLV 123, Usage 2, Dataset ID 67, Tag 07	Issuer Special Condition Code	2 AN EBCDIC 2 bytes	O				This tag contains the issuer special condition code. Visa will populate the issuer special condition code in Tag this tag prior to sending the 0600 Issuer token notification online advice to the issuer. This tag will be included when Field 63.3 contains the value of 3700 .
TLV 123, Usage 2, Dataset ID 68	Token Data						This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 05, Tag 06, Tag 07, Tag 08, and Tag 0B.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		M		This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing.

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC 2 bytes	C		C		This tag contains the default value of spaces. REFERENCE <i>For more information about this tag, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		M		The cell in the 0600 Token notification message for the provisioning result in message reason code 3711 indicates that the field contains the same value as the advice for token creation in message reason code 3700 .
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN EBCDIC, 32 bytes	M		M		This tag is present when sent by wallet providers.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M				The tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M				This tag contains the value of 02 (SE (secure element)).

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 125, Usage 2, Dataset ID 01, Tag 01	Device Type	2 AN, EBCDIC, 2 bytes	C				This tag contains the device type. REFERENCE <i>For a list of valid device types, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 02	Device Language Code	3 AN, EBCDIC, 3 bytes	C				This tag contains a three-character language code, such as eng (English).
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	M		M		This tag contains the secure element ID.

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 125, Usage 2, Dataset ID 01, Tag 04	Device Number	15 N, 15 bytes	C				This tag contains the full phone number or partial phone number when available.
TLV 125, Usage 2, Dataset ID 01, Tag 05	Device Name	16 ANS, EBCDIC, 16 bytes	C				This tag contains the device name that the consumer recognizes. NOTE <i>The value will be truncated if it is longer than 16 characters.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 06	Device Location	25 ANS, EBCDIC, 25 bytes	C				This tag contains the obfuscated geographic location of the device.
TLV 125, Usage 2, Dataset ID 01, Tag 07	IP Address	15 ANS, EBCDIC, 15 bytes	C				This tag contains the IP address of the device at the time of the provisioning request. The value is represented in 255.255.255.255 format. Each octet (255) may be 1–3 digits in length.
TLV 125, Usage 2, Dataset ID 02, Tag 03	Wallet Provider Risk Assessment	1 ANS, EBCDIC, 1 byte	C		C		This tag contains one of these values: • 0 (Unconditionally approved) • 1 (Conditionally approved with further verification) • 2 (Not approved)

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 125, Usage 2, Dataset ID 02, Tag 04	Wallet Provider Risk Assessment Version	10 ANS, EBCDIC, 10 bytes	C		C		This tag contains the Wallet Provider Risk Assessment Version. This field may contain separators to indicate major and minor components. For example: periods, hyphens, slashes, and other similar characters.
TLV 125, Usage 2, Dataset ID 02, Tag 05	Wallet Provider Device Score	2 N, 2 bytes	C				This tag contains the value of 1–5 , with the value of 5 being the most trusted.
TLV 125, Usage 2, Dataset ID 02, Tag 06	Wallet Provider Account Score	2 N, 2 bytes	C				This tag contains the value of 1–5 , with the value of 5 being the most trusted.
TLV 125, Usage 2, Dataset ID 02, Tag 07	Wallet Provider Reason Codes	30 ANS, EBCDIC, 30 bytes	C				This tag contains up to 15 wallet provider reason codes of 2 bytes each. REFERENCE <i>For a list of valid reason codes, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 125, Usage 2, Dataset ID 02, Tag 08	PAN Source	2 N, 2 bytes	C				This tag may be included in the response when the token is located with one of these values: • 01 (Key-entered) • 02 (On file) • 03 (Mobile banking app) • 04 (Token) • 05 (Chip dip) • 06 (Contactless tap)
TLV 125, Usage 2, Dataset ID 02, Tag 0A	Wallet Account E-mail Address	64 DX, 32 bytes	C				This tag contains the wallet account email address.
TLV 127, Usage 2	Terms and Conditions	Variable length, TLV format: 1 byte, binary+ 255 binary and ANS, EBCDIC, 256 bytes max					This TLV field contains Dataset ID 40.
TLV 127, Usage 2, Dataset ID 40	Terms and Conditions						This dataset ID contains Tag 01 and Tag 02.
TLV 127, Usage 2, Dataset ID 40, Tag 01	Terms and Conditions Verification	64 AN, EBCDIC, 64 bytes	C				This tag is used to specify that Field 127 contains terms and conditions data.

Table A-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 127, Usage 2, Dataset ID 40, Tag 02	Issuer Terms and Conditions Date/Time	32 AN, EBCDIC, 32 bytes format: YYYY-MM-DDT hh:mm:ss.sss ±[hhmm]	C				This tag contains the acceptance date and time.

0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3700, 3701, 3702, 3703, and 3711

The following table shows the message layout and contents of the 0620/0630 Token notification advice message to support Visa Token Service transactions for secure element (SE) mobile devices for the following message reason codes:

- **3700** (Token create)
- **3701** (Token deactivate)
- **3702** (Token suspend)
- **3703** (Token resume)
- **3711** (Device provisioning result)

NOTE

Bold values in the 0630 Token notification response messages indicate the field must contain the same values from the 0620 Token notification request messages.

Table A-8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+, 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains the PAN associated with the requested token.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	M	M	M	M	This field contains the date and time that the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	M	M	M	M	This field contains a number that uniquely identifies a cardholder transaction.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	M						This field contains the PAN expiration date that is used to support SE transactions.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	C	C	C	C	This is an existing field that is currently included when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports and/or files that will include the message.

Table A-8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		M		M		This field contains a Visa-assigned identifier.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	M	M	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	M	M	M	M	This field contains the code that defines the response to a request or the message disposition. In the 0620 messages: - For message reason codes 3700 and 3711, valid values are 00 (Good) or 85 (Conditional approval). - For message reason codes 3701, 3702, and 3703, valid values are 00 or 06 (Error).

Table A-8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
48, Usage 2	Unformatted Text in Authorization/ Reversal	Variable length, 1 byte binary+ up to 255 ANS, EBCDIC, 256 bytes max					C		The 0620 request message for message reason codes 3701 , 3702 , and 3703 contains the reason for the update. This field will not be available for 0620 request messages with message reason code 3711 .
TLV 56,	Customer Related Data		C+		C+		C+		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		C+		C+		C+		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	C+		C+		C+		Visa will populate the payment account reference in Tag 01 prior to ending the 0620 Token file inquiry response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	M	O	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	M	M	M	M	This field contains the network ID 0002 (Visa).

Table A–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		M		Each 0620 message contains the respective value of: • 3700 (Token create) • 3701 (Token deactivate) • 3702 (Token suspend) • 3703 (Token resume) • 3711 (Device provisioning result) When this field contains the value of 3700 , Field 120 may contain Tag 80 and Tag 81 in the 0100 Token activation request, 0120 Token activation STIP advice, and 0620 Token creation advice.
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	M	M	M	M	This field contains the value 890 (Issuer token advice) to identify that this message is a token status notification message.
92	File Security Code	2 AN EBCDIC, 2 bytes					O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.

Table A-8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	C						This field contains the value of TK (Token).
TLV 114	Domestic and Localized Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	O						This TLV field contains Dataset ID 70.
TLV 114, Dataset ID 70	Localized Data		O						This dataset ID contains Tag C0, Tag C1, Tag C2, Tag C3, Tag C4, and Tag C5.
TLV 114, Dataset ID 70, Tag C0	Language Code	3 AN, EBCDIC, 3 bytes	O						This tag contains the ISO 639-defined language code. This tag will be included when Field 63.3 contains the value of 3700 .
TLV 114, Dataset ID 70, Tag C1	Data Encoding Format	20 AN, EBCDIC, 20 bytes max	O						This tag identifies how all tags except C0 and C1 are encoded in this data set. This tag will be included when Field 63.3 contains the value of 3700 .

Table A–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 114, Dataset ID 70, Tag C2	Device Name	Binary, UTF-8, 400 bytes max	O						This tag contains the device name. This tag will be included when Field 63.3 contains the value of 3700. Length = 100 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114, Dataset ID 70, Tag C3	Cardholder Name	Binary, UTF-8, 1024 bytes max	O						This tag contains the cardholder name. This tag will be included when Field 63.3 contains the value of 3700. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>

Table A–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 114, Dataset ID 70, Tag C4	Address	Binary, UTF-8, 1024 bytes max	O						This tag carries all address data. Each line of the address will be comma-separated and left-justified. TLV Field 114 is only present when Field 63.3 has a value of 3700. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114, Dataset ID 70, Tag C5	Zip Code	Binary, UTF-8, 64 bytes max	O						This tag contains the zip code. This tag will be included when Field 63.3 contains the value of 3700. Length = 16 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>

Table A-8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes maximum	O	C	O	C	O	C	This field may contain additional tracing information for proprietary use.
TLV 120	Auxiliary Transaction Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max							This TLV field contains Dataset ID 57.
TLV 120, Dataset ID 57	Wallet Parameters								This dataset ID contains Tag 0C, Tag 80, and Tag 81.
TLV 120, Dataset ID 57, Tag 0C	Consumer Entry Mode	1 N, 4-bit BCD, 1 byte	C						This tag will indicate how the card information was entered on the device. Valid values are: • 1 (Key-entered) • 2 (Camera captured) • 3 (Unknown)

Table A–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 120, Dataset ID 57, Tag 80	Wallet Account Email Address Age	4 N, 4-bit BCD, 2 bytes	C						This tag contains a value that represents the number of days between 0000–9999 that the email address has existed. When Field 63.3 contains the value of 3700 , this field may be present in the 0620 Token creation advice.
TLV 120, Dataset ID 57, Tag 81	Wallet Provider Phone Score	1 N, 4-bit BCD, 1 byte	C						This tag contains a value between 1–5 , where 1 is the least trusted and 5 is the most trusted. When Field 63.3 contains the value of 3700 , this field may be present in the 0620 Token creation advice.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum							This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data								This dataset ID contains Tag D4

Table A-8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 123, Usage 2, Dataset ID 66, Tag D4	Cardholder Name	26 ANS, EBCDIC, 26 bytes	C						This field contains the cardholder name. It is present when Field 63.3 contains the value of 3700. The value will be truncated if the length of the name is longer than 26 characters.
TLV 123, Usage 2, Dataset ID 67	Activation Verification Data								This dataset ID contains Tag 07.
TLV 123, Usage 2, Dataset ID 67, Tag 07	Issuer Special Condition Code	2 AN, EBCDIC, 2 bytes	O						This is an existing tag that contains the issuer special condition code. Visa will populate the issuer special condition code in Tag 07 prior to sending the 0600 Issuer token notification online advice to the issuer. This tag applies only to messages with the value of 3700 in Field 63.3.

Table A–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 123, Usage 2, Dataset ID 68	Token Data								This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 05, Tag 06, Tag 07, Tag 08, and Tag 0B. NOTE V.I.P. will return up to nine tokens associated with the PAN. Each token found will be included in a separate iteration of Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		M		M		This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing. V.I.P. will return up to nine tokens associated with the PAN. Each token found will be included in a separate iteration of Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C						This field will be present when Field 63.3 contains the reason code value of 3700. REFERENCE For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.

Table A-8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N 11 bytes	M		M		M		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		M		M		This tag contains the token reference ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M		M		M		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M		M		M		This tag contains the values of 02 (SE (secure element)).

Table A-8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		M		M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		M		M		This tag contains a unique reference ID generated by Visa for the card account number to support SE transactions.
TLV 125, Usage 2, Dataset ID 01, Tag 01	Device Type	2 AN, EBCDIC, 2 bytes	C						This tag contains the device type. REFERENCE <i>For a list of valid device types, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 02	Device Language Code	3 AN, EBCDIC, 3 bytes	C						This tag contains a three-character language code.

Table A-8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	C+		C+		C+		This tag contains the device ID.
TLV 125, Usage 2, Dataset ID 01, Tag 04	Device Number	15 N, 15 bytes	C						This tag contains the full phone number or partial phone number when available. This tag may be included in the response when the token is located.
TLV 125, Usage 2, Dataset ID 01, Tag 05	Device Name	16 ANS, EBCDIC, 16 bytes	C						This tag provides the device name that is recognized by the consumer. NOTE <i>The value will be truncated if the name known by the consumer is larger than 16 characters.</i> <i>If the value provided by the device contains any special characters, these characters will be replaced with an * (asterisk) before being sent to the issuer.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 06	Device Location	25 ANS, EBCDIC, 25 bytes	C						This tag may contain the obfuscated geographic location of the device.

Table A-8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 125, Usage 2, Dataset ID 01, Tag 07	IP Address	15 ANS, EBCDIC, 15 bytes	C						This tag contains the IP address. The value is represented in 255.255.255.255 format. Each octet (255) may be 1–3 digits in length.
TLV 125, Usage 2, Dataset ID 02, Tag 03	Wallet Provider Risk Assessment	1 ANS, EBCDIC, 1 bytes	C						This tag contains one of these values: • 0 (Unconditionally approved) • 1 (Conditionally approved with further verification) • 2 (Not approved)
TLV 125, Usage 2, Dataset ID 02, Tag 04	Wallet Provider Risk Assessment Version	10 ANS, EBCDIC, 10 bytes	C						This tag contains the Wallet Provider Risk Assessment Version. NOTE <i>The value may contain separators to indicate major or minor components. For example: Periods, hyphens, slashes, and other similar characters.</i>
TLV 125, Usage 2, Dataset ID 02, Tag 05	Wallet Provider Device Score	2 N, 2 bytes	C						This tag contains the value of 1–5 , with the value of 5 being the most trusted.

Table A-8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 125, Usage 2, Dataset ID 02, Tag 06	Wallet Provider Account Score	2 N, 2 bytes	C						This tag contains the value of 1–5 , with the value of 5 being the most trusted.
TLV 125, Usage 2, Dataset ID 02, Tag 07	Wallet Provider Reason Codes	30 ANS, EBCDIC, 30 bytes	C						This tag may be included in the response when the token is located. It contains up to 15 wallet provider reason codes of 2 bytes each. REFERENCE <i>For a list of valid reason codes, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 02, Tag 08	PAN Source	2 N, 2 bytes	C						This tag may be included in the response when the token is located with one of these values: • 01 (Key-entered) • 02 (On file) • 03 (Mobile banking app) • 04 (Token) • 05 (Chip dip) • 06 (Contactless tap)

Table A-8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 125, Usage 2, Dataset ID 02, Tag 0A	Wallet Account E-mail Address	64 DX, 32 bytes	C						This tag contains the hashed full email address for the user's account that was sent by the digital wallet provider.
TLV 127, Usage 2	Terms and Conditions	Variable length, TLV format: 1 byte, binary+ 255 binary and ANS, EBCDIC, 256 bytes max							This TLV field contains Dataset ID 40.
TLV 127, Usage 2, Dataset ID 40	Terms and Conditions								This dataset ID contains Tag 01 and Tag 02.
TLV 127, Usage 2, Dataset ID 40, Tag 01	Terms and Conditions Verification	64 AN, EBCDIC, 64 bytes	C						This tag is used to specify that Field 127 contains terms and conditions data that is used to support SE transactions.

Table A–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 127, Usage 2, Dataset ID 40, Tag 02	Issuer Terms and Conditions Date/Time	32 AN, EBCDIC, 32 bytes format: YYYY-MM-DDT hh:mm:ss.sss ±[hhmm]	C						This tag contains the acceptance date and time.

0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3712 and 3714

The following table shows message layout and contents of the 0620/0630 Token notification advice message to support Visa Token Service transactions for secure element (SE) mobile devices for the following message reason codes:

- **3712** (OTP verification result)
- **3714** (Mobile banking app activation)

NOTE

Bold values in the message layout tables indicate that the values are from another message.

Table A-9: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714

Field Number and Name		Format	Token Notification for 3712		Token Notification for 3714		Description
			0620	0630	0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the PAN associated with the requested token.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	M	M	This field contains a number that uniquely identifies a cardholder transaction.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	C	C	This field contains the month and day.

Table A-9: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714 (cont'd.)

Field Number and Name		Format	Token Notification for 3712		Token Notification for 3714		Description
			0620	0630	0620	0630	
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		M		This field contains a Visa-assigned identifier.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i> NOTE <i>For message reason code 3700, the values sent in this field in the 0620 Token notification advice message is the same in the 0100 Token activation request and in its 0120 Token STIP advice.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	M	M	For the 0620 messages, this field must contain the verification status with a response code of 00 (Good) or 06 (Error). NOTE <i>When the response code is 06, Field 123, Usage 2, Dataset ID 67, Tag 03 contains additional information.</i> The 0630 message must contain the response code of 00.

Table A-9: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714 (cont'd.)

Field Number and Name		Format	Token Notification for 3712		Token Notification for 3714		Description
			0620	0630	0620	0630	
48, Usage 2	Unformatted Text in Authorization/Reversal	Variable length, 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C		C		The 0620 request message contains the reason for the update.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C+		C+		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		C+		C+		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	C+		C+		Visa will populate the payment account reference in Tag 01 prior to sending the 0620 Token notification advice for message reason codes 3712 and 3714 to the issuer. NOTE <i>Issuers should not submit the payment account reference in any message at this time.</i>
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the network ID 0002 (Visa).

Table A-9: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714 (cont'd.)

Field Number and Name		Format	Token Notification for 3712		Token Notification for 3714		Description
			0620	0630	0620	0630	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		Each 0620 message contains the respective value of: 3712 (OTP verification result) 3714 (Mobile banking app activation)
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the value 890 (Issuer token advice) to identify that this message is a token status notification message.
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC 25 bytes max	O	C	O	C	This field contains additional tracing information.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max					This TLV field contains Dataset ID 67 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 67	Activation Verification Data						This dataset ID contains Tag 03.

Table A-9: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714 (cont'd.)

Field Number and Name		Format	Token Notification for 3712		Token Notification for 3714		Description
			0620	0630	0620	0630	
TLV 123, Usage 2, Dataset ID 67, Tag 03	Activation Verification Result	1 AN, 1 byte	C		C		This field contains one of the following OTP verification result and mobile banking application verification code values: • 1 (Successfully verified) • 2 (Verification code expired) • 3 (Verification code failed) • 4 (Verification code missing) • 5 (Verification code retries exceeded)
TLV 123, Usage 2, Dataset ID 68	Token Data						This dataset ID contains Tag 01, Tag 03, Tag 05, Tag 06, Tag 07, Tag 08, and Tag 0B.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		M		This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing. The bolded text in the 0620 Token notification advice for the verification result message reason codes 3712 and 3714 indicates that the field contains the same value as 3700 .
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		M		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		M		This tag contains the token reference ID.

Table A-9: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714 (cont'd.)

Field Number and Name		Format	Token Notification for 3712		Token Notification for 3714		Description
			0620	0630	0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M		M		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M		M		This tag contains the value of 02 (SE (secure element)).
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	M		M		This tag contains the device ID.
TLV 125, Usage 2, Dataset ID 02, Tag 09	Wallet Account ID	32 ANS, EBCDIC, 32 bytes	O		O		This tag contains the wallet account ID.

0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3713

The following table shows the message layout and content of the 0620/0630 Issuer token notification advice message for message reason code **3713** (Call center activation) that will notify issuers when tokens representing their cards have their status has changed. The message reason code applies to tokens initiated with secure element (SE) mobile devices.

NOTE

Bold values in the message layout tables indicate that the values are from another message.

Table A-10: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3713

Field Number and Name		Format	Token Notification for Call Center Activation for 3713		Description
			0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the number that identifies the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to the Visa system by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	This field contains the month and day.

Table A-10: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3713 (cont'd.)

Field Number and Name		Format	Token Notification for Call Center Activation for 3713		Description
			0620	0630	
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		This field contains a Visa-assigned identifier.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	This field must contain the response code 00 (Good).
48, Usage 2	Unformatted Text in Authorization/ Reversal	Variable length, 1 byte binary+, 255 ANS, EBCDIC, 256 bytes max	C		The 0620 request message contains the reason for the update.

Table A-10: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3713 (cont'd.)

Field Number and Name		Format	Token Notification for Call Center Activation for 3713		Description
			0620	0630	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C+		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		C+		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	C+		Visa will populate the payment account reference in Tag 01 prior to sending the 0620 Token notification advice for message reason code 3713 to the issuer.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		Each 0620 message contains the value of 3713 (Call center activation).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.

Table A-10: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3713 (cont'd.)

Field Number and Name		Format	Token Notification for Call Center Activation for 3713		Description
			0620	0630	
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	This field contains the value 890 (Issuer token advice) to identify that this message is a token status notification message.
92	File Security Code	2 AN EBCDIC, 2 bytes	O		This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	C		This field contains the value of TK (Token) when Field 63.3 contains 3713 (Call center activation).
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M		The tag contains the token expiration date.

Table A-10: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3713 (cont'd.)

Field Number and Name		Format	Token Notification for Call Center Activation for 3713		Description
			0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M		This is an existing field and Dataset ID with the existing Tag 07 that contains the value of 02 (SE (secure element)).
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 125, Usage 2, Dataset ID 01, Tag 01	Device Type	2 AN, EBCDIC, 2 bytes	C		This tag contains the device type. It may be in the response when the token is located. REFERENCE <i>For a list of valid device types, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	C		This tag contains the device ID.

Table A-10: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3713 (cont'd.)

Field Number and Name		Format	Token Notification for Call Center Activation for 3713		Description
			0620	0630	
TLV 125, Usage 2, Dataset ID 01, Tag 04	Device Number	15 N, 15 bytes	C		This tag contains the device number, or the full or partial telephone number, when available.
TLV 125, Usage 2, Dataset ID 01, Tag 05	Device Name	16 ANS, EBCDIC, 16 bytes	C		This tag contains the device name that the consumer recognizes. The value will be truncated if the name known by the consumer is larger than 16 characters.

0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3720 and 3721

Message reason code **3720** is assigned to PAN expiry date messages and message reason code **3721** will be assigned to PAN update messages. The following table shows the message layout for PAN expiry update and PAN update advice messages.

Table A-11: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the current (old) PAN.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	M	M	This field contains the date and time the request or advice was submitted to the Visa system.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	C	C	This field contains the month and day.
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+, 11 N, 4-bit BCD, 7 bytes max	M		M		This field contains a Visa-assigned identifier.

Table A-11: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	M	M	For the 0620 message, this field must contain the value of 00 (Good). For the 0630 message, this field must contain the value of 00 (Good).
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C		C		This field must contain one of these values: • 3720 (PAN expiry update) • 3721 (PAN update) NOTE <i>This field contains reason code 3721 for messages that impact both PAN and PAN expiry updates.</i>

Table A-11: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the value 890 (Issuer token advice) to identify that this message is a token status notification message.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M		M		This field contains the value of PAN .
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max					This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68	Token Data						This dataset ID contains Tag 01, Tag 03, Tag 05, Tag 08, and Tag 0B.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		M		This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing.

Table A-11: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		M		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		M		This tag is present when sent by wallet providers.
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 127.PAN	PAN File Maintenance (TLV Format)		M		M		This field contains a new Dataset ID with the new Tag 01 and Tag 02.
TLV 127.PAN, Dataset ID 41	PAN Update Data						This dataset ID contains Tag 01 and Tag 02.

Table A-11: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
TLV 127.PAN, Dataset ID 41, Tag 01	Replacement PAN	13–19 N, 4-bit BCD 7 bytes	C		C		This field is required when the existing PAN is being replaced with a new PAN. It will be present for PAN update notifications and may be present for PAN expiry update notifications.
TLV 127.PAN, Dataset ID 41, Tag 02	Replacement PAN Expiration Date	4 N, 4-bit BCD, 2 bytes format: yymm	M		M		This field must contain the new expiration date.

0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3730

Message reason code **3730** notifies issuers of updated personalization data for Visa Token Service transactions for secure element (SE) mobile devices.

The following table shows the fields in the message layout for message reason code **3730** (Device provisioning update results).

NOTE

Bold values in the message layout tables indicate that the values are from another message.

Table A-12: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3730

Field Number and Name		Format	Token Notification Provision for 3730		Description
			0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the number that identifies the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	This field contains the month and day.

Table A-12: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3730 (cont'd.)

Field Number and Name		Format	Token Notification Provision for 3730		Description
			0620	0630	
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+, 11 N, 4-bit BCD, 7 bytes max	M		This field contains a Visa-assigned identifier.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	For the 0620 message, this field must contain response code 00 (Good).
48, Usage 2	Unformatted Text in Authorization/ Reversal	Variable length, 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C		This field is reserved for Visa use.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique and is used to support SE transactions.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	This field contains the network ID 0002 (Visa) that is used to support SE transactions.

Table A-12: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3730 (cont'd.)

Field Number and Name		Format	Token Notification Provision for 3730		Description
			0620	0630	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		This is an existing field that is used to support SE transactions. This field contains the value of 3730 (Device provisioning update results) for the updates to personalization data on the SE mobile device.
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	This field contains the value 890 (Issuer token advice) to identify that this message is a token status notification message.
115	Additional Trace Data	Variable length, 1 byte binary+, 24 ANS, EBCDIC, 25 bytes max	O	C	This field contains additional proprietary tracking information used by the transaction originator. The information returned in the 0630 response message must be unaltered.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 03, Tag 05, Tag 06, Tag 07, Tag 08, and Tag 0B.

Table A-12: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3730 (cont'd.)

Field Number and Name		Format	Token Notification Provision for 3730		Description
			0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		This tag contains the token reference ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M		The value of 02 (SE) applies to SE tokens.
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table A-12: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3730 (cont'd.)

Field Number and Name		Format	Token Notification Provision for 3730		Description
			0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	C+		This tag contains the device ID.

Full Chip Token Payment Messages

This section includes the V.I.P. POS authorization and full financial messages to support Full Chip data for NFC Visa Contactless for the Visa Token Service to support secure element (SE) mobile devices.

In addition, this appendix includes the following chip processing:

- Legacy magnetic stripe data (MSD) 1.4.2
- Quick Visa Smart Debit/Credit (qVSDC)

IMPORTANT

The existing fields that have not changed are not included in this appendix.

REFERENCE

For details about the existing fields that have not changed, refer to:

- VisaNet Authorization-Only Online Messages Technical Specifications
- Full Service POS Online Messages Technical Specifications

V.I.P. Full Chip Data for NFC Visa Contactless Messages

This following table includes only the fields that have changed to support POS authorization and full financial messages for Visa Token Service transactions.

IMPORTANT

The existing fields that have not changed are not included in this appendix.

REFERENCE

For details about the existing fields that have not changed, refer to:

- VisaNet Authorization-Only Online Messages Technical Specifications
- Full Service POS Online Messages Technical Specifications

Table A-13: Message Impact Summary for Full Chip Data

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0100/0110 Authorization	Y	N	N
0120/0130 Authorization STIP Advice	Y	N	N
0100/0110 Preauthorization	Y	Y	Y
0120/0130 Preauthorization STIP Advice	Y	Y	Y
0200/0210 Full Financial	Y	Y	Y
0220/0230 Full Financial STIP Advice	Y	Y	Y
0220/0230 Preauthorization Completion	Y	Y	Y

Y = Transaction supported

N = Transaction not supported

Table A-13: Message Impact Summary for Full Chip Data (cont'd.)

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0220/0230 Preauthorization Completion STIP Advice	Y	Y	Y
0400/0410 Authorization Reversal	Y	N	N
0400/0410 Full Financial Reversal	Y	Y	Y
0420/0430 Authorization STIP Advice Reversal	Y	N	N
0420/0430 Full Financial STIP Advice Reversal	Y	Y	Y

*Y = Transaction supported**N = Transaction not supported*

0100/0110 and 0120/0130 POS Authorization Messages for Full Chip Data Processing

The following table shows the message layout and contents of the 0100/0110 and 0120/0130 POS Authorization Messages for Full Chip data processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A–14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, this field contains one of the following existing values: • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 07 and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing. NOTE <i>The value of 91 (Contactless device-read using magnetic stripe data rules) is not applicable for issuers in the AP region.</i> <i>Effective with the October 2019 release, Canada-acquired contactless MSD card or mobile device transactions with MSD will be declined. Automated fuel dispenser (AFD) transactions will continue to be allowed.</i>

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 91. This field is optional when the transaction includes the value of 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	M	M	M	M	This field contains a code identifying transaction conditions at the point-of-sale or point of service.

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C				For SE transactions, this field: - Will be present when Field 22 contains the value of 07. - May be present when Field 22 contains the value of 91. NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> Issuers must be aware that: - The issuer discretionary data won't contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date will be present in this field. The cardholder PAN and card expiration date will not be present in this field.

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											IMPORTANT Visa implemented an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN, instead of the token PAN. The dCVV or iCVV for the token will be present in SE transactions. NOTE The dCVV and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN. REFERENCE The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification.

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
38	Authorization Identification Response	6 AN, EBCDIC, 6 bytes		M				M			For approved authorization requests, this field must not contain any of these invalid values: • 00000 (All zeros in the last five positions of the six-byte field) • ^^^^^ (All spaces in the last five positions of the six-byte field) • X (X in the last position of the six-byte field) • 0000^ (Four zeros followed by a space in the last five positions of the six-byte field) • 0000N (Four zeros followed by N in the last five positions of the six-byte field) • 0000Y (Four zeros followed by Y in the last five positions of the six-byte field) • 0000P (Four zeros followed by P in the last five positions of the six-byte field) • SVC (SVC in the first three positions of the six-byte field)

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M		M	M	M	For SE transactions, the existing response codes are supported. For SE MSD transactions: - When dCVV fails and Field 44.5 is present, this field contains the value of 05 (Do not honor) in the 0120 STIP advice. - When dCVV fails and Field 44.5 is not present, this field contains the value of 82 (Negative Online CAM, dCVV, iCVV, or CVV results) in the 0120 STIP advice.
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		For SE transactions, this field contains a Visa-defined code indicating the dynamic card verification value (dCVV) or iCVV verification results.
44.8	Card Authentication Results Code	1 ANS, EBCDIC, 1 byte					C+	O	C		For SE transactions, this field is a VSDC field that contains a Visa-defined code indicating the CAM results for qVSDC.

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				This field may be present when Field 22 contains the value of 91. Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. • The Cardholder Name field will not contain the actual name of the cardholder. • The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date. • The dCVV or iCVV for the token will be present. IMPORTANT This field is used only for MSD and for limited transactions.

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (cont'd.)											NOTE The dCVV and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN. REFERENCE The Track 1 layout for Visa cards will conform to the Visa Contactless Payment Specification, Version 2.1.

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55	Integrated Circuit Card (ICC)-Related Data	Variable length, 1 byte binary+ 255 bytes, variable by usage 256 bytes max					C	C	C	C	This field is present when Field 22 contains the POS entry mode code 07 in the authorization message. Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the chip card that the issuer has issued. • The authorization request application cryptogram (ARQC) will be based on the token, and not the cardholder PAN. • The authorization response cryptogram (ARPC) is calculated by the token service provider. NOTE <i>The content of Field 55 is brand-specific. For more information, contact your regional client support representative.</i>

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55 (cont'd.)											Issuers must be aware of CVN 43 and to support the following: • CVN 43 will be present in Tag 9F10—Issuer Application Data • The Issuer Application Data (IAD) Format 4 in Tag 9F10 • The format of card verification result (CVR) with 6 bytes of Tag 9F10 • Cryptogram will be supported in Tag 9F26—Application Cryptogram Issuers must be aware of CVN 4A that will be generated similar to CVN 10, with a new IAD format of IAD, Format 4. NOTE <i>Issuers must be aware that the IAD, Format 4 will be carried in Field 55, Tag 9F10. Issuers must be aware that the IAD, Format 4 is not supported for third bitmap issuers. Additionally, issuers must be aware that the new CVN 4A will only be supported on 0100/0110 Authorization request and response messages.</i>

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		For SE transactions, this field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read-capable terminal) to identify that the terminal only supports Visa Contactless.

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67											This dataset ID contains Tag 05.

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 or 91 - Field 60.6 has the value of 4
TLV 123, Usage 2, Dataset ID 68	Token Data										This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

Table A-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
134 Format 1	Standard Format	Variable length, 1 byte binary+ 15 bytes 16 bytes max					C	C	C	C	For SE transactions, this field applies to third bitmap issuers. This field will be present when Field 22 contains POS entry mode code 07 in the authorization message. Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the chip card that the issuer has issued. • The authorization request application cryptogram (ARQC) will be based on the token, and not the cardholder PAN. • The authorization response cryptogram (ARPC) is calculated by the token service provider. REFERENCE <i>For Field 55 issuers, refer to Field 55 in this message.</i>

0100/0110 Preauthorization POS Full Financial Messages for Full Chip Data Processing

The following table shows the message layout and contents of the 0100/0110 Preauthorization messages for Full Chip data processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A-15: 0100/0110 Preauthorization POS Messages for Full Chip Data

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, this field contains one of the following existing values: • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 07 and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing.

Table A-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 91. This field is optional when the transaction includes the value of 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.

Table A–15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	M				M				For SE transactions, this field: - Will be present when Field 22 contains the POS entry mode code value of 07. - May be present when Field 22 contains the POS entry mode code values of 91. NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date.

Table A-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											IMPORTANT Visa implemented an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN, instead of the token PAN. The dCVV or iCVV for the token will be present. NOTE <i>The dCVV and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification.</i>

Table A–15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. • The token and token expiration date will be present in this field. The cardholder PAN and card expiration date will not be present in this field. • The Decimalized Cryptogram for the token will be present. IMPORTANT Visa implemented an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN, instead of the token PAN.

Table A-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											NOTE <i>The Decimalized Cryptogram will only be based on the token. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification, Version 2.1 and to the Visa Cloud-Based Payments Contactless Specification, Version 1.4.</i>

Table A-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M		M	M	M	For SE transactions, support the existing response codes. For SE MSD transactions, the following processing will apply to 0120 STIP advices: - When dCVV failed, this field contains the value of 05 (Do not honor) if Field 44.5 is present - When dCVV failed, this field contains the value of 82 (Negative Online CAM, dCVV, iCVV, or CVV results) if Field 44.5 is not present
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		For SE transactions, this field contains a Visa-defined code indicating the dynamic card verification value (dCVV) or iCVV verification results.
44.8	Card Authentication Results Code	1 ANS, EBCDIC, 1 byte					C+	O	C		For SE transactions, this field is a VSDC field that contains a Visa-defined code indicating the CAM results for qVSDC.

Table A-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55	Integrated Circuit Card (ICC)-Related Data	Variable length, 1 byte binary+ 255 bytes, variable by usage 256 bytes max					C	C	C	C	For SE transactions, this field is present when Field 22 contains the POS entry mode code 07 in the full financial message. Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the chip card that the issuer has issued. • The issuer discretionary data will not contain any issuer-specific personalization data. • The authorization request application cryptogram (ARQC) will be based on the token, and not the cardholder PAN. • The authorization response cryptogram (ARPC) is calculated by the token service provider. NOTE <i>The content of Field 55 is brand-specific. For more information, contact your regional client support representative.</i>

Table A-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55 (cont'd.)											Issuers must be aware of CVN 43 and must support the following: • CVN 43 will be supported in Tag 9F10—Issuer Application Data • Format 4 to support the issuer application data (IAD) in Tag 9F10 • The format of card verification result (CVR) with 4 bytes of Tag 9F10 • Cryptogram will be supported in Tag 9F26—Application Cryptogram REFERENCE <i>For third bitmap issuers, refer to Field 134 in this message.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.

Table A-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		For SE transactions, this field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read-capable terminal) to identify that the terminal only supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.

Table A–15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the address verification (AV) data.
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.

Table A-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

Table A–15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
134 Format 1	Standard Format	Variable length, 1 byte binary+ 15 bytes, 16 bytes max					C	C	C	C	For SE transactions, this field applies to third bitmap issuers. This field will be present when Field 22 contains POS entry mode code 07 in the authorization message. Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the chip card that the issuer has issued. • The authorization request application cryptogram (ARQC) will be based on the token, and not the cardholder PAN. • The authorization response cryptogram (ARPC) is calculated by the token service provider. • The issuer application data will not contain any issuer-specific personalization data.

0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data Processing

The following table shows the message layout and contents of the 0200/0210 and 0220/0230 Full financial messages for Full Chip data processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, this field contains one of the following existing values: • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 07 and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing.

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22 (cont'd.)											NOTE The value of 91 (Contactless device-read using magnetic stripe data rules) is not applicable for issuers in the AP region. Effective with the October 2019 release, Canada-acquired contactless MSD card or mobile device transactions with MSD will be declined. Automated fuel dispenser (AFD) transactions will continue to be allowed.

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 91. This field is optional when the transaction includes the value of 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.
25	Point-of-Service Condition Code	2 N 4-bit BCD, 1 byte	M	M	M	M	M	M	M	M	This field contains a code identifying transaction conditions at the point-of-sale or point of service.

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description	
			Legacy (MSD 1.4.2)				qVSDC					
			Original		STIP Advice		Original		STIP Advice			
			0200	0210	0220	0230	0200	0210	0220	0230		
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss		
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C					For SE transactions, this field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code value of 91. IMPORTANT This field is required for Interlink transactions. Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date will be present in this field. The cardholder PAN and card expiration date will not be present in this field. NOTE <i>Visa implemented an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN, instead of the token PAN.</i>

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											The dCVV or iCVV for the token will be present in SE transactions. NOTE <i>The dCVV and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification, Version 2.1 and to the Visa Cloud-Based Payments Contactless Specification, Version 1.4.</i>

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2 AN EBCDIC, 2 bytes		M	M	M		M	M	M	For SE transactions, support the existing response codes. For SE MSD transactions, the following processing will apply to 0120 STIP advices: - When dCVV failed, this field contains the value of 05 (Do not honor) if Field 44.5 is present - When dCVV failed, this field contains the value of 82 (Negative Online CAM, dCVV, iCVV, or CVV results) if Field 44.5 is not present
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		For SE transactions, this field contains a Visa-defined code indicating the dynamic card verification value (dCVV) or iCVV verification results.
44.8	Card Authentication Results Code	1 ANS, EBCDIC, 1 byte					C+	O	C		For SE transactions, this field is a VSDC field that contains a Visa-defined code indicating the CAM results for qVSDC.

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description	
			Legacy (MSD 1.4.2)				qVSDC					
			Original		STIP Advice		Original		STIP Advice			
			0200	0210	0220	0230	0200	0210	0220	0230		
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss		
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C					For SE transactions, this field may be present when Field 22 contains the value of 91. IMPORTANT This field is not supported for Interlink transactions. Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. • The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date. • The Cardholder Name field will not contain the actual name of the cardholder. • The dCVV or iCVV for the token will be present.

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (cont'd.)											IMPORTANT This field is used only for MSD and for limited transactions. NOTE <i>The dCVV and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 1 layout for Visa cards will conform to the Visa Contactless Payment Specification.</i>

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55	Integrated Circuit Card (ICC)-Related Data	Variable length, 1 byte binary+ 255 bytes, variable by usage 256 bytes max					C	C	C	C	For SE transactions, this field is present when Field 22 contains the POS entry mode code 07 in the full financial message. Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the chip card that the issuer has issued. • The issuer application data will not contain any issuer-specific personalization data. • The authorization request application cryptogram (ARQC) will be based on the token, and not the cardholder PAN. • The authorization response cryptogram (ARPC) is calculated by the token service provider. NOTE <i>The content of Field 55 is brand-specific. For more information, contact your regional client support representative.</i>

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55 (cont'd.)											Issuers must be aware of CVN 43 and must support the following: - CVN 43 will be supported in Tag 9F10—Issuer Application Data - Format 4 to support the issuer application data (IAD) in Tag 9F10 - The format of card verification result (CVR) with 4 bytes of Tag 9F10 - Cryptogram will be supported in Tag 9F26—Application Cryptogram

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55 (cont'd.)											Issuers must be aware of CVN 4A that will be generated similar to CVN 10, with a new IAD format of IAD, Format 4. NOTE <i>Issuers should be aware that the IAD, Format 4 will be carried in Field 55, Tag 9F10—Issuer Application Data. Issuers should be aware that the IAD, Format 4 is not supported for third bitmap issuers.</i> <i>Additionally, issuers must be aware that the new CVN 4A will only be supported on 0200/0210 Full financial request and response messages.</i> REFERENCE <i>For third bitmap issuers, refer to Field 134 in this message.</i>

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		For SE transactions, this field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read-capable terminal) to identify that the terminal only supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67	Activation Verification Data										This dataset ID field contains Tag 05.

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67 Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

Table A-16: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
134 Format 1	Standard Format	Variable length, 1 byte binary+ 15 bytes, 16 bytes max					C	C	C	C	For SE transactions, this field applies to third bitmap issuers. This field will be present when Field 22 contains POS entry mode code 07 in the authorization message. Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the chip card that the issuer has issued. • The authorization request application cryptogram (ARQC) will be based on the token, and not the cardholder PAN. • The authorization response cryptogram (ARPC) is calculated by the token service provider. • The issuer application data will not contain any issuer-specific personalization data. REFERENCE <i>For Field 55 issuers, refer to Field 55 in this message.</i>

0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data Processing

The following table shows the message layout and contents of the 0220/0230 Preauthorization completion messages for Full Chip data processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A-17: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, this field contains one of the following existing values: • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 07 and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing.

Table A-17: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 91. This field is optional when the transaction includes the value of 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.

Table A-17: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55	Integrated Circuit Card (ICC)-Related Data	Variable length, 1 byte binary+ 255 bytes, variable by usage 256 bytes max					C	C	C	C	For SE transactions, this field is present when Field 22 contains the POS entry mode code 07 in the full financial message. Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the chip card that the issuer has issued. The issuer application data will not contain any issuer-specific personalization data. • The authorization request application cryptogram (ARQC) will be based on the token, and not the cardholder PAN. • The authorization response cryptogram (ARPC) is calculated by the token service provider. NOTE <i>The content of Field 55 is brand-specific. For more information, contact your regional client support representative.</i>

Table A-17: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55 (cont'd.)											Issuers must be aware of CVN 43 and must support the following: - CVN 43 will be supported in Tag 9F10—Issuer Application Data - Format 4 to support the issuer application data (IAD) in Tag 9F10 - The format of card verification result (CVR) with 4 bytes of Tag 9F10 - Cryptogram will be supported in Tag 9F26—Application Cryptogram REFERENCE <i>For third bitmap issuers, refer to Field 134 in this message.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.

Table A-17: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization completion message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		For SE transactions, this field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is supported, or the value of 8 (Proximity-read-capable terminal) to identify that the terminal only supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.

Table A-17: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.

Table A-17: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

Table A-17: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
134 Format 1 (cont'd.)	Standard Format	Variable length, 1 byte binary+ 15 bytes, 16 bytes max					C	C	C	C	For SE transactions, this field applies to third bitmap issuers. This field will be present when Field 22 contains POS entry mode code 07 in the authorization message. Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the chip card that the issuer has issued. • The authorization request application cryptogram (ARQC) will be based on the token, and not the cardholder PAN. • The authorization response cryptogram (ARPC) is calculated by the token service provider. • The issuer application data will not contain any issuer-specific personalization data. REFERENCE <i>For Field 55 issuers, refer to Field 55 in this message.</i>

0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Full Chip Data Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Preauthorization reversal messages for Full Chip data processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A-18: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Full Chip Data

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, the value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data										This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization reversal message to the issuer.

Table A-18: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		For SE transactions, this field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read-capable terminal) to identify that the terminal only supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.

Table A-18: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.

Table A–18: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Full Chip Data Processing

The following table shows the message layout and contents of 0400/0410 and 0420/0430 POS Full financial reversal messages for Full Chip data processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A-19: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Full Chip Data

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, the value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial reversal message to the issuer.

Table A-19: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		For SE transactions, this field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is supported, or the value of 8 (Proximity-read-capable terminal) to identify that the terminal only supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.

Table A–19: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67 Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.

Table A–19: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

Early Chip Token Payment Messages

This appendix includes the V.I.P. POS authorization and full financial messages to support Early Chip data for NFC Visa Contactless for the Visa Token Service to support secure element (SE) mobile devices.

In addition, this appendix includes the following chip processing:

- Legacy magnetic stripe data (MSD) 1.4.2
- Quick Visa Smart Debit/Credit (qVSDC)

IMPORTANT

The existing fields that have not changed are not included in this appendix.

REFERENCE

For details about the existing fields that have not changed, refer to:

- VisaNet Authorization-Only Online Messages Technical Specifications
- Full Service POS Online Messages Technical Specifications

This appendix includes only the fields that have changed to support the POS authorization and full financial messages for Visa Token Service transactions shown in the following table.

Table A–20: Message Impact Summary for Early Chip Data

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0100/0110 Authorization	Y	N	N
0120/0130 Authorization STIP Advice	Y	N	N
0100/0110 Preauthorization	Y	Y	Y
0120/0130 Preauthorization STIP Advice	Y	Y	Y
0200/0210 Full Financial	Y	Y	Y
0220/0230 Full Financial STIP Advice	Y	Y	Y
0220/0230 Preauthorization Completion	Y	Y	Y
0220/0230 Preauthorization Completion STIP Advice	Y	Y	Y
0400/0410 Authorization Reversal	Y	N	N
0400/0410 Full Financial Reversal	Y	Y	Y
0420/0430 Authorization STIP Advice Reversal	Y	N	N

Y = Transaction supported

N = Transaction not supported

Table A–20: Message Impact Summary for Early Chip Data (cont'd.)

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0420/0430 Full Financial STIP Advice Reversal	Y	Y	Y

Y = Transaction supported
N = Transaction not supported

0100/0110 and 0120/0130 POS Authorization Messages for Early Chip Data Processing

The following table shows the message layout and contents of the 0100/0110 and 0120/0130 POS Authorization messages for Early Chip data processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A–21: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.

Table A–21: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, this field contains one of the following existing values: • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 07 and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing. NOTE <i>The value of 91 (Contactless device-read using magnetic stripe data rules) is not applicable for issuers in the AP region.</i> <i>Effective with the October 2019 release, Canada-acquired contactless MSD card or mobile device transactions with MSD will be declined. Automated fuel dispenser (AFD) transactions will continue to be allowed.</i>

Table A-21: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 91. This field is optional when the transaction includes the value of 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.
25	Point-of-Service Condition Code	2 N 4-bit BCD, 1 byte	M	M	M	M	M	M	M	M	This field contains a code identifying transaction conditions at the point-of-sale or point of service.

Table A-21: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C				For SE transactions, this field: - Will be present when Field 22 contains the POS entry mode code value of 07. - May be present when Field 22 contains the POS entry mode code value of 91. NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date will be present in this field. The cardholder PAN and card expiration date will not be present in this field.

Table A-21: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											IMPORTANT Visa implemented an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN, instead of the token PAN. The dCVV or iCVV for the token will be present in SE transactions. NOTE <i>The dCVV and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification, Version 2.1.</i>

Table A-21: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
38	Authorization Identification Response	6 AN, EBCDIC, 6 bytes		M				M			For approved authorization requests, this field must not contain any of the following invalid authorization code values: • 00000 (All zeros in the last five positions of the six-byte field) • ^^^^^ (All spaces in the last five positions of the six-byte field) • X (X in the last position of the six-byte field) • 0000^ (Four zeros followed by a space in the last five positions of the six-byte field) • 0000N (Four zeros followed by N in the last five positions of the six-byte field) • 0000Y (Four zeros followed by Y in the last five positions of the six-byte field) • 0000P (Four zeros followed by P in the last five positions of the six-byte field) • SVC (SVC in the first three positions of the six-byte field)

Table A-21: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M		M	M	M	For SE transactions, support the existing response codes. The following processing will apply to 0120 STIP advices for MSD: - When dCVV failed, this field contains the value of 05 if Field 44.5 is present in MSD transactions. - When dCVV failed, this field contains the value of 82 if Field 44.5 is not present in MSD transactions. The following processing will apply to 0120 STIP advices for qVSDC: - When CAM failed, this field contains the value of 05 if Field 44.5 is present in MSD transactions. - When CAM failed, this field contains the value of Q1 for qVSDC transactions.
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		For SE transactions, this field contains a Visa-defined code indicating the dynamic card verification value (dCVV) or iCVV verification results.

Table A-21: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				For SE transactions, this field may be present when Field 22 contains the value of 91. Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date.

Table A-21: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (cont'd.)										- The Cardholder Name field will not contain the actual name of the cardholder. - The dCVV or iCVV for the token will be present. IMPORTANT This field is used only for MSD and for limited transactions. NOTE <i>The dCVV and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 1 layout for Visa cards will conform to the Visa Contactless Payment Specification.</i>	

Table A-21: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.

Table A-21: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.

Table A–21: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.

Table A-21: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data Processing

The following table shows the message layout and contents of the 0100/0110 Preauthorization messages for Early Chip data processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A–22: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, this field contains one of the following existing values: 07 (Contactless device-read using VSDC chip data rules) 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 07 and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing.

Table A-22: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 91. This field is optional when the transaction includes the value of 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.

Table A–22: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	M				M				For SE transactions, this field: - Will be present when Field 22 contains the POS entry mode code value of 07. - May be present when Field 22 contains a values of 03 or 91. NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date will be present in this field. The cardholder PAN and card expiration date will not be present in this field.

Table A–22: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											IMPORTANT Visa implemented an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN, instead of the token PAN. The dCVV or iCVV for the token will be present in SE transactions. NOTE <i>The dCVV and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> NOTE <i>The Decimalized Cryptogram and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i>

Table A-22: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											REFERENCE The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification, Version 2.1.
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M		M	M	M	For SE transactions, support the existing response codes. The following processing will apply to 0120 STIP advices for MSD: - When dCVV failed, this field contains the value of 05 if Field 44.5 is present in MSD transactions. - When dCVV failed, this field contains the value of 82 if Field 44.5 is not present in MSD transactions. The following processing will apply to 0120 STIP advices for qVSDC: - When CAM failed, this field contains the value of 05 if Field 44.5 is present in MSD transactions. - When CAM failed, this field contains the value of Q1 for qVSDC transactions.

Table A-22: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		For SE transactions, this field contains a Visa-defined code indicating the dynamic card verification value (dCVV) or iCVV verification results.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.

Table A–22: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.

Table A-22: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data Processing

The following table shows the message layout and contents of the 0220/0230 Preauthorization completion messages for Early Chip data processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A-23: 0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, this field contains one of the following existing values: • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 07 and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing.

Table A–23: 0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 91. This field is optional when the transaction includes the value of 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.

Table A-23: 0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization completion message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.

Table A-23: 0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.

Table A–23: 0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0400/0410 and 0420/0430 POS Authorization Reversal Messages for Early Chip Data Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Authorization reversal messages for Early Chip data processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A–24: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Early Chip Data

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, the value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization reversal message to the issuer.

Table A–24: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.

Table A-24: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.

Table A–24: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Early Chip Data Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Preauthorization reversal messages for Early Chip data processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A-25: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Early Chip Data

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, the value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial reversal message to the issuer.

Table A–25: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.

Table A-25: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.

Table A–25: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Early Chip Data Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Full financial reversal messages for Early Chip data processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A-26: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Early Chip Data

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, the value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial reversal message to the issuer.

Table A-26: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.

Table A-26: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.

Table A-26: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

iCVV Convert Token Payment Messages

This appendix includes the V.I.P. POS authorization and full financial messages to support iCVV Convert Service for NFC Visa Contactless for the Visa Token Service to support secure element (SE) mobile devices.

In addition, this appendix includes the following chip processing:

- Legacy magnetic stripe data (MSD) 1.4.2
- Quick Visa Smart Debit/Credit (qVSDC)

IMPORTANT

The existing fields that have not changed are not included in this appendix.

REFERENCE

For details about the existing fields that have not changed, refer to:

- BASE I Technical Specifications, Volume 1 and Volume 2
- SMS POS Technical Specifications Volume 1 and Volume 2

This appendix includes only the fields that have changed to support POS authorization and full financial messages for Visa Token Service transactions shown in the following table.

Table A–27: Message Impact Summary for iCVV Convert Service

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0100/0110 Authorization	Y	N	N
0120/0130 Authorization STIP Advice	Y	N	N
0100/0110 Preauthorization	Y	Y	N
0120/0130 Preauthorization STIP Advice	Y	Y	N
0200/0210 Full Financial	Y	Y	N
0220/0230 Full Financial STIP Advice	Y	Y	N
0220/0230 Preauthorization Completion	Y	Y	N
0220/0230 Preauthorization Completion STIP Advice	Y	Y	N
0400/0410 Authorization Reversal	Y	N	N
0400/0410 Full Financial Reversal	Y	Y	N
0420/0430 Authorization STIP Advice Reversal	Y	N	N

Y = Transaction supported

N = Transaction not supported

Table A-27: Message Impact Summary for iCVV Convert Service (cont'd.)

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0420/0430 Full Financial STIP Advice Reversal	Y	Y	N

Y = Transaction supported

N = Transaction not supported

0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0100/0110 and 0120/0130 POS Authorization messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A–28: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.

Table A–28: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, this field contains one of the following existing values: • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode code values of 07 and 91. Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing. NOTE <i>The value of 91 (Contactless device-read using magnetic stripe data rules) is not applicable for issuers in the AP region.</i> <i>Effective with the October 2019 release, Canada-acquired contactless MSD card or mobile device transactions with MSD will be declined. Automated fuel dispenser (AFD) transactions will continue to be allowed.</i>

Table A-28: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
25	Point-of-Service Condition Code	2 N 4-bit BCD, 1 byte	M	M	M	M	M	M	M	M	This field contains a code identifying transaction conditions at the point-of-sale or point of service.

Table A–28: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C				For SE transactions, this field: - Will be present when Field 22 contains the POS entry mode code value of 07. - May be present when Field 22 contains the POS entry mode code value of 91. NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe. - Generate the CVV and place the CVV according to the issuer configuration location.

Table A-28: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											Issuers must be aware that: The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification and to the Visa Cloud-Based Payments Contactless Specification, Version 1.4.</i>

Table A–28: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
38	Authorization Identification Response	6 AN, EBCDIC, 6 bytes		M				M			For approved authorization requests, this field must not contain any of the following invalid authorization code values: • 00000 (All zeros in the last five positions of the six-byte field) • ^^^^^ (All spaces in the last five positions of the six-byte field) • X (X in the last position of the six-byte field) • 0000^ (Four zeros followed by a space in the last five positions of the six-byte field) • 0000N (Four zeros followed by N in the last five positions of the six-byte field) • 0000Y (Four zeros followed by Y in the last five positions of the six-byte field) • 0000P (Four zeros followed by P in the last five positions of the six-byte field) • SVC (SVC in the first three positions of the six-byte field)

Table A–28: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes	C+	M	M	M	C+	M	M	M	For SE transactions, support the existing response codes. The following processing will apply to 0120 STIP advices: - When dCVV failed, this field contains the value of 05 if Field 44.5 is present - When dCVV failed, this field contains the value of 82 if Field 44.5 is not present
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		For SE transactions, this field contains a Visa-defined code indicating the dynamic card verification value (dCVV) or iCVV verification results.

Table A–28: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				For SE transactions, this field may be present when Field 22 contains the value of 91. Visa will: • Replace the token with the cardholder PAN and card expiration date. • Replace the service code with an equivalent existing service code for magnetic stripe. • Generate the CVV and place the CVV in the predefined location. The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. The Cardholder Name field will not contain the actual name of the cardholder. IMPORTANT This field is used only for MSD and for limited transactions.

Table A-28: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (cont'd.)											REFERENCE The Track 1 layout will conform to the Visa Contactless Payment Specification, Version 2.1.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization message to the issuer.

Table A–28: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). NOTE <i>Issuers that currently use the iCVV Convert Service must be aware that this field is dropped from the authorization and full financial messages. With the Visa Token Service, issuers must be prepared to receive the value in this field.</i>
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.

Table A-28: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.

Table A-28: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.

Table A–28: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0100/0110 Preauthorization POS Full Financial Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0100/0110 Preauthorization POS Full financial messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

IMPORTANT

The iCVV Convert Service does not support Interlink transactions initiated using a non-Visa card. For more information, contact your regional client support representative.

Table A–29: 0100/0110 Preauthorization POS Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.

Table A-29: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, this field contains one of the following existing values: • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode code values of 07 and 91. Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing.

Table A-29: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	M				M				For SE transactions, this field: - Will be present when Field 22 contains the POS entry mode code value of 07. - May be present when Field 22 contains the POS entry mode code value of 91. NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe. - Generate the CVV and place the CVV according to the issuer configuration location.

Table A–29: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											Issuers must be aware that: The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification and to the Visa Cloud-Based Payments Contactless Specification, Version 1.4.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes 2 AN, EBCDIC, 2 bytes	C+	M	M	M	C+	M	M	M	For SE transactions, support the existing response codes. The following processing will apply to 0120 STIP advices: - When dCVV failed, this field contains the value of 05 if Field 44.5 is present - When dCVV failed, this field contains the value of 82 if Field 44.5 is not present

Table A-29: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		For SE transactions, this field contains a Visa-defined code indicating the dynamic card verification value (dCVV) or iCVV verification results.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization message to the issuer.

Table A-29: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). NOTE <i>Issuers that currently use the iCVV Convert Service must be aware that this field is dropped from the authorization and full financial messages. With the Visa Token Service, issuers must be prepared to receive the value in this field.</i>
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.

Table A–29: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.

Table A-29: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0200/0210 and 0220/0230 POS Full financial messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

IMPORTANT

The iCVV Convert Service does not support Interlink transactions initiated using a non-Visa card. For more information, contact your regional client support representative.

Table A-30: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, this field contains one of the following existing values: • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode code values of 07 and 91. Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing. NOTE <i>The value of 91 (Contactless device-read using magnetic stripe data rules) is not applicable for issuers in the AP region.</i> <i>Effective with the October 2019 release, Canada-acquired contactless MSD card or mobile device transactions with MSD will be declined. Automated fuel dispenser (AFD) transactions will continue to be allowed.</i>

Table A-30: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C				For SE transactions, this field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code value of 91. IMPORTANT This field is required for Interlink transactions. Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe. - Generate the CVV and place the CVV according to the issuer configuration location.

Table A-30: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											Issuers must be aware that: The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification and to the Visa Cloud-Based Payments Contactless Specification, Version 1.4.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M		M	M	M	For SE transactions, support the existing response codes. The following processing will apply to 0220 STIP advices: - When dCVV failed, this field contains the value of 05 if Field 44.5 is present - When dCVV failed, this field contains the value of 82 if Field 44.5 is not present

Table A-30: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		For SE transactions, this field contains a Visa-defined code indicating the dynamic card verification value (dCVV) or iCVV verification results.
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				For SE transactions, this field may be present when Field 22 contains the value of 91. IMPORTANT This field is not supported for Interlink transactions. Visa will: • Replace the token with the cardholder PAN and card expiration date. • Generate the CVV and place the CVV in the predefined location. The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. The Cardholder Name field will not contain the actual name of the cardholder.

Table A-30: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (cont'd.)											IMPORTANT This field is used only for MSD and for limited transactions. REFERENCE The Track 1 layout will conform to the Visa Contactless Payment Specification.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial message to the issuer.

Table A-30: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). NOTE <i>Issuers that currently use the iCVV Convert Service must be aware that this field is dropped from the authorization and full financial messages. With the Visa Token Service, issuers must be prepared to receive the value in this field.</i>
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.

Table A-30: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.

Table A-30: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.

Table A-30: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0220/0230 Preauthorization Completion POS Full Financial Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0220/0230 Preauthorization completion messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

IMPORTANT

The iCVV Convert Service does not support Interlink transactions initiated using a non-Visa card. For more information, contact your regional client support representative.

Table A-31: 0220/0230 Preauthorization Completion POS Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, this field contains one of the following existing values: • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode code values of 07 and 91. Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.

Table A-31: 0220/0230 Preauthorization Completion POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization completion message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). NOTE <i>Issuers that currently use the iCVV Convert Service must be aware that this field is dropped from the authorization and full financial messages. With the Visa Token Service, issuers must be prepared to receive the value in this field.</i>
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.

Table A-31: 0220/0230 Preauthorization Completion POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.

Table A-31: 0220/0230 Preauthorization Completion POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0400/0410 and 0420/0430 POS Authorization Reversal Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Authorization reversal messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A-32: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, the value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization reversal message to the issuer.

Table A-32: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.

Table A-32: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Preauthorization reversal messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

IMPORTANT

The iCVV Convert Service does not support Interlink transactions initiated using a non-Visa card. For more information, contact your regional client support representative.

Table A–33: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, the value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.

Table A-33: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization reversal message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.

Table A-33: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.

Table A-33: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0400/0410 and 0420/0430 POS Full Financial Reversal Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Full financial reversal messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from secure element (SE) mobile devices.

Table A-34: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		For SE transactions, the value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial reversal message to the issuer.

Table A-34: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		For SE transactions, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.

Table A–34: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		For SE transactions, this tag contains the token that is used to replace the cardholder PAN.

Table A-34: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

Token Convert Payment Messages

The appendix includes the V.I.P. POS authorization and full financial messages to support Token Convert Service. This appendix includes chip processing for NFC Visa Contactless transactions.

IMPORTANT

The existing fields that have not changed are not included in this appendix.

REFERENCE

For details about the existing fields that have not changed, refer to:

- BASE I Technical Specifications, Volume 1 *and* Volume 2
- SMS POS Technical Specifications Volume 1 *and* Volume 2

Table A-35: Message Impact Summary for Token Convert Service Processing of NFC Visa Contactless

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0100/0110 Authorization	Y	N	N
0120/0130 Authorization STIP Advice	Y	N	N
0100/0110 Preauthorization	Y	Y	Y
0120/0130 Preauthorization STIP Advice	Y	Y	Y
0200/0210 Full Financial	Y	Y	Y
0220/0230 Full Financial STIP Advice	Y	Y	Y
0220/0230 Preauthorization Completion	Y	Y	Y
0220/0230 Preauthorization Completion STIP Advice	Y	Y	Y
0400/0410 Authorization Reversal	Y	N	N
0400/0410 Full Financial Reversal	Y	Y	Y
0420/0430 Authorization STIP Advice Reversal	Y	N	N
0420/0430 Full Financial STIP Advice Reversal	Y	Y	Y

Y = Transaction supported

N = Transaction not supported

0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages for Token Convert Service processing of NFC Visa Contactless transactions for Visa On-Behalf-Of Issuer provisioning.

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards This field contains one of the following existing values: • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode code values of 07 and 91 . Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing. NOTE <i>The value of 91 (Contactless device-read using magnetic stripe data rules) is not applicable for issuers in the AP region.</i> <i>Effective with the October 2019 release, Canada-acquired contactless MSD card or mobile device transactions with MSD will be declined. Automated fuel dispenser (AFD) transactions will continue to be allowed.</i>

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
25	Point-of-Service Condition Code	2 N 4-bit BCD, 1 byte	M	M	M	M	M	M	M	M	This field contains a code identifying transaction conditions at the point-of-sale or point of service.

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C				Visa Cards For all Visa cards processed in network 0002 (Visa) and network 0003 (Interlink), this field: - Will be present when Field 22 contains the POS entry mode code value of 07. - May be present when Field 22 contains the POS entry mode code value of or 91. NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe. - Generate the CVV and place the CVV according to the issuer configuration location.

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											In addition, the issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. NOTE <i>For Token Convert authorizations that have Field 35 present, Track 2 data will reflect the PAN.</i> REFERENCE <i>The Track 2 layout will conform to the Visa Contactless Payment Specification, Version 2.1.</i> Non-Visa Cards For non-Visa cards processed in network 0003 (Interlink), this field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code value of 91. Visa will: - Replace the token with the cardholder PAN and card expiration date.

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)										- Replace the service code with an equivalent existing service code for magnetic stripe. In addition, the: - CVC information will not be present and will be removed. - Issuer discretionary data will default to all zeros.	

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
38	Authorization Identification Response	6 AN, EBCDIC, 6 bytes		M				M			For approved authorization requests, this field must not contain any of the following invalid authorization code values: • 00000 (All zeros in the last five positions of the six-byte field) • ^^^^^ (All spaces in the last five positions of the six-byte field) • X (X in the last position of the six-byte field) • 0000^ (Four zeros followed by a space in the last five positions of the six-byte field) • 0000N (Four zeros followed by N in the last five positions of the six-byte field) • 0000Y (Four zeros followed by Y in the last five positions of the six-byte field) • 0000P (Four zeros followed by P in the last five positions of the six-byte field) • SVC (SVC in the first three positions of the six-byte field)

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2AN, EBCDIC, 2 bytes	C+	M	M	M	C+	M	M	M	For SE transactions, support the existing response codes. The following processing will apply to 0120 STIP advices: - When dCVV failed, this field contains the value of 05 if Field 44.5 is present - When dCVV failed, this field contains the value of 82 if Field 44.5 is not present
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		This field contains a Visa-defined code indicating the card verification value (CVV), CAM, or iCVV verification results. All results will be sent in this field.

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				Visa Cards For Visa cards processed in network 0002, this field may be present when Field 22 contains the value of 91 . Visa will: • Replace the token with the cardholder PAN and card expiration date. • Replace the service code with an equivalent existing service code for magnetic stripe. • Generate the CVV and place the CVV in the predefined location. The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. The Cardholder Name field will not contain the actual name of the cardholder. REFERENCE <i>The Track 1 layout will conform to the Visa Contactless Payment Specification, Version 2.1.</i>

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (cont'd.)											NOTE <i>This field is not applicable to network 0003 (Interlink) for both Visa and non-Visa cards.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization message to the issuer.

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		For SE transactions, this field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal only supports Visa payWave.)
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa and Non-Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67	Activation Verification Data										This dataset ID contains Tag 05.

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.

Table A-36: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0100/0110 Preauthorization POS Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0100/0110 Preauthorization messages for Token Convert Service processing of NFC Visa payWave transactions for Visa On-Behalf-Of Issuer provisioning.

Table A-37: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.

Table A-37: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards This field contains one of the following existing values: • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode code values of 07 and 91 . Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing.

Table A-37: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	M				M				Visa Cards For all Visa cards processed in network 0002 (Visa) and network 0003 (Interlink), this field: - Will be present when Field 22 contains the POS entry mode code value of 07. - May be present when Field 22 contains the POS entry mode code value of 91. NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe. - Generate the CVV and place the CVV according to the issuer configuration location.

Table A-37: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											In addition, the issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. REFERENCE <i>The Track 2 layout will conform to the Visa Contactless Payment Specification, Version 2.1.</i> Non-Visa Cards For non-Visa cards processed in network 0003 (Interlink), this field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code value of 91. Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe.

Table A-37: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											In addition, the: - CVC information will not be present and will be removed. - Issuer discretionary data will default to all zeros.
39	Response Code	2AN, EBCDIC, 2 bytes	C+	M	M	M	C+	M	M	M	For SE transactions, support the existing response codes. The following processing will apply to 0120 STIP advices: - When dCVV failed, this field contains the value of 05 if Field 44.5 is present - When dCVV failed, this field contains the value of 82 if Field 44.5 is not present
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		This field contains a Visa-defined code indicating the dynamic card verification value (dCVV), CAM, or iCVV verification results. All results will be sent in this field.

Table A-37: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				Visa Cards For Visa cards processed in network 0002, this field may be present when Field 22 contains the value of 91 . Visa will: • Replace the token with the cardholder PAN and card expiration date. • Replace the service code with an equivalent existing service code for magnetic stripe. • Generate the CVV and place the CVV in the predefined location. The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. The Cardholder Name field will not contain the actual name of the cardholder. REFERENCE <i>The Track 1 layout will conform to the Visa Contactless Payment Specification, Version 2.1.</i>

Table A-37: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (cont'd.)											NOTE <i>This field is not applicable to network 0003 (Interlink) for both Visa and non-Visa cards.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization message to the issuer.

Table A-37: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		For SE transactions, this field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal only supports Visa payWave.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa and Non-Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.

Table A-37: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.

Table A-37: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0200/0210 and 0220/0230 Full financial messages for Token Convert Service processing of NFC Visa Contactless transactions for Visa On-Behalf-Of Issuer provisioning.

Table A-38: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards This field contains one of the following existing values: 07 (Contactless device-read using VSDC chip data rules) 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode codes 07 and 91 . Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing.

Table A-38: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22 (cont'd.)											NOTE The value of 91 (Contactless device-read using magnetic stripe data rules) is not applicable for issuers in the AP region. Effective with the October 2019 release, Canada-acquired contactless MSD card or mobile device transactions with MSD will be declined. Automated fuel dispenser (AFD) transactions will continue to be allowed.
25	Point-of-Service Condition Code	2 N 4-bit BCD, 1 byte	M	M	M	M	M	M	M	M	This field contains a code identifying transaction conditions at the point-of-sale or point of service.

Table A-38: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C				Visa Cards For all Visa cards processed in network 0002 (Visa) and network 0003 (Interlink), this field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code value of 03 or 91. Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe. - Generate the CVV and place the CVV according to the issuer configuration location. In addition, the issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued.

Table A–38: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											REFERENCE <i>The Track 2 layout will conform to the Visa Contactless Payment Specification.</i>
											Non-Visa Cards For non-Visa cards processed in network 0003 (Interlink), this field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code value of 91. Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe.

Table A-38: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											In addition, the: - CVC information will not be present and will be removed. - Issuer discretionary data will default to all zeros.
39	Response Code	2AN, EBCDIC, 2 bytes	C+	M	M	M	C+	M	M	M	For SE transactions, support the existing response codes. The following processing will apply to 0120 STIP advices: - When dCVV failed, this field contains the value of 05 if Field 44.5 is present - When dCVV failed, this field contains the value of 82 if Field 44.5 is not present
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		This field contains a Visa-defined code indicating the dynamic card verification value (dCVV), CAM, or iCVV verification results. All results will be sent in this field.

Table A–38: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				Visa Cards For Visa cards processed in network 0002, this field may be present when Field 22 contains the value of 91 . Visa will: • Replace the token with the cardholder PAN and card expiration date. • Replace the service code with an equivalent existing service code for magnetic stripe. • Generate the CVV and place the CVV in the predefined location. The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. The Cardholder Name field will not contain the actual name of the cardholder. REFERENCE <i>The Track 1 layout will conform to the Visa Contactless Payment Specification, Version 2.1.</i>

Table A-38: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (cont'd.)											NOTE <i>This field is not applicable to network 0003 (Interlink) for both Visa and non-Visa cards.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial message to the issuer.

Table A–38: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		For SE transactions, this field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal only supports Visa payWave.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa and Non-Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.

Table A-38: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67	Activation Verification Data										This dataset ID contains Tag 05.

Table A–38: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.

Table A–38: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0220/0230 Preauthorization Completion POS Full Financial Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0220/0230 Preauthorization completion messages for Token Convert Service processing of NFC Visa Contactless transactions for Visa On-Behalf-Of Issuer provisioning.

Table A-39: 0220/0230 Preauthorization Completion POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards This field contains one of the following existing values: 07 (Contactless device-read using VSDC chip data rules) 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode codes 07 and 91 . Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing.
39	Response Code	2AN, EBCDIC, 2 bytes	C+	M	M	M	C+	M	M	M	For SE transactions, support the existing response codes.

Table A-39: 0220/0230 Preauthorization Completion POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39 (cont'd.)											The following processing will apply to 0120 STIP advices: - When dCVV failed, this field contains the value of 05 if Field 44.5 is present - When dCVV failed, this field contains the value of 82 if Field 44.5 is not present
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		This field contains a Visa-defined code indicating the dynamic card verification value (dCVV), CAM, or iCVV verification results. All results will be sent in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.

Table A-39: 0220/0230 Preauthorization Completion POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization completion message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		For SE transactions, this field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal only supports Visa payWave.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.

Table A–39: 0220/0230 Preauthorization Completion POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.

Table A-39: 0220/0230 Preauthorization Completion POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0400/0410 and 0420/0430 POS Authorization Reversal Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0400/0410 and 0420/0430 POS Authorization reversal messages for Token Convert Service processing of NFC Visa Contactless transactions for Visa On-Behalf-Of Issuer provisioning.

Table A-40: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards The value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization reversal message to the issuer.

Table A-40: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		For SE transactions, this field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal only supports Visa payWave.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa and Non-Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.

Table A-40: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table A-40: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0400/0410 and 0420/0430 POS Preauthorization reversal messages for Token Convert Service processing of NFC Visa Contactless transactions for Visa On-Behalf-Of Issuer provisioning.

Table A-41: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards The value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization reversal message to the issuer.

Table A-41: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		For SE transactions, this field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal only supports Visa payWave.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa and Non-Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.

Table A-41: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.

Table A-41: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0400/0410 and 0420/0430 POS Full financial reversal messages for Token Convert Service processing of NFC Visa Contactless transactions for Visa On-Behalf-Of Issuer provisioning.

Table A-42: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards The value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial reversal message to the issuer.

Table A-42: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		For SE transactions, this field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal only supports Visa payWave.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa and Non-Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		For SE transactions, the existing values will be supported in this field.

Table A-42: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67	Activation Verification Data										This dataset ID contains Tag 05.

Table A-42: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.

Table A-42: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		For SE transactions, this tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		For SE transactions, this tag contains the value of 02 (SE (secure element)) to identify transactions from SE devices.

THIS PAGE INTENTIONALLY LEFT BLANK.

THIS PAGE INTENTIONALLY LEFT BLANK.

Host Card Emulation Mobile Device B

This appendix includes the following message layouts for host card emulation (HCE) mobile device:

- 0302/0312 Token maintenance file message
- 0302/0312 Primary account number (PAN) maintenance file messages
- 0302/0312 Token file inquiry messages
- 0302/0312 Issuer Payment Account Reference Inquiry messages
- 0302/0312 Issuer Personalization Lifecycle Message
- 0600/0610 Issuer token notification messages for message reason codes **3700** and **3711**
- 0620/0630 Issuer token notification advice messages for message reason codes **3700, 3701, 3702, 3703, and 3711**
- 0620/0630 Issuer token notification advice messages for message reason code **3713**
- 0620/0630 Issuer token notification advice messages for message reason code **3715**
- 0620/0630 Issuer token notification advice messages for message reason codes **3720** and **3721**
- V.I.P. POS authorization and full financial messages to support the following for NFC Visa Contactless for the Visa Token Service for host card emulation (HCE) mobile device:
 - Full Chip data
 - Early Chip data
 - iCVV Convert
 - Token convert

0302/0312 Token Maintenance File Message for Host Card Emulation Mobile Device

The following table shows the message layout and contents of the 0302/0312 Token maintenance file message to support Visa Token Service transactions for host card emulation (HCE) mobile devices.

Table B-1: 0302/0312 Token Maintenance File Message for HCE Mobile Devices

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes maximum	M	M	This field contains the number identifying the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time of the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	C	C	This field contains the PAN expiration date which is currently the same as the token expiration date.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field is included in standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports and/or files that will include the message.

Table B-1: 0302/0312 Token Maintenance File Message for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0310/0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes maximum		C	The 0312 message contains Field 48, Usage 1b with the reason for the update. REFERENCE <i>For more information about this tag, refer to the Full Service POS Online Messages Technical Specifications.</i>
48, Usage 2	Unformatted Text in Authorization/ Reversal Messages	Variable length, 1 byte binary+ 255 ANS, EBCDIC, 256 bytes maximum	C	C	The 0302 message must contain Field 48, Usage 2 with the reason for the update. This field must be present when Field 63.3–Message Reason Code contains one of these values in 0302 message: • 3701 (Token deactivate) • 3702 (Token suspend) • 3703 (Token resume) • 3713 (Call center activation)

Table B-1: 0302/0312 Token Maintenance File Message for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa will populate the payment account reference in Tag 01 prior to sending the 0312 Token maintenance file response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, unique Visa-generated transaction identifier (TID).
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	O	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C		This field identifies the request message. This field contains one of these values: • 3701 (Token deactivate) • 3702 (Token suspend) • 3703 (Token resume) • 3713 (Call center activation) NOTE <i>This field must be present in the 0302 message when one of these values is sent in the message.</i>

Table B-1: 0302/0312 Token Maintenance File Message for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 2 (Change). IMPORTANT The values of 1 (Add) and 3 (Delete) are not supported for this service.
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	C	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of TK (Token).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes maximum	O	C	This field contains additional tracing information for proprietary use.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 03, Tag 05, Tag 06, and Tag 08.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13-19 N, 19 bytes maximum	C	C	This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing.

Table B-1: 0302/0312 Token Maintenance File Message for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	C	C	This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	C	C	This tag is required in the 0302 message when Tag 01 is not present. If this tag is present, Tag 03 must also be present.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm		C	This tag contains the token expiration date's year and month.
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte		C	This tag contains one of these values for the status of the token: • A (Active for payment) • I (Inactive for payment (not yet active)) • S (Temporarily suspended for payments) • D (Permanently deactivated for payments) If the token sent in the request is invalid, this field will not be included in the response.
TLV 125, Usage 2	Supporting Information (TLV Format)			C+	This TLV field contains Dataset ID 01 and Dataset ID 02.
TLV 125, Usage 2, Dataset ID 01	Token Device			C+	This dataset ID contains Tag 03.
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes		C+	This tag contains a 24-character value for wearables and other device manufacturers.

Table B-1: 0302/0312 Token Maintenance File Message for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
TLV 125, Usage 2, Dataset ID 02	Wallet Provider			C+	This dataset ID contains Tag 09.
TLV 125, Usage 2, Dataset ID 02, Tag 09	Wallet Account ID	32 ANS, EBCDIC, 32 bytes		C+	This tag contains the wallet account ID.

0302/0312 Primary Account Number Maintenance File Message for Host Card Emulation Mobile Devices

The following table shows the message layout and contents of the 0302/0312 Primary account number (PAN) maintenance file message to support Visa Token Service transactions for host card emulation (HCE) mobile devices.

This message is used for the following:

- PAN expiration date updates
- PAN replacement updates

Table B-2: 0302/0312 Primary Account Number Maintenance File Message for HCE Mobile Devices

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the current, otherwise known as old, PAN for the new PAN replacement updates. NOTE <i>This field contains the current, otherwise known as old, PAN. TLV Field 127, Dataset ID 41, Tag 01 contains the new PAN.</i>
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time that the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field is included in standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports and/or files that will include the message.

Table B-2: 0302/0312 Primary Account Number Maintenance File Message for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0310/0312 Responses and 0320 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes maximum		C+	The 0312 message contains Field 48, Usage 1b with the reason for the update. REFERENCE <i>For more information about this tag, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.

Table B-2: 0302/0312 Primary Account Number Maintenance File Message for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa will populate the payment account reference in Tag 01 prior to sending the 0312 PAN maintenance file response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, unique Visa-generated transaction identifier (TID).
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes		C	This field must contain one of these values: 3720 (PAN expiry update) 3721 (PAN update) NOTE <i>This field contains reason code 3721 for messages that impact both PAN and PAN expiry updates.</i>
73	Date, Action	6 N, 4-bit BCD, 3 bytes			This field will not be used in this message.
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 2 (Change).
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.

Table B–2: 0302/0312 Primary Account Number Maintenance File Message for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of PAN (Card data).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes maximum	O	C	This field contains additional tracing information for proprietary use.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 0B.
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	O	C+	This tag is required in the 0302 request message if the primary account number in Field 2 is not present. When present in the request message, it will be returned in the 0312 response message.
TLV 127.PAN	PAN File Maintenance (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	M	M	This TLV field contains Dataset ID 41.

Table B-2: 0302/0312 Primary Account Number Maintenance File Message for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
TLV 127.PAN, Dataset ID 41	PAN Update Data				This dataset ID contains Tag 01 and Tag 02.
TLV 127.PAN, Dataset ID 41, Tag 01	Replacement PAN	13-19 N, 4-bit BCD, 7-10 bytes	C	C	This tag is required when the existing PAN is being replaced with a new PAN.
TLV 127.PAN, Dataset ID 41, Tag 02	Replacement PAN Expiration Date	4 N, 4-bit BCD, 2 bytes format: yymm	M	M	This tag is required when Tag 01 contains a new PAN, and must contain the expiration date for the new PAN.

0302/0312 Token File Inquiry Message

Visa will implement the 0302/0312 Token file inquiry message to support Visa Token Service transactions for host card emulation (HCE) mobile devices.

This section includes the following 0302/0312 messages:

- 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID
- 0302/0312 Token File Inquiry Message—Token Detail

0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID

The following table shows the fields in the message layout used to query the token vault for all tokens associated with a PAN or PAN reference ID. The 0312 response will include a list of up to nine tokens found for the PAN or PAN reference ID.

Table B-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	C+	This field contains the PAN to be used for the token inquiry. This field is required in the 0302 request message when the PAN reference ID field is not present. This field will be present in the 0312 response when present in the request. When the PAN reference ID is used in the request in lieu of the PAN, this field will also be included in the response when the PAN reference ID is located.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time that the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm		C+	This field contains the PAN expiration date from the PAN file. Visa will insert the PAN expiration date in Field 14 in token inquiry messages prior to routing to the issuer.

Table B-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field is included in standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports and/or files that will include the message.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0310/0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes maximum		C+	This field may be present if an error occurs when processing the request. When Field 39 contains the value of 06 (Error) in the 0312 response message, Field 48, Usage 1b contains a code that describes the reason for the error. This field contains an existing value, or one of these values: • 0565 (No record in file—PAN or PAN reference ID not found) • 0572 (The source authorization center is not the center responsible for this cardholder data)

Table B-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa will populate the payment account reference in Tag 01 prior to sending the 0312 Token file inquiry response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, unique Visa-generated transaction identifier (TID).
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes			This field will not be used in this message.
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 5 (Inquire).

Table B-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of TK (Token).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes maximum	O	C	This field may contain additional tracing information for proprietary use.
TLV 123, Usage 2, Dataset ID 67, Tag 07	Issuer Special Condition Code	2 AN, EBCDIC, 2 bytes		O	This tag contains the issuer-assigned value. Visa will populate the issuer special condition code in Tag 07 prior to sending the 0312 Token file inquiry response message.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 07, Tag 08, Tag 01F35, and Tag 0B.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13-19 N, 19 bytes maximum	C	C+	V.I.P. will return up to nine tokens associated with the PAN. Each token found will be included in a separate iteration of Dataset ID 68.

Table B-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes		O	This tag, which is included in the response when the token is located, is used to support HCE transactions.
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC 1 byte		O	This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 01F35	Total Number of Tokens for Token Inquiry Criteria	4 N, 4-bit BCD, 2 bytes		O	This tag contains the total token count based on the token inquiry criteria.
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS EBCDIC, 32 bytes	C	C+	This tag is required in the 0302 request message if the primary account number in Field 2 is not present. When present in the request message, it will be returned in the 0312 response message. When one or more tokens are present for the PAN or PAN reference ID, only the first iteration of Dataset ID 68 contains this field.
TLV 127	Inquiry Control Data (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 42.

Table B–3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
TLV 127 Dataset ID 42	Inquiry Control Data				This dataset ID contains Tag 01.
TLV 127 Dataset ID 42, Tag 01	Starting Query Number	4 N, 4-bit BCD, 2 bytes	O	C	This tag contains the starting query number that the issuer wants to query. Issuers have the option to submit multiple 0302 Token file request messages in this field until the remainder of the tokens are sent in the 0312 Token file inquiry response message. If this tag is not sent in the 0302 Token file inquiry request, Visa will send the list of tokens matching any other requested criteria, beginning with the first token. This tag will not be sent in the 0312 Token file inquiry response if not sent in the 0302 Token file inquiry request.

0302/0312 Token File Inquiry Message—Token Detail for Host Card Emulation Mobile Devices

The following table shows the message layout and contents of the 0302/0312 Token file inquiry messages to retrieve details for a specific token. The 0312 response will include details for the specific token, if located, for transactions from host card emulation (HCE) mobile devices.

Table B-4: 0302/0312 Token File Inquiry Message—Token Detail for HCE Mobile Devices

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		C+	This field contains the PAN associated with the requested token. This field is not used in the 0302 request message. This field will be included in the 0312 response message when the requested token is located.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time that the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field is included in standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports and/or files that will include the message.

Table B-4: 0302/0312 Token File Inquiry Message—Token Detail for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0310/0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes maximum		C+	This field may be present if an error occurs when processing the request. When Field 39 contains the value of 06 (Error) in the 0312 response message, Field 48, Usage 1b contains a code that describes the reason for the error. This field contains an existing value, or one of these values: • 0565 (No record on file) • 0572 (The source authorization center is not the center responsible for this cardholder data) • 0757 (Token missing)
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.

Table B-4: 0302/0312 Token File Inquiry Message—Token Detail for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa will populate the payment account reference in Tag 01 prior to sending the 0312 Token file inquiry response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, unique Visa-generated transaction identifier (TID).
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes			This field will not be used in this message.
73	Date, Action	6 N, 4-bit BCD, 3 bytes			This field will not be used in this message.
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 5 (Inquire).
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of TK (Token).

Table B-4: 0302/0312 Token File Inquiry Message—Token Detail for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes maximum	O	C	This field may contain additional tracing information for proprietary use.
TLV 123, Usage 2, Dataset ID 67, Tag 07	Issuer Special Condition Code	2 AN, EBCDIC, 2 bytes		O	This tag contains an issuer-assigned value. Visa will populate the issuer special condition code in Tag 07 prior to sending the 0312 Token file inquiry response message.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 07, Tag 10 and Tag 11.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N 19 bytes maximum	C	C+	This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes		C+	This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	C	C+	This tag is required in the 0302 request message when the token reference ID in Field 123, Usage 2, Dataset ID 68, Tag 05 is present. This tag will be present in the 0312 response when present in the request. This tag will also be included in the response when the token is located.

Table B-4: 0302/0312 Token File Inquiry Message—Token Detail for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes		C	This tag is used to support HCE transactions. This tag contains the value of 03 (CBP (Cloud-based payment)).
TLV 123, Usage 2, Dataset ID 68, Tag 10	Visa Token Score	2 N, 2 bytes		C+	The value in this tag indicates the degree of risk associated with the token. This is a two-digit numeric value from 01–99 .
TLV 123, Usage 2, Dataset ID 68, Tag 11	Visa Token Decisioning	2 AN, EBCDIC, 2 bytes		C+	This tag contains the results from the Token Provisioning service. This tag carries the result of the token provisioning decision with one of these values: • 00 = Provision and activate • 05 = Do not provision • 85 = Provision inactive state — requires further consumer authentication before activation
TLV 125, Usage 2, Dataset ID 02, Tag 05	Wallet Provider Device Score	2 N, 2 bytes		C+	This tag may be included in the response when the token is located. This tag contains the value of 1–5 , with 5 being the most trusted.
TLV 125, Usage 2, Dataset ID 02, Tag 06	Wallet Provider Account Score	2 N, 2 bytes		C+	This tag may be included in the response when the token is located. This tag contains the value of 1–5 , with 5 being the most trusted.
TLV 125, Usage 2, Dataset ID 02, Tag 07	Wallet Provider Reason Codes	30 ANS, EBCDIC, 30 bytes		C+	This tag may be included in the response when the token is located. It contains up to 15 wallet provider reason codes of 2 bytes each. REFERENCE <i>For a list of valid reason codes, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table B-4: 0302/0312 Token File Inquiry Message—Token Detail for HCE Mobile Devices (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
TLV 125, Usage 2, Dataset ID 02, Tag 08	PAN Source	2 N, 2 bytes		C+	This tag may be included in the response when the token is located with one of these values: • 01 (Key-entered) • 02 (On file) • 03 (Mobile banking app) • 04 (Token) • 05 (Chip dip) • 06 (Contactless tap)

0302/0312 Issuer Payment Account Reference Inquiry and Response Messages

The following table shows the V.I.P. message layout for issuer primary account reference inquiry and response messages.

Table B–5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes maximum	C	C	This field contains the PAN. NOTE <i>Both PAN and token must not be included in V.I.P. payment account reference inquiry messages.</i>
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to the Visa system.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field contains the month and day.

Table B-5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages (cont'd.)

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This existing field contains a code that defines the response.
48, Usage 1b	Error Codes in 0310/0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes maximum		C+	This field contains a code when Field 39 contains the value of 06 (Error).
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01 and Tag 02.

Table B-5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages (cont'd.)

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	This is an existing field and tag that contains the payment account reference.
TLV 56, Dataset ID 01, Tag 02	Payment Account Reference Creation Date	5 N, 4-bit BCD, 5 bytes format: YYDDD		C+	This tag contains the payment account reference creation date in Julian date format.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains the transaction identifier.
63.1	Network ID	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID (Visa).
91	File Update Code	1 AN, EBCDIC 1 byte	M	M	This field contains the value of 5 (Inquire).
92	File Security Code	2 AN, EBCDIC 2 byte	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of PAR (Payment Account Reference).

Table B-5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages (cont'd.)

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC 25 bytes maximum	O	C	This field contains additional tracing information.
TLV 123, Usage 2, Dataset ID 68	Token Data		C	C	This dataset ID contains Tag 01.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes maximum	C	C	This tag contains the token that is used to replace the cardholder PAN. NOTE <i>Both PAN and token must be included in V.I.P. Payment account reference inquiry messages.</i>

0302/0312 Issuer Personalization Lifecycle Message

The following table shows the V.I.P. message layout for issuer personalization lifecycle message.

Table B-6: 0302/0312 Issuer Personalization Lifecycle Message

Field Name and Number		Format	Issuer Personalization Lifecycle Message		Description
			0302	0312	
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time of the request.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	O	C	This field contains the year and the month that the card expires.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C	This field contains the month and day.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>

Table B-6: 0302/0312 Issuer Personalization Lifecycle Message (cont'd.)

Field Name and Number		Format	Issuer Personalization Lifecycle Message		Description
			0302	0312	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains a code that defines the disposition of the request. These values are valid for this message: • 00 (Good) • 06 (Error)
48, Usage 1b	Error Codes in 0310/0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C	This field contains a code when Field 39 contains the value of 06 (Error). This field contains the first error in the 0302 message. These values are defined for the issuer personalization lifecycle message: • 0752 (Issuer not participating) • 0753 (Issuer provisions token) • 0755 (Field 2 missing or invalid) • 0799 (Non device based token type) • 1027 (Issuer data format invalid)
48, Usage 2	Unformatted Text in Authorization/ Reversal Messages	Variable length, TLV format, 1 byte binary+ 255 binary and ANS, EBCDIC 256 bytes max	M	M	Position 1 This field is defined where byte 1 of this position contains the length of five and byte 2 contains an * (asterisk). Positions 2-255 These positions in this field indicate the type of message. The value of 3704 (Device personalized data update and repersonalization) is defined for the issuer personalization lifecycle message.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 01.

Table B–6: 0302/0312 Issuer Personalization Lifecycle Message (cont'd.)

Field Name and Number		Format	Issuer Personalization Lifecycle Message		Description
			0302	0312	
TLV 56, Dataset ID 01	Account Data				This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C	Positions 1–4 These positions of this tag contain the BIN controller identifier, a four-character registered value assigned by EMVCo. Positions 5–29 These positions of this tag contain a 25-alphanumeric character uppercase unique value linked to a PAN. If a payment account reference (PAR) is associated with this token, V.I.P. will send the PAR in the response.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M	This field contains the Visa-generated transaction identifier (TID) that is unique for each original authorization and financial request.
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains the reason code for the message. The value of 3704 (Device personalized data update and repersonalization) is defined for the issuer personalization lifecycle message. This field will be dropped by V.I.P. in the response. NOTE <i>This field is optional when Field 91 contains the value of 5 (Inquire).</i>

Table B–6: 0302/0312 Issuer Personalization Lifecycle Message (cont'd.)

Field Name and Number		Format	Issuer Personalization Lifecycle Message		Description
			0302	0312	
91	File Update Code	1 AN, EBCDIC 1 byte	M	M	This field contains the type of change for token customer loyalty data and must contain one of these values: • 1 (Add) to add personalization data. This will add to any existing personalization data in the Visa Token Vault • 2 (Change) to change personalization data. This will replace any personalization data in the Visa Token Vault. • 3 (Delete) to delete personalization data. This will delete all previous personalization data in the Visa Token Vault. • 5 (Inquire) to inquire personalization data. This will return the existing personalization data in the Visa Token Vault. NOTE <i>The value of 4 (Replace) is not supported.</i>
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the file to be accessed and must contain TK (Token).
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 05, Tag 07, Tag 08, Tag 0B, Tag 1F37, and Tag 1F38.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M	M	This tag contains the token that is impacted by the lifecycle changes. NOTE <i>Both PAN and token must be included in V.I.P. Payment account reference inquiry messages.</i>

Table B-6: 0302/0312 Issuer Personalization Lifecycle Message (cont'd.)

Field Name and Number		Format	Issuer Personalization Lifecycle Message		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. If the token sent in the request is invalid, this field will not be included in the response. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes		C	This is an existing tag that contains the token requestor ID. If the token sent in the request is invalid, this field will not be included in the response.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes		C	This is an existing tag that contains the token reference ID. If the token sent in the request is invalid, this field will not be included in the response.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes		C	This field contains the token type and must be the value of 03 (Cloud-based payment). If the token sent in the request is invalid, this field will not be included in the response.

Table B–6: 0302/0312 Issuer Personalization Lifecycle Message (cont'd.)

Field Name and Number		Format	Issuer Personalization Lifecycle Message		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte		C	This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i> If the token sent in the request is invalid, this field will not be included in the response.
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS EBCDIC, 32 bytes		C	This tag contains a unique reference ID generated by Visa for the card account number. If the token sent in the request is invalid, this field will not be included in the response.
TLV 123, Usage 2, Dataset ID 68, Tag 1F37	File Control Information (FCI)	128 AN, EBCDIC 128 bytes	O	C	This is a new tag that contains the issuer specific EMV data. If this tag is received in the request, V.I.P. will send this tag in the response. Data sent in this tag will be ignored if Field 91 contains the value of 5.
TLV 123, Usage 2, Dataset ID 68, Tag 1F38	Issuer Application Data (IAD)	15 AN, EBCDIC, 15 bytes	O	C	This is a new tag that contains the issuer discretionary data (IDD) portion of CVN4x data. This tag has a maximum length of 15 bytes. The first byte is the format followed by 14 bytes of CVN4x issuer discretionary data. If this tag is received in the request, V.I.P. will send this tag in the response. Data sent in this tag will be ignored if Field 91 contains the value of 5.

0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711

The following table shows the message layout and content of the 0600/0610 Issuer token notification online request and response messages that support transactions from HCE consumer mobile devices with the following reason codes:

- **3700** (Token create)
- **3711** (Device provisioning result)

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the number that identifies the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	M	M	This field contains a Visa-generated tracing element and unique values for messages that Visa has processed.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	M		M		This field contains the PAN expiration date.

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		M		This field contains a Visa-assigned identifier.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	M	M	For the 0600 message, this field contains the response code of 00 (Good) or 85 (Conditional approval). The 0610 response message for message must contain the response code of 00.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C+		C+		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		C+		C+		This dataset ID contains Tag 01.

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	C+		C+		Visa will populate this tag before sending the 0600 Token notification request message to the issuer.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 3700 (Token create) or 3711 (Device provisioning result)
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	C				For message reason code 3700 , this field specifies that Field 127 contains terms and conditions data. This field contains the value of TERMS-CONDITIONS (Token Terms and Conditions).
TLV 114	Domestic and Localized Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	O				This TLV field contains Dataset ID 70.

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 114, Dataset ID 70	Localized Data		O				This dataset ID contains Tag C0, Tag C1, Tag C2, Tag C3, Tag C4, and Tag C5.
TLV 114, Dataset ID 70, Tag C0	Language Code	3 AN, EBCDIC, 3 bytes	O				This tag contains the ISO 639-defined language code.
TLV 114, Dataset ID 70, Tag C1	Data Encoding Format	20 AN, EBCDIC, 20 bytes max	O				This tag identifies how all tags except C0 and C1 are encoded in this data set.
TLV 114, Dataset ID 70, Tag C2	Device Name	Binary, UTF-8, 400 bytes max	O				This tag contains the device name. Length = 100 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114, Dataset ID 70, Tag C3	Cardholder Name	Binary, UTF-8, 1024 bytes max	O				This tag contains the cardholder name. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 114, Dataset ID 70, Tag C4	Address	Binary, UTF-8, 1024 bytes max	O				This tag carries all address data. Each line of the address will be comma-separated and left-justified. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114, Dataset ID 70, Tag C5	Zip Code	Binary, UTF-8, 64 bytes max	O				This tag contains the zip code. Length = 16 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes maximum	O	C	O	C	This field contains additional proprietary tracking information used by the transaction originator. The information in the 0610 response message must be returned unaltered.
TLV 120	Auxiliary Transaction Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	C				This TLV field contains Dataset ID 56 and Dataset ID 57.

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 120, Dataset ID 56	Device Parameter	Variable length, 2 byte binary + TLV format 255 binary and ANS EBCDIC, maximum 256 bytes	C				This field contains the device parameter.
TLV 120, Dataset ID 56, Tag 01	Device IMEI	24 AN, EBCDIC, 24 bytes	C				This tag contains the hardware ID of the device.
TLV 120, Dataset ID 56, Tag 02	OS ID	24 AN, EBCDIC, 24 bytes	C				This tag contains the number of provisioning attempts on the device within the last 24 hours.
TLV 120, Dataset ID 56, Tag 03	Provisioning Attempts on the Device	2 N, 4-bit BCD, 1 byte	C				This tag contains the number of provisioning attempts on the device within the last 24 hours.
TLV 120, Dataset ID 56, Tag 04	Account-to-Device Bonding Age	Binary, 2 bytes,	C				This tag contains the number of days the device was used by this account.
TLV 120, Dataset ID 56, Tag 05	Device Country	2 AN, EBCDIC, 2 bytes	C				This tag contains the two-character alpha ISO country code of the device at the time of provisioning.

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 120, Dataset ID 56, Tag 06	Token Protection Method	1 N, 4-bit BCD, 1 byte	C				This tag describes how the tokens are protected on the device. Valid values are: • 1 (Software) • 2 (Transaction execution environment (TEE)) • 3 (Secure element (SE)) • 4 (Cloud) NOTE <i>Cloud applies to e-commerce use cases only.</i>
TLV 120, Dataset ID 56, Tag 07	Presentation Type	1 N, 4-bit BCD, 1 byte	C				This tag contains the token presentment mode. Valid values are: • 1 (Near field communication (NFC)—host card emulation (HCE) or secure element (SE)) • 2 (Magnetic secure transmission) • 3 (QR-consumer device) • 4 (QR-consumer cloud)
TLV 120, Dataset ID 56, Tag 08	Device Serial Number	24 AN, EBCDIC, 24 bytes	C				This tag contains the serial number of the mobile device.
TLV 120, Dataset ID 56, Tag 09	Location Source	1 N, 4-bit BCD, 1 byte	C				This tag contains the source used to identify the consumer's location. Valid values are: • 1 (WiFi) • 2 (Cellular) • 3 (GPS) • 4 (Other)
TLV 120, Dataset ID 56, Tag 0A	Device Time Zone	5 AN, EBCDIC, 5 bytes	C				This tag contains the device time zone.

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 120, Dataset ID 56, Tag 0B	Device Time Zone Setting	1 N, 4-bit BCD, 1 byte	C				This tag will indicate how the time zone setting was obtained. Valid values are: 1 (Network set) 2 (Consumer set)
TLV 120, Dataset ID 56, Tag 0C	Device Bluetooth Media Access Control (MAC)	24 AN, EBCDIC, 24 bytes	C				This tag contains the MAC address for Bluetooth.
TLV 120, Dataset ID 56, Tag 0D	OS Type	1 N, 4-bit BCD, 1 byte	C				This tag indicates the operating system running on the device. Valid values are: 1 (Android) 2 (iOS) 3 (Windows) 4 (Blackberry) 5 (Tizen) 6 (Other)
TLV 120, Dataset ID 57	Wallet Parameters		C				This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 04, Tag 05, Tag 06, Tag 07, Tag 08, Tag 09, Tag 0A, Tag 0B, and Tag 0C.
TLV 120, Dataset ID 57, Tag 01	Wallet Provider PAN Age	Binary, 2 bytes	C				This tag contains the number of days that the user's PAN has been on file.
TLV 120, Dataset ID 57, Tag 02	User Account Age	Binary, 2 bytes	C				This tag contains the number of days the user account has existed.
TLV 120, Dataset ID 57, Tag 03	Wallet Account Age	Binary, 2 bytes	C				This tag contains the number of days since the user created the wallet account or started using the account.

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 120, Dataset ID 57, Tag 04	Days Since Last Activity	Binary, 2 bytes	C				This tag contains the number of days since the last activity on the account.
TLV 120, Dataset ID 57, Tag 05	Number of Transactions in the Last 12 Months	Binary, 2 bytes	C				This tag contains the number of transactions on this account within the last 12 months.
TLV 120, Dataset ID 57, Tag 06	Days Since Last Account Change	Binary, 2 bytes	C				This tag contains the number of days since account settings were changed.
TLV 120, Dataset ID 57, Tag 07	Suspended Cards in Account	1 N, 4-bit BCD, 1 byte	C				This tag contains the number of cards suspended on the account.
TLV 120, Dataset ID 57, Tag 08	Wallet Account Country	2 AN, EBCDIC, 2 byte	C				This tag contains the two-character alpha ISO country code of the account holder.
TLV 120, Dataset ID 57, Tag 09	Number of Active Tokens	Binary, 1 byte	C				This tag contains the number of active tokens on this account.
TLV 120, Dataset ID 57, Tag 0A	Number of Devices With Active Tokens	Binary, 1 byte	C				This tag contains the number of devices for this user with the same token.
TLV 120, Dataset ID 57, Tag 0B	Number of Active Tokens on All Devices	Binary, 2 bytes	C				This tag contains the number of active tokens for this user across all devices.

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 120, Dataset ID 57, Tag 0C	Consumer Entry Mode	1 N, 4-bit BCD, 1 byte	C				This tag will indicate how the card information was entered on the device. Valid values are: 1 (Key-entered) 2 (Camera captured) 3 (Unknown)
TLV 120, Dataset ID 58	Card Environment Data		C				The dataset ID contains Tag 80, Tag 81, Tag 82, Tag 83, Tag 84, Tag 85, and Tag 86.
TLV 120, Dataset ID 58, Tag 80	Original Token	13–19 N, 19 bytes max	C				This tag contains the original token that was previously provisioned. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58, Tag 81	Original Token Assurance Method	2 AN, EBCDIC, 2 bytes	C				This tag contains the original token assurance method. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58, Tag 82	Original Token Requestor ID	11 N, 11 bytes	C				This tag contains the original token requestor ID. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58, Tag 83	Original Token Reference ID	32 AN, EBCDIC, 32 bytes	C				This tag contains the original token reference ID. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 120, Dataset ID 58, Tag 84	Original Token Type	2 AN, EBCDIC, 2 bytes	C				This field contains the token type of the source token used for provisioning a new token. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58, Tag 85	Original Device Type	2 AN, EBCDIC, 2 bytes	C				This field contains the device type of the source token used for provisioning a new token. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58, Tag 86	Original Device ID	48 ANS, EBCDIC, up to 48 bytes	C				This field contains the device ID of the source token used for provisioning a new token. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max					This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data						This dataset ID contains Tag D4.

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 123, Usage 2, Dataset ID 66, Tag D4	Cardholder Name	26 ANS, EBCDIC, 26 bytes	C				This field contains the cardholder name. It is present when Field 63.3 contains the value of 3700 . The value will be truncated if the length of the name is longer than 26 characters.
TLV 123, Usage 2, Dataset ID 67, Tag 07	Issuer Special Condition Code	2 AN, EBCDIC, 2 bytes	O				This tag contains the issuer special condition code. Visa will populate the issuer special condition code in this tag before sending the 0600 Issuer token notification online advice to the issuer.
TLV 123, Usage 2, Dataset ID 68	Token Data						This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 05, Tag 06, Tag 07, Tag 08, and Tag 0B.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		M		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C		C		This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		M		This tag contains the token requestor ID. The 0600 Token notification message for message reason code 3711 contains the same value as the 0600 Token notification message for message reason code 3700 .

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		M		This tag is present when sent by wallet providers. The 0600 Token notification message for message reason code 3711 contains the same value as the 0600 Token notification message for message reason code 3700 .
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M				This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M				This tag contains values of 03 (CBP (cloud-based payment)).
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		M		This tag contains a unique, Visa-generated reference ID for the card account number.

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 01 and Dataset ID 02.
TLV 125, Usage 2, Dataset ID 01	Token Device						This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 04, Tag 05, Tag 06, and Tag 07.
TLV 125, Usage 2, Dataset ID 01, Tag 01	Device Type	2 AN, EBCDIC, 2 byte	C				This tag contains the device type. REFERENCE <i>For a list of valid device types, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 02	Device Language Code	3 AN, EBCDIC, 3 byte	C				This tag contains a three-character language code, such as eng (English).
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	M		M		The tag contains the device ID.
TLV 125, Usage 2, Dataset ID 01, Tag 04	Device Number	15 N, 15 bytes	C				This tag contains the full phone number or partial phone number when available.

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 125, Usage 2, Dataset ID 01, Tag 05	Device Name	16 ANS, EBCDIC, 16 bytes	C				This tag contains the device name that the consumer recognizes. NOTE <i>The value will be truncated if it is longer than 16 characters.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 06	Device Location	25 ANS, EBCDIC, 25 bytes	C				This tag contains the obfuscated geographic location of the device.
TLV 125, Usage 2, Dataset ID 01, Tag 07	IP Address	15 ANS, EBCDIC, 15 bytes	C				This tag contains the IP address of the device at the time of the provisioning request. The value is represented in 255.255.255.255 format. The octet (255) may be 1–3 digits in length.
TLV 125, Usage 2, Dataset ID 02	Wallet Provider						This dataset ID contains Tag 07, Tag 08, Tag 09, and Tag 0A.
TLV 125, Usage 2, Dataset ID 02, Tag 07	Wallet Provider Reason Codes	30 ANS, EBCDIC, 30 bytes	C				This tag contains up to 15 wallet provider reason codes of 2 bytes each. REFERENCE <i>For a list of valid reason codes, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 125, Usage 2, Dataset ID 02, Tag 08	PAN Source	2 N, 2 bytes	C				This tag contains the PAN source pertaining to token provisioning. Valid values are: • 01 (Key-entered) • 02 (On file) • 03 (Mobile banking app) • 04 (Token) • 05 (Chip dip) • 06 (Contactless tap)
TLV 125, Usage 2, Dataset ID 02, Tag 09	Wallet Account ID	32 ANS, EBCDIC, 32 bytes	C		C		This tag contains the wallet account ID.
TLV 125, Usage 2, Dataset ID 02, Tag 0A	Wallet Account E-mail Address	64 DX, 32 bytes	C				This tag contains the wallet account email address.
TLV 127, Usage 2	Terms and Conditions	Variable length, TLV format: 1 byte, binary+ 255 binary and ANS, EBCDIC, 256 bytes max					This TLV field contains Dataset ID 40.
TLV 127, Usage 2, Dataset ID 40	Terms and Conditions						This dataset ID contains Tag 01 and Tag 02.

Table B-7: 0600/0610 Issuer Token Notification Message for Message Reason Codes 3700 and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provisioning for 3711		Description
			0600	0610	0600	0610	
TLV 127, Usage 2, Dataset ID 40, Tag 01	Terms and Conditions Verification	64 AN, EBCDIC, 64 bytes	C				This tag is used to specify that Field 127 contains terms and conditions data. NOTE <i>For HCE, if the mobile app is the issuer's mobile app, the terms and conditions are verified by the issuer.</i>
TLV 127, Usage 2, Dataset ID 40, Tag 02	Issuer Terms and Conditions Date/Time	32 AN, EBCDIC, 32 bytes format: YYYY-MM-DDT hh:mm:ss.sss ±[hhmm]	C				This tag contains the acceptance date and time.

0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3700, 3701, 3702, 3703, and 3711

The following table shows the message layout and contents of the 0620/0630 Token notification advice message to support Visa Token Service transactions for host card emulation (HCE) mobile devices for the following message reason codes:

- **3700** (Token create)
- **3701** (Token deactivate)
- **3702** (Token suspend)
- **3703** (Token resume)
- **3711** (Device provisioning result)

NOTE

Bold values in the 0630 Token notification response messages indicate the field must contain the same values from the 0620 Token notification request messages.

Bold values in the 0620 Token notification messages indicate the field contains the same values from the 0100 Token activation request and 0120 Token STIP advice.

Table B-8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains the number that identifies the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	M	M	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	M	M	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed. NOTE For message reason code 3700 (Token create), the values sent in this field in the 0620 Token notification advice message is the same in the 0100 Token activation request and in its 0120 Token STIP advice. Message reason code 3711 (Device provisioning result) can have the same system trace audit number as message reason code 3715 (Replenishment confirmation of limited use keys).

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	M						This field contains the PAN expiration date.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	C	C	C	C	This field contains the month and day.
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		M		M		This field contains a Visa-assigned identifier.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	M	M	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
39	Response Code	2 N, 2 bytes	M	M	M	M	M	M	For the 0620 message for message reason code 3700 (Token create), 3701 (Token deactivate), 3702 (Token suspend), and 3703 (Token resume), this field must contain the response code of 00 (Good). For the 0620 message for message reason code 3711 (Device provisioning result), this field must contain the response code of 00 (Good) or 85 (Conditional approval). The 0630 message for message reason codes 3700, 3701, 3702, 3703, and 3711 must contain the response code of 00 (Good) in the response message.
48, Usage 2	Unformatted Text in Authorization/ Reversal	2 N, 2 bytes			C		C		The 0620 request message for message reason codes 3701, 3702, and 3703 contains the reason for the update. For the 0620 message for message reason code 3711, this field will not be available.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C+		C+		C+		This TLV field contains Dataset ID 01.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 56, Dataset ID 01	Account Data		C+		C+		C+		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	C+		C+		C+		Visa will populate the payment account reference in Tag 01 prior to sending the 0620 Token notification advice for message reason codes 3700 , 3701 , 3702 , 3703 , and 3711 to the issuer.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	M	O	M	O	This field contains a right-justified, unique Visa-generated transaction identifier (TID). NOTE For message reason codes 3700 (Token create) and 3711 (Device provisioning result), the values sent in this field in the 0620 Token notification advice message is the same in the 0100 Token activation request and in its 0120 Token STIP advice.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	M	M	M	M	This field contains the network ID 0002 (Visa).

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		M		Each 0620 message contains one of these values: • 3700 (Token create) • 3701 (Token deactivate) • 3702 (Token suspend) • 3703 (Token resume) • 3711 (Device provisioning result)
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	M	M	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.
92	File Security Code	2 AN EBCDIC, 2 bytes					O		This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	C						For message reason code 3700 , this field contains the value of TERMS-CONDITIONS (Token Terms and Conditions). This field will not be populated for message reason code 3711 (Device provisioning result).
TLV 114	Domestic and Localized Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	O						This TLV field contains Dataset ID 70.
TLV 114 Dataset ID 70	Localized Data		O						This dataset ID contains Tag C0, Tag C1, Tag C2, Tag C3, Tag C4, and Tag C5.
TLV 114 Dataset ID 70 Tag C0	Language Code	3 AN, EBCDIC, 3 bytes	O						This tag is for future use. This tag contains the ISO 639-defined language code. TLV Field 114 is only present when Field 63.3 has a value of 3700 .

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 114 Dataset ID 70 Tag C1	Data Encoding Format	20 AN, EBCDIC, 20 bytes max	O						This tag identifies how all tags except C0 and C1 are encoded in this data set. TLV Field 114 is only present when Field 63.3 has a value of 3700 .
TLV 114 Dataset ID 70 Tag C2	Device Name	Binary, UTF-8, 400 bytes max	O						This tag contains the device name. Length = 100 characters maximum TLV Field 114 is only present when Field 63.3 has a value of 3700 . NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114 Dataset ID 70 Tag C3	Cardholder Name	Binary, UTF-8, 1024 bytes max	O						This tag contains the cardholder name. Length = 256 characters maximum TLV Field 114 is only present when Field 63.3 has a value of 3700 . NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 114 Dataset ID 70 Tag C4	Address	Binary, UTF-8, 1024 bytes max	O						This tag carries all address data. Each line of the address will be comma-separated and left-justified. Length = 256 characters maximum This tag will only be included when Field 63.3 contains message reason code 3700. NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114 Dataset ID 70 Tag C5	Zip Code	Binary, UTF-8, 64 bytes max	O						This tag contains the zip code. Length = 16 characters maximum This tag will only be included when Field 63.3 contains message reason code 3700. NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes maximum	O	C	O	C	O	C	This field contains additional proprietary tracking information used by the transaction originator. The information returned in the 0630 response message must be unaltered.
TLV 120	Auxiliary Transaction Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max							This TLV field contains Dataset ID 56, Dataset ID 57, and Dataset ID 58.
TLV 120, Dataset ID 56	Device Parameters		C						For message reason code 3700 , this dataset ID contains Tag 01, Tag 02, Tag 03, Tag 04, Tag 05, Tag 06, Tag 07, Tag 08, Tag 09, Tag 0A, Tag 0B, Tag 0C, and Tag 0D.
TLV 120, Dataset ID 56 Tag 01	Device IMEI	24 AN, EBCDIC, 24 bytes	C						For message reason code 3700 , this tag contains the hardware ID of the device.
TLV 120, Dataset ID 56 Tag 02	OS ID	24 AN, EBCDIC, 24 bytes	C						For message reason code 3700 , this tag will indicate the build of velocity and risk rules.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 120, Dataset ID 56 Tag 03	Provisioning Attempts on the Device	2 N, 4-bit BCD, 1 byte	C						For message reason code 3700 , this tag contains the number of provisioning attempts on the device within the last 24 hours.
TLV 120, Dataset ID 56 Tag 04	Account-to-Device Bonding Age	Binary, 2 bytes	C						For message reason code 3700 , this tag contains the number of days the device was used by this account.
TLV 120, Dataset ID 56 Tag 05	Device Country	2 AN, EBCDIC, 2 bytes	C						For message reason code 3700 , this tag contains the two-character alpha ISO country code of the device at the time of provisioning.
TLV 120, Dataset ID 56 Tag 06	Token Protection Method	1 N, 4-bit BCD, 1 byte	C						For message reason code 3700 , this tag will describe how the tokens are protected on the device. Valid values are: • 1 (Software) • 2 (Transaction execution environment (TEE)) • 3 (Secure element (SE)) • 4 (Cloud) NOTE <i>Cloud applies to e-commerce use cases only.</i>

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 120, Dataset ID 56 Tag 07	Presentation Type	1 N, 4-bit BCD, 1 byte	C						For message reason code 3700 , this tag contains the token presentment mode. Valid values are: • 1 (Near field communication (NFC)—host card emulation (HCE) or secure element (SE)) • 2 (Magnetic secure transmission) • 3 (QR-consumer device) • 4 (QR-consumer cloud)
TLV 120, Dataset ID 56 Tag 08	Device Serial Number	24 AN, EBCDIC, 24 bytes	C						For message reason code 3700 , this tag contains the serial number of the mobile device.
TLV 120, Dataset ID 56, Tag 09	Location Source	1 N, 4-bit BCD, 1 byte	C						For message reason code 3700 , this tag contains the source used to identify the consumer's location. Valid values are: • 1 (WiFi) • 2 (Cellular) • 3 (GPS) • 4 (Other)
TLV 120, Dataset ID 56, Tag 0A	Device Time Zone	5 AN, EBCDIC, 5 bytes	C						For message reason code 3700 , this tag contains the device time zone.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 120, Dataset ID 56, Tag 0B	Device Time Zone Setting	1 N, 4-bit BCD, 1 byte	C						For message reason code 3700 , this tag will indicate how the time zone setting was obtained. Valid values are: • 1 (Network set) • 2 (Consumer set)
TLV 120, Dataset ID 56, Tag 0C	Device Bluetooth Media Access Control (MAC)	24 ANS, EBCDIC, 24 bytes	C						For message reason code 3700 , this tag contains the MAC address for Bluetooth.
TLV 120, Dataset ID 56, Tag 0D	OS Type	1 N, 4-bit BCD, 1 bytes	C						For message reason code 3700 , this tag will indicate the operating system running on the device. Valid values are: • 1 (Android) • 2 (iOS) • 3 (Windows) • 4 (Blackberry) • 5 (Tizen) • 6 (Other)
TLV 120, Dataset ID 57	Wallet Parameters		C						For message reason code 3700 , this dataset ID contains Tag 01, Tag 02, Tag 03, Tag 04, Tag 05, Tag 06, Tag 07, Tag 08, Tag 09, Tag 0A, Tag 0B, and Tag 0C.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 120, Dataset ID 57, Tag 01	Wallet Provider PAN Age	Binary, 2 bytes	C						For message reason code 3700 , this tag contains the number of days that the user's PAN has been on file for the user.
TLV 120, Dataset ID 57, Tag 02	User Account Age	Binary, 2 bytes	C						For message reason code 3700 , this tag contains the number of days the user account has existed.
TLV 120, Dataset ID 57, Tag 03	Wallet Account Age	Binary, 2 bytes	C						For message reason code 3700 , this tag contains the number of days since the user created the wallet account or started using the account.
TLV 120, Dataset ID 57, Tag 04	Days Since Last Activity	Binary, 2 bytes	C						For message reason code 3700 , this tag contains the number of days since the last activity on the account.
TLV 120, Dataset ID 57, Tag 05	Number of Transactions in the Last 12 Months	Binary, 2 bytes	C						For message reason code 3700 , this tag contains the number of transactions on this account within the last 12 months.
TLV 120, Dataset ID 57, Tag 06	Days Since Last Account Change	Binary, 2 bytes	C						For message reason code 3700 , this tag contains the number of days since account settings were changed.
TLV 120, Dataset ID 57, Tag 07	Suspended Cards in Account	1 N, 4-bit BCD 1 byte	C						For message reason code 3700 , this tag contains the number of cards suspended on the account.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 120, Dataset ID 57, Tag 08	Wallet Account Country	2 AN, 2 bytes	C						For message reason code 3700 , this tag contains the two-character alpha ISO country code of the account holder.
TLV 120, Dataset ID 57, Tag 09	Number of Active Tokens	Binary, 1 byte	C						For message reason code 3700 , this tag contains the number of active tokens on this account.
TLV 120, Dataset ID 57, Tag 0A	Number of Devices With Active Tokens	Binary, 1 byte	C						For message reason code 3700 , this tag contains the number of devices for this user with the same token.
TLV 120, Dataset ID 57, Tag 0B	Number of Active Tokens on All Devices	Binary, 2 bytes	C						For message reason code 3700 , this tag contains the number of active tokens for this user across all devices.
TLV 120, Dataset ID 57, Tag 0C	Consumer Entry Mode	1 N, 4-BCD, 1 byte	C						For message reason code 3700 , this tag will indicate how the card information was entered on the device. Valid values are: • 1 (Key-entered) • 2 (Camera captured) • 3 (Unknown)
TLV 120, Dataset ID 58	Card Environment Data		C						This dataset ID contains Tag 80, Tag 81, Tag 82, Tag 83, Tag 84, Tag 85, and Tag 86.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 120, Dataset ID 58, Tag 80	Original Token	13–19 N, 19 bytes max	C						This tag contains the original token that was previously provisioned. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58, Tag 81	Original Token Assurance Method	2 AN, EBCDIC, 2 bytes	C						This tag contains the original token assurance method. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58, Tag 82	Original Token Requestor ID	11 N, 11 bytes	C						This tag contains the original token requestor ID. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58, Tag 83	Original Token Reference ID	32 AN, EBCDIC, 32 bytes	C						This tag contains the original token reference ID. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 120, Dataset ID 58, Tag 84	Original Token Type	2 AN, EBCDIC, 2 bytes	C						This field contains the token type of the source token used for provisioning a new token. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700.
TLV 120, Dataset ID 58, Tag 85	Original Device Type	2 AN, EBCDIC, 2 bytes	C						This field contains the device type of the source token used for provisioning a new token. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700.
TLV 120, Dataset ID 58, Tag 86	Original Device ID	48 ANS, EBCDIC, up to 48 bytes	C						This field contains the device ID of the source token used for provisioning a new token. This tag will be present in token for token provisioning messages that contain Field 63.3 with the value of 3700.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max							This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data								This dataset ID contains Tag D4.
TLV 123, Usage 2, Dataset ID 66, Tag D4	Cardholder Name	26 ANS, EBCDIC, 26 bytes	C						This field contains the cardholder name. It is present when Field 63.3 contains the value of 3700 . The value will be truncated if the length of the name is longer than 26 characters.
TLV 123, Usage 2, Dataset ID 67, Tag 07	Issuer Special Condition Code	2 N, 2 bytes	O						This tag contains the issuer special condition code. For message reason code 3700 , Visa will populate the issuer special condition code in this tag prior to sending the 0600 Issuer token notification advice to the issuer.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 123, Usage 2, Dataset ID 68	Token Data								This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 05, Tag 06, Tag 07, Tag 08, and Tag 0B.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		M		M		This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 N, 2 bytes	C						This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. This field is present when Field 63.3 contains the reason code value of 3700. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	2 N, 2 bytes	M		M		M		This tag contains the token requestor ID. The 0620 Token notification message for message reason code 3711 contains the same value as the 0620 Token notification message for message reason code 3700.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	2 N, 2 bytes	M		M		M		This tag is present when sent by wallet providers. The 0620 Token notification message for message reason code 3711 contains the same value as the 0620 Token notification message for message reason code 3700 .
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M						This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 N, 2 bytes	M				M		This tag contains the value of 03 (CBP (cloud-based payment)).
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	2 N, 2 bytes	M		M		M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	2 N, 2 bytes	M		M		M		This tag contains a unique reference ID generated by Visa for the card account number.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 125, Usage 2, Dataset ID 01, Tag 01	Device Type	2 N, 2 bytes	C						This tag contains the device type. REFERENCE <i>For a list of valid device types, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	2 N, 2 bytes	C+		C+		C+		This tag contains the device ID.
TLV 125, Usage 2, Dataset ID 01, Tag 04	Device Number	2 N, 2 bytes	C						This tag contains the full phone number or partial phone number when available.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 125, Usage 2, Dataset ID 01, Tag 05	Device Name	2 N, 2 bytes	C						This tag contains the device name that is recognized by the consumer that is used to support HCE transactions. NOTE <i>The value will be truncated if the name known by the consumer is larger than 16 characters.</i> <i>If the value provided by the device contains any special characters, these characters will be replaced with an * (asterisk) before being sent to the issuer.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 06	Device Location	25 ANS, EBCDIC, 25 bytes	C						This tag contains the device location.
TLV 125, Usage 2, Dataset ID 02, Tag 05	Wallet Provider Device Score	2 N, 2 bytes	C						This tag is used to support HCE transactions.
TLV 125, Usage 2, Dataset ID 02, Tag 06	Wallet Provider Account Score	2 N, 2 bytes	C						This tag is used to support HCE transactions.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 125, Usage 2, Dataset ID 02, Tag 07	Wallet Provider Reason Codes	30 ANS, EBCDIC, 30 bytes	C						This tag contains the wallet provider reason codes when Field 63.3 contains the value of 3700. REFERENCE <i>For a list of valid reason codes, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 02, Tag 08	PAN Source	2 N, 2 bytes	C						This tag may be included in the response when the token is located with one of these values: • 01 (Key-entered) • 02 (On file) • 03 (Mobile banking app) • 04 (Token) • 05 (Chip dip) • 06 (Contactless tap)
TLV 125, Usage 2, Dataset ID 02, Tag 09	Wallet Account ID	32 ANS, EBCDIC, 32 bytes	C		C		C		This tag contains the wallet account ID.
TLV 125, Usage 2, Dataset ID 02, Tag 0A	Wallet Account E-mail Address	64 DX, 32 bytes	C		C		C		This tag contains the hashed full email address for the user's account that was sent by the digital wallet provider.

Table B–8: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, 3703, and 3711 (cont'd.)

Field Number and Name		Format	Token Notification Creation for 3700		Token Notification Provision for 3711		Wallet Provider Token Notification Update for 3701, 3702, 3703		Description
			0620	0630	0620	0630	0620	0630	
TLV 127, Usage 2	Terms and Conditions	Variable length, TLV format: 1 byte, binary+ 255 binary and ANS, EBCDIC, 256 bytes max							This TLV field contains Dataset ID 40.
TLV 127, Usage 2, Dataset ID 40	Terms and Conditions								This dataset ID contains Tag 01 and Tag 02.
TLV 127, Usage 2, Dataset ID 40, Tag 01	Terms and Conditions Verification	64 AN, EBCDIC, 64 bytes	C						This tag is used to specify that Field 127 contains terms and conditions data. For HCE, if the mobile app is the issuer's mobile app, the terms and conditions are verified by the issuer.
TLV 127, Usage 2, Dataset ID 40, Tag 02	Issuer Terms and Conditions Date/Time	32 AN, EBCDIC, 32 bytes format: YYYY-MM-DDT hh:mm:ss.sss ±[hhmm]	C						This tag contains the acceptance date and time.

0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3712 and 3714

The following table shows message layout and contents of the 0620/0630 Token notification advice message to support Visa Token Service transactions for host card emulation (HCE) mobile devices for the following message reason codes:

- **3712** (OTP verification result)
- **3714** (Mobile banking app activation)

NOTE

Bold values in the 0630 Token notification response messages indicate the field must contain the same values from the 0620 Token notification request messages.

Table B–9: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714

Field Number and Name		Format	Token Notification for 3712		Token Notification for 3714		Description
			0620	0630	0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the number that identifies the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	C	C	This field contains the month and day.

Table B-9: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714 (cont'd.)

Field Number and Name		Format	Token Notification for 3712		Token Notification for 3714		Description
			0620	0630	0620	0630	
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		M		This field contains a Visa-assigned identifier.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	M	M	This field must contain the response code 00 (Good).
48, Usage 2	Unformatted Text in Authorization/ Reversal	Variable length, TLV format, 1 byte binary+ 255 binary and ANS, EBCDIC 256 bytes max	C		C		The 0620 request message contains the reason for the update.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C+		C+		This TLV field contains Dataset ID 01.

Table B–9: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714 (cont'd.)

Field Number and Name		Format	Token Notification for 3712		Token Notification for 3714		Description
			0620	0630	0620	0630	
TLV 56, Dataset ID 01	Account Data		C+		C+		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	C+		C+		Visa will populate the payment account reference in this tag prior to sending the 0620 Token notification advice to the issuer.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		Each 0620 message contains the respective value of: 3712 (OTP verification result) 3714 (Mobile banking app activation)
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes maximum	O	C	O	C	This field contains additional proprietary tracking information used by the transaction originator. The information returned in the 0630 response message must be unaltered.

Table B-9: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714 (cont'd.)

Field Number and Name		Format	Token Notification for 3712		Token Notification for 3714		Description
			0620	0630	0620	0630	
TLV 123, Usage 2							This TLV field contains Dataset ID 67 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 67	Activation Verification Data						This dataset ID contains Tag 03.
TLV 123, Usage 2, Dataset ID 67, Tag 03	Activation Verification Result	1 AN, 1 byte	C		C		This field contains one of the following OTP verification result and mobile banking application verification code values: • 1 (Successfully verified) • 2 (Verification code expired) • 3 (Verification code failed) • 4 (Verification code missing) • 5 (Verification code retries exceeded)
TLV 123, Usage 2, Dataset ID 68	Token Data						This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 05, Tag 06, Tag 07, Tag 08, and Tag 0B.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		M		The bold value in the 0620 Token notification advice for verification result for message reason codes 3712 and 3714 indicates that the field contains the same value as 3700 .
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11bytes	M		M		This tag contains the token requestor ID.

Table B–9: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714 (cont'd.)

Field Number and Name		Format	Token Notification for 3712		Token Notification for 3714		Description
			0620	0630	0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		M		This tag is present when sent by wallet providers. Bold values in the 0620 Token notification advice for verification result message reason codes 3712 and 3714 indicates that the field contains the same value as the 3700 .
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M		M		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M		M		This tag contains the value of 03 (CBP (cloud-based payment)).
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 bytes	M		M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	M		M		This tag contains the device ID.

Table B-9: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3712 and 3714 (cont'd.)

Field Number and Name		Format	Token Notification for 3712		Token Notification for 3714		Description
			0620	0630	0620	0630	
TLV 125, Usage 2, Dataset ID 02	Wallet Provider						This dataset ID contains Tag 09.
TLV 125, Usage 2, Dataset ID 02, Tag 09	Wallet Account ID	32 ANS, EBCDIC, 32 bytes	C		C		This tag contains the wallet account ID.

0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3713

The following table shows the message layout and content of the 0620/0630 Issuer token notification advice message for message reason code **3713** (Call center activation) that will notify issuers when tokens representing their cards have their status has changed. The message reason code applies to tokens initiated with host card emulation (HCE) mobile devices.

Table B-10: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3713

Field Number and Name		Format	Token Notification for Call Center Activation for 3713		Description
			0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the number that identifies the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to the Visa system by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	This field contains the month and day.
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		This field contains a Visa-assigned identifier.

Table B-10: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3713 (cont'd.)

Field Number and Name		Format	Token Notification for Call Center Activation for 3713		Description
			0620	0630	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	For the 0620 message for message reason code 3713 (Call center activation), this field contains the response code of provisioning with a value of 00 (Good). The 0630 message for message reason code 3713 must contain the response code of 00 (Good) in the response message.
48, Usage 2	Unformatted Text in Authorization/ Reversal	Variable length, 1 byte binary+ up to 255 ANS, EBCDIC, 256 bytes max	C		The 0620 request message contains the reason for the update.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C+		This TLV field contains Dataset ID 01.

Table B-10: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3713 (cont'd.)

Field Number and Name		Format	Token Notification for Call Center Activation for 3713		Description
			0620	0630	
TLV 56, Dataset ID 01	Account Data		C+		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	C+		Visa will populate the payment account reference in this tag before sending the 0620 Token notification advice for message reason codes 3713 to the issuer.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	This field contains a right-justified, unique Visa-generated transaction identifier (TID). NOTE <i>For message reason code 3713 (Call center activation), the value sent in this field in the 0620 Token notification advice message is the same in the 0100 Token activation request and in its 0120 Token STIP advice.</i>
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		Each 0620 message contains the value of 3713 (Call center activation).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.

Table B-10: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3713 (cont'd.)

Field Number and Name		Format	Token Notification for Call Center Activation for 3713		Description
			0620	0630	
92	File Security Code	2 AN EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 03, Tag 05, Tag 06, Tag 07, Tag 08, and Tag 0B.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		This tag is present when sent by wallet providers.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M		The tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M		This tag contains the value of 03 (CBP (cloud-based payment)).

Table B-10: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3713 (cont'd.)

Field Number and Name		Format	Token Notification for Call Center Activation for 3713		Description
			0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 125, Usage 2					This TLV field contains Dataset ID 01.
TLV 125, Usage 2, Dataset ID 01	Token Device				This dataset ID contains Tag 03.
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	C		This tag contains device ID.
TLV 125, Usage 2, Dataset ID 02					This dataset ID contains Tag 09.
TLV 125, Usage 2, Dataset ID 02, Tag 09	Wallet Account ID	32 ANS, EBCDIC, 32 bytes	C		This tag contains the wallet account ID.

0620/0630 Issuer Token Notification Advice Messages for Message Reason Code 3715

The following table shows the message layout and content of the 0620/0630 Issuer token notification advice message for message reason code **3715** (Replenishment confirmation of limited use keys) that is used for active key management with HCE mobile devices.

NOTE

Bold values in the 0630 Token notification response messages indicate the field must contain the same values from the 0620 Token notification request messages.

Table B-11: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3715

Field Number and Name		Format	Token Notification for Replenishment Confirmation 3715		Description
			0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the number that identifies the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.

Table B-11: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3715 (cont'd.)

Field Number and Name		Format	Token Notification for Replenishment Confirmation 3715		Description
			0620	0630	
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed. NOTE Message reason code 3715 (Replenishment confirmation of limited use keys) can have the same system trace audit number as message reason code 3711 (Device provisioning result).
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	This field contains the month and day.
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		This field contains a Visa-assigned identifier.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE The retrieval reference number must begin with a valid Julian date.

Table B-11: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3715 (cont'd.)

Field Number and Name		Format	Token Notification for Replenishment Confirmation 3715		Description
			0620	0630	
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	For the 0620 message, this field contains the value of 00 (Good). For the 0630 message, this field contains the value of 00 (Good).
48, Usage 2	Unformatted Text in Authorization/ Reversal	Variable length, 1 byte binary+ up to 255 ANS, EBCDIC, 256 bytes max format: yhnhccyhnhcc	C		The first set of ynhhcc is the account parameter index for the limited use key (LUK) that is being replenished on the device, and the second set of ynhhcc is for the previous LUK on the device. y = Year hhhh = Number of hours from midnight January 1st cc = LUK count in the hour
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C+		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		C+		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	C+		Visa will populate the payment account reference in this tag prior to sending the 0620 Token notification advice for message reason code 3715 to the issuer.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	This field contains a right-justified, unique Visa-generated transaction identifier (TID).

Table B-11: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3715 (cont'd.)

Field Number and Name		Format	Token Notification for Replenishment Confirmation 3715		Description
			0620	0630	
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		Each 0620 message contains the value of 3715 (Replenishment confirmation of limited use keys).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes maximum	O	C	This field contains additional proprietary tracking information used by the transaction originator. The information returned in the 0630 response message must be unaltered.
TLV 123, Usage 2, Dataset ID 68					This dataset ID contains Tag 01, Tag 03, Tag 05, Tag 06, Tag 07, Tag 08, and Tag 0B.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		This tag contains the token that is used to replace the cardholder PAN.

Table B-11: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3715 (cont'd.)

Field Number and Name		Format	Token Notification for Replenishment Confirmation 3715		Description
			0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID		M		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID		M		This tag is present when sent by wallet providers.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M		The tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type		M		This tag contains the value of 03 (CBP (cloud-based payment)).
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status		M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS EBCDIC, 32 bytes	M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	M		This tag contains the device ID.

THIS PAGE INTENTIONALLY LEFT BLANK.

0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3720 and 3721

Message reason code **3720** is assigned to PAN expiry date messages and message reason code **3721** will be assigned to PAN update messages. The following table shows the message layout for PAN expiry update and PAN update advice messages.

Table B-12: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the current (old) PAN.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	M	M	This field contains the date and time the request or advice was submitted to the Visa system.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	C	C	This field contains the month and day.
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		M		This field contains a Visa-assigned identifier.

Table B–12: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	M	M	For the 0620 message, this field contains the value of 00 (Good). For the 0630 message, this field must contain the value of 00 (Good).
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the network ID 0002 (Visa).

Table B-12: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C		C		This field contains one of these values: • 3720 (PAN expiry update) • 3721 (PAN update) NOTE <i>This field contains reason code 3721 for messages that impact both PAN and PAN expiry updates.</i>
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M		M		This field contains the value of PAN .
TLV 123, Usage 2, Dataset ID 68	Token Data						This dataset ID contains Tag 01, Tag 03, Tag 05, Tag 08, and Tag 0B.

Table B-12: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		M		This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		M		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		M		This tag is present when sent by wallet providers.
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 127.PAN	PAN File Maintenance (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	M		M		This is an existing field with Dataset ID 41.

Table B-12: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
TLV 127.PAN, Dataset ID 41	PAN Update Data						This dataset ID contains Tag 01 and Tag 02.
TLV 127.PAN, Dataset ID 41, Tag 01	Replacement PAN	13–19 N, 4-bit BCD, 7–10 bytes	C		C		This tag is required when the existing PAN is being replaced with a new PAN. It is present for PAN update notifications and may be present for PAN expiry update notifications.
TLV 127.PAN, Dataset ID 41, Tag 02	Replacement PAN Expiration Date	4 N, 4-bit BCD, 2 bytes format: yymm	M		M		This tag contains the new expiration date.

Full Chip Token Payment Messages

V.I.P. Full Chip Data for NFC Visa Contactless Messages

This appendix includes the V.I.P. POS authorization and full financial messages to support Full Chip data for NFC Visa Contactless for the Visa Token Service to support host card emulation (HCE) mobile devices.

In addition, this appendix includes the following chip processing:

- Legacy magnetic stripe data (MSD) 1.4.2
- Quick Visa Smart Debit/Credit (qVSDC)

IMPORTANT

The existing fields that have not changed are not included in this appendix.

REFERENCE

For details about the existing fields that have not changed, refer to:

- VisaNet Authorization-Only Online Messages Technical Specifications
- Full Service POS Online Messages Technical Specifications

This appendix includes only the fields that have changed to support the POS authorization and full financial messages for Visa Token Service transactions shown in the following table.

Table B-13: Message Impact Summary for Full Chip Data

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0100/0110 Authorization	Y	N	N
0120/0130 Authorization STIP Advice	Y	N	N
0100/0110 Preauthorization	Y	Y	Y
0120/0130 Preauthorization STIP Advice	Y	Y	Y
0200/0210 Full Financial	Y	Y	Y
0220/0230 Full Financial STIP Advice	Y	Y	Y
0220/0230 Preauthorization Completion	Y	Y	Y
0220/0230 Preauthorization Completion STIP Advice	Y	Y	Y
0400/0410 Authorization Reversal	Y	N	N
0400/0410 POS Preauthorization Reversal	Y	Y	Y
0400/0410 Full Financial Reversal	Y	Y	Y
0420/0430 Authorization STIP Advice Reversal	Y	N	N

Y = Transaction supported

N = Transaction not supported

Table B-13: Message Impact Summary for Full Chip Data (cont'd.)

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0420/0430 Full Financial STIP Advice Reversal	Y	Y	Y

*Y = Transaction supported**N = Transaction not supported*

0100/0110 and 0120/0130 POS Authorization Messages for Full Chip Data Processing

The following table shows the message layout and contents of the 0100/0110 and 0120/0130 POS Authorization Messages for Full Chip data processing to support Visa Token Service transactions initiated from host emulation (HCE) mobile devices.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
4	Amount, Transaction	12 N, 4-bit BCD, 6 bytes	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains these values: 000000000002 for the initial attempt 000000000003 for the second attempt 000000000004 for the third and all subsequent attempts NOTE The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer. The decimal place is implied based on the currency.

Table B–14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description	
			Legacy (MSD 1.4.2)				qVSDC					
			Original		STIP Advice		Original		STIP Advice			
			0100	0110	0120	0130	0100	0110	0120	0130		
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss		
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M		M							For step-up authentication, this field contains 7299 (Miscellaneous personal service—Not elsewhere classified). Issuers must be aware that the digital wallets will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for step-up authentication prior to sending the message to the issuer.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 03, 07, and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing. For step-up authentication, this field contains 01 (Manual key entry). NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22 (cont'd.)											Issuers that issue full chip cards and choose to process payment token service POS transactions submitted with a QR code must support the value of 03 in Field 22 of 0100 Authorization full chip data
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 03 or 91. This field is optional when the transaction includes the value of 03 or 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
25	Point-of-Service Condition Code	2 N 4-bit BCD, 1 byte	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 59 (E-commerce request through public network). NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>
32	Acquiring Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 746922 . This is a routing number created by Visa for this purpose only. It is a key element that the Host system can use to identify the Visa access code in authorization message transactions. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C				This field: - Will be present when Field 22 contains the POS entry mode code value of 07. - May be present when Field 22 contains the POS entry mode code values of 03 (Optical code) or 91 (Contactless device-read using magnetic stripe data rules). NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C				IMPORTANT Visa implemented an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN, instead of the token PAN. This field: - Will be present when Field 22 contains the POS entry mode code 07 - May be present when Field 22 contains the POS entry mode code value of 91 (Contactless device-read using magnetic stripe data rules) Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											IMPORTANT Visa implemented an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN instead of the token PAN. The Decimalized Cryptogram for the token will be present. NOTE <i>The Decimalized Cryptogram will only be based on the token. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification.</i>

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
38	Authorization Identification Response	6 AN, EBCDIC, 6 bytes		M				M			For approved authorization requests, this field must not contain any of the following invalid authorization code values: • 00000 (All zeros in the last five positions of the six-byte field) • ^^^^^ (All spaces in the last five positions of the six-byte field) • X (X in the last position of the six-byte field) • 0000^ (Four zeros followed by a space in the last five positions of the six-byte field) • 0000N (Four zeros followed by N in the last five positions of the six-byte field) • 0000Y (Four zeros followed by Y in the last five positions of the six-byte field) • 0000P (Four zeros followed by P in the last five positions of the six-byte field) • SVC (SVC in the first three positions of the six-byte field)

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M		M	M	M	For HCE transactions, support the existing response codes. For HCE MSD transactions, the following processing will apply to 0120 STIP advices: - When Decimalized Cryptogram failed, this field contains the value of 05 (Do not honor) if Field 44.5 is present - When Decimalized Cryptogram failed, this field contains the value of 82 (Negative online CAM, dCVV, iCVV, or CVV result or Offline PIN authentication was interrupted) if Field 44.5 is not present

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
41	Card Acceptor Terminal Identification	8 ANS, EBCDIC, 8 bytes	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 11111111 . This value, in conjunction with Field 32 and Field 42, can be used to identify the transaction for step-up authentication method. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
42	Card Acceptor Identification Code	15 ANS, EBCDIC, 15 bytes	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 111111111111111. This value, in conjunction with Field 32 and Field 41, can be used to identify the transaction for step-up authentication method. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
43	Card Acceptor Name/Location	40 ANS, EBCDIC, 40 bytes	M		C		M		C		For the step-up authentication method, this field contains CODE_NNNNNN_XXXXXXXXXXXXXX, where: CODE = pos. 1–4 NNNNNN = pos. 6–11 contains a Visa-generated 6-digit access code XXXXXXXXXXXXXX = pos. 13–25 contains an up to 13-character wallet descriptor, left-justified NOTE <i>When the authorization posts to the cardholder account, the cardholder can retrieve the access code from the banking online website or application.</i> <i>The wallet descriptor is the digital wallet that initiated the authentication request.</i> <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i> This value, in conjunction with Field 32 and Field 41, can be used to identify the transaction for step-up authentication method.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description	
			Legacy (MSD 1.4.2)				qVSDC					
			Original		STIP Advice		Original		STIP Advice			
			0100	0110	0120	0130	0100	0110	0120	0130		
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss		
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C							For MSD HCE transactions, this field contains a Visa-defined code indicating the decimalized cryptogram. For qVSDC transactions, this field contains a Visa-defined code indicating qVSDC results. Field 44.5 will be populated with the same value as the CAM result code that will be returned in Field 44.8.
44.8	Card Authentication Results Code	1 ANS, EBCDIC, 1 byte					C+	O	C			This field is a VSDC field that contains a Visa-defined code indicating the CAM results for qVSDC.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				IMPORTANT This field will not be supported, and V.I.P. will decline the HCE transaction if only Field 45 is present. If both Field 35 and Field 45 are present, then V.I.P. will drop Field 45 and only process the HCE transaction with Field 35. Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. • The Cardholder Name field will not contain the actual name of the cardholder. • The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date. • The dCVV or iCVV for the token will be present.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (cont'd.)											IMPORTANT This field is used only for MSD and for limited transactions. NOTE The dCVV and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN. REFERENCE The Track 1 layout for Visa cards will conform to the Visa Contactless Payment Specification.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
49	Currency Code, Transaction	3 N, 4-bit BCD, 2 bytes	M	M	M	M	M	M	M	M	For the step-up authentication, this field contains the numeric currency code for Field 4. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55	Integrated Circuit Card (ICC)-Related Data	Variable length, 1 byte binary+ 255 bytes, variable by usage 256 bytes max					C	C	C	C	This field is present when Field 22 contains the POS entry mode code 07 in the authorization message. Issuers must be aware of CVN 43 and must support the following: - CVN 43 will be present in Tag 9F10—Issuer Application Data - Issuer Application Data (IAD) Format 4 in Tag 9F10 - The format of card verification result (CVR) with 6 bytes of Tag 9F10 - Cryptogram will be supported in Tag 9F26—Application Cryptogram In addition, issuers must be aware of the following: - The issuer discretionary data will not contain any issuer-specific data that may be present in the chip card that the issuer has issued. - The authorization request application cryptogram (ARQC) will be based on the token, and not the cardholder PAN. - The authorization response cryptogram (ARPC) is calculated by the token service provider.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55 (cont'd.)											NOTE <i>The content of Field 55 is brand-specific. For more information, contact your regional client support representative.</i> IMPORTANT Only Field 55 is supported. Field 134 for third-bitmap is not supported.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization message to the issuer.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read-capable terminal) to identify that the terminal only supports Visa Contactless. Issuers that issue full chip cards and choose to process payment token service POS transactions submitted with a QR code must support the value of 3 (QR code) in Field 60.2 in 0100 Authorization POS messages for full chip data.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 66, Tag C0	Postal Code	9 AN, EBCDIC, 9 bytes	O		O		O		O		For the step-up authentication, AVS data may be absent or may not reflect the actual cardholder postal code when Field 32 contains 746922 . NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66, Tag CF	Street Address	40 AN, EBCDIC, 40 bytes	○		○		○		○		For the step-up authentication, AVS data may be absent or may not reflect the actual cardholder street address when Field 32 contains 746922. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66, Tag D0	Compressed AVS Data	14 AN, EBCDIC, 14 bytes	○		○		○		○		U.K. issuers only. For the step-up authentication, AVS data may be absent or may not reflect the cardholder address when Field 32 contains the value of 746922 . NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i> REFERENCE <i>For additional information, refer to Article 9.5.1, New U.K. Compressed Data Format for the Address Verification Service in the April 2015 VisaNet Business Enhancements Global Technical Letter and Implementation Guide.</i>
TLV 123, Usage 2, Dataset ID 67	Activation Verification Data										This dataset ID contains Tag 04 and Tag 05.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: • Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) • Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, Tag 07, Tag 1F31, Tag 1F32, and Tag 1F33.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.

Table B-14: 0100/0110 and 0120/0130 POS Authorization for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		C+		C+		This tag contains the elapsed time in hours since the current limited use key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		C+		C+		This tag contains the cumulative count of transactions for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		C+		C+		This tag contains the cumulative total of transaction amounts in USD for the current LUK.

0100/0110 Preauthorization POS Full Financial Messages for Full Chip Data Processing

The following table shows the message layout and contents of the 0100/0110 Preauthorization messages for Full Chip data processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B-15: 0100/0110 Preauthorization POS Messages for Full Chip Data

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.

Table B–15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 03, 07, and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing.

Table B–15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 03 or 91. This field is optional when the transaction includes the value of 03 or 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.

Table B–15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	M				M				Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date. NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> IMPORTANT Visa implemented an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN, instead of the token PAN.

Table B-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)										- The dCVV or iCVV for the token will be present. NOTE <i>The dCVV and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification.</i> This field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code values of 03 (Optical code) or 91 (Contactless device-read using magnetic stripe data rules).	

Table B-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. • The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date. • The Decimalized Cryptogram for the token will be present. IMPORTANT Visa implemented an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN, instead of the token PAN. NOTE <i>The Decimalized Cryptogram will only be based on the token. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i>

Table B-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											REFERENCE The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification and to the Visa Cloud-Based Payments Contactless Specification.
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M		M	M	M	This field contains the existing response codes. For HCE MSD transactions, the following processing will apply to 0120 advices: - When Decimalized Cryptogram failed, this field contains the value of 05 (Do not honor) if Field 44.5 is present - When Decimalized Cryptogram failed, this field contains the value of 82 (Negative online CAM, dCVV, iCVV, or CVV results or Offline PIN authentication was interrupted) if Field 44.5 is not present

Table B–15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description	
			Legacy (MSD 1.4.2)				qVSDC					
			Original		STIP Advice		Original		STIP Advice			
			0100	0110	0120	0130	0100	0110	0120	0130		
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss		
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C							For MSD HCE transactions, this field contains a Visa-defined code indicating the decimalized cryptogram. For qVSDC transactions, this field contains a Visa-defined code indicating qVSDC results. Field 44.5 will be populated with the same value as the CAM result code that will be returned in Field 44.8.

Table B-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55	Integrated Circuit Card (ICC)-Related Data	Variable length, 1 byte binary+ 255 bytes, variable by usage 256 bytes max					C	C	C	C	This field is present when Field 22 contains the POS entry mode code 07 in the authorization message. Issuers must be aware of CVN 43 and must support the following: - CVN 43 will be supported in Tag 9F10—Issuer Application Data - Format 4 to support the issuer application data (IAD) in Tag 9F10 - The format of card verification result (CVR) with 4 bytes of Tag 9F10 - Cryptogram will be supported in Tag 9F26—Application Cryptogram

Table B-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55 (cont'd.)											In addition, issuers must be aware of the following: • The issuer discretionary data will not contain any issuer-specific data that may be present in the chip card that the issuer has issued. • The authorization request application cryptogram (ARQC) will be based on the token, and not the cardholder PAN. • The authorization response cryptogram (ARPC) is calculated by the token service provider. • The issuer application data will not contain any issuer-specific personalization data. NOTE <i>The content of Field 55 is brand-specific. For more information, contact your regional client support representative.</i> IMPORTANT Only Field 55 is supported. Field 134 for third-bitmap is not supported.

Table B-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read-capable terminal) to identify that the terminal only supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).

Table B-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, Tag 07, Tag 1F31, Tag 1F32, and Tag 1F33.

Table B-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.

Table B-15: 0100/0110 Preauthorization POS Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		C+		C+		This tag contains the elapsed time in hours since the current limited use key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		C+		C+		This tag contains the cumulative count of transactions for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		C+		C+		This tag contains the cumulative total of transaction amounts in USD for the current LUK.

0100/0110 and 0120/0130 POS Authorization Full Chip Data Processing with QR Code

The following table shows the changes to full chip data processing to support Visa Token Service transactions submitted with a QR code for authorization only transactions.

Table B-16: 0100/0110 and 0120/0130 POS Authorization Full Chip Data Processing with QR Code

Field Number and Name		Format	Full Chip Data				Description
			qVSDC				
			Original		STIP Advice		
			0100	0110	0120	0130	
			Acq	VIC	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 03 (Optical code) Issuers that do not support contactless chip must be prepared to support the values of 03, 07, and 91. Issuers that currently support chip data will continue to receive these values for contact and contactless chip processing.
35	Track 2 Data	Variable length, 1 byte binary+ 37 N, 4-bit BCD, 20 bytes max	C				The contents of QR Tag 57 will be from the QR code and will be placed in Field 35 of authorization messages. REFERENCE <i>For the format and contents of QR Tag 57, contact your regional client support representative.</i> Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.

Table B-16: 0100/0110 and 0120/0130 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Number and Name		Format	Full Chip Data				Description
			qVSDC				
			Original		STIP Advice		
			0100	0110	0120	0130	
			Acq	VIC	VIC	Iss	
35 (cont'd.)							Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. • The token and token expiration date, and not the cardholder PAN and card expiration date, will be present in this field. – Visa will implement an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN instead of the token PAN. • The decimalized cryptogram for the token will be present in HCE transactions. – The decimalized cryptogram will only be based on the token. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN. REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification</i>

Table B-16: 0100/0110 and 0120/0130 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Number and Name		Format	Full Chip Data				Description
			qVSDC				
			Original		STIP Advice		
			0100	0110	0120	0130	
			Acq	VIC	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M	The following processing will apply to 0120 STIP advices: - If decimalized cryptogram fails, this field contains the value 05 (Do not honor) when Field 44.5—CVV/iCVV Results Code is present. - If decimalized cryptogram fails, this field contains the value of 82 (Negative online CAM, dCVV, iCVV, or CVV results or offline PIN authentication interrupted) when Field 44.5 is not present.
44.8	Card Authentication Results Code	1 ANS, EBCDIC, 1 byte	C+	C	C+		This field is a Visa Smart Debit/Credit (VSDC) field that contains a Visa-defined code indicating the card authentication method (CAM) results for Quick Visa Smart Debit/Credit (qVSDC).

Table B-16: 0100/0110 and 0120/0130 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Number and Name		Format	Full Chip Data				Description
			qVSDC				
			Original		STIP Advice		
			0100	0110	0120	0130	
			Acq	VIC	VIC	Iss	
55	Integrated Circuit Card (ICC)-Related Data	Variable length, 1 byte binary+ 255 bytes, variable by usage 256 bytes max	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 03 (Optical code) in the authorization request message. Issuers must be aware of the cryptogram version number (CVN) 44 and support the following tags: • Tag 82—Application Interchange Profile • Tag 9F10—Issuer Application Data, with the value of 44 (CVN44) • Tag 9F26—Application Cryptogram • Tag 9F36—Application Transaction Counter • Tag 9F37—Unpredictable Number • Tag 9F6E—Form Factor Indicator • Tag 9F7C—Customer Exclusive Data, this tag is optional The content of Field 55 is brand-specific. For more information, contact your client support representative. IMPORTANT Only Field 55 is supported for HCE transactions. Field 134 for the third bitmap is not supported in HCE messages.

Table B-16: 0100/0110 and 0120/0130 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Number and Name		Format	Full Chip Data				Description
			qVSDC				
			Original		STIP Advice		
			0100	0110	0120	0130	
			Acq	VIC	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		This field contains one of these values: • 3 (QR code) • 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) • 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.)
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C		The existing values will be supported in this field.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Results	2 N, 2 bytes	C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68	Token Data						This dataset ID contains Tag 1F31, Tag 1F32, Tag 1F33, Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.

Table B-16: 0100/0110 and 0120/0130 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Number and Name		Format	Full Chip Data				Description
			qVSDC				
			Original		STIP Advice		
			0100	0110	0120	0130	
			Acq	VIC	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		This tag contains the elapsed time in hours since the current limited use key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		This tag contains the cumulative count of transactions for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		This tag contains the cumulative total of transaction amounts in U.S. dollars (USD) for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table B-16: 0100/0110 and 0120/0130 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Number and Name		Format	Full Chip Data				Description
			qVSDC				
			Original		STIP Advice		
			0100	0110	0120	0130	
			Acq	VIC	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		For HCE and QR transactions, this tag contains the value of 03 (CBP).

0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data Processing

The following table shows the message layout and contents of the 0200/0210 and 0220/0230 Full financial messages for Full Chip data processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 03, 07, and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing. Issuers that issue full chip cards and choose to process payment token service POS transactions submitted with a QR code must support the value of 03 in Field 22 of 0100 Authorization full chip data

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 03 or 91. This field is optional when the transaction includes the value of 03 or 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.
25	Point-of-Service Condition Code	2 N 4-bit BCD, 1 byte	M	M	M	M	M	M	M	M	This field contains a code identifying transaction conditions at the point-of-sale or point of service.

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description	
			Legacy (MSD 1.4.2)				qVSDC					
			Original		STIP Advice		Original		STIP Advice			
			0200	0210	0220	0230	0200	0210	0220	0230		
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss		
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C					This field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code values of 03 (Optical code) or 91 (Contactless device-read using magnetic stripe data rules). IMPORTANT This field is required for Interlink transactions. Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date.

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											NOTE <i>Visa implemented an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN, instead of the token PAN.</i> NOTE <i>The dCVV and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> • The Decimalized Cryptogram for the token will be present. NOTE <i>The Decimalized Cryptogram will only be based on the token. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i>

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											REFERENCE The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification and to the Visa Cloud-Based Payments Contactless Specification.
39	Response Code	2 AN EBCDIC, 2 bytes		M	M	M		M	M	M	This field contains the existing response codes. For HCE MSD transactions, the following processing will apply to 0220 STIP advices: - When Decimalized Cryptogram failed, this field contains the value of 05 (Do not honor) if Field 44.5 is present - When Decimalized Cryptogram failed, this field contains the value of 82 (Negative online CAM, dCVV, iCVV, or CVV results or Offline PIN authentication was interrupted) if Field 44.5 is not present

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description	
			Legacy (MSD 1.4.2)				qVSDC					
			Original		STIP Advice		Original		STIP Advice			
			0200	0210	0220	0230	0200	0210	0220	0230		
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss		
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C							For MSD HCE transactions, this field contains a Visa-defined code indicating the decimalized cryptogram. For qVSDC transactions, this field contains a Visa-defined code indicating qVSDC results. Field 44.5 will be populated with the same value as the CAM result code that will be returned in Field 44.8.
44.8	Card Authentication Results Code	1 ANS, EBCDIC, 1 byte					C+	O	C			This field is a VSDC field that contains a Visa-defined code indicating the CAM results for qVSDC.

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				IMPORTANT This field will not be supported, and V.I.P. will decline the HCE transaction if only Field 45 is present. If both Field 35 and Field 45 are present, then V.I.P. will drop Field 45 and only process the HCE transaction with Field 35. IMPORTANT This field is not supported for Interlink transactions. Issuers must be aware that: • The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. • The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date. • The Cardholder Name field will not contain the actual name of the cardholder. • The dCVV or iCVV for the token will be present.

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (cont'd.)											IMPORTANT This field is used only for MSD and for limited transactions. NOTE <i>The dCVV and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 1 layout for Visa cards will conform to the Visa Contactless Payment Specification.</i>

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial message to the issuer.

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported, or the value of 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal only supports Visa Contactless. Issuers that issue full chip cards and choose to process payment token service POS transactions submitted with a QR code must support the value of 3 (QR code) in Field 60.2 in 0200 Full financial POS authorization messages for full chip data.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Results	2 N, 2 bytes	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 1F31, Tag 1F32, Tag 1F33, Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		C+		C+		This tag contains the elapsed time in hours since the current limited use key (LUK) was provisioned or replenished on the device.

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		C+		C+		This tag contains the cumulative count of transactions for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		C+		C+		This tag contains the cumulative total of transaction amounts in USD for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.

Table B-17: 0200/0210 and 0220/0230 POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

0200/0210 and 0220/0230 POS Authorization Full Chip Data Processing with QR Code

The following table shows the changes to full chip data processing to support Visa Token Service transactions submitted with a QR code for V.I.P. Full service endpoints.

Table B-18: 0200/0210 and 0220/0230 POS Authorization Full Chip Data Processing with QR Code

Field Name and Number		Format	Full Chip Data												Description
			qVSDC												
			Original				Acquirer Advice				STIP Advice		BASE II Advice		
			0200		0210		0220		0230		0220	0230	0220	0230	
			Acq	VIC	Iss	VIC	Acq	VIC	Iss	VIC	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD 2 bytes	M	C+			M	C+			M		M		This field contains the value of 03 (Optical code) Issuers that do not support contactless chip must be prepared to support the values of 03, 07, and 91. Issuers that currently support chip data will continue to receive these values for contact and contactless chip processing.

Table B-18: 0200/0210 and 0220/0230 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Name and Number		Format	Full Chip Data												Description	
			qVSDC													
			Original				Acquirer Advice				STIP Advice		BASE II Advice			
			0200		0210		0220		0230		0220	0230	0220	0230		
			Acq	VIC	Iss	VIC	Acq	VIC	Iss	VIC	VIC	Iss	VIC	Iss		
35	Track 2 Data	Variable length, 1 byte binary+, up to 37 N, 4-bit BCD, 20 bytes max	C	C												The contents of QR Tag 57 will be from the QR code and will be placed in Field 35 of authorization messages. REFERENCE <i>For the format and contents of QR Tag 57, contact your regional client support representative.</i> Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.

Table B-18: 0200/0210 and 0220/0230 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Name and Number		Format	Full Chip Data												Description
			qVSDC												
			Original				Acquirer Advice				STIP Advice		BASE II Advice		
			0200		0210		0220		0230		0220	0230	0220	0230	
			Acq	VIC	Iss	VIC	Acq	VIC	Iss	VIC	VIC	Iss	VIC	Iss	
35 (cont'd.)															Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date, and not the cardholder PAN and card expiration date, will be present in this field. - Visa will implement an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN instead of the token PAN.

Table B-18: 0200/0210 and 0220/0230 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Name and Number		Format	Full Chip Data												Description
			qVSDC												
			Original				Acquirer Advice				STIP Advice		BASE II Advice		
			0200		0210		0220		0230		0220	0230	0220	0230	
			Acq	VIC	Iss	VIC	Acq	VIC	Iss	VIC	VIC	Iss	VIC	Iss	
35 (cont'd.)															- The decimalized cryptogram for the token will be present in HCE transactions. - The decimalized cryptogram will only be based on the token. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN. REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification.</i>

Table B–18: 0200/0210 and 0220/0230 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Name and Number		Format	Full Chip Data												Description
			qVSDC												
			Original				Acquirer Advice				STIP Advice		BASE II Advice		
			0200		0210		0220		0230		0220	0230	0220	0230	
			Acq	VIC	Iss	VIC	Acq	VIC	Iss	VIC	VIC	Iss	VIC	Iss	
			Acq	VIC	Iss	VIC	Acq	VIC	Iss	VIC	VIC	Iss	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes		C+	M						M	M			The following processing will apply to 0120 STIP advices: - If decimalized cryptogram fails, this field contains the value 05 (Do not honor) when Field 44.5—CVV/iCVV Results Code is present. - If decimalized cryptogram fails, this field contains the value of 82 (Negative online CAM, dCVV, iCVV, or CVV results or offline PIN authentication interrupted) when Field 44.5 is not present.
44.8	Card Authentication Results Code	1 ANS, EBCDIC, 1 byte	C+	C			C		C+		C+		C+		This field is a Visa Smart Debit/Credit (VSDC) field that contains a Visa-defined code indicating the card authentication method (CAM) results for Quick Visa Smart Debit/Credit (qVSDC).

Table B-18: 0200/0210 and 0220/0230 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Name and Number		Format	Full Chip Data												Description
			qVSDC												
			Original				Acquirer Advice				STIP Advice		BASE II Advice		
			0200		0210		0220		0230		0220	0230	0220	0230	
			Acq	VIC	Iss	VIC	Acq	VIC	Iss	VIC	VIC	Iss	VIC	Iss	
			Acq	VIC	Iss	VIC	Acq	VIC	Iss	VIC	VIC	Iss	VIC	Iss	
55	Integrated Circuit Card (ICC)-Related Data	Variable length, 1 byte binary+ 255 bytes, variable by usage 256 bytes max	C	C-	C	C-	C	C-			C		C		This field will be present when Field 22 contains the POS entry mode code value of 03 in the authorization request message. Issuers must be aware of the cryptogram version number (CVN) 44 and to support the following tags: - Tag 82—Application Interchange Profile - Tag 9F10—Issuer Application Data, with the value of 44 (CVN44) - Tag 9F26—Application Cryptogram - Tag 9F36—Application Transaction Counter - Tag 9F37—Unpredictable Number - Tag 9F6E—Form Factor Indicator - Tag 9F7C—Customer Exclusive Data, this tag is optional The content of Field 55 is brand-specific. IMPORTANT Only Field 55 is supported for HCE transactions. Field 134 for the third bitmap is not supported.

Table B-18: 0200/0210 and 0220/0230 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Name and Number		Format	Full Chip Data												Description			
			qVSDC															
			Original				Acquirer Advice				STIP Advice		BASE II Advice					
			0200		0210		0220		0230		0220	0230	0220	0230				
			Acq	VIC	Iss	VIC	Acq	VIC	Iss	VIC	VIC	Iss	VIC	Iss				
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	O					C					C			C		This field contains one of these values: • 3 (QR code) • 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) • 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.)
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+													M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes											M			M		The existing values will be supported in this field.

Table B-18: 0200/0210 and 0220/0230 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Name and Number		Format	Full Chip Data												Description
			qVSDC												
			Original				Acquirer Advice				STIP Advice		BASE II Advice		
			0200		0210		0220		0230		0220	0230	0220	0230	
			Acq	VIC	Iss	VIC	Acq	VIC	Iss	VIC	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Results	2 N, 2 bytes	C+		C+		C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68	Token Data														This dataset ID contains Tag 1F31, Tag 1F32, Tag 1F33, Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+												This tag contains the elapsed time in hours since the current limited use key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+												This tag contains the cumulative count of transactions for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+												This tag contains the cumulative total of transaction amounts in U.S. dollars (USD) for the current LUK.

Table B-18: 0200/0210 and 0220/0230 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Name and Number		Format	Full Chip Data												Description
			qVSDC												
			Original				Acquirer Advice				STIP Advice		BASE II Advice		
			0200		0210		0220		0230		0220	0230	0220	0230	
			Acq	VIC	Iss	VIC	Acq	VIC	Iss	VIC	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M		M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		M+		M+		This tag contains the token expiration date.

Table B–18: 0200/0210 and 0220/0230 POS Authorization Full Chip Data Processing with QR Code (cont'd.)

Field Name and Number		Format	Full Chip Data												Description
			qVSDC												
			Original				Acquirer Advice				STIP Advice		BASE II Advice		
			0200		0210		0220		0230		0220	0230	0220	0230	
			Acq	VIC	Iss	VIC	Acq	VIC	Iss	VIC	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		M+		M+		This tag contains the value of 03 (CBP).

0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data Processing

The following table shows the message layout and contents of the 0220/0230 Preauthorization completion messages for Full Chip data processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B–19: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 03, 07, and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing.

Table B-19: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 03 or 91. This field is optional when the transaction includes the value of 03 or 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.

Table B-19: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55	Integrated Circuit Card (ICC)-Related Data	Variable length, 1 byte binary+ 255 bytes, variable by usage 256 bytes max					C	C	C	C	Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the chip card that the issuer has issued. - The authorization request application cryptogram (ARQC) will be based on the token, and not the cardholder PAN. - The authorization response cryptogram (ARPC) is calculated by the token service provider. - The issuer application data will not contain any issuer-specific personalization data. NOTE <i>The content of Field 55 is brand-specific. For more information, contact your regional client support representative.</i> This field is present when Field 22 contains the POS entry mode code 07 in the authorization message.

Table B–19: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
55 (cont'd.)											Issuers must be aware of CVN 43 and must support the following: - CVN 43 will be supported in Tag 9F10—Issuer Application Data - Format 4 to support the issuer application data (IAD) in Tag 9F10 - The format of card verification result (CVR) with 4 bytes of Tag 9F10 - Cryptogram will be supported in Tag 9F26—Application Cryptogram IMPORTANT Only Field 55 is supported. Field 134 for third-bitmap is not supported.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.

Table B-19: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization completion message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is supported, or the value of 8 (Proximity-read-capable terminal) to identify that the terminal only supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.

Table B-19: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.

Table B-19: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.

Table B–19: 0220/0230 Preauthorization Completion POS Full Financial Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

0400/0410 and 0420/0430 POS Authorization Reversal Messages for Full Chip Data Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Authorization reversal messages for Full Chip data processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B–20: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Full Chip Data

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		The value from the original is included in this field. The value of 03 (Optical code) is used for transactions submitted with a QR code.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization reversal message to the issuer.

Table B–20: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain one of these values: • 3 (QR code) to identify that the terminal is QR-code capable • 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported • 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal supports Visa Contactless
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.

Table B–20: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.

Table B-20: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.

Table B–20: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Full Chip Data Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Preauthorization reversal messages for Full Chip data processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B–21: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Full Chip Data

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		The value from the original is included in this field.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read-capable terminal) to identify that the terminal only supports Visa Contactless.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.

Table B-21: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization reversal message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.

Table B-21: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)

Table B–21: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.

Table B–21: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Full Chip Data Processing

The following table shows the message layout and contents of 0400/0410 and 0420/0430 POS Full financial reversal messages for Full Chip data processing to support Visa Token Service transactions initiated with host card emulation (HCE) mobile devices.

Table B-22: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Full Chip Data

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		The value from the original is included in this field. The value of 03 (Optical code) is used for transactions submitted with a QR code.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial reversal message to the issuer.

Table B-22: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain one of these values: • 3 (QR code) to identify that the terminal is QR-code capable • 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported • 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal supports Visa Contactless
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.

Table B–22: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67	Activation Verification Data										This dataset ID contains Tag 04 and Tag 05.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)

Table B-22: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.

Table B–22: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Full Chip Data (cont'd.)

Field Number and Name		Format	Full Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

Early Chip Token Payment Messages

This appendix includes the V.I.P. POS authorization and full financial messages to support Early Chip data for NFC Visa Contactless for the Visa Token Service to support host card emulation (HCE) mobile devices.

In addition, this appendix includes the following chip processing:

- Legacy magnetic stripe data (MSD) 1.4.2
- Quick Visa Smart Debit/Credit (qVSDC)

IMPORTANT

The existing fields that have not changed are not included in this appendix.

REFERENCE

For details about the existing fields that have not changed, refer to:

- VisaNet Authorization-Only Online Messages Technical Specifications
- Full Service POS Online Messages Technical Specifications

This appendix includes only the fields that have changed to support the POS authorization and full financial messages for Visa Token Service transactions shown in the following table.

Table B–23: Message Impact Summary for Early Chip Data

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0100/0110 Authorization	Y	N	N
0120/0130 Authorization STIP Advice	Y	N	N
0100/0110 Preauthorization	Y	Y	Y
0120/0130 Preauthorization STIP Advice	Y	Y	Y
0200/0210 Full Financial	Y	Y	Y
0220/0230 Full Financial STIP Advice	Y	Y	Y
0220/0230 Preauthorization Completion	Y	Y	Y
0220/0230 Preauthorization Completion STIP Advice	Y	Y	Y
0400/0410 Authorization Reversal	Y	N	N
0400/0410 POS Preauthorization Reversal	Y	Y	Y
0400/0410 Full Financial Reversal	Y	Y	Y
0420/0430 Authorization STIP Advice Reversal	Y	N	N

Y = Transaction supported

N = Transaction not supported

Table B–23: Message Impact Summary for Early Chip Data (cont'd.)

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0420/0430 Full Financial STIP Advice Reversal	Y	Y	Y

Y = Transaction supported
N = Transaction not supported

0100/0110 and 0120/0130 POS Authorization Messages for Early Chip Data Processing

The following table shows the message layout and contents of the 0100/0110 and 0120/0130 POS Authorization messages for Early Chip data processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B-24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
4	Amount, Transaction	12 N, 4-bit BCD, 6 bytes	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains these values: • 000000000002 for the initial attempt • 000000000003 for the second attempt • 000000000004 for the third and all subsequent attempts NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i> The decimal place is implied based on the currency.

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M		M						For step-up authentication, this field contains 7299 (Miscellaneous personal service—Not elsewhere classified). Issuers must be aware that the digital wallets will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for step-up authentication prior to sending the message to the issuer.

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 03, 07, and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing. For step-up authentication, this field contains 01 (Manual key entry). NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 03 or 91. This field is optional when the transaction includes the value of 03 or 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 59 (E-commerce request through public network). NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
32	Acquiring Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 746922. This is a routing number created by Visa for this purpose only. It is a key element that the Host system can use to identify the Visa access code in authorization message transactions. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C				This field: - Will be present when Field 22 contains the POS entry mode code 07. - May be present when Field 22 contains the POS entry mode code values of 03 (Optical code) or 91 (Contactless device-read using magnetic stripe data rules). NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i>

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date. IMPORTANT Visa implemented an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN, instead of the token PAN.

Table B-24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											The Decimalized Cryptogram for the token will be present. NOTE <i>The Decimalized Cryptogram will only be based on the token. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification.</i>

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
38	Authorization Identification Response	6 AN, EBCDIC, 6 bytes		M				M			For approved authorization requests, this field must not contain any of the following invalid authorization code values: • 00000 (All zeros in the last five positions of the six-byte field) • ^^^^^ (All spaces in the last five positions of the six-byte field) • X (X in the last position of the six-byte field) • 0000^ (Four zeros followed by a space in the last five positions of the six-byte field) • 0000N (Four zeros followed by N in the last five positions of the six-byte field) • 0000Y (Four zeros followed by Y in the last five positions of the six-byte field) • 0000P (Four zeros followed by P in the last five positions of the six-byte field) • SVC (SVC in the first three positions of the six-byte field)

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M		M	M	M	This field contains the existing response codes. The following processing will apply to 0120 STIP advices: - When Decimalized Cryptogram failed, this field contains the value of 05 (Do not honor) if Field 44.5 is present in MSD transactions - When Decimalized Cryptogram failed, this field contains the value of 82 (Negative online CAM, dCVV, iCVV, or CVV results or Offline PIN authentication was interrupted) if Field 44.5 is not present in MSD transactions - When CAM failed, this field contains the value of Q1 (Card Authentication failed or Offline PIN authentication was interrupted) for qVSDC transactions

Table B-24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
41	Card Acceptor Terminal Identification	8 ANS, EBCDIC, 8 bytes	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 11111111. This value, in conjunction with Field 32 and Field 42, can be used to identify the transaction for step-up authentication method. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
42	Card Acceptor Identification Code	15 ANS, EBCDIC, 15 bytes	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 1111111111111111. This value, in conjunction with Field 32 and Field 41, can be used to identify the transaction for step-up authentication method. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
43	Card Acceptor Name/Location	40 ANS, EBCDIC, 40 bytes	M		C		M		C		For the step-up authentication method, this field contains CODE_NNNNNN_XXXXXXXXXXXXXX, where: CODE = pos. 1–4 NNNNNN = pos. 6–11 contains a 6-digit access code generated by Visa XXXXXXXXXXXXXX = pos. 13–25 contains an up to 13-character wallet descriptor that is left justified When the authorization posts to the cardholder account, the cardholder can retrieve the access code from the banking online website or application. The wallet descriptor is the digital wallet that initiated the authentication request. The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer. This value, in conjunction with Field 32 and Field 41, can be used to identify the transaction for step-up authentication method.

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
44.5	CAVV/iCVV Results Code	1ANS EBCDIC, 1 byte	C+	O	C						This field contains a Visa-defined code indicating the Decimalized Cryptogram verification results. Field 44.5 will be populated with the same value as the CAM result code that will be returned in Field 44.8.
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				IMPORTANT This field will not be supported, and V.I.P. will decline the HCE transaction if only Field 45 is present. If both Field 35 and Field 45 are present, then V.I.P. will drop Field 45 and only process the HCE transaction with Field 35. Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date.

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (cont'd.)											- The Cardholder Name field will not contain the actual name of the cardholder. - The dCVV or iCVV for the token will be present. IMPORTANT This field is used only for MSD and for limited transactions. NOTE <i>The dCVV and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 1 layout for Visa cards will conform to the Visa Contactless Payment Specification.</i>

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
49	Currency Code, Transaction	3 N, 4-bit BCD, 2 bytes	M	M	M	M	M	M	M	M	For the step-up authentication, this field contains the numeric currency code for Field 4. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain one of these values: • 3 (QR code) to identify that the terminal is QR-code capable • 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported • 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal supports Visa Contactless
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.

Table B-24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66, Tag C0	Postal Code	9 AN, EBCDIC, 9 bytes	O		O		O		O		For the step-up authentication, AVS data may be absent or may not reflect the actual cardholder postal code when Field 32 contains 746922 . NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>
TLV 123, Usage 2, Dataset ID 66, Tag CF	Street Address	40 AN, EBCDIC, 40 bytes	O		O		O		O		For the step-up authentication, AVS data may be absent or may not reflect the actual cardholder street address when Field 32 contains 746922 . NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66, Tag D0	Compressed AVS Data	14 AN, EBCDIC, 14 bytes	O		O		O		O		U.K. issuers only. For the step-up authentication, AVS data may be absent or may not reflect the cardholder address when Field 32 contains the value of 746922 . NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i> REFERENCE <i>For additional information, refer to Article 9.5.1, New U.K. Compressed Data Format for the Address Verification Service in the April 2015 VisaNet Business Enhancements Global Technical Letter and Implementation Guide.</i>

Table B-24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: • Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) • Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 1F31, Tag 1F32, Tag 1F33, Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.

Table B–24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		C+		C+		This tag contains the elapsed time in hours since the current limited use key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		C+		C+		This tag contains the cumulative count of transactions for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		C+		C+		This tag contains the cumulative total of transaction amounts in USD for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.

Table B-24: 0100/0110 and 0120/0130 POS Authorization for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.
TLV 123, Usage 2, Dataset ID 68, Tag 03	TokenRequestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data Processing

The following table shows the message layout and contents of the 0100/0110 Preauthorization messages for Early Chip data processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B-25: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 03, 07, and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing.

Table B–25: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 03 or 91. This field is optional when the transaction includes the value of 03 or 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.

Table B–25: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description	
			Legacy (MSD 1.4.2)				qVSDC					
			Original		STIP Advice		Original		STIP Advice			
			0100	0110	0120	0130	0100	0110	0120	0130		
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss		
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	M				M					This field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains a values of 03 (Optical code) or 91 (Contactless device-read using magnetic stripe data rules). NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The token and token expiration date will be present in this field; and not the cardholder PAN and card expiration date.

Table B-25: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											IMPORTANT Visa implemented an issuing BIN-level participation option for issuers that choose to receive the cardholder PAN, instead of the token PAN. The Decimalized Cryptogram or iCVV for the token will be present. NOTE <i>The Decimalized Cryptogram and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification.</i>

Table B–25: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M		M	M	M	This field contains the existing response codes. The following processing will apply to 0120 STIP advices: - When Decimalized Cryptogram failed, this field contains the value of 05 (Do not honor) if Field 44.5 is present in MSD transactions - When Decimalized Cryptogram failed, this field contains the value of 82 (Negative online CAM, dCVV, iCVV, or CVV results or Offline PIN authentication was interrupted) if Field 44.5 is not present in MSD transactions - When CAM failed, this field contains the value of Q1 (Card Authentication failed or Offline PIN authentication was interrupted) for qVSDC transactions

Table B–25: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description	
			Legacy (MSD 1.4.2)				qVSDC					
			Original		STIP Advice		Original		STIP Advice			
			0100	0110	0120	0130	0100	0110	0120	0130		
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss		
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C							For MSD HCE transactions, this field contains a Visa-defined code indicating the decimalized cryptogram. For qVSDC transactions, this field contains a Visa-defined code indicating qVSDC results. Field 44.5 will be populated with the same value as the CAM result code that will be returned in Field 44.8.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O			This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O			This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O			Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization message to the issuer.

Table B–25: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.

Table B–25: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 1F31, Tag 1F32, Tag 1F33, Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		C+		C+		This tag contains the elapsed time in hours since the current limited use key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		C+		C+		This tag contains the cumulative count of transactions for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		C+		C+		This tag contains the cumulative total of transaction amounts in USD for the current LUK.

Table B–25: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.

Table B–25: 0100/0110 Preauthorization POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data Processing

The following table shows the message layout and contents of the 0220/0230 Preauthorization completion messages for Early Chip data processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B–26: 0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the values of 03, 07, and 91. Issuers that currently support chip data will continue to receive the values for contact and contactless chip processing.

Table B-26: 0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
23	Card Sequence Number	3 N, 4-bit BCD, 2 bytes	C	C	C	C	C	C	C	C	This field will be present when Field 22 contains the POS entry mode code value of 07. This field may be present when Field 22 contains the POS entry mode code value of 03 or 91. This field is optional when the transaction includes the value of 03 or 91 in Field 22. This field contains the PAN sequence number of the token, and not the PAN sequence number of the cardholder PAN. Currently, this field contains the value of 0 (Zero) when present.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.

Table B–26: 0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization completion to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.

Table B-26: 0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.

Table B–26: 0220/0230 Preauthorization Completion POS Full Financial Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

0400/0410 and 0420/0430 POS Authorization Reversal Messages for Early Chip Data Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Authorization reversal messages for Early Chip data processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B-27: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Early Chip Data

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		The value from the original is included in this field. The value of 03 (Optical code) is used for transactions submitted with a QR code.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization reversal message to the issuer.

Table B–27: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain one of these values: • 3 (QR code) to identify that the terminal is QR-code capable • 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported • 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal supports Visa Contactless
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.

Table B-27: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.

Table B–27: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Early Chip Data Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Preauthorization reversal messages for Early Chip data processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B–28: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Early Chip Data

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		The value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization reversal message to the issuer.

Table B–28: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.

Table B–28: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68	Token Data										This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table B–28: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Early Chip Data Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Full financial reversal messages for Early Chip data processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B–29: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Early Chip Data

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		The value from the original is included in this field. The value of 03 (Optical code) is used for transactions submitted with a QR code.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial reversal message to the issuer.

Table B–29: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain one of these values: • 3 (QR code) to identify that the terminal is QR-code capable • 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported • 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal supports Visa Contactless
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.

Table B-29: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: 02 (Time-To-Live exceeded) 03 (Count exceeded) 04 (Amount exceeded)

Table B–29: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.

Table B-29: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Early Chip Data (cont'd.)

Field Number and Name		Format	Early Chip Data								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

iCVV Convert Token Payment Messages

This appendix includes the V.I.P. POS authorization and full financial messages to support iCVV Convert Service for NFC Visa Contactless for the Visa Token Service to support host card emulation (HCE) mobile devices.

In addition, this appendix includes the following chip processing:

- Legacy magnetic stripe data (MSD) 1.4.2
- Quick Visa Smart Debit/Credit (qVSDC)

IMPORTANT

The existing fields that have not changed are not included in this appendix.

REFERENCE

For details about the existing fields that have not changed, refer to:

- VisaNet Authorization-Only Online Messages Technical Specifications
- Full Service POS Online Messages Technical Specifications

This appendix includes only the fields that have changed to support POS authorization and full financial messages for Visa Token Service transactions shown in the following table.

Table B–30: Message Impact Summary for iCVV Convert Service

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0100/0110 Authorization	Y	N	N
0120/0130 Authorization STIP Advice	Y	N	N
0100/0110 Preauthorization	Y	Y	N
0120/0130 Preauthorization STIP Advice	Y	Y	N
0200/0210 Full Financial	Y	Y	N
0220/0230 Full Financial STIP Advice	Y	Y	N
0220/0230 Preauthorization Completion	Y	Y	N
0220/0230 Preauthorization Completion STIP Advice	Y	Y	N
0400/0410 Authorization Reversal	Y	N	N
0400/0410 POS Preauthorization Reversal	Y	Y	Y
0400/0410 Full Financial Reversal	Y	Y	N
0420/0430 Authorization STIP Advice Reversal	Y	N	N

Y = Transaction supported

N = Transaction not supported

Table B-30: Message Impact Summary for iCVV Convert Service (cont'd.)

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0420/0430 Full Financial STIP Advice Reversal	Y	Y	N

Y = Transaction supported
N = Transaction not supported

0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0100/0110 and 0120/0130 POS Authorization messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B-31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.

Table B-31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
4	Amount, Transaction	12 N, 4-bit BCD, 6 bytes	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains these values: • 000000000002 for the initial attempt • 000000000003 for the second attempt • 000000000004 for the third and all subsequent attempts Issuers must be aware that the digital wallet will send a token request to Visa after the cardholder selects step-up authentication. Visa will generate the 0100 Authorization request for the step-up authentication prior to sending the message to the issuer. The decimal place is implied based on the currency.
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M		M						For step-up authentication, this field contains 7299 (Miscellaneous personal services—Not elsewhere classified). Issuers must be aware that the digital wallet will send a token request to Visa after the cardholder selects step-up authentication. Visa will generate the 0100 Authorization request for the step-up authentication prior to sending the message to the issuer.

Table B–31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode code values of 03, 07, and 91. Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing. For step-up authentication, this field contains 01 (Manual key entry). NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B–31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 bytes	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 59 (E-commerce request through public network). NOTE <i>Issuers must be aware that the digital wallet will send a token request to Visa after the cardholder selects the step-up option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i> NOTE <i>Effective with the April 2017 release, the value of 73 (Original transaction token-based with cryptogram) will no longer be used in Field 25 to identify recurring transactions initiated with a payment token. 0100 Authorization messages that contain the value of 73 in Field 25 will be rejected with the existing reject code 0018 (Invalid value).</i>

Table B–31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
32	Acquiring Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 746922. This is a routing number created by Visa for this purpose only. It is a key element that the Host system can use to identify the Visa access code in authorization message transactions NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B–31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C				This field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code values of 03 (Optical code) or 91 (Contactless device-read using magnetic stripe data rules). NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe. - Generate the CVV and place the CVV according to the issuer configuration location.

Table B–31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The Decimalized Cryptogram or iCVV for the token will be present. NOTE <i>The Decimalized Cryptogram and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification and to the Visa Cloud-Based Payments Contactless Specification.</i>

Table B–31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
38	Authorization Identification Response	6 AN, EBCDIC, 6 bytes		M				M			For approved authorization requests, this field must not contain any of the following invalid authorization code values: • 00000 (All zeros in the last five positions of the six-byte field) • ^^^^^ (All spaces in the last five positions of the six-byte field) • X (X in the last position of the six-byte field) • 0000^ (Four zeros followed by a space in the last five positions of the six-byte field) • 0000N (Four zeros followed by N in the last five positions of the six-byte field) • 0000Y (Four zeros followed by Y in the last five positions of the six-byte field) • 0000P (Four zeros followed by P in the last five positions of the six-byte field) • SVC (SVC in the first three positions of the six-byte field)

Table B–31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes	C+	M	M	M	C+	M	M	M	This field contains the existing response codes. The following processing will apply to 0120 STIP advices: - When Decimalized Cryptogram failed, this field contains the value of 05 (Do not honor) if Field 44.5 is present - When Decimalized Cryptogram failed, this field contains the value of 82 (Negative online CAM, dCVV, iCVV, or CVV results or Offline PIN authentication was interrupted) if Field 44.5 is not present

Table B–31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
41	Cardholder Acceptor Terminal Identification	8 ANS, EBCDIC, 8 bytes	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 11111111. This value, in conjunction with Field 32 and Field 42, can be used to identify the transaction for step-up authentication method. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B–31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
42	Card Acceptor Identification Code	15 ANS, EBCDIC, 15 bytes	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 1111111111111111. This value, in conjunction with Field 32 and Field 42, can be used to identify the transaction for step-up authentication method. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
43	Card Acceptor Name/Location	40 ANS, EBCDIC, 40 bytes	M		C		M		C		For the step-up authentication method, this field contains CODE_NNNNNN_XXXXXXXXXXXXXX, where: • CODE = pos. 1–4 • NNNNNN = pos. 6–11 contains a 6-digit access code generated by Visa • XXXXXXXXXXXXXX = pos. 13–25 contains an up to 13-character wallet descriptor that is left justified NOTE <i>When the authorization posts to the cardholder account, the cardholder can retrieve the access code from the banking online website or application.</i> <i>The wallet descriptor is the digital wallet that initiated the authentication request.</i> <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i> This value, in conjunction with Field 32 and Field 41, can be used to identify the transaction for step-up authentication method.

Table B–31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C						This field contains a Visa-defined code indicating the Decimalized Cryptogram verification results.
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				IMPORTANT This field is not be supported, and V.I.P. will decline the HCE transaction if only Field 45 is present. If both Field 35 and Field 45 are present, then V.I.P. will drop Field 45 and only process the HCE transaction with Field 35. Visa will: • Replace the token with the cardholder PAN and card expiration date. • Replace the service code with an equivalent existing service code for magnetic stripe. • Generate the CVV and place the CVV in the predefined location. The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. The Cardholder Name field will not contain the actual name of the cardholder.

Table B-31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (Cont'd)											Field 44.5 will be populated with the same value as the CAM result code that will be returned in Field 44.8. IMPORTANT This field is used only for MSD and for limited transactions. REFERENCE <i>The Track 1 layout will conform to the Visa Contactless Payment Specification.</i>
49	Currency Code, Transaction	3 N, 4-bit BCD, 2 bytes	M	M	M	M	M	M	M	M	For the step-up authentication, this field contains the numeric currency code for Field 4. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B–31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization message to the issuer.

Table B-31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain one of these values: • 3 (QR code) to identify that the terminal is QR-code capable • 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported • 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal supports Visa Contactless
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). NOTE <i>Issuers that currently use the iCVV Convert Service must be aware that this field is dropped from the authorization and full financial messages. With the Visa Token Service, issuers must be prepared to receive the value in this field.</i>

Table B–31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.

Table B-31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66, Tag C0	Postal Code	9 AN, EBCDIC, 9 bytes	O		O		O		O		For the step-up authentication, AVS data may be absent or may not reflect the actual cardholder postal code when Field 32 contains 746922 . NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>
TLV 123, Usage 2, Dataset ID 66, Tag CF	Street Address	40 AN, EBCDIC, 40 bytes	O		O		O		O		For the step-up authentication, AVS data may be absent or may not reflect the actual cardholder street address when Field 32 contains 746922 . NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B–31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66, Tag D0	Compressed AVS Data	14 AN, EBCDIC, 14 bytes	O		O		O		O		U.K. issuers only. For the step-up authentication, AVS data may be absent or may not reflect the cardholder address when Field 32 contains the value of 746922. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i> REFERENCE <i>For additional information, refer to Article 9.5.1, New U.K. Compressed Data Format for the Address Verification Service in the April 2015 VisaNet Business Enhancements Global Technical Letter and Implementation Guide.</i>

Table B-31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	O								This field will be populated when these conditions are met: • Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) • Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.

Table B-31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions initiated from HCE devices.

Table B-31: 0100/0110 and 0120/0130 POS Authorization Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		C+		C+		This tag contains the elapsed time in hours since the current limited use key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		C+		C+		This tag contains the cumulative count of transactions for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		C+		C+		This tag contains the cumulative total of transaction amounts in USD for the current LUK.

0100/0110 Preauthorization POS Full Financial Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0100/0110 Preauthorization POS Full financial messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

IMPORTANT

The iCVV Convert Service does not support Interlink transactions initiated using a non-Visa card. For more information, contact your regional client support representative.

Table B-32: 0100/0110 Preauthorization POS Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.

Table B-32: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode codes 03, 07, and 91. Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing.

Table B–32: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	M				M				This field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code values of 03 (Optical code) or 91 (Contactless device-read using magnetic stripe data rules). NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe. - Generate the CVV and place the CVV according to the issuer configuration location.

Table B-32: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											Issuers must be aware that: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. - The Decimalized Cryptogram or iCVV for the token will be present. NOTE <i>The Decimalized Cryptogram and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, and not the cardholder PAN.</i> REFERENCE <i>The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification and to the Visa Cloud-Based Payments Contactless Specification.</i>

Table B–32: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes 2 AN, EBCDIC, 2 bytes	C+	M	M	M	C+	M	M	M	This field contains the existing response codes. The following processing will apply to 0120 STIP advices: - When Decimalized Cryptogram failed, this field contains the value of 05 (Do not honor) if Field 44.5 is present - When Decimalized Cryptogram failed, this field contains the value of 82 (Negative online CAM, dCVV, iCVV, or CVV results or Offline PIN authentication was interrupted) if Field 44.5 is not present
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C						This field contains a Visa-defined code indicating the Decimalized Cryptogram verification results. Field 44.5 will be populated with the same value as the CAM result code that will be returned in Field 44.8.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal supports Visa Contactless.

Table B-32: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization message to the issuer.

Table B–32: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). NOTE <i>Issuers that currently use the iCVV Convert Service must be aware that this field is dropped from the authorization and full financial messages. With the Visa Token Service, issuers must be prepared to receive the value in this field.</i>
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.

Table B-32: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.

Table B–32: 0100/0110 Preauthorization POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions initiated from HCE devices.
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		C+		C+		This tag contains the elapsed time in hours since the current limited use key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		C+		C+		This tag contains the cumulative count of transactions for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		C+		C+		This tag contains the cumulative total of transaction amounts in USD for the current LUK.

0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0200/0210 and 0220/0230 POS Full financial messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from host card (HCE) mobile devices.

IMPORTANT

The iCVV Convert Service does not support Interlink transactions initiated using a non-Visa card. For more information, contact your regional client support representative.

Table B–33: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode codes 03, 07, and 91. Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing.
25	Point-of-Service Condition Code	2 N 4-bit BCD, 1 byte	M	M	M	M	M	M	M	M	This field contains a code identifying transaction conditions at the point-of-sale or point of service.

Table B-33: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C				This field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code values of 03 or 91 (Contactless device-read using magnetic stripe data rules). IMPORTANT This field is required for Interlink transactions. Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe. - Generate the CVV and place the CVV according to the issuer configuration location.

Table B–33: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											Be aware of the following: - The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer issued. - The Decimalized Cryptogram or iCVV for the token will be present. NOTE The Decimalized Cryptogram and iCVV authentication data does not apply to non-Visa cards. The authentication data for non-Visa cards will also be based on the token, not the cardholder PAN. REFERENCE The Track 2 layout for Visa cards will conform to the Visa Contactless Payment Specification and to the Visa Cloud-Based Payments Contactless Specification.

Table B–33: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M		M	M	M	This field contains the existing response codes. The following processing will apply to 0220 STIP advices: - When Decimalized Cryptogram failed, this field contains the value of 05 if Field 44.5 is present - When Decimalized Cryptogram failed, this field contains the value of 82 if Field 44.5 is not present
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C						This field contains a Visa-defined code indicating the Decimalized Cryptogram verification results. Field 44.5 will be populated with the same value as the CAM result code that will be returned in Field 44.8.

Table B–33: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				IMPORTANT This field will not be supported, and V.I.P. will decline the HCE transaction if only Field 45 is present. If both Field 35 and Field 45 are present, then V.I.P. will drop Field 45 and only process the HCE transaction with Field 35. This field is not supported for Interlink transactions. Visa will: • Replace the token with the cardholder PAN and card expiration date. • Generate the CVV and place the CVV in the predefined location. The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. The Cardholder Name field will not contain the actual name of the cardholder.

Table B–33: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (cont'd.)											IMPORTANT This field is used only for MSD and for limited transactions. REFERENCE <i>The Track 1 layout will conform to the Visa Contactless Payment Specification.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial message to the issuer.

Table B–33: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain one of these values: • 3 (QR code) to identify that the terminal is QR-code capable • 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported • 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal supports Visa Contactless

Table B-33: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). NOTE <i>Issuers that currently use the iCVV Convert Service must be aware that this field is dropped from the authorization and full financial messages. With the Visa Token Service, issuers must be prepared to receive the value in this field.</i>
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.

Table B–33: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: • Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) • Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)

Table B-33: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.

Table B–33: 0200/0210 and 0220/0230 POS Full Financial Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions initiated from HCE devices.
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		C+		C+		This tag contains the elapsed time in hours since the current limited use key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		C+		C+		This tag contains the cumulative count of transactions for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		C+		C+		This tag contains the cumulative total of transaction amounts in USD for the current LUK.

0220/0230 Preauthorization Completion POS Full Financial Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0220/0230 Preauthorization completion messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

IMPORTANT

The iCVV Convert Service does not support Interlink transactions initiated using a non-Visa card. For more information, contact your regional client support representative.

Table B-34: 0220/0230 Preauthorization Completion POS Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		This field contains one of the following existing values: • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode codes 07 and 91. Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.

Table B-34: 0220/0230 Preauthorization Completion POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization completion message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). NOTE <i>Issuers that currently use the iCVV Convert Service must be aware that this field is dropped from the authorization and full financial messages. With the Visa Token Service, issuers must be prepared to receive the value in this field.</i>

Table B–34: 0220/0230 Preauthorization Completion POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.

Table B-34: 0220/0230 Preauthorization Completion POS Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions initiated from HCE devices.

0400/0410 and 0420/0430 POS Authorization Reversal Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Authorization reversal messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B-35: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		The value from the original is included in this field. The value of 03 (Optical code) is used for transactions submitted with a QR code.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.

Table B-35: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization reversal message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain one of these values: • 3 (QR code) to identify that the terminal is QR-code capable • 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported • 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal supports Visa Contactless
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).

Table B–35: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)

Table B-35: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.

Table B–35: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions initiated from HCE devices.

0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Preauthorization reversal messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

IMPORTANT

The iCVV Convert Service does not support Interlink transactions initiated using a non-Visa card. For more information, contact your regional client support representative.

Table B–36: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		The value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.

Table B-36: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization reversal message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.

Table B-36: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table B-36: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions initiated from HCE devices.

0400/0410 and 0420/0430 POS Full Financial Reversal Messages for iCVV Convert Service Processing

The following table shows the message layout and contents of the 0400/0410 and 0420/0430 POS Full financial reversal messages for iCVV Convert Service processing to support Visa Token Service transactions initiated from host card emulation (HCE) mobile devices.

Table B-37: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for iCVV Convert Service

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		The value from the original is included in this field. The value of 03 (Optical code) is used for transactions submitted with a QR code.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial reversal message to the issuer.

Table B–37: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain one of these values: 3 (QR code) to identify that the terminal is QR-code capable 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal supports Visa Contactless
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.

Table B–37: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)

Table B–37: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		This tag contains the token that is used to replace the cardholder PAN.

Table B-37: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for iCVV Convert Service (cont'd.)

Field Number and Name		Format	iCVV Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions initiated from HCE devices.

Token Convert Payment Messages

The appendix includes the V.I.P. POS authorization and full financial messages to support Token Convert Service for Visa On-Behalf-Of Issuer provisioning. This appendix includes chip processing for NFC Visa Contactless transactions.

Table B-38: Message Impact Summary for Token Convert Service Processing of NFC Visa Contactless

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0100/0110 Authorization	Y	N	N
0120/0130 Authorization STIP Advice	Y	N	N
0100/0110 Preauthorization	Y	Y	Y
0120/0130 Preauthorization STIP Advice	Y	Y	Y
0200/0210 Full Financial	Y	Y	Y
0220/0230 Full Financial STIP Advice	Y	Y	Y
0220/0230 Preauthorization Completion	Y	Y	Y
0220/0230 Preauthorization Completion STIP Advice	Y	Y	Y
0400/0410 Authorization Reversal	Y	N	N
0400/0410 POS Preauthorization Reversal	Y	Y	Y
0400/0410 Full Financial Reversal	Y	Y	Y
0420/0430 Authorization STIP Advice Reversal	Y	N	N
0420/0430 Full Financial STIP Advice Reversal	Y	Y	Y

Y = Transaction supported

N = Transaction not supported

0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages for Token Convert Service processing of NFC Visa Contactless transactions for Visa On-Behalf-Of Issuer provisioning.

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
4	Amount, Transaction	12 N, 4-bit BCD, 6 bytes	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains these values: • 000000000002 for the initial attempt • 000000000003 for the second attempt • 000000000004 for the third and all subsequent attempts The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for step-up authentication prior to sending the message to the issuer. The decimal place is implied based on the currency.

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description	
			Legacy (MSD 1.4.2)				qVSDC					
			Original		STIP Advice		Original		STIP Advice			
			0100	0110	0120	0130	0100	0110	0120	0130		
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss		
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M		M							For step-up authentication, this field contains 7299 (Miscellaneous personal service—Not elsewhere classified). Issuers must be aware that the digital wallets will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for step-up authentication prior to sending the message to the issuer.

Table B–39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode values of 03 , 07 , and 91 . Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing. For step-up authentication, this field contains 01 (Manual key entry). NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 59 (E-commerce request through public network). NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
32	Acquiring Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 746922. This is a routing number created by Visa for this purpose only. It is a key element that the Host system can use to identify the Visa access code in authorization message transactions. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C				Visa Cards For all Visa cards processed in network 0002 (Visa) and network 0003 (Interlink), this field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code values of 03 or 91. NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i>

Table B–39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (Cont'd)											Visa will: • Replace the token with the cardholder PAN and card expiration date. • Replace the service code with an equivalent existing service code for magnetic stripe. • Generate the CVV and place the CVV according to the issuer configuration location. In addition, the issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. REFERENCE <i>The Track 2 layout will conform to the Visa Contactless Payment Specification.</i> NOTE <i>For Token Convert authorizations that have Field 35 present, Track 2 data will reflect the PAN.</i>

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (Cont'd)											Non-Visa Cards For non-Visa cards, network 0003 (Interlink), this field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code values of 03 or 91. Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe. In addition, the: - CVC information will not be present and will be removed. - Issuer discretionary data will all default to 0 (Zero).

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
38	Authorization Identification Response	6 AN, EBCDIC, 6 bytes		M				M			For approved authorization requests, this field must not contain any of the following invalid authorization code values: • 00000 (All zeros in the last five positions of the six-byte field) • ^^^^^ (All spaces in the last five positions of the six-byte field) • X (X in the last position of the six-byte field) • 0000^ (Four zeros followed by a space in the last five positions of the six-byte field) • 0000N (Four zeros followed by N in the last five positions of the six-byte field) • 0000Y (Four zeros followed by Y in the last five positions of the six-byte field) • 0000P (Four zeros followed by P in the last five positions of the six-byte field) • SVC (SVC in the first three positions of the six-byte field)

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2AN, EBCDIC, 2 bytes	C+	M	M	M	C+	M	M	M	For HCE transactions, support the existing response codes. The following processing will apply to 0120 STIP advices: - When dCVV failed, this field contains the value of 05 if Field 44.5 is present - When dCVV failed, this field contains the value of 82 if Field 44.5 is not present
41	Card Acceptor Terminal Identification	8 ANS, EBCDIC, 8 bytes	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 11111111 . This value, in conjunction with Field 32 and Field 42, can be used to identify the transaction for step-up authentication method. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
42	Card Acceptor Identification Code	15 ANS, EBCDIC, 15 bytes	M	M	M	M	M	M	M	M	For the step-up authentication method, this field contains 111111111111111. This value, in conjunction with Field 32 and Field 41, can be used to identify the transaction for step-up authentication method. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
43	Card Acceptor Name/Location	40 ANS, EBCDIC, 40 bytes	M		C		M		C		For the step-up authentication method, this field contains CODE_NNNNNNN_XXXXXXXXXXXXXX, where: CODE = pos. 1–4 NNNNNNN = pos. 6–11 contains a 6-digit access code generated by Visa XXXXXXXXXXXXXX = pos. 13–25 contains an up to 13-character wallet descriptor that is left justified When the authorization posts to the cardholder account, the cardholder can retrieve the access code from the banking online website or application. The wallet descriptor is the digital wallet that initiated the authentication request. The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer. This value, in conjunction with Field 32 and Field 41, can be used to identify the transaction for step-up authentication method.

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		This field contains a Visa-defined code indicating the dynamic card verification value (dCVV), CAM, or iCVV verification results. All results will be sent in this field. Field 44.5 will be populated with the same value as the CAM result code that will be returned in Field 44.8.

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				Visa Cards For Visa cards processed in network 0002, this field may be present when Field 22 contains the value of 91 . Visa will: • Replace the token with the cardholder PAN and card expiration date. • Replace the service code with an equivalent existing service code for magnetic stripe. • Generate the CVV and place the CVV in the predefined location. The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. The Cardholder Name field will not contain the actual name of the cardholder. REFERENCE <i>The Track 1 layout will conform to the Visa Contactless Payment Specification.</i>

Table B–39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (Cont'd)											NOTE <i>This field is not applicable to network 0003 (Interlink) for both Visa and non-Visa cards.</i>
49	Currency Code, Transaction	3 N, 4-bit BCD, 2 bytes	M	M	M	M	M	M	M	M	For the step-up authentication, this field contains the numeric currency code for Field 4. NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain one of these values: • 3 (QR code) to identify that the terminal is QR-code capable • 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported • 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal supports Visa Contactless

Table B–39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa and Non-Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max									This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data										This dataset ID contains Tag C0, Tag CF, and Tag D0.

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66, Tag C0	Postal Code	9 AN, EBCDIC, 9 bytes	O		O		O		O		For the step-up authentication, AVS data may be absent or may not reflect the actual cardholder postal code when Field 32 contains 746922 . NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>
TLV 123, Usage 2, Dataset ID 66, Tag CF	Street Address	40 AN, EBCDIC, 40 bytes	O		O		O		O		For the step-up authentication, AVS data may be absent or may not reflect the actual cardholder street address when Field 32 contains 746922 . NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i>

Table B–39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 66, Tag D0	Compressed AVS Data	14 AN, EBCDIC, 14 bytes	O		O		O		O		U.K. issuers only. For the step-up authentication, AVS data may be absent or may not reflect the cardholder address when Field 32 contains the value of 746922 . NOTE <i>The digital wallet will send a token request to Visa after the cardholder selects the step-up authentication option. Visa will generate the 0100 Authorization request message for the step-up authentication prior to sending the message to the issuer.</i> REFERENCE <i>For additional information, refer to Article 9.5.1, New U.K. Compressed Data Format for the Address Verification Service in the April 2015 VisaNet Business Enhancements Global Technical Letter and Implementation Guide.</i>

Table B-39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag must include one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: • Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) • Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.

Table B–39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

Table B–39: 0100/0110 and 0120/0130 POS Authorization Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		C+		C+		This tag contains the elapsed time in hours since the current limited use key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		C+		C+		This tag contains the cumulative count of transactions for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		C+		C+		This tag contains the cumulative total of transaction amounts in USD for the current LUK.

0100/0110 Preauthorization POS Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0100/0110 Preauthorization messages for Token Convert Service processing of NFC Visa Contactless transactions for Visa On-Behalf-Of Issuer provisioning.

Table B-40: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M		M	M	M	This field contains a number identifying the customer account or relationship.

Table B-40: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode codes 03 , 07 , and 91 . Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing.

Table B–40: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	M				M				Visa Cards For all Visa cards processed in network 0002 (Visa) and network 0003 (Interlink), this field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code values of 03 or 91. NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i> Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe.

Table B-40: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (Cont'd)											- Generate the CVV and place the CVV according to the issuer configuration location. In addition, the issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. REFERENCE <i>The Track 2 layout will conform to the Visa Contactless Payment Specification.</i> Non-Visa Cards For non-Visa cards, network 0003 (Interlink), this field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code value of 03 or 91.

Table B–40: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (Cont'd)											Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe. In addition, the: - CVC information will not be present and will be removed. - Issuer discretionary data will all default to 0 (Zero).
39	Response Code	2AN, EBCDIC, 2 bytes	C+	M	M	M	C+	M	M	M	For HCE transactions, support the existing response codes. The following processing will apply to 0120 STIP advices: - When dCVV failed, this field contains the value of 05 if Field 44.5 is present - When dCVV failed, this field contains the value of 82 if Field 44.5 is not present

Table B-40: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		This field contains a Visa-defined code indicating the dynamic card verification value (dCVV), CAM, or iCVV verification results. All results will be sent in this field. Field 44.5 will be populated with the same value as the CAM result code that will be returned in Field 44.8.

Table B-40: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				Visa Cards For Visa cards processed in network 0002, this field may be present when Field 22 contains the value of 91 (Contactless device-read using magnetic stripe data rules). Visa will: • Replace the token with the cardholder PAN and card expiration date. • Replace the service code with an equivalent existing service code for magnetic stripe. • Generate the CVV and place the CVV in the predefined location. The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued.

Table B-40: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (Cont'd)											The Cardholder Name field will not contain the actual name of the cardholder. REFERENCE <i>The Track 1 layout will conform to the Visa Contactless Payment Specification.</i> NOTE <i>This field is not applicable to network 0003 (Interlink) for both Visa and non-Visa cards.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.

Table B–40: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa and Non-Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.

Table B–40: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2											This TLV field contains Dataset ID 67 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 67											This dataset ID contains Tag 04.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68											This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, Tag 07, Tag 1F31, Tag 1F32, and Tag 1F33.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.

Table B–40: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

Table B–40: 0100/0110 Preauthorization POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0100	0110	0120	0130	0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		C+		C+		This tag contains the elapsed time in hours since the current limited use key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		C+		C+		This tag contains the cumulative count of transactions for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		C+		C+		This tag contains the cumulative total of transaction amounts in USD for the current LUK.

0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0200/0210 and 0220/0230 Full financial messages for Token Convert Service processing of NFC Visa Contactless transactions for Visa On-Behalf-Of Issuer provisioning.

Table B-41: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode codes 03 , 07 , and 91 . Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing.
25	Point-of-Service Condition Code	2 N 4-bit BCD, 1 byte	M	M	M	M	M	M	M	M	This field contains a code identifying transaction conditions at the point-of-sale or point of service.

Table B-41: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				C				Visa Cards For all Visa cards processed in network 0002 (Visa) and network 0003 (Interlink), this field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code values of 03 or 91. Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe. - Generate the CVV and place the CVV according to the issuer configuration location. In addition, the issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. REFERENCE <i>The Track 2 layout will conform to the Visa Contactless Payment Specification.</i>

Table B–41: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
35 (cont'd.)											Non-Visa Cards For non-Visa cards, network 0003 (Interlink), this field: - Will be present when Field 22 contains the POS entry mode code of 07. - May be present when Field 22 contains the POS entry mode code values of 03 or 91. Visa will: - Replace the token with the cardholder PAN and card expiration date. - Replace the service code with an equivalent existing service code for magnetic stripe. In addition, the: - CVC information will not be present and will be removed. - Issuer discretionary data will all default to 0 (Zero).

Table B-41: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
39	Response Code	2AN, EBCDIC, 2 bytes	C+	M	M	M	C+	M	M	M	For HCE transactions, support the existing response codes. The following processing will apply to 0120 STIP advices: - When dCVV failed, this field contains the value of 05 if Field 44.5 is present - When dCVV failed, this field contains the value of 82 if Field 44.5 is not present
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		This field contains a Visa-defined code indicating the dynamic card verification value (dCVV), CAM, or iCVV verification results. All results will be sent in this field. Field 44.5 will be populated with the same value as the CAM result code that will be returned in Field 44.8.

Table B-41: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte binary+ up to 76 ANS, EBCDIC, 77 bytes max	C				C				Visa Cards For Visa cards processed in network 0002, this field may be present when Field 22 contains the value of 91 (Contactless device-read using magnetic stripe data rules). Visa will: • Replace the token with the cardholder PAN and card expiration date. • Replace the service code with an equivalent existing service code for magnetic stripe. • Generate the CVV and place the CVV in the predefined location. The issuer discretionary data will not contain any issuer-specific data that may be present in the magnetic-stripe or chip card that the issuer has issued. The Cardholder Name field will not contain the actual name of the cardholder. REFERENCE <i>The Track 1 layout will conform to the Visa Contactless Payment Specification.</i>

Table B-41: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
45 (cont'd.)											NOTE <i>This field is not applicable to network 0003 (Interlink) for both Visa and non-Visa cards.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial message to the issuer.

Table B–41: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain one of these values: 3 (QR code) to identify that the terminal is QR-code capable 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal supports Visa Contactless
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa and Non-Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.

Table B-41: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: • Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) • Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.

Table B–41: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

Table B-41: 0200/0210 and 0220/0230 POS Full Financial Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0200	0210	0220	0230	0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		C+		C+		This tag contains the elapsed time in hours since the current limited use key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		C+		C+		This tag contains the cumulative count of transactions for the current LUK.
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		C+		C+		This tag contains the cumulative total of transaction amounts in USD for the current LUK.

0220/0230 Preauthorization Completion POS Full Financial Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0220/0230 Preauthorization completion messages for Token Convert Service processing of NFC Visa Contactless transactions for Visa On-Behalf-Of Issuer provisioning.

Table B-42: 0220/0230 Preauthorization Completion POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards This field contains one of the following existing values: • 03 (Optical code) • 07 (Contactless device-read using VSDC chip data rules) • 91 (Contactless device-read using magnetic stripe data rules) Issuers that do not support contactless chip must be prepared to support the POS entry mode codes 03 , 07 , and 91 . Issuers that currently support chip data will continue to receive the POS entry mode codes for contact and contactless chip processing.
39	Response Code	2AN, EBCDIC, 2 bytes	C+	M	M	M	C+	M	M	M	Support the existing response codes. The following processing will apply to 0120 STIP advices: • When dCVV failed, this field contains the value of 05 if Field 44.5 is present • When dCVV failed, this field contains the value of 82 if Field 44.5 is not present

Table B-42: 0220/0230 Preauthorization Completion POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte	C+	O	C		C+	O	C		This field contains a Visa-defined code indicating the dynamic card verification value (dCVV), CAM, or iCVV verification results. All results will be sent in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization completion message to the issuer.

Table B-42: 0220/0230 Preauthorization Completion POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)

Table B-42: 0220/0230 Preauthorization Completion POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.

Table B–42: 0220/0230 Preauthorization Completion POS Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0220	0230	0220	0230	0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

0400/0410 and 0420/0430 POS Authorization Reversal Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0400/0410 and 0420/0430 POS Authorization reversal messages for Token Convert Service processing of NFC Visa Contactless transactions for Visa On-Behalf-Of Issuer provisioning.

Table B-43: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards The value from the original is included in this field. The value of 03 (Optical code) is used for transactions submitted with a QR code.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.

Table B-43: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization reversal message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain one of these values: • 3 (QR code) to identify that the terminal is QR-code capable • 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported • 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal supports Visa Contactless

Table B–43: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa and Non-Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.

Table B–43: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

THIS PAGE INTENTIONALLY LEFT BLANK.

0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0400/0410 and 0420/0430 POS Preauthorization reversal messages for Token Convert Service processing of NFC Visa Contactless transactions for Visa On-Behalf-Of Issuer provisioning.

Table B-44: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards The value from the original is included in this field.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization reversal message to the issuer.

Table B-44: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal supports Visa Contactless.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa and Non-Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)

Table B-44: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.

Table B-44: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service NFC Visa Contactless Processing

The following table shows the message layout and content of the 0400/0410 and 0420/0430 POS Full financial reversal messages for Token Convert Service processing of NFC Visa Contactless transactions for Visa On-Behalf-Of Issuer provisioning.

Table B-45: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		M		M		Visa and Non-Visa Cards The value from the original is included in this field. The value of 03 (Optical code) is used for transactions submitted with a QR code.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		O		This dataset ID contains Tag 01.

Table B-45: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial reversal message to the issuer.
60.2	Terminal Entry Capability	1 N, 4-bit BCD 1 digit	M		M		M		M		This field may contain one of these values: 3 (QR code) to identify that the terminal is QR-code capable 5 (Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card.) to identify that contact chip is also supported 8 (Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card.) to identify that the terminal supports Visa Contactless

Table B–45: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		M+		M+		Visa and Non-Visa Cards For all Visa cards processed in network 0002 and network 0003, and non-Visa cards processed in network 0003, this field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			C				C		The existing values will be supported in this field.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C+		C+		C+		C+		This tag contains one of these values: • 02 (Time-To-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)

Table B-45: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 05	Cardholder Verification Methods Identified by Cardholder Device	4 N, 4-bit BCD, 2 bytes	C		C		C		C		This field will be populated when these conditions are met: - Field 22 has the value of 07 (Contactless device-read-originated using VSDC chip data rules; online CAM authentication method; iCVV checking possible) or 91 (Contactless device-read-originated using magnetic stripe data rules; dCVV checking is possible; online CAM checking possible for MSD CVN 17 only) - Field 60.6 has the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token that is used to replace the cardholder PAN.

Table B–45: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Token Convert Service Processing of NFC Visa Contactless Transactions (cont'd.)

Field and Field Name		Format	Token Convert Service								Description
			Legacy (MSD 1.4.2)				qVSDC				
			Original		STIP Advice		Original		STIP Advice		
			0400	0410	0420	0430	0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		C+		C+		Visa and Non-Visa Cards This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		M+		M+		Visa and Non-Visa Cards This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		M+		M+		This tag contains the value of 03 (CBP (cloud-based payment)) to identify transactions from HCE devices.

THIS PAGE INTENTIONALLY LEFT BLANK.

Card-on-File/E-Commerce

C

This appendix includes the following message layouts for card-on-file and e-commerce:

- 0302/0312 Token maintenance file messages
- 0302/0312 Primary account number (PAN) maintenance file messages
- 0302/0312 Token file inquiry messages
- 0302/0312 Issuer Payment Account Reference Inquiry messages
- 0600/0610 Issuer token notification online messages for message reason code **3700**
- 0620/0630 Issuer token notification advice messages for message reason codes **3700, 3701, 3702, 3703**
- 0620/0630 Issuer token notification advice messages for message reason code **3716**
- 0620/0630 Issuer token notification advice messages for message reason codes **3720** and **3721**
- The following V.I.P. POS authorization and full financial messages:
 - 0100/0110 and 0120/0130 Authorization messages
 - 0100/0110 and 0120/0130 Preauthorization messages
 - 0200/0210 and 0220/0230 Full financial messages
 - 0220/0230 Preauthorization completion messages
 - 0400/0410 and 0420/0430 Authorization reversal messages
 - 0400/0410 and 0420/0430 Preauthorization reversal messages
 - 0400/0410 and 0420/0430 Full financial reversal messages

0302/0312 Token Maintenance File Message

The 0302/0312 Token maintenance file message will allow participating issuers to request that Visa store their tokens in the Visa Token Vault. In addition, this message will manage existing tokens on behalf of the issuer.

The following table shows the message layout and contents for the token maintenance request message and response.

Table C-1: 0302/0312 Token Maintenance File

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
—	Bit Map, Secondary	8 bytes, 64-bit string	M	M	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	C	This field contains the number identifying the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number assigned by the message initiator that uniquely identifies a cardholder transaction and all the message types, also known as system transactions that it comprises, according to individual program rules.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	C	C	This field contains the PAN expiration date which is currently the same as the token expiration date.

Table C-1: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field contains the month and day.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The message initiator will assign the number and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0310/0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C	This field contains a description of the first error that the VIC found in an 0302 File maintenance request message.
48, Usage 2	Unformatted Text in Authorization/ Reversal Messages	Variable length, 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C	C	The 0302 message must contain Field 48, Usage 2 with the reason for the update.

Table C-1: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa will populate the payment account reference in this tag prior to sending the 0312 Token maintenance file response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.0	Field 63 Bitmap	24 N, bit string, 3 bytes	C	C	This field contains a bitmap that specifies which subfields are present.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	O	This field contains a code that specifies the network to be used for transmission of the message and determines the program rules that apply to the transactions.

Table C-1: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C		This field contains values to identify the request message. This field contains one of these values: 3701 (Token deactivate) 3702 (Token suspend) 3703 (Token resume) 3713 (Call center activation) 3743 (Call center step up - device binding) 3744 (Mobile banking app step up - device binding) 3753 (Call center step up - cardholder verification) 3754 (Mobile banking app step up - cardholder verification) NOTE <i>This field must be present in the 0302 message when one of these values is sent in the message.</i>
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 2 (Change).
92	File Security Code	2 AN, EBCDIC, 2 bytes	M	M	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of TK (Token).

Table C–1: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field contains additional tracing information for proprietary use.
TLV Field 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 68.
TLV Field 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 05, Tag 06, Tag 07, Tag 08, and Tag 80.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	C	C	This tag contains the token.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C	C	This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	C	C	This tag contains the token requestor ID.

Table C-1: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	C	C	This tag contains the token reference ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm		C	This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes		M	This tag contains the token type value of 01 (ECOM/COF (e-commerce/card on file)).
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte		C	This tag contains the status of the token. If the token sent in the request is invalid, this field will not be included in the response. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table C-1: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
TLV 123, Usage 2, Dataset ID 68, Tag 80	Bound Device Index	1 N, 1 byte	C		This field contains the index number from the Visa database where the device ID is stored. The value will be a one-byte hexadecimal value in the range of 01–63 (Decimal 1–99). NOTE <i>Issuers must send this field when the value in Field 63.3 is 3743 or 3744.</i> <i>The value in this field must be the same value that was used for device binding in the 0100 Device binding request message.</i>
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 01.
TLV 125, Usage 2, Dataset ID 01	Token Device				This dataset ID contains Tag 04 and Tag 05.
TLV 125, Usage 2, Dataset ID 01, Tag 04	Device Number	15 N, 15 bytes		C+	This tag contains the full phone number or partial phone number when available.
TLV 125, Usage 2, Dataset ID 01, Tag 05	Device Name	16 ANS, EBCDIC, 16 bytes		C+	This tag contains the device name that the consumer recognizes.

0302/0312 Primary Account Number Maintenance File Message for Card-on-File and E-Commerce

The following table shows the message layout and contents of the 0302/0312 Primary account number (PAN) maintenance file message to support Visa Token Service transactions for card-on-file and e-commerce.

This message is used for the following:

- PAN expiration date updates
- PAN replacement updates

Table C-2: 0302/0312 Primary Account Number Maintenance File Message for Card-on-File and E-Commerce

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the current (old) PAN for the new PAN replacement updates. NOTE <i>TLV Field 127, Dataset ID 41, Tag 01 contains the new PAN.</i>
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time that the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field is included in standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports and/or files that will include the message.

Table C-2: 0302/0312 Primary Account Number Maintenance File Message for Card-on-File and E-Commerce (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0310/0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C+	The 0312 message contains Field 48, Usage 1b with the reason for the update. REFERENCE <i>For more information about this tag, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.

Table C–2: 0302/0312 Primary Account Number Maintenance File Message for Card-on-File and E-Commerce (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa will populate the payment account reference in this tag prior to sending the 0312 PAN maintenance file response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes		C	This field must contain one of these values: 3720 (PAN expiry update) 3721 (PAN update) NOTE <i>This field contains reason code 3721 for messages that impact both PAN and PAN expiry updates.</i>
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 2 (Change).
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.

Table C–2: 0302/0312 Primary Account Number Maintenance File Message for Card-on-File and E-Commerce (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field that contains the value of PAN (Card data).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field contains additional tracing information for proprietary use.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max	O	C+	This TLV field contains Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68	Token Data		O	C+	This dataset ID contains Tag 0B.
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	O	C+	This tag is required in the 0302 request message if the primary account number in Field 2 is not present. When present in the request message, it will be returned in the 0312 response message.

Table C–2: 0302/0312 Primary Account Number Maintenance File Message for Card-on-File and E-Commerce (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
TLV 127.PAN	PAN File Maintenance (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	M	M	This TLV field contains Dataset ID 41.
TLV 127.PAN, Dataset ID 41	PAN Update Data				This dataset ID contains Tag 01 and Tag 02.
TLV 127.PAN, Dataset ID 41, Tag 01	Replacement PAN	13–19 N, 4-bit BCD, 7–10 bytes	C	C	This tag is required when the existing PAN is being replaced with a new PAN.
TLV 127.PAN, Dataset ID 41, Tag 02	Replacement PAN Expiration Date	4 N, 4-bit BCD, 2 bytes format: yymm	M	M	This tag is required when Tag 01 contains a new PAN, and must contain the expiration date for the new PAN.

0302/0312 Token File Inquiry Message

The 0302/0312 Token file inquiry message supports Visa Token Service transactions for card-on-file and e-commerce.

This section includes these 0302/0312 messages:

- 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID
- 0302/0312 Token File Inquiry Message—Token Detail

0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID

The following table shows the message layout and content used to query the token vault for all tokens associated with a PAN or PAN reference ID. The 0312 response will include a list of up to nine tokens found for the PAN or PAN reference ID.

Table C-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary, 19 N, 4-bit BCD, 11 bytes max	C	C+	This field contains the PAN to be used for the token inquiry. In the 0302 request message, this field is required when the PAN reference ID field is not present. In the 0312 response message, this field is present when present in the request. When the PAN reference ID is used in lieu of the PAN in the request, this field will also be included in the response when the PAN reference ID is located.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time that the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm		C+	This field contains the PAN expiration date from the PAN file. Visa will insert the PAN expiration date in Field 14 in token inquiry messages prior to routing to the issuer.

Table C-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field is included in standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports/files that will include the message.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0310/0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C+	This field may be present if an error occurs when processing the request. When Field 39 contains the value of 06 (Error) in the 0312 response message, Field 48, Usage 1b contains a code that describes the reason for the error.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.

Table C-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa will populate the payment account reference in this tag prior to sending the 0312 Token file inquiry response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 5 (Inquire).
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of TK (Token).

Table C-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field may contain additional tracing information for proprietary use.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 07, Tag 08, Tag 0B, Tag 0D, and Tag 1F35.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N 19 bytes max	C	C+	This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing. V.I.P. will return up to 9 tokens associated with the PAN. Each token found will be included in a separate iteration of Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes		O	This tag is included in the response when the token is located. The value of 01 (ECOM/COF (e-commerce/card on file)) will apply to card-on-file/e-commerce transactions.

Table C-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte		O	This tag contains the status of the token. If the token sent in the request is invalid, this field will not be included in the response. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS EBCDIC, 32 bytes	C	C+	This tag is required in the 0302 request message if the primary account number in Field 2 is not present. When present in the request message, it will be returned in the 0312 response message. When one or more tokens are present for the PAN or PAN reference ID, only the first iteration of Dataset ID 68 contains this field.
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte		C	This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).
TLV 123, Usage 2, Dataset ID 68, Tag 1F35	Total Number of Tokens for Token Inquiry Criteria	2 N, 4-bit BCD, 2 bytes		O	This tag contains the total token count based on the token inquiry criteria.

Table C-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
TLV 127	Inquiry Control Data (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 42.
TLV 127 Dataset ID 42	Inquiry Control Data				This dataset ID contains Tag 01.
TLV 127 Dataset ID 42, Tag 01	Starting Query Number	4 N 4-bit BCD, 2 bytes	O	C	This tag contains the starting query number that the issuer wants to query. Issuers have the option to submit multiple 0302 Token file request messages in this field until the remainder of the tokens are sent in the 0312 Token file inquiry response message. If this tag is not sent in the 0302 Token file inquiry request, Visa will send the list of tokens matching any other requested criteria, beginning with the first token. This tag will not be sent in the 0312 Token file inquiry response if not sent in the 0302 Token file inquiry request.

0302/0312 Token File Inquiry Message—Token Detail for Card-on-File and E-Commerce

The following table shows the message layout and contents of the 0302/0312 Token file inquiry message used to retrieve details for a specific token. The 0312 response will include details for the specific token, if located, for card-on-file and e-commerce transactions.

Table C-4: 0302/0312 Token File Inquiry Message—Token Detail for Card-on-File and E-Commerce

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		C+	This field contains the PAN associated with the requested token. This field is not used in the 0302 request message. This field will be included in the 0312 response message when the requested token is located.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time that the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field is included in standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports and/or files that will include the message.

Table C-4: 0302/0312 Token File Inquiry Message—Token Detail for Card-on-File and E-Commerce (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0310/0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C+	This field may be present if an error occurs when processing the request. When Field 39 contains the value of 06 in the 0312 response message, Field 48, Usage 1b contains a code that describes the reason for the error.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa will populate the payment account reference in this tag prior to sending the 0312 Token file inquiry response message.

Table C-4: 0302/0312 Token File Inquiry Message—Token Detail for Card-on-File and E-Commerce (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, unique Visa-generated transaction identifier (TID).
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 5 (Inquire).
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of TK (Token).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field may contain additional tracing information for proprietary use.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	C	C+	This tag contains the token that is used to replace the cardholder PAN.

Table C-4: 0302/0312 Token File Inquiry Message—Token Detail for Card-on-File and E-Commerce (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN EBCDIC, 2 bytes		C+	This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	C	C+	This tag is required in the 0302 request message when the token reference ID in Field 123, Usage 2, Dataset ID 68, Tag 05 is present. This tag will be in the 0312 response when it is present in the request. This tag will also be included in the response when the token is located.
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C+		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 02.
TLV 125, Usage 2, Dataset ID 02	Wallet Provider				This dataset ID contains Tag 05, Tag 06, Tag 07, and Tag 08.
TLV 125, Usage 2, Dataset ID 02, Tag 05	Wallet Provider Device Score	2 N, 2 bytes		C+	This tag may be included in the response when the token is located. This tag contains the value of 1–5 , with 5 being the most trusted.

Table C-4: 0302/0312 Token File Inquiry Message—Token Detail for Card-on-File and E-Commerce (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
TLV 125, Usage 2, Dataset ID 02, Tag 06	Wallet Provider Account Score	2 N, 2 bytes		C+	This tag may be included in the response when the token is located. This tag contains the value of 1–5 , with 5 being the most trusted.
TLV 125, Usage 2, Dataset ID 02, Tag 07	Wallet Provider Reason Codes	30 ANS, EBCDIC, 30 bytes		C+	This tag may be included in the response when the token is located. It contains up to 15 wallet provider reason codes of 2 bytes each. REFERENCE <i>For a list of valid reason codes, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 02, Tag 08	PAN Source	2 N, 2 bytes		C+	This tag may be included in the response when a token with one of these values is located: • 01 (Key-entered) • 02 (On file) • 03 (Mobile banking app) • 04 (Token) • 05 (Chip dip) • 06 (Contactless tap)

0302/0312 Issuer Payment Account Reference Inquiry and Response Messages

The following table shows the V.I.P. message layout for issuer primary account reference inquiry and response messages.

Table C-5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	C	This field contains the PAN. NOTE <i>Both PAN and token must not be included in V.I.P. payment account reference inquiry messages.</i>
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to the Visa system.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field contains the month and day.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>

Table C-5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages (cont'd.)

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains a code that defines the response.
48, Usage 1b	Error Codes in 0310/0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C+	This field contains a code when Field 39 is 06 (Error).
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01 and Tag 02.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	This tag contains the payment account reference.
TLV 56, Dataset ID 01, Tag 02	Payment Account Reference Creation Date	5 N, 4-bit BCD, 5 bytes format: YYDDD		C+	This tag contains the payment account reference creation date in Julian date format.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains the transaction identifier.

Table C-5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages (cont'd.)

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
63.1	Network ID	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
91	File Update Code	1 AN, EBCDIC 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 5 (Inquire).
92	File Security Code	2 AN, EBCDIC 2 byte	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains PAR (Payment account reference).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field contains additional tracing information.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	C	C	This tag contains the token that is used to replace the cardholder PAN. NOTE <i>Both PAN and token must not be included in V.I.P. Payment account reference inquiry messages.</i>

0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700

The following table shows the message layout and contents of the 0600/0610 Issuer token notification online message to support Visa Token Service transactions for card-on-file and e-commerce for message reason code **3700** (Token create).

NOTE

*Issuers can choose to receive the 0600 Issuer token notification online message instead of the 0620 Issuer token notification advice for message reason code **3700**.*

Table C-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
—	Bit Map, Secondary	8 bytes, 64-bit string	M	M	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the number identifying the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number assigned by the message initiator that uniquely identifies a cardholder transaction and all the message types, also known as system transactions that it comprises, according to individual program rules.

Table C–6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	M		This field contains the PAN expiration date.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	M	M	This field contains the month and day when this message becomes part of a transaction.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the response code 00 (Unconditional approval (provision and activate immediately for payments)) in the response message.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.

Table C–6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 N, EBCDIC, 29 bytes		C+	Visa will populate the payment account reference in this tag prior to sending the 0600 Token notification request message for message reason code 3700 to the issuer.
62.0	Field 62 Bitmap	64 N, bit string, 8 bytes	M	O	This field contains a bitmap that specifies which Field 62 subfields are present.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique for each original authorization and financial request.
63.0	Field 63 Bitmap	24 N, bit string, 3 bytes	M	M	This field contains a bitmap that specifies which subfields are present.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	This field contains a code that specifies the network to be used for transmission of the message and determines the program rules that apply to the transactions.
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains values to identify that the request message is requesting a token. This field contains one of these values: • 3700 (Token create) • 3701 (Token deactivate) • 3702 (Token suspend) • 3703 (Token resume)

Table C-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.
100	Receiving Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	C		This field is a message routing field. It contains a code that identifies the institution that should receive a request or advice.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	C		This field is used to specify that Field 127 contains terms and conditions data. This field contains the value of TERMS-CONDITIONS (Token terms and conditions). This field is used when Field 63.3 contained the message reason code 3700 when a token was created.
TLV 114	Domestic and Localized Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	O		This TLV field contains Dataset ID 70.
TLV 114 Dataset ID 70	Localized Data		O		This dataset ID contains Tag C0, Tag C1, Tag C2, Tag C3, Tag C4, and Tag C5.

Table C–6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 114 Dataset ID 70 Tag C0	Language Code	3 AN, EBCDIC, 3 bytes	O		This tag contains the ISO 639-defined language code.
TLV 114 Dataset ID 70 Tag C1	Data Encoding Format	20 AN, EBCDIC, 20 bytes max	O		This tag identifies how all tags except C0 and C1 are encoded in this data set.
TLV 114 Dataset ID 70 Tag C2	Device Name	Binary, UTF-8, 400 bytes max	O		This tag contains the device name. Length = 100 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114 Dataset ID 70 Tag C3	Cardholder Name	Binary, UTF-8, 1024 bytes max	O		This tag contains the cardholder name. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>

Table C-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 114 Dataset ID 70 Tag C4	Address	Binary, UTF-8, 1024 bytes max	O		This tag carries all address data. Each line of the address will be comma-separated and left-justified. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114 Dataset ID 70 Tag C5	Zip Code	Binary, UTF-8, 64 bytes max	O		This tag contains the zip code. Length = 16 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 120	Auxiliary Transaction Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max			This TLV field contains Dataset ID 58.
TLV 120, Dataset ID 58	Card Environment Data		C		The dataset ID contains Tag 80, Tag 81, Tag 82, Tag 83, Tag 84, Tag 85, and Tag 86.
TLV 120, Dataset ID 58 Tag 80	Original Token	13-19 N, 19 bytes max	C		This tag contains the original token that was previously provisioned.

Table C-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 120, Dataset ID 58 Tag 81	Original Token Assurance Method	2 AN, EBCDIC, 2 bytes	C		This tag contains the original token assurance method.
TLV 120, Dataset ID 58 Tag 82	Original Token Requestor ID	11 N, 11 bytes	C		This tag contains the original token requestor ID.
TLV 120, Dataset ID 58 Tag 83	Original Token Reference ID	32 AN, EBCDIC, 32 bytes	C		This tag contains the original token reference ID.
TLV 120, Dataset ID 58 Tag 84	Original Token Type	2 AN, EBCDIC, 2 bytes	C		This field contains the token type of the source token used for provisioning a new token.
TLV 120, Dataset ID 58 Tag 85	Original Device Type	2 AN, EBCDIC, 2 bytes	C		This field contains the device type of the source token used for provisioning a new token.
TLV 120, Dataset ID 58 Tag 86	Original Device ID	48 ANS, EBCDIC, up to 48 bytes	C		This field contains the device ID of the source token used for provisioning a new token.

Table C-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data				This dataset ID contains Tag D4.
TLV 123, Usage 2, Dataset ID 66, Tag D4	Cardholder Name	26 ANS, EBCDIC, 26 bytes	C		This field contains the cardholder name. It is present when Field 63.3 contains the value of 3700 . The value will be truncated if the length of the name is longer than 26 characters.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 07, Tag 08, Tag 0D, and Tag 86.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13-19 N, 19 bytes max	M		This tag contains the token that is used to replace the cardholder PAN.

Table C–6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C	C	This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M		This tag contains the value of 01 (ECOM/COF (e-commerce/card on file)).
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		This tag contains the status of the token. If the token sent in the request is invalid, this field will not be included in the response. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).

Table C-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 86	Token Requestor - Token Service Provider ID	11 N, 4-bit BCD, 6 bytes	C		This tag contains a unique value that identifies the token requestor-token service provider (TR-TSP). NOTE <i>This tag will only be present when the transaction is initiated by a TR-TSP.</i>
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 02.
TLV 125, Usage 2, Dataset ID 02	Wallet Provider				This dataset ID contains Tag 06, Tag 07, Tag 08, and Tag 0A.
TLV 125, Usage 2, Dataset ID 02, Tag 06	Wallet Provider Account Score	2 N, 2 bytes	C	C	This tag contains the wallet provider account score.
TLV 125, Usage 2, Dataset ID 02, Tag 07	Wallet Provider Reason Codes	30 ANS, EBCDIC, 30 bytes	C	C	This tag contains up to 15 wallet provider reason codes of 2 bytes each. REFERENCE <i>For a list of valid reason codes, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table C–6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 125, Usage 2, Dataset ID 02, Tag 08	PAN Source	2 N, 2 bytes	M	M	This tag contains one of these values: • 01 (Key-entered) • 02 (On-file) • 04 (Token)
TLV 125, Usage 2, Dataset ID 02, Tag 0A	Wallet Account E-Mail Address	64 DX, 32 bytes	M	M	This tag contains the wallet account email address.

0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3700, 3701, 3702, and 3703

The following table shows the message layout and contents of the 0620/0630 Token notification advice message to support Visa Token Service transactions for card-on-file and e-commerce for the following message reason codes:

- **3700** (Token create)
- **3701** (Token deactivate)
- **3702** (Token suspend)
- **3703** (Token resume)

NOTE

*Issuers that initiate token lifecycle management messages for reason codes **3701**, **3702**, and **3703** can optionally receive the 0620 Issuer token notification advices.*

NOTE

Bold values in the 0630 Token notification response messages indicate the field must contain the same values from the 0620 Token notification request messages.

Table C–7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the number identifying the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number assigned by the message initiator that uniquely identifies a cardholder transaction and all the message types, also known as system transactions that it comprises, according to individual program rules.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	M		This field contains the PAN expiration date.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>

Table C-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	This field contains the response code 00 (Unconditional approval (provision and activate immediately for payments)) in the response message.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C+		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		C+		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	C+		Visa will populate the payment account reference in this tag prior to sending the 0620 Token notification advice for message reason codes.
62.0	Field 62 Bitmap	64 N, bit string, 8 bytes	M	O	This field contains a bitmap that specifies which Field 62 subfields are present.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique for each original authorization and financial request.
63.0	Field 63 Bitmap	24 N, bit string, 3 bytes	M	M	This field contains a bitmap that specifies which subfields are present.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	This is a field that contains the network ID 0002 (Visa).

Table C–7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains values to identify that the request message is requesting a token. This field contains one of these values: • 3700 (Token create) • 3701 (Token deactivate) • 3702 (Token suspend) • 3703 (Token resume)
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.
92	File Security Code	2 AN EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
100	Receiving Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	C		This field is a message routing field. It contains a code that identifies the institution that should receive a request or advice.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	C		For message reason code 3700 , this field contains the value of TERMS-CONDITIONS (Token terms and conditions). For message reason codes 3701 , 3702 , and 3703 , this field contains the value of TK (Token).

Table C-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 114	Domestic and Localized Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	O		This TLV field contains Dataset ID 70.
TLV 114 Dataset ID 70	Localized Data		O		This dataset ID contains Tag C0, Tag C1, Tag C2, Tag C3, Tag C4, and Tag C5.
TLV 114 Dataset ID 70 Tag C0	Language Code	3 AN, EBCDIC, 3 bytes	O		This tag contains the ISO 639-defined language code.
TLV 114 Dataset ID 70 Tag C1	Data Encoding Format	20 AN, EBCDIC, 20 bytes max	O		This tag identifies how all tags except C0 and C1 are encoded in this data set.
TLV 114 Dataset ID 70 Tag C2	Device Name	Binary, UTF-8, 400 bytes max	O		This tag contains the device name. Length = 100 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>

Table C-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 114 Dataset ID 70 Tag C3	Cardholder Name	Binary, UTF-8, 1024 bytes max	O		This tag contains the cardholder name. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114 Dataset ID 70 Tag C4	Address	Binary, UTF-8, 1024 bytes max	O		This tag carries all address data. Each line of the address will be comma-separated and left-justified. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114 Dataset ID 70 Tag C5	Zip Code	Binary, UTF-8, 64 bytes max	O		This tag contains the zip code. Length = 16 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 120	Auxiliary Transaction Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max			This TLV field contains Dataset ID 58.

Table C-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 120, Dataset ID 58	Card Environment Data		C		The dataset ID contains Tag 80, Tag 81, Tag 82, Tag 83, Tag 84, Tag 85, and Tag 86.
TLV 120, Dataset ID 58 Tag 80	Original Token	13–19 N, 19 bytes max	C		This tag contains the original token that was previously provisioned. It is included in the 0100 message when TLV Field 125, Usage 2, Dataset ID 02, Tag 08 contains the value of 04 .
TLV 120, Dataset ID 58 Tag 81	Original Token Assurance Method	2 AN, EBCDIC, 2 bytes	C		This tag contains the original token assurance method.
TLV 120, Dataset ID 58 Tag 82	Original Token Requestor ID	11 N, 11 bytes	C		This tag contains the original token requestor ID.
TLV 120, Dataset ID 58 Tag 83	Original Token Reference ID	32 AN, EBCDIC, 32 bytes	C		This tag contains the original token reference ID.
TLV 120, Dataset ID 58 Tag 84	Original Token Type	2 AN, EBCDIC, 2 bytes	C		This field contains the token type of the source token used for provisioning a new token.
TLV 120, Dataset ID 58 Tag 85	Original Device Type	2 AN, EBCDIC, 2 bytes	C		This field contains the device type of the source token used for provisioning a new token.

Table C-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 120, Dataset ID 58 Tag 86	Original Device ID	48 ANS, EBCDIC, up to 48 bytes	C		This field contains the device ID of the source token used for provisioning a new token.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data				
TLV 123, Usage 2, Dataset ID 66, Tag D4	Cardholder Name	26 ANS, EBCDIC, 26 bytes	C		This field contains the cardholder name. It is present when Field 63.3 contains the value of 3700 . The value will be truncated if the length of the name is longer than 26 characters.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		This tag contains the token that is used to replace the cardholder PAN.

Table C-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C		This tag will be included in the response when the token is located. It is present when Field 63.3 has a value of 3700 . REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		This tag contains the token reference ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M		The tag contains the token expiration date. It is present when Field 63.3 has a value of 3700 .
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M		This tag contains the token type value of 01 (ECOM/COF (e-commerce/card on file)).

Table C-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		This tag contains the status of the token. If the token sent in the request is invalid, this field will not be included in the response. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		This tag contains a unique reference ID generated by Visa for the card account number. It is present when Field 63.3 has a value of 3700.
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).
TLV 123, Usage 2, Dataset ID 68, Tag 86	Token Requestor - Token Service Provider ID	11 N, 4-bit BCD, 6 bytes	C		This tag contains a unique value that identifies the token requestor-token service provider (TR-TSP). NOTE <i>This tag will only be present when the transaction is initiated by a TR-TSP.</i>

Table C-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes maximum			This is a TLV field that contains Dataset ID 01 and Dataset ID 02.
TLV 125, Usage 2, Dataset ID 01	Token Device		C		This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 04, Tag 05, Tag 06, and Tag 07.
TLV 125, Usage 2, Dataset ID 01, Tag 01	Device Type	2 AN, EBCDIC, 2 bytes	C		This tag contains the device type when Field 63.3 contains the reason code value of 3700 .
TLV 125, Usage 2, Dataset ID 01, Tag 02	Device Language Code	3 AN, EBCDIC, 3 bytes	C		This tag contains a three-character language code, such as eng (English).
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	C		This tag contains the device ID.

Table C-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 125, Usage 2, Dataset ID 01, Tag 04	Device Number	15 N, 15 bytes	C		This tag contains the full phone number or partial phone number when available.
TLV 125, Usage 2, Dataset ID 01, Tag 05	Device Name	16 ANS, EBCDIC, 16 bytes	C		This tag contains the device name that the consumer recognizes. NOTE <i>The value will be truncated if it is longer than 16 characters.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 06	Device Location	25 ANS, EBCDIC, 25 bytes	C		This tag contains the obfuscated geographic location of the device.
TLV 125, Usage 2, Dataset ID 01, Tag 07	IP Address	15 ANS, EBCDIC, 15 bytes	C		This tag contains the IP address of the device at the time of the provisioning request. The value is represented in 255.255.255.255 format. Each octet (255) may be 1–3 digits in length.
TLV 125, Usage 2, Dataset ID 02	Wallet Provider		C		This dataset ID contains Tag 07, Tag 08, Tag 09, and Tag 0A.
TLV 125, Usage 2, Dataset ID 02, Tag 07	Wallet Provider Reason Codes	30 ANS, EBCDIC, 30 bytes	C		NOTE <i>For a list of valid reason codes, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table C-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 125, Usage 2, Dataset ID 02, Tag 08	PAN Source	2 N, 2 bytes	C		This tag contains the value of 01 (Key-entered) or 02 (On file).
TLV 125, Usage 2, Dataset ID 02, Tag 09	Wallet Account ID	32 ANS, EBCDIC, 32 bytes	C		This tag contains the wallet account ID.
TLV 125, Usage 2, Dataset ID 02, Tag 0A	Wallet Account E-mail Address	64 DX, 32 bytes	C		This tag contains the wallet account email address with the hashed full email address for the user's account sent by the digital wallet provider when Field 63.3 contains the value of 3700 .
TLV 127, Usage 2	Terms and Conditions	Variable length, TLV format: 1 byte, binary+ 255 binary and ANS, EBCDIC, 256 bytes max	C	O	This TLV field contains Dataset ID 40.
TLV 127, Usage 2, Dataset ID 40	Terms and Conditions		C	O	This dataset ID contains Tag 01 and Tag 02.
TLV 127, Usage 2, Dataset ID 40, Tag 01	Terms and Conditions Verification	64 AN, EBCDIC, 64 bytes	C	O	This field contains the terms and conditions data when Field 63.3 contains message reason code 3700 .

Table C-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 127, Usage 2, Dataset ID 40, Tag 02	Issuer Terms and Conditions Date/Time	32 AN, EBCDIC, 32 bytes format: YYYY-MM-DDT hh:mm:ss.sss ±[hhmm]	C	O	This tag contains the acceptance date and time. It is present when Field 63.3 has a value of 3700 .

0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3716

Message reason code **3716** is assigned when token expiration updates apply to e-commerce/card-on-file tokens. The following table shows the message layout for token expiry update advice messages.

Table C–8: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3716

Field Number and Name		Format	Token Expiry Update		Description
			0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the current (old) PAN.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to the Visa system.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	This field contains the month and day.
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		This field contains a Visa-assigned identifier.

Table C–8: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3716 (cont'd.)

Field Number and Name		Format	Token Expiry Update		Description
			0620	0630	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	For the 0620 message, this field contains the value of 00 (Good). For the 0630 message, this field must contain the value of 00 (Good).
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		C		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	C		Visa will populate the payment account reference in Tag 01 prior to sending the 0620 Token notification advice to the issuer.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.

Table C–8: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3716 (cont'd.)

Field Number and Name		Format	Token Expiry Update		Description
			0620	0630	
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C		This field that contains the new value of 3716 (Token expiry update) when expiration dates for e-commerce/card-on-file tokens are updated.
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M		This field contains the value of TK (Token).
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum			This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing.

Table C–8: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3716 (cont'd.)

Field Number and Name		Format	Token Expiry Update		Description
			0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		This tag is present when sent by wallet providers.
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 127.PAN	PAN File Maintenance (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 41.
TLV 127, Dataset ID 41	PAN Update Data				This dataset contains Tag 01 and Tag 02.
TLV 127, Dataset ID 41, Tag 01	Replacement PAN	13-19 N, 4-bit BCD, 7–10 bytes	C		This tag is required when the existing PAN is being replaced with a new PAN. It is present for PAN update notifications and may be present for PAN expiry update notifications.

Table C–8: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3716 (cont'd.)

Field Number and Name		Format	Token Expiry Update		Description
			0620	0630	
TLV 127, Dataset ID 41, Tag 02	Replacement PAN Expiration Date	4 N, 4-bit BCD, 2 bytes format: yymm	M		This tag contains the new expiration date.

0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3720 and 3721

Message reason code **3720** is assigned to PAN expiry date messages and message reason code **3721** will be assigned to PAN update messages. The following table shows the message layout for PAN expiry update and PAN update advice messages.

Table C-9: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the current (old) PAN.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	M	M	This field contains the date and time the request or advice was submitted to the Visa system.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	C	C	This field contains the month and day.
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		M		This field contains a Visa-assigned identifier.

Table C-9: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	M	M	For the 0620 message, this field contains the value of 00 (Good). For the 0630 message, this field must contain the value of 00 (Good).
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C		C		This is an field with one of these values: 3720 (PAN expiry update) 3721 (PAN update) NOTE <i>This field contains reason code 3721 for messages that impact both PAN and PAN expiry updates.</i>

Table C–9: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M		M		This field contains the value of PAN (Card data).
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		M		This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		M		This tag contains the token requestor ID.

Table C-9: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		M		This tag is present when sent by wallet providers.
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 127.PAN	PAN File Maintenance (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max					This TLV field contains Dataset ID 41.
TLV 127, Dataset ID 41	PAN Update Data						This dataset contains Tag 01 and Tag 02.
TLV 127, Dataset ID 41, Tag 01	Replacement PAN	13-19 N, 4-bit BCD, 7-10 bytes	C		C		This tag is required when the existing PAN is being replaced with a new PAN. It is present for PAN update notifications and may be present for PAN expiry update notifications.
TLV 127, Dataset ID 41, Tag 02	Replacement PAN Expiration Date	4 N, 4-bit BCD, 2 bytes format: yymm	M		M		This tag contains the new expiration date.

Token Payment Messages for Card-on-File and E-Commerce

The appendix includes the V.I.P. POS authorization and full financial messages to support card-on-file and e-commerce transactions.

IMPORTANT

The existing fields that have not changed are not included in this appendix.

For details about the existing fields that have not changed, refer to:

- VisaNet Authorization-Only Online Messages Technical Specifications
- Full Service POS Online Messages Technical Specifications

Table C-10: Message Impact Summary for Card-on-File and E-Commerce

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0100/0110 Authorization	Y	N	N
0100/0110 Preauthorization	Y	N	N
0120/0130 Authorization STIP Advice	Y	N	N
0120/0130 Preauthorization STIP Advice	Y	N	N
0200/0210 Full Financial	Y	N	N
0220/0230 Full Financial STIP Advice	Y	N	N
0220/0230 Preauthorization Completion	Y	N	N
0220/0230 Preauthorization Completion STIP Advice	Y	N	N
0400/0410 Authorization Reversal	Y	N	N
0400/0410 Full Financial Reversal	Y	N	N
0420/0430 Authorization STIP Advice Reversal	Y	N	N
0420/0430 Full Financial STIP Advice Reversal	Y	N	N

Y = Transaction supported

N = Transaction not supported

0100/0110 and 0120/0130 Authorization Messages for Card-on-File and E-Commerce

The following table shows the message layout and content of the 0100/0110 and 0120/0130 Authorization messages for card-on-file and e-commerce.

NOTE

Bold values in the 0110 POS authorization response indicate the field must contain the same values from the 0100 POS authorization request.

Bold values in the 0130 STIP advice response indicate the field must contain the same values from the 0120 STIP advice request.

Table C–11: 0100/0110 and 0120/0130 Authorization Messages for Card-on-File and E-Commerce Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the number identifying the cardholder account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table C-11: 0100/0110 and 0120/0130 Authorization Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 34	Electronic Commerce Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	O				This TLV field contains Dataset ID 56.
TLV 34, Dataset ID 02, Tag 88	Payment Credential Merchant Relationship Indicator	1 AN, EBCDIC, 1 bytes	C		C		Web browser auto fill transactions use this tag to indicate relationship between merchant website submitting the authorization request and payment credential. Valid values are: • 0 (No link) • 1 (Linked)
TLV 34, Dataset ID 56	Supplemental Data		O				This dataset ID contains Tag DF21.
TLV 34 Dataset ID 56 Tag DF21	Secure Remote Commerce	1 N, 4-bit BCD 1 byte	C+	0			This field carries the indicator that identifies that a token-based e-commerce or card-on-file request was initiated using Visa Digital Commerce. This tag contains the Visa Digital Commerce Indicator with the value of 01 (Visa digital commerce).

Table C-11: 0100/0110 and 0120/0130 Authorization Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
38	Authorization Identification Response	6 AN, EBCDIC, 6 bytes		M		M	For approved authorization requests, this field must not contain any of these invalid values: • 00000 (All zeros in the last five positions of the six-byte field) • ^^^^^ (All spaces in the last five positions of the six-byte field) • X (X in the last position of the six-byte field) • 0000^ (Four zeros followed by a space in the last five positions of the six-byte field) • 0000N (Four zeros followed by N in the last five positions of the six-byte field) • 0000Y (Four zeros followed by Y in the last five positions of the six-byte field) • 0000P (Four zeros followed by P in the last five positions of the six-byte field) • SVC (SVC in the first three positions of the six-byte field)
44.3	Additional Token Response Information	1 AN, EBCDIC, 1 byte	C+	O	C		This field contains a value used to identify transactions eligible for token services. Valid values: • 1 (Token program) • Space (Not applicable)
44.10	CVV2 Result Code	1 ANS, EBCDIC, 1 byte	C	C	C		This field contains the dynamic token verification value (DTVV) verification result code. In the 0100/0110 messages, this field contains the value of M (CVV2 match). In the 0120 message, this field contains the value of M or N (CVV2 no match).

Table C–11: 0100/0110 and 0120/0130 Authorization Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C+	C	C+		This field contains one of these values: 0 (CAVV could not be verified or CAVV data was not provided when expected) 1 (CAVV failed verification—authentication) 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in this tag prior to sending the POS authorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	C		C		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
60.8	Mail/Phone/ Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C		C		This field contains the value of 05 (Secure electronic commerce transaction) or 07 (Non-authenticated security transaction).

Table C–11: 0100/0110 and 0120/0130 Authorization Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67, Tag 08	Token Verification Result Code	1 ANS, EBCDIC, 1 byte	C+		C+		This tag contains the token verification result code with one these values: • 1 (TAVV cryptogram failed validation) • 2 (TAVV cryptogram passed validation) • 3 (DTVV or Visa-defined format cryptogram failed validation) • 4 (DTVV or Visa-defined cryptogram passed validation)

Table C–11: 0100/0110 and 0120/0130 Authorization Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68	Token Data	Variable length, TLV format 1 byte binary + up to 255 binary and ANS, EBCDIC, maximum 256 bytes	M+		M+		Originators that send account funding transactions (AFTs) and original credit transactions (OCTs) with a token must include all valid values in Field 123, Usage 2, Dataset ID 68 for the Visa Token Service.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the payment token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		This tag contains the token expiration date.

Table C-11: 0100/0110 and 0120/0130 Authorization Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	M+		M+		This tag contains the value of 01 (ECOM/COF (e-commerce/card on file)).
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C		C		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).
TLV 123, Usage 2, Dataset ID 68, Tag 80	Bound Device Index	1 N, 1 bytes	C		C		This field contains the index number from the Visa database where the device ID is stored. The value will be a one-byte hexadecimal value in the range of 01–63 (Decimal 1–99).
TLV 123, Usage 2, Dataset ID 68, Tag 81	Token User Identifier	1–11 N, 11 bytes max	C		C		This field contains a unique value that identifies the token user. The token user is an entity that initiates the payment request. In the Europe region, the token user identifier may be used to support dynamic linking requirements of PSD2/RTS.

Table C–11: 0100/0110 and 0120/0130 Authorization Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 82	Token User Application Type	1 N, 1 bytes	C		C		This field contains the application type of the token user. This entity can be the merchant, a marketplace, or a check out host. The application type is one of these valid values: • 00 (Unknown) • 01 (Web) • 02 (Mobile web) • 03 (Mobile application) • 04 (Marketplace application) • 05 (Voice application) • 06 (Biometric application) • 07–FF (Reserved)
TLV 123, Usage 2, Dataset ID 68, Tag 83	Token Authentication Factor A	1 N, 1 bytes	C		C		This field contains an authentication factor used by token requestors and merchants to authenticate the cardholder at the time of the transaction. This information will be provided at the time of cryptogram generation and will be provided to issuers during transaction processing. In the Europe region, authentication factors may be used to support the SCA requirements of PSD2/RTS.
TLV 123, Usage 2, Dataset ID 68, Tag 84	Token Authentication Factor B	1 N, 1 bytes	C		C		This field contains an authentication factor used by token requestors and merchants to authenticate the cardholder at the time of the transaction. This information will be provided at the time of cryptogram generation and will be provided to issuers during transaction processing. In the Europe region, authentication factors may be used to support the SCA requirements of PSD2/RTS.

Table C-11: 0100/0110 and 0120/0130 Authorization Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 85	Token Authentication Amount	3 N, 3 bytes	C		C		This field contains the payment amount made visible by the token requestor to the consumer at the time of purchase. This information can be used for dynamic linking. In the Europe region, token user identifier may be used to support dynamic linking requirements of PSD2/RTS. NOTE <i>This amount is the seven right-most digits of the payment amount, excluding the minor units, converted from decimal digits to binary. The applicable number of minor units excluded is specified by the currency code in Field 49—Currency Code, Transaction.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 86	Token Requestor - Token Service Provider ID	11 N, 4-bit BCD, 6 bytes	C		C		This tag contains a unique value that identifies the token requestor-token service provider (TR-TSP). NOTE <i>This tag will only be present when the transaction is initiated by a TR-TSP.</i>

Table C–11: 0100/0110 and 0120/0130 Authorization Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
126.9	Usage 3: 3-D Secure CAVV, Revised Format	40 N, 4-bit BCD, 20 bytes	C		C		This field contains the token authentication verification value (TAVV) in a Visa-defined format for card-on-file and e-commerce when specified in the Token Requestor ID Table. NOTE <i>Issuers are not required to take any action on this field. This field will not be present without TAVV.</i> IMPORTANT Effective with the April 2022 release, issuers in AP (except for Bangladesh, India, Japan, and Nepal), CEMEA, Europe, and LAC regions no longer receive this field.

Table C-11: 0100/0110 and 0120/0130 Authorization Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
126.20	3-D Secure Indicator	1 AN, EBCDIC, 1 byte	C		C		This field enables issuers to identify the 3DS version number and the 3DS authentication method used in an authorization message. The value for the 3DS indicator will be extracted from the incoming request message in Field 126.9—CAVV Data and sent in Field 126.20 in the request message to the issuer. These are the valid values for this field: • 0 (3DS 1.0.2 or prior; all authentication methods; or 3DS 1.0.2 frictionless flow) • 1 (Challenge flow using static passcode) • 2 (Challenge flow using one time passcode (OTP) using SMS method) • 3 (Challenge flow using OTP through key fob or card reader method) • 4 (Challenge flow using OTP through app method) • 5 (Challenge flow using OTP through any other method) • 6 (Challenge flow using knowledge based authentication (KBA) method) • 7 (Challenge flow using out of band (OOB) with biometric method) • 8 (Challenge flow using OOB with app login method) • 9 (Challenge flow using OOB with any other method) • A (Challenge flow using any other authentication method) • E (Attempts server responding) • F (Frictionless flow, RBA (Risk-based authentication))

0100/0110 and 0120/0130 Preauthorization Messages for Card-on-File and E-Commerce

The following table shows the message layout and content of the 0100/0110 and 0120/0130 Preauthorization messages for card-on-file and e-commerce.

NOTE

Bold values in the 0110 Preauthorization response indicate the field must contain the same values from the 0100 Preauthorization request.

Bold values in the 0130 STIP advice response indicate the field must contain the same values from the 0120 STIP advice request.

Table C–12: 0100/0110 and 0120/0130 Preauthorization Messages for Card-on-File and E-Commerce Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the number identifying the cardholder account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table C-12: 0100/0110 and 0120/0130 Preauthorization Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C		C		This field contains one of these values: 0 (CAVV could not be verified or CAVV data was not provided when expected) 1 (CAVV failed verification—authentication) 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in this tag prior to sending the POS authorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	C		C		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
60.8	Mail/Phone/Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C		C		This field contains the value of 05 (Secure electronic commerce transaction) or 07 (Non-authenticated security transaction).

Table C–12: 0100/0110 and 0120/0130 Preauthorization Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max					This TLV field contains Dataset ID 66 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the payment token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.

Table C-12: 0100/0110 and 0120/0130 Preauthorization Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	M+		M+		This tag contains the value of 01 (ECOM/COF (e-commerce/card on file)).
126.9	Usage 3: 3-D Secure CAVV, Revised Format	40 N, 4-bit BCD, 20 bytes	C		C		This field contains the token authentication verification value (TAVV) in a Visa-defined format for card-on-file and e-commerce when specified in the Token Requestor ID Table. NOTE <i>Issuers are not required to take any action on this field. This field will not be present without TAVV.</i>

0200/0210 and 0220/0230 Full Financial Messages for Card-on-File and E-Commerce

The following table shows the message layout and content of the 0200/0210 and 0220/0230 Full financial messages for card-on-file and e-commerce.

NOTE

Bold values in the 0210 POS authorization response indicate the field must contain the same values from the 0200 POS authorization request.

Bold values in the 0230 STIP advice response indicate the field must contain the same values from the 0220 STIP advice request.

Table C–13: 0200/0210 and 0220/0230 Full Financial Messages for Card-on-File and E-Commerce Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the number identifying the cardholder account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table C-13: 0200/0210 and 0220/0230 Full Financial Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 34	Electronic Commerce Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	O				This TLV field contains Dataset ID 56.
TLV 34, Dataset ID 02, Tag 88	Payment Credential Merchant Relationship Indicator	1 AN, EBCDIC, 1 bytes	C		C		Web browser auto fill transactions use this tag to indicate relationship between merchant website submitting the authorization request and payment credential. Valid values are: • 0 (No link) • 1 (Linked)
TLV 34 Dataset ID 56	Supplemental Data		O				This dataset ID contains Tag DF21.
TLV 34 Dataset ID 56 Tag DF21	Secure Remote Commerce	1 N, 4-bit BCD 1 byte	C+	0			This field carries the indicator that identifies that a token-based e-commerce or card-on-file request was initiated using Visa Digital Commerce. This tag contains the Visa Digital Commerce Indicator with the value of 01 (Visa digital commerce).

Table C–13: 0200/0210 and 0220/0230 Full Financial Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
44.3	Additional Token Response Information	1 AN, EBCDIC, 1 byte	C+	O	C		This field contains a value used to identify transactions eligible for token services. Valid values: • 1 (Token program) • Space (Not applicable)
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C+	C	C+		This field contains one of these values: • 0 (CAVV could not be verified or CAVV data was not provided when expected) • 1 (CAVV failed verification—authentication) • 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in this tag prior to sending the POS authorization message to the issuer.

Table C-13: 0200/0210 and 0220/0230 Full Financial Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M		M		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
63.6, position 4	Mail/Phone/ Electronic Commerce (MOTO/ECI) and Payment Indicator	1 ANS, EBCDIC, 1 byte	C		M		This field contains the value of 5 (Secure electronic commerce transaction) or 7 (Non-authenticated security transaction).
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.

Table C–13: 0200/0210 and 0220/0230 Full Financial Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 08	Token Verification Result Code	1 ANS, EBCDIC, 1 byte	C+		C+		This tag contains the token verification result code with one of these values: • 1 (TAVV cryptogram failed validation) • 2 (TAVV cryptogram passed validation) • 3 (DTVV or Visa-defined format cryptogram failed validation) • 4 (DTVV or Visa-defined cryptogram passed validation)
TLV 123, Usage 2, Dataset ID 68	Token Data		M+		M+		For originators that send account funding transactions (AFTs) and original credit transactions (OCTs) with a token in Field 2, Visa will include a valid values in Field 123, Usage 2, Dataset ID 68 for the Visa Token Service.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the payment token used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.

Table C-13: 0200/0210 and 0220/0230 Full Financial Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	M+		M+		This tag contains the value of 01 (ECOM/COF (e-commerce/card on file)).
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C		C		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).
TLV 123, Usage 2, Dataset ID 68, Tag 80	Bound Device Index	1 N, 1 bytes	C		C		This field contains the index number from the Visa database where the device ID is stored. The value will be a one-byte hexadecimal value in the range of 01-63 (Decimal 1-99).
TLV 123, Usage 2, Dataset ID 68, Tag 81	Token User Identifier	1-11 N, 11 bytes max	C		C		This field contains a unique value that identifies the token user. The token user is an entity that initiates the payment request. In the Europe region, the token user identifier may be used to support dynamic linking requirements of PSD2/RTS.

Table C-13: 0200/0210 and 0220/0230 Full Financial Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 82	Token User Application Type	1 N, 1 bytes	C		C		This field contains the application type of the token user. This entity can be the merchant, a marketplace, or a check out host. The application type is one of the following valid values: • 00 (Unknown) • 01 (Web) • 02 (Mobile web) • 03 (Mobile application) • 04 (Marketplace application) • 05 (Voice application) • 06 (Biometric application) • 07-FF (Reserved)
TLV 123, Usage 2, Dataset ID 68, Tag 83	Token Authentication Factor A	1 N, 1 bytes	C		C		This field contains an authentication factor used by token requestors and merchants to authenticate the cardholder at the time of the transaction. For token processing, this information will be provided at the time of cryptogram generation and will be provided to issuers during transaction processing. In the Europe region, authentication factors may be used to support the SCA requirements of PSD2/RTS.

Table C-13: 0200/0210 and 0220/0230 Full Financial Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 84	Token Authentication Factor B	1 N, 1 bytes	C		C		This field contains an authentication factor used by token requestors and merchants to authenticate the cardholder at the time of the transaction. For token processing, this information will be provided at the time of cryptogram generation and will be provided to issuers during transaction processing. In the Europe region, authentication factors may be used to support the SCA requirements of PSD2/RTS.
TLV 123, Usage 2, Dataset ID 68, Tag 85	Token Authentication Amount	3 N, 3 bytes	C		C		This field contains the payment amount made visible by the token requestor to the consumer at the time of purchase. This information can be used for dynamic linking. In the Europe region, token user identifier may be used to support dynamic linking requirements of PSD2/RTS. NOTE <i>This amount is the seven right-most digits of the payment amount, excluding the minor units, converted from decimal digits to binary. The applicable number of minor units excluded is specified by the currency code in Field 49—Currency Code, Transaction.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 86	Token Requestor - Token Service Provider ID	11 N, 4-bit BCD, 6 bytes	C		C		This tag contains a unique value that identifies the token requestor-token service provider (TR-TSP). NOTE <i>This tag will only be present when the transaction is initiated by a TR-TSP.</i>

Table C-13: 0200/0210 and 0220/0230 Full Financial Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
126.9	Usage 3: 3-D Secure CAVV, Revised Format	40 N, 4-bit BCD, 20 bytes	C		C		This field contains the token authentication verification value (TAVV) in a Visa-defined format for card-on-file and e-commerce. NOTE <i>Issuers are not required to take any action on this field. This field will not be present without TAVV.</i>

Table C-13: 0200/0210 and 0220/0230 Full Financial Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
126.20	3-D Secure Indicator	1 AN, EBCDIC, 1 byte	C		C		This field will enable issuers to identify the 3Ds version number and the 3Ds authentication method used in an authorization message. The value for the 3Ds indicator will be extracted from the incoming request message in Field 126.9—CAVV Data and sent in Field 126.20 in the request message to the issuer. These are the valid values for this field: • 0 (3DS 1.0.2 or prior; all authentication methods; or 3DS 1.0.2 frictionless flow) • 1 (Challenge flow using static passcode) • 2 (Challenge flow using one time passcode (OTP) using SMS method) • 3 (Challenge flow using OTP through key fob or card reader method) • 4 (Challenge flow using OTP through app method) • 5 (Challenge flow using OTP through any other method) • 6 (Challenge flow using knowledge based authentication (KBA) method) • 7 (Challenge flow using out of band (OOB) with biometric method) • 8 (Challenge flow using OOB with app login method) • 9 (Challenge flow using OOB with any other method) • A (Challenge flow using any other authentication method) • E (Attempts server responding) • F (Frictionless flow, RBA (Risk-based authentication))

0220/0230 Preauthorization Completion Full Financial Messages for Card-on-File and E-Commerce

The following table shows the message layout and content of the 0220/0230 Preauthorization completion messages for e-commerce enabler.

NOTE

Bold values in the 0200 Original request indicate that the value in this field is the same as the value in the preauthorization request.

Bold values in the 0210 Completion response indicate that the field must contain the same values from the 0200 Original request.

Bold values in the 0230 STIP advice response indicate that the field must contain the same values from the 0220 STIP advice request.

Table C-14: 0220/0230 Preauthorization Completion Messages for Card-on-File and E-Commerce Enabler Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	M	M	M	This field contains the number identifying the cardholder account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table C-14: 0220/0230 Preauthorization Completion Messages for Card-on-File and E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C		C		This field contains one of these values: 0 (CAVV could not be verified or CAVV data was not provided when expected) 1 (CAVV failed verification—authentication) 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in this tag prior to sending the POS authorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD, 1 digit	M		M		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
60.8	Mail/Phone/Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C		C		This field contains the value of 05 (Secure electronic commerce transaction) or 07 (Non-authenticated security transaction).

Table C-14: 0220/0230 Preauthorization Completion Messages for Card-on-File and E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
63.6, position 4	Mail/Phone/Electronic Commerce (MOTO/ECI) and Payment Indicator	1 ANS, EBCDIC, 1 byte	M		M		This field contains the value of 5 (Secure electronic commerce transaction) or 7 (Non-authenticated security transaction).
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data						
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	O		O		This tag contains the payment token used to replace the cardholder PAN.

Table C-14: 0220/0230 Preauthorization Completion Messages for Card-on-File and E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	O		O		This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	O		O		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	O		O		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	O		O		This tag contains the value of 01 (ECOM/COF (e-commerce/card on file)).
126.9	Usage 3: 3-D Secure CAVV, Revised Format	40 N, 4-bit BCD, 20 bytes	C		C		This field contains the token authentication verification value (TAVV) in a Visa-defined format for e-commerce enabler transactions when specified in the Token Requestor ID Table. NOTE <i>Issuers are not required to take any action on this field. This field will not be present without TAVV.</i>

0400/0410 and 0420/0430 Authorization Reversal Messages for Card-on-File and E-Commerce

The following table shows the message layout and content of the 0400/0410 and 0420/0430 Authorization reversal messages for card-on-file and e-commerce.

NOTE

Bold values in the 0400 Original request indicate that the value in this field is the same as the value in the authorization request.

Bold values in the 0410 Reversal response indicate that the field must contain the same values from the 0400 Original request.

Bold values in the 0430 STIP advice response indicate that the field must contain the same values from the 0420 STIP advice request.

Table C-15: 0400/0410 and 0420/0430 Authorization Reversal Messages for Card-on-File and E-Commerce Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the number identifying the cardholder account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table C-15: 0400/0410 and 0420/0430 Authorization Reversal Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
44.3	Additional Token Response Information	1 AN, EBCDIC, 1 byte	C+	O	C		This field contains a value used to identify transactions eligible for token services. Valid values: • 1 (Token program) • Space (Not applicable)
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C		C		This field contains one of these values: • 0 (CAVV could not be verified or CAVV data was not provided when expected) • 1 (CAVV failed verification—authentication) • 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in this tag prior to sending the POS authorization message to the issuer.

Table C-15: 0400/0410 and 0420/0430 Authorization Reversal Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M		M		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
60.8	Mail/Phone/ Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C		C		This field contains the value of 05 (Secure electronic commerce transaction) or 07 (Non-authenticated security transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max					This TLV field contains Dataset ID 66 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data		M+		M+		Originators that send account funding transactions (AFTs) with a token must include all valid values in Field 123, Usage 2, Dataset ID 68 for the Visa Token Service.

Table C-15: 0400/0410 and 0420/0430 Authorization Reversal Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the payment token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	M+		M+		This tag contains the value of 01 (ECOM/COF (e-commerce/card on file)).
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C+		C+		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).

Table C–15: 0400/0410 and 0420/0430 Authorization Reversal Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 86	Token Requestor - Token Service Provider ID	11 N, 4-bit BCD, 6 bytes	C		C		This tag contains a unique value that identifies the token requestor-token service provider. NOTE <i>This tag will only be present when the transaction is initiated by a Token Requestor-Token Service Provider.</i>

0400/0410 and 0420/0430 Preauthorization Reversal Messages for Card-on-File and E-Commerce

The following table shows the message layout and content of the 0400/0410 and 0420/0430 POS Preauthorization reversal messages for card-on-file and e-commerce.

NOTE

Bold values in the 0400 Original request indicate that the value in this field is the same as the value in the preauthorization request.

Bold values in the 0410 Reversal response indicate that the field must contain the same values from the 0400 Original request.

Bold values in the 0430 STIP advice response indicate that the field must contain the same values from the 0420 STIP advice request.

Table C-16: 0400/0410 and 0420/0430 Preauthorization Reversal Messages for Card-on-File and E-Commerce Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	M	M	M	This field contains the cardholder PAN.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table C-16: 0400/0410 and 0420/0430 Preauthorization Reversal Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C		C		This field contains one of these values: 0 (CAVV could not be verified or CAVV data was not provided when expected) 1 (CAVV failed verification—authentication) 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in this tag prior to sending the preauthorization reversal message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M		M		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).

Table C-16: 0400/0410 and 0420/0430 Preauthorization Reversal Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
60.8	Mail/Phone/ Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C		C		This field contains the value of 05 (Secure electronic commerce transaction) or 07 (Non-authenticated security transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains the STIP/Switch reason code values.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max					This TLV field contains Dataset ID 66 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data		M+		M+		Originators that send AFTs and OCTs with a token must include all valid values in Field 123, Usage 2, Dataset ID 68 for the Visa Token Service.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the payment token that is used to replace the cardholder PAN.

Table C-16: 0400/0410 and 0420/0430 Preauthorization Reversal Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	M+		M+		This tag contains the value of 01 (ECOM/COF (e-commerce/card on file)).

0400/0410 and 0420/0430 Full Financial Reversal Messages for Card-on-File and E-Commerce

The following table shows the message layout and content of the 0400/0410 and 0420/0430 Full financial reversal messages for card-on-file and e-commerce.

NOTE

Bold values in the 0400 Original request indicate that the value in this field is the same as the value in the full financial request. Bold values in the 0410 Reversal response indicate that the field must contain the same values from the 0400 Original request. Bold values in the 0430 STIP advice response indicate that the field must contain the same values from the 0420 STIP advice request.

Table C–17: 0400/0410 and 0420/0430 Full Financial Reversal Messages for Card-on-File and E-Commerce Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the number identifying the cardholder account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table C-17: 0400/0410 and 0420/0430 Full Financial Reversal Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C		C		This field contains one of these values: • 0 (CAVV could not be verified or CAVV data was not provided when expected) • 1 (CAVV failed verification—authentication) • 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in this tag prior to sending the POS authorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD, 1 digit	M		M		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction).
60.8	Mail/Phone/Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C		C		Issuers must be aware that they will receive the value submitted by the acquirers in the reversal messages.

Table C-17: 0400/0410 and 0420/0430 Full Financial Reversal Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
63.6, position 4	Mail/Phone/Electronic Commerce (MOTO/ECI) and Payment Indicator	1 ANS, EBCDIC, 1 byte	C		C		This field contains the value of 5 (Secure electronic commerce transaction) or 7 (Non-authenticated security transaction).
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max					This TLV field contains Dataset ID 66 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data		M+		M+		Originators that send AFTs with a token must include all valid values in Field 123, Usage 2, Dataset ID 68 for the Visa Token Service.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the payment token that is used to replace the cardholder PAN.

Table C-17: 0400/0410 and 0420/0430 Full Financial Reversal Messages for Card-on-File and E-Commerce Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	M+		M+		This tag contains the value of 01 (ECOM/COF (e-commerce/card on file)).
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C+		C+		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).

THIS PAGE INTENTIONALLY LEFT BLANK.

Magnetic Secure Transmission

D

This appendix includes the V.I.P. POS authorization and full financial messages for cloud-based payment with Magnetic Secure Transmission (MST).

Table D-1: Message Impact Summary for Magnetic Secure Transmission

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0100/0110 Authorization	Y	N	N
0120/0130 Authorization STIP Advice	Y	N	N
0100/0110 Preauthorization	Y	Y	Y
0120/0130 Preauthorization STIP Advice	Y	N	N
0200/0210 Full Financial	Y	Y	Y
0220/0230 Full Financial STIP Advice	Y	Y	Y
0220/0230 Preauthorization Completion	Y	Y	Y
0220/0230 Preauthorization Completion STIP Advice	Y	Y	Y
0400/0410 Authorization Reversal	Y	N	N
0400/0410 Full Financial Reversal	Y	Y	Y
0420/0430 Authorization STIP Advice Reversal	Y	N	N
0420/0430 Full Financial STIP Advice Reversal	Y	Y	Y

Y = Transaction supported

N = Transaction not supported

0100/0110 and 0120/0130 POS Authorization Messages for Cloud-Based Payment with Magnetic Secure Transmission

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages for Cloud-Based Payment with Magnetic Secure Transmission (MST).

Table D–2: 0100/0110 and 0120/0130 POS Authorization Messages for Cloud-Based Payment with Magnetic Secure Transmission

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M	This field contains a number identifying the customer account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 90 (Magnetic stripe read and exact content of Track 1 or Track 2 included (CVV check is possible)).
25	Point-of-Service Condition Code	2 N 4-bit BCD, 1 byte	M	M	M	M	This field contains a code identifying transaction conditions at the point-of-sale or point of service.

Table D–2: 0100/0110 and 0120/0130 POS Authorization Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				This field contains the token data or issuers can choose to receive track data instead of token data. The following are token data elements: - Token received from the Visa Cloud-Based Payment Platform - Token expiration date received from the Visa Cloud-Based Payment Platform - Service code received from the Visa Cloud-Based Payment Platform - Issuer discretionary data that contains: HHHH—Timestamp received as part of the account parameter index from the Visa Cloud-Based Payment Platform CC—Counter received as part of the account parameter index from the Visa Cloud-Based Payment Platform AAAA—Application transaction counter (ATC) XXX—Magnetic-stripe verification value for the cloud-based payment token The following is the Visa-generated track data: - Primary account number (PAN) - Pan expiration date - Service code with the value assigned by Visa - CVV - Issuer discretionary data contains zeros NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i>

Table D–2: 0100/0110 and 0120/0130 POS Authorization Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
38	Authorization Identification Response	6 AN, EBCDIC, 6 bytes		M		M	For approved authorization requests, this field must not contain any of the following invalid authorization code values: • 00000 (All zeros in the last five positions of the six-byte field) • ^^^^^ (All spaces in the last five positions of the six-byte field) • X (X in the last position of the six-byte field) • 0000^ (Four zeros followed by a space in the last five positions of the six-byte field) • 0000N (Four zeros followed by N in the last five positions of the six-byte field) • 0000Y (Four zeros followed by Y in the last five positions of the six-byte field) • 0000P (Four zeros followed by P in the last five positions of the six-byte field) • SVC (SVC in the first three positions of the six-byte field)
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M	When the magnetic stripe verification value for the cloud-based payment token fails and Field 44.5 is present, this field contains the value of 05 (Do not honor). If Field 44.5 is not present, this field contains the value of 82 (Negative online CAM, dCVV, iCVV, or CVV results).
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte		O	C		In 0120/0220 STIP advices, if the issuer can accept this field, it contains the results of verifying the magnetic stripe verification value for the cloud-based payment token. Existing values in this field is used to represent the verification results.

Table D–2: 0100/0110 and 0120/0130 POS Authorization Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte, binary + up to 76 ANS, EBCDIC, maximum 77 bytes	C				This field contains the token data or issuers can choose to receive track data instead of token data. The following are token data elements: • Token received from the Visa Cloud-Based Payment Platform • Token expiration date received from the Visa Cloud-Based Payment Platform • Service code received from the Visa Cloud-Based Payment Platform • CVV received from the Visa Cloud-Based Payment Platform • Issuer discretionary data that contains: – HHHH—Timestamp received as part of the account parameter index from the Visa Cloud-Based Payment Platform – CC—Counter received as part of the account parameter index from the Visa Cloud-Based Payment Platform – AAAA—Application transaction counter (ATC) – XXX—Magnetic-stripe verification value for the cloud-based payment token The following is the Visa-generated track data: • PAN • Cardholder name will be blanks • Pan expiration date • Service code with the value assigned by Visa • Issuer discretionary data contains zeros • CVV with a Visa assigned value

Table D-2: 0100/0110 and 0120/0130 POS Authorization Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	C		C		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). Visa will insert this value based on the presence of a Visa-issued token.
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		The existing values are supported in this field.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C		C		This tag contains the active account management velocity checking result value. Valid values are: • 02 (Time-to-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the token that is used to replace the cardholder PAN and is a required data element in token processing.

Table D-2: 0100/0110 and 0120/0130 POS Authorization Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		This tag contains the token type value of 03 (CBP (cloud-based payment)) to identify cloud-based payment token transactions with MST.
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		This tag contains the elapsed time in hours since the current Limited Use Key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		This tag contains the cumulative count of transactions for the current LUK.

Table D-2: 0100/0110 and 0120/0130 POS Authorization Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		This tag contains the cumulative total of transaction amounts in USD for the current LUK.

0100/0110 Preauthorization POS Messages for Cloud-Based Payment with Magnetic Secure Transmission

The following table shows the message layout and content of the 0100/0110 Preauthorization messages for Cloud-Based Payment with Magnetic Secure Transmission (MST).

Table D-3: 0100/0110 Preauthorization POS Messages for Cloud-Based Payment with Magnetic Secure Transmission

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		M	M	M	This field contains a number identifying the customer account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 90 (Magnetic stripe read and exact content of Track 1 or Track 2 included (CVV check is possible)).
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	M				This field contains the token data or issuers can choose to receive track data instead of token data. The following are token data elements: • Token received from the Visa Cloud-Based Payment Platform • Token expiration date received from the Visa Cloud-Based Payment Platform • Service code received from the Visa Cloud-Based Payment Platform

Table D-3: 0100/0110 Preauthorization POS Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
35 (cont'd.)							- Issuer discretionary data that contains: HHHH—Timestamp received as part of the account parameter index from the Visa Cloud-Based Payment Platform CC—Counter received as part of the account parameter index from the Visa Cloud-Based Payment Platform AAAA—Application transaction counter (ATC) XXX—Magnetic-stripe verification value for the cloud-based payment token The following is the Visa-generated track data: - Primary account number (PAN) - Pan expiration date - Service code with the value assigned by Visa - CVV - Issuer discretionary data contains zeros NOTE <i>Europe issuers must be able to receive this field. However, they can ignore the data in the field and perform their token processing using the existing fields defined for token-based transactions.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M	When the magnetic stripe verification value for the cloud-based payment token fails and Field 44.5 is present, this field contains the value of 05 (Do not honor). If Field 44.5 is not present, this field contains the value of 82 (Negative online CAM, dCVV, iCVV, or CVV results).

Table D–3: 0100/0110 Preauthorization POS Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte		O	C		In 0120/0220 STIP advices, if the issuer can accept this field, it contains the results of verifying the magnetic stripe verification value for the cloud-based payment token. Existing values in this field are used to represent the verification results.

Table D–3: 0100/0110 Preauthorization POS Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte, binary + up to 76 ANS, EBCDIC, maximum 77 bytes	O				This field contains the token data or issuers can choose to receive track data instead of token data. The following are token data elements: • Token received from the Visa Cloud-Based Payment Platform • Token expiration date received from the Visa Cloud-Based Payment Platform • Service code received from the Visa Cloud-Based Payment Platform • CVV received from the Visa Cloud-Based Payment Platform • Issuer discretionary data that contains: – HHHH—Timestamp received as part of the account parameter index from the Visa Cloud-Based Payment Platform – CC—Counter received as part of the account parameter index from the Visa Cloud-Based Payment Platform – AAAA—Application transaction counter (ATC) – XXX—Magnetic-stripe verification value for the cloud-based payment token The following is the Visa-generated track data: • PAN • Cardholder name will be blanks • Pan expiration date • Service code with the value assigned by Visa • Issuer discretionary data contains zeros • CVV with a Visa assigned value

Table D-3: 0100/0110 Preauthorization POS Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). Visa will insert this value based on the presence of a Visa-issued token.
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		The existing values are supported in this field.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	O				This tag contains the active account management velocity checking result value. Valid values are: • 02 (Time-to-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the token that is used to replace the cardholder PAN and is a required data element in token processing.

Table D-3: 0100/0110 Preauthorization POS Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		This tag contains the token type value of 03 (CBP (cloud-based payment)) to identify cloud-based payment token transactions with MST.
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C+		C+		This tag contains the elapsed time in hours since the current Limited Use Key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C+		C+		This tag contains the cumulative count of transactions for the current LUK.

Table D-3: 0100/0110 Preauthorization POS Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C+		C+		This tag contains the cumulative total of transaction amounts in USD for the current LUK.

0200/0210 and 0220/0230 POS Full Financial Messages for Cloud-Based Payment with Magnetic Secure Transmission

The following table shows the message layout and content of the 0200/0210 and 0220/0230 Full financial messages for cloud-based payment with Magnetic Secure Transmission (MST).

Table D-4: 0200/0210 and 0220/0230 POS Full Financial Messages for Cloud-Based Payment with Magnetic Secure Transmission

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 90 (Magnetic stripe read and exact content of Track 1 or Track 2 included (CVV check is possible)).
25	Point-of-Service Condition Code	2 N 4-bit BCD, 1 byte	M	M	M	M	This field contains a code identifying transaction conditions at the point-of-sale or point of service.

Table D-4: 0200/0210 and 0220/0230 POS Full Financial Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
35	Track 2 Data	Variable length, 1 byte binary+ up to 37 N, 4-bit BCD, 20 bytes	C				This field contains the token data or issuers can choose to receive track data instead of token data. The following are token data elements: • Token received from the Visa Cloud-Based Payment Platform • Token expiration date received from the Visa Cloud-Based Payment Platform • Service code received from the Visa Cloud-Based Payment Platform • Issuer discretionary data that contains: – HHHH—Timestamp received as part of the account parameter index from the Visa Cloud-Based Payment Platform – CC—Counter received as part of the account parameter index from the Visa Cloud-Based Payment Platform – AAAA—Application transaction counter (ATC) – XXX—Magnetic-stripe verification value for the cloud-based payment token The following is the Visa-generated track data: • Primary account number (PAN) • Pan expiration date • Service code with the value assigned by Visa • CVV • Issuer discretionary data contains zeros

Table D-4: 0200/0210 and 0220/0230 POS Full Financial Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M	When the magnetic stripe verification value for the cloud-based payment token fails and Field 44.5 is present, this field contains the value of 05 (Do not honor). If Field 44.5 is not present, this field contains the value of 82 (Negative online CAM, dCVV, iCVV, or CVV results).
44.5	CVV/iCVV Results Code	1 ANS, EBCDIC, 1 byte		O	C		In 0120/0220 STIP advices, if the issuer can accept this field, it contains the results of verifying the magnetic stripe verification value for the cloud-based payment token. Existing values in this field is used to represent the verification results.

Table D-4: 0200/0210 and 0220/0230 POS Full Financial Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
45	Track 1 Data	Variable length, 1 byte, binary + up to 76 ANS, EBCDIC, maximum 77 bytes	C				This field contains the token data or issuers can choose to receive track data instead of token data. The following are token data elements: • Token received from the Visa Cloud-Based Payment Platform • Token expiration date received from the Visa Cloud-Based Payment Platform • Service code received from the Visa Cloud-Based Payment Platform • CVV received from the Visa Cloud-Based Payment Platform • Issuer discretionary data that contains: – HHHH—Timestamp received as part of the account parameter index from the Visa Cloud-Based Payment Platform – CC—Counter received as part of the account parameter index from the Visa Cloud-Based Payment Platform – AAAA—Application transaction counter (ATC) – XXX—Magnetic-stripe verification value for the cloud-based payment token The following is the Visa-generated track data: • PAN • Cardholder name will be blanks • Pan expiration date • Service code with the value assigned by Visa • Issuer discretionary data contains zeros • CVV with a Visa assigned value

Table D-4: 0200/0210 and 0220/0230 POS Full Financial Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). Visa will insert this value based on the presence of a Visa-issued token.
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		The existing values are supported in this field.
TLV 123, Usage 2, Dataset ID 67, Tag 04	Active Account Management Velocity Checking Result	2 N, 2 byte	C		C-		This tag contains the active account management velocity checking result value. Valid values are: • 02 (Time-to-Live exceeded) • 03 (Count exceeded) • 04 (Amount exceeded)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the token that is used to replace the cardholder PAN and is a required data element in token processing.

Table D-4: 0200/0210 and 0220/0230 POS Full Financial Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		This tag contains the token type value of 03 (CBP (cloud-based payment)) to identify cloud-based payment token transactions with MST.
TLV 123, Usage 2, Dataset ID 68, Tag 1F31	Elapsed Time to Live	4 N, 4 bytes	C		C		This tag contains the elapsed time in hours since the current Limited Use Key (LUK) was provisioned or replenished on the device.
TLV 123, Usage 2, Dataset ID 68, Tag 1F32	Count of Number of Transactions	3 N, 3 bytes	C		C-		This tag contains the cumulative count of transactions for the current LUK.

Table D-4: 0200/0210 and 0220/0230 POS Full Financial Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 1F33	Cumulative Transaction Amount	7 N, 7 bytes	C		C-		This tag contains the cumulative total of transaction amounts in USD for the current LUK.

0220/0230 Preauthorization Completion POS Full Financial Messages for Cloud-Based Payment with Magnetic Secure Transmission

The following table shows the message layout and content of the 0220/0230 Preauthorization completion messages for cloud-based payment with Magnetic Secure Transmission (MST).

Table D-5: 0220/0230 Preauthorization Completion POS Full Financial Messages for Cloud-Based Payment with Magnetic Secure Transmission

Field and Field Name		Format	Original		STIP Advice		Description
			0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 90 (Magnetic stripe read and exact content of Track 1 or Track 2 included (CVV check is possible)).
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization completion message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). Visa will insert this value based on the presence of a Visa-issued token.

Table D-5: 0220/0230 Preauthorization Completion POS Full Financial Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		The existing values are supported in this field.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	C		C		This tag contains the token that is used to replace the cardholder PAN and is a required data element in token processing.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C		C		This tag identifies how the cardholder was authenticated during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	C		C		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	C		C		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	C		C		This tag contains the token type value of 03 (CBP (cloud-based payment)) to identify cloud-based payment token transactions with MST.

0400/0410 and 0420/0430 POS Authorization Reversal Messages for Cloud-Based Payment with Magnetic Secure Transmission

The following table shows the message layout and content of the 0400/0410 and 0420/0430 POS Authorization reversal messages for cloud-based payment with Magnetic Secure Transmission (MST).

Table D-6: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Cloud-Based Payment with Magnetic Secure Transmission

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 90 (Magnetic stripe read and exact content of Track 1 or Track 2 included (CVV check is possible)).
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS authorization reversal message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). Visa will insert this value based on the presence of a Visa-issued token.

Table D-6: 0400/0410 and 0420/0430 POS Authorization Reversal Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		The existing values are supported in this field.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the token that is used to replace the cardholder PAN and is a required data element in token processing.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		This tag contains the token type value of 03 (CBP (cloud-based payment)) to identify cloud-based payment token transactions with MST.

0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Cloud-Based Payment with Magnetic Secure Transmission

The following table shows the message layout and content of the 0400/0410 and 0420/0430 POS Preauthorization reversal messages for cloud-based payment with Magnetic Secure Transmission (MST).

Table D-7: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Cloud-Based Payment with Magnetic Secure Transmission

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 90 (Magnetic stripe read and exact content of Track 1 or Track 2 included (CVV check is possible)).
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS preauthorization reversal message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). Visa will insert this value based on the presence of a Visa-issued token.

Table D-7: 0400/0410 and 0420/0430 POS Preauthorization Reversal Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		The existing values are supported in this field.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the token that is used to replace the cardholder PAN and is a required data element in token processing.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		This tag contains the token type value of 03 (CBP (cloud-based payment)) to identify cloud-based payment token transactions with MST.

0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Cloud-Based Payment with Magnetic Secure Transmission

The following table shows the message layout and content of the 0400/0410 and 0420/0430 POS Full financial reversal messages for cloud-based payment with Magnetic Secure Transmission (MST).

Table D–8: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Cloud-Based Payment with Magnetic Secure Transmission

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 90 (Magnetic stripe read and exact content of Track 1 or Track 2 included (CVV check is possible)).
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa will populate the payment account reference in Tag 01 prior to sending the POS full financial reversal message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M+		M+		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). Visa will insert this value based on the presence of a Visa-issued token.

Table D–8: 0400/0410 and 0420/0430 POS Full Financial Reversal Messages for Cloud-Based Payment with Magnetic Secure Transmission (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		The existing values are supported in this field.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the token that is used to replace the cardholder PAN and is a required data element in token processing.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		This tag contains the token type value of 03 (CBP (cloud-based payment)) to identify cloud-based payment token transactions with MST.

This appendix includes the following message layouts for e-commerce enabler:

- 0302/0312 Token maintenance file message
- 0302/0312 Primary account number (PAN) maintenance file messages
- 0302/0312 Token file inquiry messages
- 0302/0312 Issuer Payment Account Reference Inquiry messages
- 0600/0610 Issuer token notification online message for message reason code **3700**
- 0620/0630 Issuer token notification advice message for message reason codes **3700, 3701, 3702, 3703**
- 0620/0630 Issuer token notification advice message for message reason code **3716**
- 0620/0630 Issuer token notification advice messages for message reason codes **3720** and **3721**
- The following V.I.P. POS authorization and full financial messages:
 - 0100/0110 and 0120/0130 Authorization messages
 - 0100/0110 and 0120/0130 Preauthorization messages
 - 0200/0210 and 0220/0230 Full financial messages
 - 0220/0230 Preauthorization Completion Full financial messages
 - 0400/0410 and 0420/0430 Authorization reversal messages
 - 0400/0410 and 0420/0430 Preauthorization reversal messages
 - 0400/0410 and 0420/0430 Full financial reversal messages

0302/0312 Token Maintenance File Message

The 0302/0312 Token maintenance file message will allow participating issuers to maintain and inquire about e-commerce enabler tokens.

The following table shows the message layout and contents for the token maintenance request message and response.

Table E-1: 0302/0312 Token Maintenance File

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
—	Bit Map, Secondary	8 bytes, 64-bit string	M	M	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	C	This field contains the number identifying the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number assigned by the message initiator that uniquely identifies a cardholder transaction and all the message types, also known as system transactions that it comprises, according to individual program rules.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	C	C	This field contains the PAN expiration date which is currently the same as the token expiration date.

Table E-1: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field contains the month and day when this message becomes part of a transaction.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number is assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0312 Response and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C	This field contains the description of the first error that the VIC found in an 0302 File maintenance request message.
48, Usage 2	Unformatted Text in Authorization/ Reversal Messages	Variable length, 1 byte binary+ 255 ANS, EBCDIC 256 bytes max	C	C	The 0302 message must contain Field 48, Usage 2 with the reason for the update. This field must be present when Field 63.3 contains one of these values in the 0302 message: • 3701 (Token deactivate) • 3702 (Token suspend) • 3703 (Token resume) • 3713 (Call center activation)

Table E-1: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data				This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	This tag contains the payment account reference.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified unique Visa-generated transaction identifier (TID).
63.0	Field 63 Bitmap	24 N, bit string, 3 bytes	C	C	This field contains a bitmap that specifies which subfields are present.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	O	This field contains a code that specifies the network to be used for transmission of the message and determines the program rules that apply to the transactions.

Table E-1: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C		This field contains values to identify the request message. This field contains one of these values: • 3701 (Token deactivate) • 3702 (Token suspend) • 3703 (Token resume) This field must be present in the 0302 message when one of these values is sent in the message.
73	Date, Action	6 N, 4-bit BCD, 2 bytes	C	C	This field contains the purge date for the account.
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code that specifies the type of file processing required with a valid value of 2 (Change).
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	C	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of TK (Token).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field contains additional tracing information for proprietary use.

Table E-1: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13-19 N, 19 bytes max	C	C	This tag contains the token. A token is required for a change.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C	C	This tag is included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	C	C	Tag 03 is required for an add request.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Device Name	32 AN, EBCDIC, 32 bytes		C+	Tag 05 contains the device name that may be included in the response when the token is located.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm		C	Tag 06 contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes		C+	Tag 07 contains the token type value of 05 (E-commerce enabler)

Table E-1: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte		C	This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i> If the token sent in the request is invalid, this field will not be included in the response.

0302/0312 Primary Account Number Maintenance File Message for E-Commerce Enabler

The following table shows the message layout and contents of the 0302/0312 Primary account number (PAN) maintenance file message to support Visa Token Service transactions for e-commerce enabler.

This message is used for the following:

- PAN expiration date updates
- PAN replacement updates

Table E-2: 0302/0312 Primary Account Number Maintenance File Message for E-Commerce Enabler

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the current (old) PAN for the new PAN replacement updates. NOTE <i>This field contains the current (old) PAN. TLV Field 127, Dataset ID 41, Tag 01 contains the new PAN.</i>
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time that the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field is included in standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports/files that will include the message.

Table E-2: 0302/0312 Primary Account Number Maintenance File Message for E-Commerce Enabler (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number is assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C+	The 0312 message contains Field 48, Usage 1b with the reason for the update. REFERENCE <i>For more information about this tag, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa populates the payment account reference in Tag 01 prior to sending the 0312 PAN maintenance file response message.

Table E-2: 0302/0312 Primary Account Number Maintenance File Message for E-Commerce Enabler (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes		C	This field must contain one of these values: 3720 (PAN expiry update) 3721 (PAN update) NOTE <i>This field contains reason code 3721 for messages that impact both PAN and PAN expiry updates.</i>
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 2 (Change).
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of PAN (Card data).

Table E-2: 0302/0312 Primary Account Number Maintenance File Message for E-Commerce Enabler (cont'd.)

Field Number and Name		Format	Primary Account Number Maintenance File		Description
			0302	0312	
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field contains additional tracing information for proprietary use.
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	O	C+	This tag is required in the 0302 request message if the primary account number in Field 2 is not present. When present in the request message, it is returned in the 0312 response message.
TLV 127.PAN	PAN File Maintenance (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	M	M	This TLV field contains Dataset ID 41.
TLV 127.PAN, Dataset ID 41	PAN Update Data				This dataset ID contains Tag 01 and Tag 02.
TLV 127.PAN, Dataset ID 41, Tag 01	Replacement PAN	13-19 N, 4-bit BCD, 7-10 bytes	C	C	This tag is required when the existing PAN is being replaced with a new PAN.
TLV 127.PAN, Dataset ID 41, Tag 02	Replacement PAN Expiration Date	4 N, 4-bit BCD, 2 bytes format: yymm	M	M	This tag is required when Tag 01 contains a new PAN, and must contain the expiration date for the new PAN.

0302/0312 Token File Inquiry Message

Visa will implement the 0302/0312 Token file inquiry message to support Visa Token Service transactions for e-commerce enabler.

This section includes the following 0302/0312 messages:

- 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID
- 0302/0312 Token File Inquiry Message—Token Detail

0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID

The following table shows the message layout and content used to query the token vault for all tokens associated with a PAN or PAN reference ID. The 0312 response will include a list of up to nine tokens found for the PAN or PAN reference ID.

Table E-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	C+	This field contains the PAN to be used for the token inquiry. This field is required in the 0302 request message when the PAN reference ID field is not present. This field is present in the 0312 response when present in the request. When the PAN reference ID is used in the request in lieu of the PAN, this field will also be included in the response when the PAN reference ID is located.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time that the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm		C+	This field contains the PAN expiration date from the PAN file. Visa inserts the PAN expiration date in Field 14 in token inquiry messages prior to routing to the issuer.

Table E-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field is included in standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports/files that will include the message.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number is assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C+	This field may be present if an error occurs when processing the request. When Field 39 contains the value of 06 (Error) in the 0312 response message, Field 48, Usage 1b contains a code that describes the reason for the error.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.

Table E-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa populates the payment account reference in Tag 01 prior to sending the 0312 Token file inquiry response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 5 (Inquire).
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of TK (Token).

Table E-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field may contain additional tracing information for proprietary use.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N 19 bytes max	C	C+	This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing. V.I.P. will return up to 9 tokens associated with the PAN. Each token found is included in a separate iteration of Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes		O	This tag, which is included in the response when the token is located, is used to support e-commerce enabler transactions. The value of 05 (E-commerce enabler) applies to e-commerce enabler transactions.
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte		O	This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 01F35	Total Number of Tokens for Token Inquiry Criteria	4 N, 4-bit BCD, 2 bytes		O	This tag contains the total token count based on the token inquiry criteria.

Table E-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	C	C+	This tag is required in the 0302 request message if the primary account number in Field 2 is not present. When present in the request message, it is returned in the 0312 response message. When one or more tokens are present for the PAN or PAN reference ID, only the first iteration of Dataset ID 68 contains this field.
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte		C	This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).
TLV 127	Inquiry Control Data (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 42.
TLV 127 Dataset ID 42	Inquiry Control Data				This dataset ID contains Tag 01.

Table E-3: 0302/0312 Token File Inquiry Message—List All Tokens for PAN or PAN Reference ID (cont'd.)

Field Number and Name		Format	Token File Inquiry—List All Tokens for PAN or PAN Reference ID		Description
			0302	0312	
TLV 127 Dataset ID 42, Tag 01	Starting Query Number	4 N, 4-bit BCD, 2 bytes	O	C	This tag contains the starting query number that the issuer wants to query. Issuers have the option to submit multiple 0302 Token file request messages in this field until the remainder of the tokens are sent in the 0312 Token file inquiry response message. If this tag is not sent in the 0302 Token file inquiry request, Visa will send the list of tokens matching any other requested criteria, beginning with the first token. This tag will not be sent in the 0312 Token file inquiry response if not sent in the 0302 Token file inquiry request.

0302/0312 Token File Inquiry Message—Token Detail for E-Commerce Enabler

The following table shows the message layout and contents of the 0302/0312 Token file inquiry message used to retrieve details for a specific token. The 0312 response will include details for the specific token, if located, for e-commerce enabler transactions.

Table E-4: 0302/0312 Token File Inquiry Message—Token Detail for E-Commerce Enabler

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max		C+	This field contains the PAN associated with the requested token. This field is not used in the 0302 request message. This field is included in the 0312 response message when the requested token is located.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time that the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number that uniquely identifies a cardholder transaction.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field is included in standard 0302 messages when the processing option is turned on to receive it for a V.I.P. Authorization Only processor, or the processor is V.I.P. Full Service. This field contains the date of the reports/files that will include the message.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number is assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>

Table E-4: 0302/0312 Token File Inquiry Message—Token Detail for E-Commerce Enabler (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0312 Responses and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C+	This field may be present if an error occurs when processing the request. When Field 39—Response Code, contains 06 in the 0312 response message, Field 48, Usage 1b contains a code that describes the reason for the error.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa populates the payment account reference in Tag 01 prior to sending the 0312 Token file inquiry response message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified, unique Visa-generated transaction identifier (TID).
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).

Table E-4: 0302/0312 Token File Inquiry Message—Token Detail for E-Commerce Enabler (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code to specify the type of file processing required. The valid value is 5 (Inquire).
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of TK (Token).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field may contain additional tracing information for proprietary use.
TLV 123, Usage 2, Dataset ID 67, Tag 07	Issuer Special Condition Code	2 AN, EBCDIC, 2 bytes		O	This tag contains an issuer-assigned value. Visa populates the issuer special condition code in Tag 07 prior to sending the 0312 Token file inquiry response message.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	C	C+	This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing.

Table E-4: 0302/0312 Token File Inquiry Message—Token Detail for E-Commerce Enabler (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes		C+	This tag is included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	C	C+	This tag is required in the 0302 request message when the token reference ID in Field 123, Usage 2, Dataset ID 68, Tag 05 is present. This tag is present in the 0312 response when present in the request. This tag will also be included in the response when the token is located.
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C+		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes maximum		C+	This TLV field contains Dataset ID 02.
TLV 125, Usage 2, Dataset ID 02	Wallet Provider			C+	This dataset ID contains Tag 05, Tag 06, Tag 07 and Tag 08.
TLV 125, Usage 2, Dataset ID 02, Tag 05	Wallet Provider Device Score	2 N, 2 bytes		C+	This tag may be included in the response when the token is located. This tag contains the value of 1–5 , with 5 being the most trusted.

Table E-4: 0302/0312 Token File Inquiry Message—Token Detail for E-Commerce Enabler (cont'd.)

Field Number and Name		Format	Token File Inquiry—Token Detail		Description
			0302	0312	
TLV 125, Usage 2, Dataset ID 02, Tag 06	Wallet Provider Account Score	2 N, 2 bytes		C+	This tag may be included in the response when the token is located. This tag contains the value of 1–5 , with 5 being the most trusted.
TLV 125, Usage 2, Dataset ID 02, Tag 07	Wallet Provider Reason Codes	30 ANS, EBCDIC, 30 bytes		C+	This tag may be included in the response when the token is located. It contains up to 15 wallet provider reason codes of 2 bytes each. REFERENCE <i>For a list of valid reason codes, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 02, Tag 08	PAN Source	2 N, 2 bytes		C+	This tag may be included in the response when the token is located with one of these values: • 01 (Key-entered) • 02 (On file) • 03 (Mobile banking app) • 04 (Token) • 05 (Chip dip) • 06 (Contactless tap)

0302/0312 Issuer Payment Account Reference Inquiry and Response Messages

The following table shows the V.I.P. message layout for issuer primary account reference inquiry and response messages.

Table E-5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	C	This field contains the PAN. NOTE <i>Both PAN and token must not be included in V.I.P. payment account reference inquiry messages.</i>
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to the Visa system.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field contains the month and day.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number is assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>

Table E-5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages (cont'd.)

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains a code that defines the response.
48, Usage 1b	Error Codes n 0310/0312 Responses and 322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, maximum 3 bytes		C+	This field contains a code when Field 39 is 06 (Error).
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01 and Tag 02.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	This tag contains the payment account reference.
TLV 56, Dataset ID 01, Tag 02	Payment Account Reference Creation Date	5 N, 4-bit BCD, 5 bytes format: YYDDD		C+	This tag contains the payment account reference creation date in Julian date format.

Table E-5: 0302/0312 Issuer Payment Account Reference Inquiry and Response Messages (cont'd.)

Field Name and Number		Format	Issuer Payment Account Reference		Description
			0302	0312	
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains the transaction identifier.
63.1	Network ID	4 N, 4-bit BCD, 2 bytes	O	C	This field contains the network ID 0002 (Visa).
91	File Update Code	1 AN, EBCDIC 1 byte	M	M	This field contains 5 (Inquire).
92	File Security Code	2 AN, EBCDIC 2 byte	O	O	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains PAR (Payment Account Reference).
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC 25 bytes max	O	C	This field contains additional tracing information.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	C	C	This tag contains the token that is used to replace the cardholder PAN. NOTE <i>Both PAN and token must be included in V.I.P. Payment account reference inquiry messages.</i>

THIS PAGE INTENTIONALLY LEFT BLANK.

0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700

The following table shows the message layout and contents of the 0600/0610 Issuer token notification online message to support Visa Token Service transactions for e-commerce enabler transactions for message reason code **3700** (Token create).

NOTE

*Issuers can choose to receive the 0600 Issuer token notification online message instead of the 0620 Issuer token notification advice for message reason code **3700**.*

Table E-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
—	Bit Map, Secondary	8 bytes, 64-bit string	M	M	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the number identifying the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number assigned by the message initiator that uniquely identifies a cardholder transaction and all the message types, also known as system transactions that it comprises, according to individual program rules.

Table E-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	M		This field contains the PAN expiration date.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number is assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the response code 00 (Unconditional approval (provision and activate immediately for payments)) in the response message.
62.0	Field 62 Bitmap	64 N, bit string, 8 bytes	M	O	This field contains a bitmap that specifies which Field 62 subfields are present.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max		C+	This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data			C+	This dataset ID contains Tag 01.

Table E-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	Visa populates the payment account reference in Tag 01 prior to sending the 0600 Token notification request message for message reason code 3700 to the issuer.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique for each original authorization and financial request.
63.0	Field 63 Bitmap	24 N, bit string, 3 bytes	M	M	This field contains a bitmap that specifies which subfields are present.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	This field contains a code that specifies the network to be used for transmission of the message and determines the program rules that apply to the transactions.
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains values to identify that the request message is requesting a token. This field contains the value of 3700 (Token create).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.

Table E-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
100	Receiving Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	C		This field is a message routing field. It contains a code that identifies the institution that should receive a request or advice.
101	File name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	C		This field is used to specify that Field 127 contains terms and conditions data to support e-commerce enabler transactions. This field contains the value of TERMS-CONDITIONS (Token Terms and Conditions). This field is used when Field 63.3 contained the message reason code 3700 when a token was created.
TLV 114	Domestic and Localized Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	O		This TLV field contains Dataset ID 70.
TLV 114 Dataset ID 70	Localized Data		O		This dataset ID contains Tag C0, Tag C1, Tag C2, Tag C3, Tag C4, and Tag C5.
TLV 114 Dataset ID 70 Tag C0	Language Code	3 AN, EBCDIC, 3 bytes	O		This tag contains the ISO 639-defined language code.

Table E-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 114 Dataset ID 70 Tag C1	Data Encoding Format	20 AN, EBCDIC, 20 bytes max	O		This tag identifies how all tags except C0 and C1 are encoded in this data set.
TLV 114 Dataset ID 70 Tag C2	Device Name	Binary, UTF-8, 400 bytes max	O		This tag contains the device name. Length = 100 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114 Dataset ID 70 Tag C3	Cardholder Name	Binary, UTF-8, 1024 bytes max	O		This tag contains the cardholder name. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114 Dataset ID 70 Tag C4	Address	Binary, UTF-8, 1024 bytes max	O		This tag carries all address data. Each line of the address is comma-separated and left-justified. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114 Dataset ID 70 Tag C5	Zip Code	Binary, UTF-8, 64 bytes max	O		This tag contains the zip code. Length = 16 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>

Table E-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 120	Auxiliary Transaction Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max			This TLV field contains Dataset ID 58.
TLV 120, Dataset ID 58	Card Environment Data		C		The dataset ID contains Tag 80, Tag 81, Tag 82, Tag 83, Tag 84, Tag 85, and Tag 86.
TLV 120, Dataset ID 58 Tag 80	Original Token	13–19 N, 19 bytes max	C		This tag contains the original token that was previously provisioned. This tag is present in token for token provisioning messages.
TLV 120, Dataset ID 58 Tag 81	Original Token Assurance Method	2 AN, EBCDIC, 2 bytes	C		This tag contains the original token assurance method. This tag is present in token for token provisioning messages.
TLV 120, Dataset ID 58 Tag 82	Original Token Requestor ID	11 N, 11 bytes	C		This tag contains the original token requestor ID. This tag is present in token for token provisioning messages.
TLV 120, Dataset ID 58 Tag 83	Original Token Reference ID	32 AN, EBCDIC, 32 bytes	C		This tag contains the original token reference ID. This tag is present in token for token provisioning messages.

Table E-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 120, Dataset ID 58 Tag 84	Original Token Type	2 AN, EBCDIC, 2 bytes	C		This field contains the token type of the source token used for provisioning a new token. This tag is present in token for token provisioning messages.
TLV 120, Dataset ID 58 Tag 85	Original Device Type	2 AN, EBCDIC, 2 bytes	C		This field contains the device type of the source token used for provisioning a new token. This tag is present in token for token provisioning messages.
TLV 120, Dataset ID 58 Tag 86	Original Device ID	48 ANS, EBCDIC, up to 48 bytes	C		This field contains the device ID of the source token used for provisioning a new token. This tag is present in token for token provisioning messages.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum			This TLV field contains Dataset ID 66 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data				This dataset ID contains Tag D4.

Table E–6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 123, Usage 2, Dataset ID 66, Tag D4	Cardholder Name	26 ANS, EBCDIC, 26 bytes	C		This field contains the cardholder name. It is present when Field 63.3 contains the value of 3700 . The value is truncated if the length of the name is longer than 26 characters.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 07, Tag 0D, and Tag 86.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		This tag contains the token.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C	C	This tag is included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M		This tag contains the token type value of 05 (E-commerce enabler).

Table E-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C+		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).
TLV 123, Usage 2, Dataset ID 68, Tag 86	Token Requestor - Token Service Provider ID	11 N, 4-bit BCD, 6 bytes	C		This tag contains a unique value that identifies the token requestor-token service provider (TR-TSP). NOTE <i>This tag will only be present when the transaction is initiated by a TR-TSP.</i>
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 02.
TLV 125, Usage 2, Dataset ID 01, Tag 01	Device Type	2 AN, EBCDIC, 2 bytes	C		This tag contains the device type value. REFERENCE <i>For a list of valid device types, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 02	Wallet Provider				This dataset ID contains Tag 06, Tag 07, Tag 08, Tag 09, and Tag 0A.

Table E-6: 0600/0610 Issuer Token Notification Online Message for Message Reason Code 3700 (cont'd.)

Field Number and Name		Format	Issuer Token Notification Online Message		Description
			0600	0610	
			VIC	Iss	
TLV 125, Usage 2, Dataset ID 02, Tag 06	Wallet Provider Account Score	2 N, 2 bytes	C	C	This tag contains the value of 1-5 , with the value of 5 being the most trusted.
TLV 125, Usage 2, Dataset ID 02, Tag 07	Wallet Provider Reason Codes	30 ANS, EBCDIC, 30 bytes	C	C	This tag contains up to 15 wallet provider reason codes of 2 bytes each. REFERENCE <i>For a list of valid reason codes, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 02, Tag 08	PAN Source	2 N, 2 bytes	M	M	This tag contains the value of 01 (Key-entered) or 02 (On file).
TLV 125, Usage 2, Dataset ID 02, Tag 09	Wallet Account ID	32 ANS, EBCDIC, 32 bytes	M	M	This tag contains the wallet account ID.
TLV 125, Usage 2, Dataset ID 02, Tag 0A	Wallet Account E-mail Address	64 DX, 32 bytes	M	M	This tag contains the wallet account e-mail address.

0620/0630 Issuer Token Notification Advice Message for Message Reason Codes 3700, 3701, 3702, and 3703

The following table shows the message layout and contents of the 0620/0630 Token notification advice message to support Visa Token Service transactions for e-commerce enabler for the following message reason codes:

- **3700** (Token create)
- **3701** (Token deactivate)
- **3702** (Token suspend)
- **3703** (Token resume)

NOTE

*Issuers that initiate token lifecycle management messages for reason codes **3701**, **3702**, and **3703** can optionally receive the 0620 Issuer token notification advices.*

Table E-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
—	Bit Map, Secondary	8 bytes, 64-bit string	M	M	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the number identifying the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.

Table E–7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number assigned by the message initiator that uniquely identifies a cardholder transaction and all the message types, also known as system transactions that it comprises, according to individual program rules.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	M		This field contains the PAN expiration date.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	This field contains the month and day when this message becomes part of a transaction.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number is assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	This field contains the response code 00 (Unconditional approval (provision and activate immediately for payments)) in the response message.
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C+		This TLV field contains Dataset ID 01.

Table E-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 56, Dataset ID 01	Account Data		C+		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	C+		Visa populates the payment account reference in Tag 01 prior to sending the 0620 Token notification advice for message reason code 3700 , 3701 , 3702 , and 3703 to the issuer.
62.0	Field 62 Bitmap	64 N, bit string, 8 bytes	M	O	This field contains a bitmap that specifies which Field 62 subfields are present.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique for each original authorization and financial request.
63.0	Field 63 Bitmap	24 N, bit string, 3 bytes	M	M	This field contains a bitmap that specifies which subfields are present.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	This field contains a code that specifies the network to be used for transmission of the message and determines the program rules that apply to the transactions.
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains values to identify that the request message is requesting a token. This field contains one of these values: • 3700 (Token create) • 3701 (Token deactivate) • 3702 (Token suspend) • 3703 (Token resume)
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.

Table E–7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.
92	File Security Code	2 AN EBCDIC, 2 bytes	O		This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry. NOTE <i>This field is present when Field 63.3 contains one of these values:</i> • 3701 (Token deactivate) • 3702 (Token suspend) • 3703 (Token resume)
100	Receiving Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	C		This field is a message routing field. It contains a code that identifies the institution that should receive a request or advice.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	C		For message reason code 3700, this field contains the value of TERMS-CONDITIONS (Token Terms and Conditions). For message reason codes 3701, 3702, and 3703, this field contains the value of TK (Token).
TLV 114	Domestic and Localized Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	O		This TLV field contains Dataset ID 70.

Table E-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 114 Dataset ID 70	Localized Data				This dataset ID contains Tag C0, Tag C1, Tag C2, Tag C3, Tag C4, and Tag C5.
TLV 114 Dataset ID 70 Tag C0	Language Code	3 AN, EBCDIC, 3 bytes	O		This tag is for future use. This tag contains the ISO 639-defined language code. This tag will only be included when Field 63.3 contains message reason code 3700 .
TLV 114 Dataset ID 70 Tag C1	Data Encoding Format	20 AN, EBCDIC, 20 bytes max	O		This tag identifies how all tags except C0 and C1 are encoded in this data set. This tag will only be included when Field 63.3 contains message reason code 3700 .
TLV 114 Dataset ID 70 Tag C2	Device Name	Binary, UTF-8, 400 bytes max	O		This tag contains the device name. This tag will only be included when Field 63.3 contains message reason code 3700 . Length = 100 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114 Dataset ID 70 Tag C3	Cardholder Name	Binary, UTF-8, 1024 bytes max	O		This tag contains the cardholder name. This tag will only be included when Field 63.3 contains message reason code 3700 . Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>

Table E-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 114 Dataset ID 70 Tag C4	Address	Binary, UTF-8, 1024 bytes max	O		This tag carries all address data. Each line of the address is comma-separated and left-justified. This tag will only be included when Field 63.3 contains message reason code 3700. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114 Dataset ID 70 Tag C5	Zip Code	Binary, UTF-8, 64 bytes max	O		This tag contains the zip code. This tag will only be included when Field 63.3 contains message reason code 3700. Length = 16 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 120	Auxiliary Transaction Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max			This TLV field contains Dataset ID 58.
TLV 120, Dataset ID 58	Card Environment Data		C		The dataset ID contains Tag 80, Tag 81, Tag 82, Tag 83, Tag 84, Tag 85, and Tag 86.

Table E-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 120, Dataset ID 58 Tag 80	Original Token	13–19 N, 19 bytes max	C		This tag contains the original token that was previously provisioned. This tag is present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58 Tag 81	Original Token Assurance Method	2 AN, EBCDIC, 2 bytes	C		This tag contains the original token assurance method. This tag is present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58 Tag 82	Original Token Requestor ID	11 N, 11 bytes	C		This tag contains the original token requestor ID. This tag is present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58 Tag 83	Original Token Reference ID	32 AN, EBCDIC, 32 bytes	C		This tag contains the original token reference ID. This tag is present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58 Tag 84	Original Token Type	2 AN, EBCDIC, 2 bytes	C		This field contains the token type of the source token used for provisioning a new token. This tag is present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 120, Dataset ID 58 Tag 85	Original Device Type	2 AN, EBCDIC, 2 bytes	C		This field contains the device type of the source token used for provisioning a new token. This tag is present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .

Table E-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 120, Dataset ID 58 Tag 86	Original Device ID	48 ANS, EBCDIC, up to 48 bytes	C		This field contains the device ID of the source token used for provisioning a new token. This tag is present in token for token provisioning messages that contain Field 63.3 with the value of 3700 .
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum			This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data				This dataset ID contains Tag D4.
TLV 123, Usage 2, Dataset ID 66, Tag D4	Cardholder Name	26 ANS, EBCDIC, 26 bytes	C		This field contains the cardholder name. It is present when Field 63.3 contains the value of 3700 . The value is truncated if the length of the name is longer than 26 characters.
TLV 123, Usage 2, Dataset ID 68	Token Data				This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 05, Tag 06, Tag 07, Tag 08, Tag 0B, Tag 0D, and Tag 86.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		This tag contains the token that is used to replace the cardholder PAN.

Table E-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C		This tag is included in the response when the token is located. It is present when Field 63.3 has a value of 3700. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		This tag contains the token requestor ID. It is present when Field 63.3 has a value of 3700.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		This tag contains the token reference ID. It is present when Field 63.3 has a value of 3700.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes, format: yymm	M		The tag contains the token expiration date. It is present when Field 63.3 has a value of 3700.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M		This tag contains the token type value of 05 (E-commerce enabler).
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table E-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		This tag contains a unique reference ID generated by Visa for the card account number. It is present when Field 63.3 has a value of 3700 .
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C+		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).
TLV 123, Usage 2, Dataset ID 68, Tag 86	Token Requestor - Token Service Provider ID	11 N, 4-bit BCD, 6 bytes	C		This tag contains a unique value that identifies the token requestor-token service provider (TR-TSP). NOTE <i>This tag will only be present when the transaction is initiated by a TR-TSP.</i>
TLV 125, Usage 2	Supporting Information	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 01, Dataset ID 02, and Dataset ID 41.
TLV 125, Usage 2, Dataset ID 01	Token Device		C		This dataset ID contains Tag 01, Tag 02, Tag 04, Tag 05, Tag 06, and Tag 07.
TLV 125, Usage 2, Dataset ID 01, Tag 01	Device Type	2 AN, EBCDIC, 2 bytes	C		This tag contains the device type value. REFERENCE <i>For a list of valid device types, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table E-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 125, Usage 2, Dataset ID 01, Tag 02	Device Language Code	3 AN, EBCDIC, 3 bytes	C		This tag contains the device language code.
TLV 125, Usage 2, Dataset ID 01, Tag 04	Device Number	15 N, 15 bytes	C		This tag contains the device number.
TLV 125, Usage 2, Dataset ID 01, Tag 05	Device Name	16 ANS, EBCDIC, 16 bytes	C		This tag contains the device name.
TLV 125, Usage 2, Dataset ID 01, Tag 06	Device Location	25 ANS, EBCDIC, 25 bytes	C		This tag contains the device location.
TLV 125, Usage 2, Dataset ID 01, Tag 07	IP Address	15 ANS, EBCDIC, 15 bytes	C		This tag contains the IP address.
TLV 125, Usage 2, Dataset ID 02	Wallet Provider		C		This dataset ID contains Tag 07, Tag 08, Tag 09, and Tag 0A.
TLV 125, Usage 2, Dataset ID 02, Tag 07	Wallet Provider Reason Codes	30 ANS, EBCDIC, 30 bytes	C		Tag 07 contains the wallet provider reason codes when Field 63.3 contains the value of 3700. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table E-7: 0620/0630 Issuer Token Notification Advice for Message Reason Codes 3700, 3701, 3702, and 3703 (cont'd.)

Field Number and Name		Format	Issuer Token Notification		Description
			0620	0630	
			VIC	Iss	
TLV 125, Usage 2, Dataset ID 02, Tag 08	PAN Source	2 N, 2 bytes	C		Tag 08 contains the value of 01 (Key-entered) or 02 (On file).
TLV 125, Usage 2, Dataset ID 02, Tag 09	Wallet Account ID	32 ANS, EBCDIC, 32 bytes	C		Tag 09 contains the wallet account ID.
TLV 125, Usage 2, Dataset ID 02, Tag 0A	Wallet Account E-mail Address	64 DX, 32 bytes	C		Tag 0A contains the wallet account email address.
TLV 125, Usage 2, Dataset ID 40	Terms and Conditions	Variable length, TLV Format up to 255 binary and ANS, EBCDIC, 256 bytes max	C	O	This dataset ID contains Tag 01 and Tag 02.
TLV 125, Usage 2, Dataset ID 40, Tag 01	Terms and Conditions Verification	64 AN, EBCDIC, 64 bytes	C	O	Tag 01 contains the terms and conditions verification. This field is present when Field 63.3 contains the value of 3700 . The default value is spaces.
TLV 125, Usage 2, Dataset ID 40, Tag 02	Issuer Terms and Conditions Date/Time	32 AN, EBCDIC, 32 bytes format: YYYY-MM-DDT hh:mm:ss.sss ±[hhmm]	C	O	Tag 02 contains issuer terms and conditions date/time. This field is present when Field 63.3 contains the value of 3700 . The default value is spaces.

0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3716

Message reason code **3716** is assigned when token expiration updates apply to e-commerce enabler tokens. The following table shows the message layout for token expiry update advice messages.

Table E-8: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3716

Field Number and Name		Format	Token Expiry Update		Description
			0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the current (old) PAN.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to the Visa system.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	This field contains the month and day.
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		This field contains a Visa-assigned identifier.

Table E-8: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3716 (cont'd.)

Field Number and Name		Format	Token Expiry Update		Description
			0620	0630	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number is assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	For the 0620 message, this field contains the value of 00 (Good). For the 0630 message, this field must contain the value of 00 (Good).
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	C		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		C		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	C		Visa populates the payment account reference in Tag 01 prior to sending the 0620 Token notification advice to the issuer.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.

Table E-8: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3716 (cont'd.)

Field Number and Name		Format	Token Expiry Update		Description
			0620	0630	
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C		This field that contains the new value of 3716 (Token expiry update) when expiration dates for e-commerce enabler tokens are updated.
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M		This field contains the value of TK (Token).
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum			This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing.

Table E–8: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3716 (cont'd.)

Field Number and Name		Format	Token Expiry Update		Description
			0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		This tag is present when sent by wallet providers.
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 127.PAN	PAN File Maintenance (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 41.
TLV 127, Dataset ID 41	PAN Update Data				This dataset contains Tag 01 and Tag 02.
TLV 127, Dataset ID 41, Tag 01	Replacement PAN	13-19 N, 4-bit BCD, 7–10 bytes	C		This tag is required when the existing PAN is being replaced with a new PAN. It is present for PAN update notifications and may be present for PAN expiry update notifications.

Table E-8: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3716 (cont'd.)

Field Number and Name		Format	Token Expiry Update		Description
			0620	0630	
TLV 127, Dataset ID 41, Tag 02	Replacement PAN Expiration Date	4 N, 4-bit BCD, 2 bytes format: yymm	M		This tag contains the new expiration date.

0620/0630 Issuer Token Notification Advice Message for Message Reason Code 3720 and 3721

Message reason code **3720** is assigned to PAN expiry date messages and message reason code **3721** will be assigned to PAN update messages. The following table shows the message layout for PAN expiry update and PAN update advice messages.

Table E-9: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the current (old) PAN.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	M	M	This field contains the date and time the request or advice was submitted to the Visa system.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	M	M	This field contains a Visa-generated tracing element and unique values for any messages that Visa has processed.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	C	C	This field contains the month and day.
33	Forwarding Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M		M		This field contains a Visa-assigned identifier.

Table E-9: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	M	M	For the 0620 message, this field contains the value of 00 (Good). For the 0630 message, this field must contain the value of 00 (Good).
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C		C		This is an field with one of these values: 3720 (PAN expiry update) 3721 (PAN update) NOTE <i>This field contains reason code 3721 for messages that impact both PAN and PAN expiry updates.</i>

Table E-9: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the value of 890 (Issuer token advice) to identify that this message is a token status notification message.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M		M		This field contains the value of PAN (Card data).
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		M		This tag contains the token that is used to replace the cardholder PAN. It is a required data element for token processing.
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		M		This tag contains the token requestor ID.

Table E-9: 0620/0630 Issuer Token Notification Advice for Message Reason Code 3720 and 3721 (cont'd.)

Field Number and Name		Format	PAN Update		Pan Expiry Date Update		Description
			0620	0630	0620	0630	
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		M		This tag is present when sent by wallet providers.
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		M		This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 127.PAN	PAN File Maintenance (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max					This TLV field contains Dataset ID 41.
TLV 127, Dataset ID 41	PAN Update Data						This dataset contains Tag 01 and Tag 02.
TLV 127, Dataset ID 41, Tag 01	Replacement PAN	13-19 N, 4-bit BCD, 7-10 bytes	C		C		This tag is required when the existing PAN is being replaced with a new PAN. It is present for PAN update notifications and may be present for PAN expiry update notifications.
TLV 127, Dataset ID 41, Tag 02	Replacement PAN Expiration Date	4 N, 4-bit BCD, 2 bytes format: yymm	M		M		This tag contains the new expiration date.

E-Commerce Enabler Token Payment Messages

The appendix includes the V.I.P. POS authorization and full financial messages to support e-commerce enabler transactions.

IMPORTANT

The existing fields that have not changed are not included in this appendix.

Table E-10: Message Impact Summary for E-Commerce Enabler

Message Type	Network 0002 (Visa)	Network 0003 (Interlink) for Visa Cards	Network 0003 (Interlink) for non-Visa Cards
0100/0110 Authorization	Y	N	N
0100/0110 Preauthorization	Y	N	N
0120/0130 Authorization STIP Advice	Y	N	N
0120/0130 Preauthorization STIP Advice	Y	N	N
0200/0210 Full Financial	Y	N	N
0220/0230 Full Financial STIP Advice	Y	N	N
0220/0230 Preauthorization Completion	Y	N	N
0220/0230 Preauthorization Completion STIP Advice	Y	N	N
0400/0410 Authorization Reversal	Y	N	N
0400/0410 Full Financial Reversal	Y	N	N
0400/0410 Preauthorization Reversal	Y	N	N
0420/0430 Authorization STIP Advice Reversal	Y	N	N
0420/0430 Preauthorization STIP Advice Reversal	Y	N	N
0420/0430 Full Financial STIP Advice Reversal	Y	N	N

Y = Transaction supported

N = Transaction not supported

0100/0110 and 0120/0130 Authorization Messages for E-Commerce Enabler

The following table shows the message layout and content of the 0100/0110 and 0120/0130 Authorization messages for e-commerce enabler.

NOTE

Bold values in the 0110 POS authorization response indicate the field must contain the same values from the 0100 POS authorization request.

Bold values in the 0130 STIP advice response indicate the field must contain the same values from the 0120 STIP advice request.

Table E-11: 0100/0110 and 0120/0130 Authorization Messages for E-Commerce Enabler Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the number identifying the cardholder account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table E-11: 0100/0110 and 0120/0130 Authorization Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 34	Electronic Commerce Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	C		C		This TLV field contains Dataset ID 02 and Dataset ID 56.
TLV 34, Dataset ID 02	Acceptance Environment Additional Data						This dataset ID contains Tag 88.
TLV 34, Dataset ID 02, Tag 88	Payment Credential Merchant Relationship Indicator	1 AN, EBCDIC, 1 bytes	C		C		Web browser auto fill transactions use this tag to indicate relationship between merchant website submitting the authorization request and payment credential. Valid values are: • 0 (No link) • 1 (Linked)
TLV 34, Dataset ID 56	Supplemental Data		C+	0	C+		This dataset ID contains Tag DF21.
TLV 34, Dataset ID 56 Tag DF21	Secure Remote Commerce	1 N, 4-bit BCD 1 byte	C+	0	C+		This field carries the indicator that identifies that a token-based e-commerce enabler request was initiated using Visa Digital Commerce. This tag contains the Visa Digital Commerce Indicator with the value of 01 (Visa digital commerce).

Table E-11: 0100/0110 and 0120/0130 Authorization Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
38	Authorization Identification Response	6 AN, EBCDIC, 6 bytes		M		M	For approved authorization requests, this field must not contain any of the following invalid authorization code values: • 00000 (All zeros in the last five positions of the six-byte field) • ^^^^^ (All spaces in the last five positions of the six-byte field) • X (X in the last position of the six-byte field) • 0000^ (Four zeros followed by a space in the last five positions of the six-byte field) • 0000N (Four zeros followed by N in the last five positions of the six-byte field) • 0000Y (Four zeros followed by Y in the last five positions of the six-byte field) • 0000P (Four zeros followed by P in the last five positions of the six-byte field) • SVC (SVC in the first three positions of the six-byte field)
44.3	Additional Token Response Information	1 AN, EBCDIC, 1 byte	C+	O	C		This field contains a value used to identify transactions eligible for token services. Valid values: • 1 (Token program) • Space (Not applicable)
44.10	CVV2 Result Code	1 ANS, EBCDIC, 1 byte	C	C	C		This field contains the dynamic token verification value (DTVV) verification result code. In the 0100/0110 messages, this field contains the value of M (CVV2 match). In the 0120 message, this field contains the value of M or N (CVV2 No matched).

Table E-11: 0100/0110 and 0120/0130 Authorization Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C+	C	C+		This field contains one of these values: • 0 (CAVV could not be verified or CAVV data was not provided when expected) • 1 (CAVV failed verification—authentication) • 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in Tag 01 prior to sending the POS authorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	C		C		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction) for token transactions.
60.8	Mail/Phone/ Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C		C		This field contains the value of 05 (Secure electronic commerce transaction) or 07 (Non-authenticated security transaction).

Table E-11: 0100/0110 and 0120/0130 Authorization Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66, Dataset, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 67	Activation Verification Data						This dataset ID contains Tag 08.
TLV 123, Usage 2, Dataset ID 67, Tag 08	Token Verification Result Code	1 ANS, EBCDIC, 1 byte	C+		C+		This tag contains the token verification result code with one these values: • 1 (TAVV cryptogram failed validation) • 2 (TAVV cryptogram passed validation) • 3 (DTVV or Visa-defined format cryptogram failed validation) • 4 (DTVV or Visa-defined cryptogram passed validation)
TLV 123, Usage 2, Dataset ID 68	Token Data		M+		M+		Originators that send account funding transactions (AFTs) and original credit transactions (OCTs) with a token must include all valid values in Field 123, Usage 2, Dataset ID 68 for the Visa Token Service.

Table E-11: 0100/0110 and 0120/0130 Authorization Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13-19 N, 19 bytes max	M+		M+		This tag contains the payment token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag is included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	M+		M+		This tag contains the value of 05 (E-commerce enabler).
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C+		C+		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).

Table E-11: 0100/0110 and 0120/0130 Authorization Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 80	Bound Device Index	1 N, 1 bytes	C		C		This field contains the index number from the Visa database where the device ID is stored. The value is a one-byte hexadecimal value in the range of 01–63 (Decimal 1–99).
TLV 123, Usage 2, Dataset ID 68, Tag 81	Token User Identifier	1–11 N, 11 bytes max	C		C		This field contains a unique value that identifies the token user. The token user is an entity that initiates the payment request. In the Europe region, the token user identifier may be used to support dynamic linking requirements of PSD2/RTS.
TLV 123, Usage 2, Dataset ID 68, Tag 82	Token User Application Type	1 N, 1 bytes	C		C		This field contains the application type of the token user. This entity can be the merchant, a marketplace, or a check out host. The application type is one of these valid values: • 00 (Unknown) • 01 (Web) • 02 (Mobile web) • 03 (Mobile application) • 04 (Marketplace application) • 05 (Voice application) • 06 (Biometric application) • 07–FF (Reserved)
TLV 123, Usage 2, Dataset ID 68, Tag 83	Token Authentication Factor A	1 N, 1 bytes	C		C		This field contains an authentication factor used by token requestors and merchants to authenticate the cardholder at the time of the transaction. This information is provided at the time of cryptogram generation and is provided to issuers during transaction processing. In the Europe region, authentication factors may be used to support the SCA requirements of PSD2/RTS.

Table E-11: 0100/0110 and 0120/0130 Authorization Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 84	Token Authentication Factor B	1 N, 1 bytes	C		C		This field contains an authentication factor used by token requestors and merchants to authenticate the cardholder at the time of the transaction. This information is provided at the time of cryptogram generation and is provided to issuers during transaction processing. In the Europe region, authentication factors may be used to support the SCA requirements of PSD2/RTS.
TLV 123, Usage 2, Dataset ID 68, Tag 85	Token Authentication Amount	3 N, 3 bytes	C		C		This field contains the payment amount made visible by the token requestor to the consumer at the time of purchase. This information can be used for dynamic linking. In the Europe region, token user identifier may be used to support dynamic linking requirements of PSD2/RTS. NOTE <i>This amount is the seven right-most digits of the payment amount, excluding the minor units, converted from decimal digits to binary. The applicable number of minor units excluded is specified by the currency code in Field 49—Currency Code, Transaction.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 86	Token Requestor - Token Service Provider ID	11 N, 4-bit BCD, 6 bytes	C		C		This tag contains a unique value that identifies the token requestor-token service provider (TR-TSP). NOTE <i>This tag will only be present when the transaction is initiated by a TR-TSP.</i>

Table E-11: 0100/0110 and 0120/0130 Authorization Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
126.9	Usage 3: 3-D Secure CAVV, Revised Format	40 N, 4-bit BCD, 20 bytes	C				This field contains the token authentication verification value (TAVV) in a Visa-defined format for e-commerce enabler when specified in the Token Requestor ID Table. NOTE <i>Issuers are not required to take any action on this field. This field will not be present without TAVV.</i>
126.20	3-D Secure Indicator	1 AN, EBCDIC, 1 byte	C		C		This field enables issuers to identify the 3DS version number and the 3DS authentication method used in an authorization message. The value for the 3DS indicator is extracted from the incoming request message in Field 126.9—CAVV Data and sent in Field 126.20 in the request message to the issuer. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>

0100/0110 and 0120/0130 Preauthorization Messages for E-Commerce Enabler

The following table shows the message layout and content of the 0100/0110 and 0120/0130 Preauthorization messages for e-commerce enabler.

NOTE

Bold values in the 0110 Preauthorization response indicate the field must contain the same values from the 0100 Preauthorization request.

Bold values in the 0130 STIP advice response indicate the field must contain the same values from the 0120 STIP advice request.

Table E-12: 0100/0110 and 0120/0130 Preauthorization Messages for E-Commerce Enabler Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the number identifying the cardholder account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table E-12: 0100/0110 and 0120/0130 Preauthorization Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C		C		This field contains one of these values: • 0 (CAVV could not be verified or CAVV data was not provided when expected) • 1 (CAVV failed verification—authentication) • 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in this tag prior to sending the POS authorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	C		C		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction) for token transactions.
60.8	Mail/Phone/Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C		C		This field contains the value of 05 (Secure electronic commerce transaction) or 07 (Non-authenticated security transaction).

Table E-12: 0100/0110 and 0120/0130 Preauthorization Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data		O		O		Originators that send account funding transactions (AFTs) and original credit transactions (OCTs) with a token must include all valid values in Field 123, Usage 2, Dataset ID 68 for the Visa Token Service.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	O		O		This tag contains the payment token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	O		O		This tag is included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table E-12: 0100/0110 and 0120/0130 Preauthorization Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0100	0110	0120	0130	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	O		O		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	O		O		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	O		O		This tag contains the value of 05 (E-commerce enabler).
126.9	Usage 3: 3-D Secure CAVV, Revised Format	40 N, 4-bit BCD, 20 bytes	C		C		This field contains the token authentication verification value (TAVV) in a Visa-defined format for e-commerce enabler transactions when specified in the Token Requestor ID Table. NOTE <i>Issuers are not required to take any action on this field. This field will not be present without TAVV.</i>

0200/0210 and 0220/0230 Full Financial Messages for E-Commerce Enabler

The following table shows the message layout and content of the 0200/0210 and 0220/0230 Full financial messages for e-commerce enabler.

NOTE

Bold values in the 0210 POS authorization response indicate the field must contain the same values from the 0200 POS authorization request.

Bold values in the 0230 STIP advice response indicate the field must contain the same values from the 0220 STIP advice request.

Table E-13: 0200/0210 and 0220/0230 Full Financial Messages for E-Commerce Enabler Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the number identifying the cardholder account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table E-13: 0200/0210 and 0220/0230 Full Financial Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 34	Electronic Commerce Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	C		C		This TLV field contains Dataset ID 56.
TLV 34, Dataset ID 02	Acceptance Environment Additional Data						This dataset ID contains Tag 88.
TLV 34, Dataset ID 02, Tag 88	Payment Credential Merchant Relationship Indicator	1 AN, EBCDIC, 1 bytes	C		C		Web browser auto fill transactions use this tag to indicate relationship between merchant website submitting the authorization request and payment credential. Valid values are: • 0 (No link) • 1 (Linked)
TLV 34 Dataset ID 56	Supplemental Data		C		C		This dataset ID contains Tag DF21.
TLV 34 Dataset ID 56 Tag DF21	Secure Remote Commerce	1 N, 4-bit BCD 1 byte	C+	0	C+		This field carries the indicator that identifies that a token-based e-commerce enabler request was initiated using Visa Digital Commerce. This tag contains the Visa Digital Commerce Indicator with the value of 01 (Visa digital commerce).

Table E-13: 0200/0210 and 0220/0230 Full Financial Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
44.3	Additional Token Response Information	1 AN, EBCDIC, 1 byte	C+	O	C		This field contains a value used to identify transactions eligible for token services. Valid values: 1 (Token program) - Space (Not applicable)
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C+	C	C+		This field contains one of these values: 0 (CAVV could not be verified or CAVV data was not provided when expected) 1 (CAVV failed verification—authentication) 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in this tag prior to sending the POS authorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M		M		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction) for token transactions.

Table E-13: 0200/0210 and 0220/0230 Full Financial Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
60.8	Mail/Phone/ Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C		C		This field contains the value of 05 (Secure electronic commerce transaction) or 07 (Non-authenticated security transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
63.6, position 4	Mail/Phone/ Electronic Commerce (MOTO/ECI) and Payment Indicator	1 ANS, EBCDIC, 1 byte	C		M		This field contains the value of 5 (Secure electronic commerce transaction) or 7 (Non-authenticated security transaction).
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.

Table E-13: 0200/0210 and 0220/0230 Full Financial Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 67, Tag 08	Token Verification Result Code	1 ANS, EBCDIC, 1 byte	C+		C+		This tag contains the token verification result code with one of these values: • 1 (TAVV cryptogram failed validation) • 2 (TAVV cryptogram passed validation) • 3 (DTVV or Visa-defined format cryptogram failed validation) • 4 (DTVV or Visa-defined cryptogram passed validation)
TLV 123, Usage 2, Dataset ID 68	Token Data		M+		M+		For originators that send account funding transactions (AFTs) and original credit transactions (OCTs) with a token in Field 2, Visa will include a valid values in Field 123, Usage 2, Dataset ID 68 for the Visa Token Service.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the payment token used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag is included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.

Table E-13: 0200/0210 and 0220/0230 Full Financial Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	M+		M+		This tag contains the value of 05 (E-commerce enabler).
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C		C		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).
TLV 123, Usage 2, Dataset ID 68, Tag 80	Bound Device Index	1 N, 1 bytes	C		C		This field contains the index number from the Visa database where the device ID is stored. The value is a one-byte hexadecimal value in the range of 01–63 (Decimal 1–99).
TLV 123, Usage 2, Dataset ID 68, Tag 81	Token User Identifier	1–11 N, 11 bytes max	C		C		This field contains a unique value that identifies the token user. The token user is an entity that initiates the payment request. In the Europe region, the token user identifier may be used to support dynamic linking requirements of PSD2/RTS.

Table E-13: 0200/0210 and 0220/0230 Full Financial Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 82	Token User Application Type	1 N, 1 bytes	C		C		This field contains the application type of the token user. This entity can be the merchant, a marketplace, or a check out host. The application type is one of these valid values: • 00 (Unknown) • 01 (Web) • 02 (Mobile web) • 03 (Mobile application) • 04 (Marketplace application) • 05 (Voice application) • 06 (Biometric application) • 07–FF (Reserved)
TLV 123, Usage 2, Dataset ID 68, Tag 83	Token Authentication Factor A	1 N, 1 bytes	C		C		This field contains an authentication factor used by token requestors and merchants to authenticate the cardholder at the time of the transaction. This information is provided at the time of cryptogram generation and is provided to issuers during transaction processing. In the Europe region, authentication factors may be used to support the SCA requirements of PSD2/RTS.
TLV 123, Usage 2, Dataset ID 68, Tag 84	Token Authentication Factor B	1 N, 1 bytes	C		C		This field contains an authentication factor used by token requestors and merchants to authenticate the cardholder at the time of the transaction. This information is provided at the time of cryptogram generation and is provided to issuers during transaction processing. In the Europe region, authentication factors may be used to support the SCA requirements of PSD2/RTS.

Table E-13: 0200/0210 and 0220/0230 Full Financial Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 85	Token Authentication Amount	3 N, 3 bytes	C		C		This field contains the payment amount made visible by the token requestor to the consumer at the time of purchase. This information can be used for dynamic linking. In the Europe region, token user identifier may be used to support dynamic linking requirements of PSD2/RTS. NOTE <i>This amount is the seven right-most digits of the payment amount, excluding the minor units, converted from decimal digits to binary. The applicable number of minor units excluded is specified by the currency code in Field 49—Currency Code, Transaction.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 86	Token Requestor - Token Service Provider ID	11 N, 4-bit BCD, 6 bytes	C		C		This tag contains a unique value that identifies the token requestor-token service provider (TR-TSP). NOTE <i>This tag will only be present when the transaction is initiated by a TR-TSP.</i>
126.9	Usage 3: 3-D Secure CAVV, Revised Format	40 N, 4-bit BCD, 20 bytes	C		C		This field contains the token authentication verification value (TAVV) in a Visa-defined format for e-commerce enabler transactions when specified in the Token Requestor ID Table. NOTE <i>Issuers are not required to take any action on this field. This field will not be present without TAVV.</i>

Table E-13: 0200/0210 and 0220/0230 Full Financial Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0200	0210	0220	0230	
			VIC	Iss	VIC	Iss	
126.20	3-D Secure Indicator	1 AN, EBCDIC, 1 byte	C		C		This field enables issuers to identify the 3DS version number and the 3DS authentication method used in an authorization message. The value for the 3DS indicator is extracted from the incoming request message in Field 126.9—CAVV Data and sent in Field 126.20 in the request message to the issuer. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>

0220/0230 Preauthorization Completion Full Financial Messages for E-Commerce Enabler

The following table shows the message layout and content of the 0220/0230 Preauthorization completion messages for e-commerce enabler.

NOTE

Bold values in the 0200 Original request indicate that the value in this field is the same as the value in the preauthorization request.

Bold values in the 0210 Completion response indicate that the field must contain the same values from the 0200 Original request.

Bold values in the 0230 STIP advice response indicate that the field must contain the same values from the 0220 STIP advice request.

Table E-14: 0220/0230 Preauthorization Completion Messages for E-Commerce Enabler Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	M	M	M	This field contains the number identifying the cardholder account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table E-14: 0220/0230 Preauthorization Completion Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C		C		This field contains one of these values: 0 (CAVV could not be verified or CAVV data was not provided when expected) 1 (CAVV failed verification—authentication) 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in this tag prior to sending the POS authorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M		M		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction) for token transactions.
60.8	Mail/Phone/Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C		C		This field contains the value of 05 (Secure electronic commerce transaction) or 07 (Non-authenticated security transaction).

Table E-14: 0220/0230 Preauthorization Completion Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
63.6, position 4	Mail/Phone/ Electronic Commerce (MOTO/ECI) and Payment Indicator	1 ANS, EBCDIC, 1 byte	M		M		This field contains the value of 5 (Secure electronic commerce transaction) or 7 (Non-authenticated security transaction).
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data						This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 06, and Tag 07.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the payment token used to replace the cardholder PAN.

Table E-14: 0220/0230 Preauthorization Completion Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0220	0230	0220	0230	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag is included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	M+		M+		This tag contains the value of 05 (E-commerce enabler).
126.9	Usage 3: 3-D Secure CAVV, Revised Format	40 N, 4-bit BCD, 20 bytes	C		C		This field contains the token authentication verification value (TAVV) in a Visa-defined format for e-commerce enabler transactions when specified in the Token Requestor ID Table. NOTE <i>Issuers are not required to take any action on this field. This field will not be present without TAVV.</i>

0400/0410 and 0420/0430 Authorization Reversal Messages for E-Commerce Enabler

The following table shows the message layout and content of the 0400/0410 and 0420/0430 Authorization reversal messages for e-commerce enabler.

NOTE

Bold values in the 0400 Original request indicate that the value in this field is the same as the value in the authorization request.

Bold values in the 0410 Reversal response indicate that the field must contain the same values from the 0400 Original request.

Bold values in the 0430 STIP advice response indicate that the field must contain the same values from the 0420 STIP advice request.

Table E–15: 0400/0410 and 0420/0430 Authorization Reversal Messages for E-Commerce Enabler Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the number identifying the cardholder account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table E-15: 0400/0410 and 0420/0430 Authorization Reversal Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
44.3	Additional Token Response Information	1 AN, EBCDIC, 1 byte	C+	O	C		This field contains a value used to identify transactions eligible for token services. Valid values: 1 (Token program) - Space (Not applicable)
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C		C		This field contains one of these values: 0 (CAVV could not be verified or CAVV data was not provided when expected) 1 (CAVV failed verification—authentication) 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in this tag prior to sending the POS authorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M		M		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction) for token transactions.

Table E-15: 0400/0410 and 0420/0430 Authorization Reversal Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
60.8	Mail/Phone/ Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C		C		This field contains the value of 05 (Secure electronic commerce transaction) or 07 (Non-authenticated security transaction).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data		M+		M+		Originators that send account funding transactions (AFTs) with a token must include all valid values in Field 123, Usage 2, Dataset ID 68 for the Visa Token Service.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the payment token that is used to replace the cardholder PAN.

Table E-15: 0400/0410 and 0420/0430 Authorization Reversal Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag is included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	M+		M+		This tag contains the value of 05 (E-commerce enabler).
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C		C		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).

0400/0410 and 0420/0430 Preauthorization Reversal Messages for E-Commerce Enabler

The following table shows the message layout and content of the 0400/0410 and 0420/0430 Preauthorization reversal messages for e-commerce enabler.

NOTE

Bold values in the 0400 Original request indicate that the value in this field is the same as the value in the preauthorization request.

Bold values in the 0410 Reversal response indicate that the field must contain the same values from the 0400 Original request.

Bold values in the 0430 STIP advice response indicate that the field must contain the same values from the 0420 STIP advice request.

Table E-16: 0400/0410 and 0420/0430 Preauthorization Reversal Messages for E-Commerce Enabler Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	M	M	M	This field contains the cardholder PAN.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table E-16: 0400/0410 and 0420/0430 Preauthorization Reversal Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C		C		This field contains one of these values: 0 (CAVV could not be verified or CAVV data was not provided when expected) 1 (CAVV failed verification—authentication) 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in this tag prior to sending the preauthorization reversal message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M		M		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction) for token transactions.
60.8	Mail/Phone/Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C		C		This field contains the value of 05 (Secure electronic commerce transaction) or 07 (Non-authenticated security transaction).

Table E-16: 0400/0410 and 0420/0430 Preauthorization Reversal Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains the STIP/Switch reason code values.
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data						Originators that send account funding transactions (AFTs) and original credit transactions (OCTs) with a token must include all valid values in Field 123, Usage 2, Dataset ID 68 for the Visa Token Service.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the payment token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag is included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table E-16: 0400/0410 and 0420/0430 Preauthorization Reversal Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	M+		M+		This tag contains the value of 05 (E-commerce enabler).

0400/0410 and 0420/0430 Full Financial Reversal Messages for E-Commerce Enabler

The following table shows the message layout and content of the 0400/0410 and 0420/0430 Full financial reversal messages for e-commerce enabler.

NOTE

Bold values in the 0400 Original request indicate that the value in this field is the same as the value in the full financial request. Bold values in the 0410 Reversal response indicate that the field must contain the same values from the 0400 Original request. Bold values in the 0430 STIP advice response indicate that the field must contain the same values from the 0420 STIP advice request.

Table E-17: 0400/0410 and 0420/0430 Full Financial Reversal Messages for E-Commerce Enabler Transactions

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the number identifying the cardholder account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 10 (Credential on file: merchant initiates transaction for cardholder using credentials stored on file). Issuers who have not modified their systems to support the value of 10 can continue to support the value of 01 (Manual (key entry)) in this field.
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)

Table E-17: 0400/0410 and 0420/0430 Full Financial Reversal Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
44.3	Additional Token Response Information	1 AN, EBCDIC, 1 byte	C+	O	C		This field contains a value used to identify transactions eligible for token services. Valid values: • 1 (Token program) • Space (Not applicable)
44.13	CAVV Results Code	1 ANS, EBCDIC, 1 byte	C		C		This field contains one of these values: • 0 (CAVV could not be verified or CAVV data was not provided when expected) • 1 (CAVV failed verification—authentication) • 2 (CAVV passed verification—authentication) NOTE <i>This field will not be present without TAVV.</i>
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates the payment account reference in this tag prior to sending the POS authorization message to the issuer.
60.6	Chip Transaction Indicator	1 N, 4-bit BCD 1 digit	M		M		This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction) for token transactions.

Table E-17: 0400/0410 and 0420/0430 Full Financial Reversal Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
60.8	Mail/Phone/ Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C		C		This field contains the value of 05 (Secure electronic commerce transaction) or 07 (Non-authenticated security transaction). Issuers must be aware that they will receive the value submitted by the acquirers in the reversal messages.
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
63.6, position 4	Mail/Phone/ Electronic Commerce (MOTO/ECI) and Payment Indicator	1 ANS, EBCDIC, 1 byte	C		C		This field contains the value of 5 (Secure electronic commerce transaction) or 7 (Non-authenticated security transaction).
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66 and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data		O		O		This field may contain the Address Verification Service (AVS) data.
TLV 123, Usage 2, Dataset ID 68	Token Data		M+		M+		Originators that send AFTs with a token must include all valid values in Field 123, Usage 2, Dataset ID 68 for the Visa Token Service.

Table E-17: 0400/0410 and 0420/0430 Full Financial Reversal Messages for E-Commerce Enabler Transactions (cont'd.)

Field and Field Name		Format	Original		STIP Advice		Description
			0400	0410	0420	0430	
			VIC	Iss	VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M+		M+		This tag contains the payment token that is used to replace the cardholder PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C+		C+		This tag is included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M+		M+		This tag contains the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M+		M+		This tag contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M+		M+		This tag contains the value of 05 (E-commerce enabler).
TLV 123, Usage 2, Dataset ID 68, Tag 0D	Auto Fill Indicator	1 AN, EBCDIC, 1 byte	C		C		This tag contains a value to identify tokens for web browser auto fill. The valid value is A (Auto fill).

THIS PAGE INTENTIONALLY LEFT BLANK.

Device Binding Transactions

F

This appendix includes the following message layouts for card-on-file/e-commerce and e-commerce enabler transactions:

- 0100/0110 Device Binding Request and Response
- 0120/0130 Device Binding Advice and Response
- 0302/0312 Token Maintenance File
- 0620/0630 Issuer Device Binding Notification Advice and Response

NOTE

The 0620 advice message described in this appendix is titled Issuer Device Binding Notification. However, it is used to notify issuers of both device binding and cardholder verification events.

0100/0110 Device Binding Request Messages for Device Binding

The following table shows the message layout and contents of the 0100/0110 Device binding request and response messages used to support the binding of consumer devices with e-commerce/card-on-file and e-commerce enabler tokens.

NOTE

Bold values in the 0110 Device binding response indicate the field must contain the same value from the 0100 Device binding request.

Table F-1: 0100/0110 Device Binding Request and Response

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
2	Primary Account Number	Variable length 1 byte binary + up to 19 N, 4-bit BCD, maximum 11 bytes	M	M	This is an existing field that contains the number identifying the cardholder account or relationship.
3	Processing Code	6 N, 4-bit BCD, 3 bytes	M	M	This is an existing field that contains the following existing values: - Positions 1–2, Transaction Type, contains the value of 00 (Goods/service purchase-debit) - Positions 3–4, Account Type (From), contains the value of 00 (Not applicable or not specified) - Positions 5–6, Account Type (To), contains the value of 00 (Not applicable)
4	Amount, Transaction	12 N, 4-bit BCD, 6 bytes	M	M	This is an existing field that contains the value of 000000000000 (Zero).

Table F-1: 0100/0110 Device Binding Request and Response (cont'd.)

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
6	Amount, Cardholder Billing	12 N, 4-bit BCD, 6 bytes	C	C	This field contains the transaction amount from Field 4 converted to the currency used to bill the cardholder's account. NOTE <i>Issuers that receive the multicurrency fields in 0100 Device binding request messages must be prepared to support Field 6 containing all zeros.</i>
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes	M	M	This is an existing field that contains the date and time when the request was created for the issuer.
10	Conversion Rate, Cardholder Billing	8 N, 4-bit BCD, 4 bytes	C		This field contains the rate used by Visa to convert the transaction amount in Field 4 to the cardholder billing amount in Field 6.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This is an existing field that contains a Visa-generated tracing element and unique values for messages that Visa has processed. NOTE <i>The values sent in this field in the 0100 Device binding request will be the same in its 0120 STIP advice and 0620 Issuer device binding notification advice messages.</i>
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes	M		This is an existing field that contains the PAN expiration date.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	This is an existing field that contains the month and day.

Table F-1: 0100/0110 Device Binding Request and Response (cont'd.)

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M		This is an existing field that contains the existing MCC 6012 (Financial institutions – merchandise, services, and debt repayment).
19	Acquiring Institution Country Code	3 N, 4-bit BCD, 2 bytes	M	M	This is an existing field that contains the country code of the issuer's primary account number BIN in Field 2—Primary Account Number.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		This is an existing field that contains the value of 00 (Unknown or terminal not used).
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	This is an existing field that contains the value of 51 (Address/CVV2/account verification without authorization).
32	Acquiring Institution Identification Code	Variable length 1 byte binary + up to 11 N, 4-bit BCD, maximum 7 bytes	M	M	This is an existing field that contains a Visa acquiring identifier. The default value is 320000 for COF/e-commerce and e-commerce enabler.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes	M	M	This is an existing field that contains a number used with other key data elements to identify and track all messages related to a given transaction, referred to as a transaction set. The content is limited to numeric information in ydddhnnnnnn format. NOTE <i>The values sent in this field in the 0100 Device binding request will be the same in its 0120 STIP advice and 0620 Issuer device binding notification advice messages.</i>

Table F-1: 0100/0110 Device Binding Request and Response (cont'd.)

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This is an existing field that contains one of the following response codes: 00 (Unconditional approval [immediately bind token to device]) 05 (Do not honor) 85 (Conditional approval [do not bind token to device until additional consumer verification is performed]) Any response code present other than 00 and 85 will prevent device binding.
42	Card Acceptor Identification Code	15 ANS, EBCDIC, 15 bytes	M	M	This is an existing field. Issuers must be prepared to receive the default value of 3200000000000001 for COF/e-commerce and e-commerce enabler.
43	Card Acceptor Name/Location	40 ANS, EBCDIC, 40 bytes	M		This is an existing field that contains the default value of Visa Device Binding in positions 1–25, Card Acceptor Name and the local country code of the PAN in positions 39–40, Country Code.
49	Currency Code, Transaction	3 N, 4-bit BCD, 2 bytes	M	M	This is an existing field that contains a valid currency code set by Visa as part of the binding request.
51	Currency Code, Cardholder Billing	3 N, 4-bit BCD, 2 bytes	C		This field contains a three-digit numeric code that identifies the currency used by the issuer to bill the cardholder's account. NOTE <i>If this field is present, the following fields are also required:</i> - Field 6—Amount, Cardholder Billing - Field 10—Conversion Rate, Cardholder Billing

Table F-1: 0100/0110 Device Binding Request and Response (cont'd.)

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 01 and Dataset ID 03.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		Visa will populate the payment account reference in Tag 01 prior to sending the 0100 Device binding request messages.
TLV 56, Dataset ID 03, Tag 80	Customer Identification (Unspecified)	99 ANS, EBCDIC, 99 bytes	C		This field contains market-specific customer identification.
62.0	Field 62 Bitmap	64 N, bit string, 8 bytes	M	O	This field contains a bitmap that specifies which Field 62 subfields are present.
62.2	Transaction Identifier	15 N, 4-bit BCD, 8 bytes	M	O	This is an existing field that contains a right-justified, Visa-generated transaction identifier (TID) that is unique. NOTE <i>The values sent in this field in the 0100 Device binding request will be the same in its 0120 STIP advice and 0620 Issuer device binding notification advice messages.</i>
63.0	Field 63 Bitmap	24 N, bit string, 3 bytes	M	M	This field contains a bitmap that specifies which subfields are present.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	This is an existing field that contains the network ID 0002 (Visa).

Table F-1: 0100/0110 Device Binding Request and Response (cont'd.)

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M	O	This is an existing field with a value to identify that the message is requesting device binding. This field contains the value of 3740 (Device binding).
63.13	Decimal Positions Indicator	6 N, 4-bit BCD, 3 bytes	C		This field contains the number of decimal positions in Field 4 and Field 6 if they are present in the message. NOTE <i>Only issuers that participate in the Currency Precision Service will receive Field 63.13</i>
TLV 120, Dataset ID 56	Device Parameters		O		This field contains the device parameters.
TLV 120, Dataset ID 56, Tag 01	Device IMEI	24 AN, EBCDIC, 24 bytes	O		This tag contains the hardware ID of the device.
TLV 120, Dataset ID 56, Tag 02	OS ID	24 AN, EBCDIC, 24 bytes	O		This tag will indicate the build of velocity and risk rules.
TLV 120, Dataset ID 56, Tag 03	Provisioning Attempts on the Device	Binary, 1 byte	O		This tag contains the number of binding attempts on the device within the last 24 hours.
TLV 120, Dataset ID 56, Tag 04	Account-to-Device Bonding Age	Binary, 2 bytes	O		This tag contains the number of days the device was used by this account.
TLV 120, Dataset ID 56, Tag 05	Device Country	2 AN, EBCDIC, 2 bytes	O		This tag contains the two-character alpha ISO country code of the device at the time of provisioning.

Table F-1: 0100/0110 Device Binding Request and Response (cont'd.)

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
TLV 120, Dataset ID 56, Tag 06	Token Protection Method	1 N, 4-bit BCD, 1 byte	O		This tag will describe how the tokens are protected on the device. Valid values are: • 1 (Software) • 2 (Transaction execution environment (TEE)) • 3 (Secure element (SE)) • 4 (Cloud) NOTE <i>Cloud applies to electronic commerce use cases only.</i>
TLV 120, Dataset ID 56, Tag 07	Presentation Type	1 N, 4-bit BCD, 1 byte	O		This tag contains the token presentment mode. Valid values are: • 1 (Near field communication (NFC)—Host card emulation (HCE) or secure element (SE)) • 2 (Magnetic secure transmission) • 3 (QR-consumer device) • 4 (QR-consumer cloud)
TLV 120, Dataset ID 56, Tag 08	Device Serial Number	24 AN, EBCDIC, 24 bytes	O		This tag contains the serial number of the mobile device.
TLV 120, Dataset ID 56, Tag 09	Location Source	1 N, 4-bit BCD, 1 byte	O		This tag contains the source used to identify the consumer's location. Valid values are: • 1 (WiFi) • 2 (Cellular) • 3 (GPS) • 4 (Other)
TLV 120, Dataset ID 56, Tag 0A	Device Time Zone	5 AN, EBCDIC, 5 bytes	O		This tag contains the device time zone.

Table F-1: 0100/0110 Device Binding Request and Response (cont'd.)

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
TLV 120, Dataset ID 56, Tag 0B	Device Time Zone Setting	1 N, 4-bit BCD, 1 byte	O		This tag will indicate how the time zone setting was obtained. Valid values are: • 1 (Network set) • 2 (Consumer set)
TLV 120, Dataset ID 56, Tag 0C	Device Bluetooth Media Access Control (MAC)	24 ANS, EBCDIC, 24 bytes	O		This tag contains the MAC address for Bluetooth.
TLV 120, Dataset ID 56, Tag 0D	OS Type	1 N, 4-bit BCD, 1 byte	O		This tag will indicate the operating system running on the device. Valid values are: • 1 (Android) • 2 (iOS) • 3 (Windows) • 4 (Blackberry) • 5 (Tizen) • 6 (Other)
TLV 120, Dataset ID 57	Wallet Parameters		O		This field contains the wallet parameters.
TLV 120, Dataset ID 57, Tag 01	Wallet Provider PAN Age	Binary, 2 bytes	O		This tag contains the number of days that the user's PAN has been on file for the user.
TLV 120, Dataset ID 57, Tag 02	User Account Age	Binary, 2 bytes	O		This tag contains the number of days since the user account for this user exists.
TLV 120, Dataset ID 57, Tag 03	Wallet Account Age	Binary, 2 bytes	O		This tag contains the number of days since the user created the wallet account or started using the account.

Table F-1: 0100/0110 Device Binding Request and Response (cont'd.)

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
TLV 120, Dataset ID 57, Tag 04	Days Since Last Activity	Binary, 2 bytes	O		This tag contains the number of days since the last activity on the account.
TLV 120, Dataset ID 57, Tag 05	Number of Transactions, Last 12 Months	Binary, 2 bytes	O		This tag contains the number of transactions on this account within the last 12 months.
TLV 120, Dataset ID 57, Tag 06	Days Since Last Account Change	Binary, 2 bytes	O		This tag contains the number of days since account settings were changed.
TLV 120, Dataset ID 57, Tag 07	Suspended Cards in Account	Binary, 1 byte	O		This tag contains the number of cards suspended on the account.
TLV 120, Dataset ID 57, Tag 08	Wallet Account Country	2 AN, EBCDIC, 2 bytes	O		This tag contains the two-character alpha ISO country code of the account holder.
TLV 120, Dataset ID 57, Tag 09	Number of Active Tokens	Binary, 1 byte	O		This tag contains the number of active tokens on this account.
TLV 120, Dataset ID 57, Tag 0A	Number of Devices With Active Tokens	Binary, 1 byte	O		This tag contains the number of devices for this user with the same token.
TLV 120, Dataset ID 57, Tag 0B	Number of Active Tokens on All Devices	Binary, 2 bytes	O		This tag contains the number of active tokens for this user across all devices.

Table F-1: 0100/0110 Device Binding Request and Response (cont'd.)

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
TLV 120, Dataset ID 57, Tag 0C	Consumer Entry Mode	1 N, 4-bit BCD, 1 byte	O		This tag will indicate how the card information was entered in the device. Valid values are: • 1 (Key-entered) • 2 (Camera captured) • 3 (Unknown)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		This is an existing field and dataset ID with the existing Tag 01 that contains the token.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C	C	This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		This is an existing field and dataset ID with the existing Tag 03.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		This is an existing field and dataset ID with the existing Tag 05.

Table F-1: 0100/0110 Device Binding Request and Response (cont'd.)

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M		This is an existing field and dataset ID with the existing Tag 07 that contains one of the following values • 01 (ECOM/COF (e-commerce/card on file)) • 05 (E-commerce enabler) NOTE <i>Certain error conditions can result in this tag not being present in the 0120 STIP advice message.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 12	Number of Active Tokens	2 N, 2 bytes	C		This is an existing field and dataset ID with the existing Tag 12 that contains the number of tokens that are currently active for this PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 13	Number of Inactive Tokens	2 N, 2 bytes	C		This is an existing field and dataset ID with the existing Tag 13 that contains the number of tokens that are currently inactive or tokens have not been activated for this PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 14	Number of Suspended Tokens	2 N, 2 bytes	C		This is an existing field and dataset ID with the existing Tag 14 that contains the number of tokens that were activated, but are suspended for payments for this PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		This is an existing field and dataset ID with the existing Tag 0B that contains a unique reference ID generated by Visa for the card account number.

Table F-1: 0100/0110 Device Binding Request and Response (cont'd.)

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
TLV 123, Usage 2, Dataset ID 68, Tag 80	Bound Device Index	Binary, 1 byte	M		This field contains the index number from the Visa database where the device ID is stored. NOTE <i>Bound device index is only applicable for transactions with e-commerce/card-on-file and e-commerce enabler token types. This tag contains a zero value for transactions with secure element and cloud-based payment token types.</i> <i>When a device ID is validated for an authorization transaction originated from a trusted device Tag 80 will be present in token-based e-commerce authorization transactions for e-commerce/card-on-file and e-commerce enabler tokens.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 81	Token User Identifier	1–11 N, 11 bytes max	C		This field contains a unique value that identifies the token user. The token user is an entity that initiates the payment request.
TLV 123, Usage 2, Dataset ID 68, Tag 82	Token User Application Type	Binary, 1 byte	C		This field contains the application type of the token user. The token user is the entity that initiated the token payment request. This entity can be the merchant, a marketplace, or a check-out host. The application type can have any of the following values: • 00 (Unknown) • 01 (Web) • 02 (Mobile web) • 03 (Mobile application) • 04 (Marketplace application) • 05 (Voice application) • 06 (Biometric application)

Table F-1: 0100/0110 Device Binding Request and Response (cont'd.)

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
TLV 125, Usage 2, Dataset ID 01, Tag 01	Device Type	2 AN, EBCDIC, 2 bytes	C		This tag contains the device type. REFERENCE <i>For a list of valid device types, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 02	Device Language Code	3 AN, EBCDIC, 3 bytes	C		This is an existing field and dataset ID with the existing Tag 02 that will conform with ISO 639.
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	M		This is an existing field and dataset ID with the existing Tag 03.
TLV 125, Usage 2, Dataset ID 01, Tag 04	Device Number	15 N, 15 bytes	C		This is an existing field and dataset ID with the existing Tag 04 that contains the device number, or the full or partial telephone number, when available.
TLV 125, Usage 2, Dataset ID 01, Tag 05	Device Name	16 ANS, EBCDIC, 16 bytes	C		This is an existing field and dataset ID with the existing Tag 05 that will provide the device name that is recognized by the consumer. The value will be truncated if the name known by the consumer is larger than 16 characters.

Table F-1: 0100/0110 Device Binding Request and Response (cont'd.)

Field Number and Name		Format	Device Binding Request		Description
			0100	0110	
TLV 125, Usage 2, Dataset ID 01, Tag 06	Device Location	25 ANS, EBCDIC, 25 bytes	C		This is an existing field and dataset ID with the existing Tag 06 that contains the obfuscated geographic location of the device. When available, the latitude and longitude will be provided with up to 4 digits of precision. For example: +xxx.xxxx/-xxx.xxxx. Precision may be rounded to a less granular level. For example: +xx/-xxx or +xx.xx/-xxx.xx.
TLV 125, Usage 2, Dataset ID 01, Tag 07	IP Address	15 ANS, EBCDIC, 15 bytes	C		This is an existing field and dataset ID with the existing Tag 07 that contains the IP address of the device at the time of the provisioning request. The value is represented in 255.255.255.255 format. Each octet (255) may be 1–3 digits in length.
TLV 125, Usage 2, Dataset ID 02, Tag 09	Wallet Account ID	32 ANS, EBCDIC, 32 bytes	M		This is an existing field with the existing Tag 09 that contains the wallet account ID.
TLV 125, Usage 2, Dataset ID 02, Tag 0A	Wallet Account E-mail Address	64 DX, 32 bytes	M		This is an existing field and dataset ID that contains the hashed full email address for the user's account that was sent by the digital wallet provider.

0120/0130 STIP Advice Messages for Device Binding

The following table shows the message layout and contents of the 0120/0130 STIP advice and response messages used to support the binding of consumer devices with e-commerce/card-on-file and e-commerce enabler tokens.

NOTE

All of the values in the 0120 Device binding STIP advice message are from the 0100 Device binding request message (or created in V.I.P.)

Bold values in the 0130 Device binding STIP advice response message indicate the field must contain the same values from the 0120 Device binding STIP advice request message.

Table F-2: 0120/0130 Device Binding Advice and Response

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
2	Primary Account Number	Variable length 1 byte binary + up to 19 N, 4-bit BCD, maximum 11 bytes	M	M	This is an existing field that contains the number identifying the cardholder account or relationship.
3	Processing Code	6 N, 4-bit BCD, 3 bytes	M	M	This is an existing field that contains the following existing values: - Positions 1–2, Transaction Type; contains the value of 00 (Goods/service purchase-debit) - Positions 3–4, Account Type (From); contains the value of 00 (Not applicable or not specified) - Positions 5–6, Account Type (To); contains the value of 00 (Not applicable)
4	Amount, Transaction	12 N, 4-bit BCD, 6 bytes	M		This is an existing field that contains the value of 000000000000 (Zero).

Table F–2: 0120/0130 Device Binding Advice and Response (cont'd.)

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
6	Amount, Cardholder Billing	12 N 4-bit BCD, 6 bytes	C		This field contains the transaction amount from Field 4 converted to the currency used to bill the cardholder's account. NOTE <i>Issuers that receive the multicurrency fields in 0100 Device binding request messages must be prepared to support Field 6 containing all zeros.</i>
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes	M	M	This is an existing field that contains the date and time when the request was created for the issuer.
10	Conversion Rate, Cardholder Billing	8 N, 4-bit BCD, 4 bytes	C		This field contains the rate used by Visa to convert the transaction amount in Field 4 to the cardholder billing amount in Field 6.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This is an existing field that contains a Visa-generated tracing element and unique values for messages that Visa has processed. NOTE <i>The values sent in this field in the 0100 Device binding request will be the same in its 0120 STIP advice and 0620 Issuer device binding notification advice messages.</i>
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes	M		This is an existing field that contains the PAN expiration date.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	This is an existing field that contains the month and day.

Table F–2: 0120/0130 Device Binding Advice and Response (cont'd.)

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M		This is an existing field that contains the existing MCC 6012 (Financial institutions – merchandise, services, and debt repayment).
19	Acquiring Institution Country Code	3 N, 4-bit BCD, 2 bytes	M	M	This is an existing field that contains the country code of the issuer's primary account number BIN in Field 2—Primary Account Number.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		This is an existing field that contains the value of 00 (Unknown or terminal not used).
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	This is an existing field that contains the value of 51 (Address/CVV2/account verification without authorization).
32	Acquiring Institution Identification Code	Variable length 1 byte binary + up to 11 N, 4-bit BCD, maximum 7 bytes	M	M	This is an existing field that contains a Visa acquiring identifier. Default value is 320000 for COF/e-commerce and e-commerce enabler.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes	M	M	This is an existing field that contains a number used with other key data elements to identify and track all messages related to a given transaction, referred to as a transaction set. The content is limited to numeric information in ydddhnnnnnnn format. NOTE <i>The values sent in this field in the 0100 Device binding request will be the same in its 0120 STIP advice and 0620 Issuer device binding notification advice messages.</i>

Table F–2: 0120/0130 Device Binding Advice and Response (cont'd.)

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	This is an existing field with existing values. For the 0120 STIP advice, the response code 05 (Do not honor) is used to indicate the device binding was not allowed in STIP. For the 0130 STIP advice response, only 00 (Accepted and processed) is used in the response, and it is used to acknowledge receipt of STIP advice.
42	Card Acceptor Identification Code	15 ANS, EBCDIC, 15 bytes	M	M	This is an existing field. Issuers must be prepared to receive the default value of 320000 for COF/e-commerce and e-commerce enabler.
43	Card Acceptor Name/Location	40 ANS, EBCDIC, 40 bytes	M		This is an existing field that contains the default value of Visa Device Binding in positions 1–25, Card Acceptor Name and the local country code of the PAN in positions 39–40, Country Code.
44.1	Response Source Reason/Code	1 ANS, EBCDIC, 1 byte	M		This is an existing field that will be set by Visa only and contains the response source or reason code that identifies the source of the Field 39 response decision.
49	Currency Code, Transaction	3 N, 4-bit BCD, 2 bytes	M		This is an existing field that contains a valid currency code set by Visa as part of the binding request.

Table F–2: 0120/0130 Device Binding Advice and Response (cont'd.)

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
51	Currency Code, Cardholder Billing	3 N, 4-bit BCD, 2 bytes	C		This field contains a three-digit numeric code that identifies the currency used by the issuer to bill the cardholder's account. NOTE <i>If this field is present, the following fields are also required:</i> - Field 6—Amount, Cardholder Billing - Field 10—Conversion Rate, Cardholder Billing
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		Visa will populate the payment account reference in Tag 01 prior to sending 0120 Device binding advice messages.
TLV 56, Dataset ID 03, Tag 80	Customer Identification (Unspecified)	99 ANS, EBCDIC, 99 bytes	C		This field contains market-specific customer identification.
62.0	Field 62 Bitmap	64 N, bit string, 8 bytes	M	O	This field contains a bitmap that specifies which Field 62 subfields are present.
62.2	Transaction Identifier	15 N, 4-bit BCD, 8 bytes	M	O	This is an existing field that contains a right-justified, Visa-generated transaction identifier (TID) that is unique. NOTE <i>The values sent in this field in the 0100 Device binding request will be the same in its 0120 STIP advice and 0620 Issuer device binding notification advice messages.</i>
63.0	Field 63 Bitmap	64 N, bit string, 8 bytes	M	O	This field contains a bitmap that specifies which Field 63 subfields are present.

Table F–2: 0120/0130 Device Binding Advice and Response (cont'd.)

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	This is an existing field that contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		This is an existing field with a value to identify that the message is requesting device binding. This field contains the value of 3740 (Device binding).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		This is an existing field that contains a code that identifies why STIP responded for the issuer or why the switch generated an advice. It contains the value of 9220 (Device binding request could not be completed)
63.13	Decimal Positions Indicator	Fixed length, 3 bytes, 64 N, BCD	C		This field contains the number of decimal positions in Field 4 and Field 6 if they are present in the message. NOTE <i>Only issuers that participate in the Currency Precision Service will receive Field 63.13</i>
TLV 120, Dataset ID 56	Device Parameters		O		This field contains the device parameters.
TLV 120, Dataset ID 56, Tag 01	Device IMEI	24 AN, EBCDIC, 24 bytes	O		This tag contains the hardware ID of the device.
TLV 120, Dataset ID 56, Tag 02	OS ID	24 AN, EBCDIC, 24 bytes	O		This tag will indicate the build of velocity and risk rules.
TLV 120, Dataset ID 56, Tag 03	Provisioning Attempts on the Device	2 N, 4-bit BCD, 1 byte	O		This tag contains the number of binding attempts on the device within the last 24 hours.

Table F-2: 0120/0130 Device Binding Advice and Response (cont'd.)

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
TLV 120, Dataset ID 56, Tag 04	Account-to-Device Bonding Age	2 bytes, binary	O		This tag contains the number of days the device was used by this account.
TLV 120, Dataset ID 56, Tag 05	Device Country	2 AN, EBCDIC, 2 bytes	O		This tag contains the two-character alpha ISO country code of the device at the time of provisioning.
TLV 120, Dataset ID 56, Tag 06	Token Protection Method	1 N, 4-bit BCD, 1 byte	O		This tag will describe how the tokens are protected on the device. Valid values are: • 1 (Software) • 2 (Transaction execution environment (TEE)) • 3 (Secure element (SE)) • 4 (Cloud) NOTE <i>The value of 4 only applies to e-commerce tokens.</i>
TLV 120, Dataset ID 56, Tag 07	Presentation Type	1 N, 4-bit BCD, 1 byte	O		This tag contains the token presentment mode. Valid values are: • 1 (Near field communication (NFC)—Host card emulation (HCE) or secure element (SE)) • 2 (Magnetic secure transmission) • 3 (QR-consumer device) • 4 (QR-consumer cloud)
TLV 120, Dataset ID 56, Tag 08	Device Serial Number	24 AN, EBCDIC, 24 bytes	O		This tag contains the serial number of the mobile device.

Table F-2: 0120/0130 Device Binding Advice and Response (cont'd.)

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
TLV 120, Dataset ID 56, Tag 09	Location Source	1 N, 4-bit BCD, 1 byte	O		This tag contains the source used to identify the consumer's location. Valid values are: • 1 (WiFi) • 2 (Cellular) • 3 (GPS) • 4 (Other)
TLV 120, Dataset ID 56, Tag 0A	Device Time Zone	5 N, 4-bit BCD, 5 byte	O		This tag contains the device time zone.
TLV 120, Dataset ID 56, Tag 0B	Device Time Zone Setting	1 N, 4-bit BCD, 1 byte	O		This tag will indicate how the time zone setting was obtained. Valid values are: • 1 (Network set) • 2 (Consumer set)
TLV 120, Dataset ID 56, Tag 0C	Device Bluetooth Media Access Control (MAC)	24 ANS, EBCDIC, 24 bytes	O		This tag contains the MAC address for Bluetooth.
TLV 120, Dataset ID 56, Tag 0D	OS Type	1 N, 4-bit BCD, 1 byte	O		This tag will indicate the operating system running on the device. Valid values are: • 1 (Android) • 2 (iOS) • 3 (Windows) • 4 (Blackberry) • 5 (Tizen) • 6 (Other)
TLV 120, Dataset ID 57	Wallet Parameters		O		This field contains the wallet parameters.

Table F-2: 0120/0130 Device Binding Advice and Response (cont'd.)

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
TLV 120, Dataset ID 57, Tag 01	Wallet Provider PAN Age	Binary, 2 bytes	O		This tag contains the number of days that the user's PAN has been on file for the user.
TLV 120, Dataset ID 57, Tag 02	User Account Age	Binary, 2 bytes	O		This tag contains the number of days since the user account for this user exists.
TLV 120, Dataset ID 57, Tag 03	Wallet Account Age	Binary, 2 bytes	O		This tag contains the number of days since the user created the wallet account or started using the account.
TLV 120, Dataset ID 57, Tag 04	Days Since Last Activity	Binary, 2 bytes	O		This tag contains the number of days since the last activity on the account.
TLV 120, Dataset ID 57, Tag 05	Number of Transactions, Last 12 Months	Binary, 2 bytes	O		This tag contains the number of transactions on this account within the last 12 months.
TLV 120, Dataset ID 57, Tag 06	Days Since Last Account Change	Binary, 2 bytes	O		This tag contains the number of days since account settings were changed.
TLV 120, Dataset ID 57, Tag 07	Suspended Cards in Account	1 N, 4-bit BCD, 1 byte	O		This tag contains the number of cards suspended on the account.
TLV 120, Dataset ID 57, Tag 08	Wallet Account Country	2 AN, EBCDIC, 2 byte	O		This tag contains the two-character alpha ISO country code of the account holder.
TLV 120, Dataset ID 57, Tag 09	Number of Active Tokens	Binary, 1 byte	O		This tag contains the number of active tokens on this account.

Table F–2: 0120/0130 Device Binding Advice and Response (cont'd.)

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
TLV 120, Dataset ID 57, Tag 0A	Number of Devices With Active Tokens	Binary, 1 byte	O		This tag contains the number of devices for this user with the same token.
TLV 120, Dataset ID 57, Tag 0B	Number of Active Tokens on All Devices	Binary, 2 bytes	O		This tag contains the number of active tokens for this user across all devices.
TLV 120, Dataset ID 57, Tag 0C	Consumer Entry Mode	1 N, 4-bit BCD, 1 byte	O		This tag will indicate how the card information was entered in the device. Valid values are: • 1 (Key-entered) • 2 (Camera captured) • 3 (Unknown)
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		This is an existing field and dataset ID with the existing Tag 01 that contains the token.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 byte	C	C	This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		This is an existing field and dataset ID with the existing Tag 03.

Table F-2: 0120/0130 Device Binding Advice and Response (cont'd.)

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 byte	M		This is an existing field and dataset ID with the existing Tag 05.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 byte	C		This is an existing field and dataset ID with the existing Tag 07 that contains one of the following values: • 01 (ECOM/COF (e-commerce/card on file)) • 05 (E-commerce enabler) NOTE <i>Certain error conditions can result in this tag not being present in the 0120 Device binding STIP advice message.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 12	Number of Active Tokens	2 N, 2 bytes	C		This is an existing field and dataset ID with the existing Tag 12 that contains the number of tokens that are currently active for this PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 13	Number of Inactive Tokens	2 N, 2 bytes	C		This is an existing field and dataset ID with the existing Tag 13 that contains the number of tokens that are currently inactive or tokens have not been activated for this PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 14	Number of Suspended Tokens	2 N, 2 bytes	C		This is an existing field and dataset ID with the existing Tag 14 that contains the number of tokens that were activated, but are suspended for payments for this PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 byte	M		This is an existing field and dataset ID with the existing Tag 0B that contains a unique reference ID generated by Visa for the card account number.

Table F–2: 0120/0130 Device Binding Advice and Response (cont'd.)

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
TLV 123, Usage 2, Dataset ID 68, Tag 80	Bound Device Index	Binary, 1 byte	M		This field contains the index number from the Visa database where the device ID is stored. NOTE <i>Bound device index is only applicable for transactions with e-commerce/card-on-file and e-commerce enabler token types. This tag contains a zero value for transactions with secure element and cloud-based payment token types.</i> <i>When a device ID is validated for an authorization transaction originated from a trusted device Tag 80 will be present in token-based e-commerce authorization transactions for e-commerce/card-on-file and e-commerce enabler tokens.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 81	Token User Identifier	1–11 N, 11 bytes	C		This field contains a unique value that identifies the token user. The token user is an entity that initiates the payment request.

Table F-2: 0120/0130 Device Binding Advice and Response (cont'd.)

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
TLV 123, Usage 2, Dataset ID 68, Tag 82	Token User Application Type	Binary, 1 byte	C		This field contains the application type of the token user. The token user is the entity that initiated the token payment request. This entity can be the merchant, a marketplace, or a check-out host. The application type can have any of the following values: • 00 (Unknown) • 01 (Web) • 02 (Mobile web) • 03 (Mobile application) • 04 (Marketplace application) • 05 (Voice application) • 06 (Biometric application)
TLV 125, Usage 2, Dataset ID 01, Tag 01	Device Type	2 AN, EBCDIC, 2 bytes	C		This tag contains the device type. REFERENCE <i>For a list of valid device types, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 02	Device Language Code	3AN, EBCDIC, 3 bytes	C		This is an existing field and dataset ID with the existing Tag 02 that will conform with ISO 639.
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	M		This is an existing field and dataset ID with the existing Tag 03.
TLV 125, Usage 2, Dataset ID 01, Tag 04	Device Number	15 N, 15 bytes	C		This is an existing field and dataset ID with the existing Tag 04 that may contain the device number, or the full or partial telephone number when available.

Table F–2: 0120/0130 Device Binding Advice and Response (cont'd.)

Field Number and Name		Format	Device Binding STIP Advice		Description
			0120	0130	
TLV 125, Usage 2, Dataset ID 01, Tag 05	Device Name	16 ANS, EBCDIC, 16 bytes	C		This is an existing field and dataset ID with the existing Tag 05 that will provide the device name that is recognized by the consumer. The value will be truncated if the name known by the consumer is larger than 16 characters.
TLV 125, Usage 2, Dataset ID 01, Tag 06	Device Location	25 ANS, EBCDIC, 25 bytes	C		This is an existing field and dataset ID with the existing Tag 06 that may contain the obfuscated geographic location of the device. When available, the latitude and longitude will be provide with up to 4 digits of precision. For example: +xxx.xxxx/-xxx.xxxx. Precision may be rounded to a less granular level. For example: +xx/-xxx or +xx.xx/-xxx.xx.
TLV 125, Usage 2, Dataset ID 01, Tag 07	IP Address	15 ANS, EBCDIC, 15 bytes	C		This is an existing field and dataset ID with the existing Tag 07 that contains the IP address of the device at the time of the provisioning request. Each octet (255) may be 1–3 digits in length.
TLV 125, Usage 2, Dataset ID 02, Tag 09	Wallet Account ID	32 ANS, EBCDIC, 32 bytes	M		This is an existing field with the existing Tag 09 that contains the wallet account ID.
TLV 125, Usage 2, Dataset ID 02, Tag 0A	Wallet Account E-mail Address	64 DX, 32 bytes	M		This is an existing field and dataset ID that contains the hashed full email address for the user's account that was sent by the digital wallet provider.

0302/0312 Token Maintenance File Message

The 0302/0312 Token maintenance file message will allow participating issuers to maintain and inquire about device bound tokens.

The following table shows the message layout and contents for the token maintenance request message and response.

Table F-3: 0302/0312 Token Maintenance File

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
—	Bit Map, Secondary	8 bytes, 64-bit string	M	M	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	C	C	This field contains the number identifying the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number assigned by the message initiator that uniquely identifies a cardholder transaction and all the message types, also known as system transactions that it comprises, according to individual program rules.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	C	C	This field contains the PAN expiration date which is currently the same as the token expiration date.

Table F-3: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd		C+	This field contains the month and day when this message becomes part of a transaction.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>
39	Response Code	2 AN, EBCDIC, 2 bytes		M	This field contains the code that defines the response to a request or the message disposition.
48, Usage 1b	Error Codes in 0312 Response and 0322 Advices	Variable length, 1 byte binary+ 4 N, 4-bit BCD, 3 bytes max		C	This field contains the description of the first error that the VIC found in an 0302 File maintenance request message.
48, Usage 2	Unformatted Text in Authorization/ Reversal Messages	Variable length, 1 byte binary+ 255 ANS, EBCDIC 256 bytes max	C	C	The 0302 message must contain Field 48, Usage 2 with the reason for the update. This field must be present when Field 63.3 contains one of these values in the 0302 message: • 3701 (Token deactivate) • 3703 (Token resume)

Table F-3: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max			This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data				This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes		C+	This tag contains the payment account reference.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	This field contains a right-justified unique Visa-generated transaction identifier (TID).
63.0	Field 63 Bitmap	24 N, bit string, 3 bytes	C	C	This field contains a bitmap that specifies which subfields are present.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	O	O	This field contains a code that specifies the network to be used for transmission of the message and determines the program rules that apply to the transactions.

Table F-3: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C		This field contains values to identify the request message. This field contains one of these values: • 3743 (Call center step up - device binding) • 3744 (Mobile banking app step up - device binding) • 3753 (Call center step up - cardholder verification) • 3754 (Mobile banking app step up - cardholder verification) This field must be present in the 0302 message when one of these values is sent in the message.
73	Date, Action	6 N, 4-bit BCD, 2 bytes	C	C	This field contains the purge date for the account.
91	File Update Code	1 AN, EBCDIC, 1 byte	M	M	This field contains a code that specifies the type of file processing required with a valid value of 2 (Change).
92	File Security Code	2 AN, EBCDIC, 2 bytes	O	C	This field contains an operator identification number. The issuer uses this field when it needs to include an operator ID in a file update or file inquiry.
101	File Name	Variable length, 1 byte binary+ 17 ANS, EBCDIC, 18 bytes max	M	M	This field contains the value of TK (Token).

Table F-3: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes max	O	C	This field contains additional tracing information for proprietary use.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13-19 N, 19 bytes max	C	C	This tag contains the device bound token. NOTE <i>For an 0302 inquiry, V.I.P. will return all tokens associated with the PAN.</i> A token will be required for a change or delete. For an add, if the issuer has already assigned a token, the add request contains a token.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C	C	This tag will be included in the response when the token is located. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	C	C	Tag 03 is required for an add request.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Device Name	32 AN, EBCDIC, 32 bytes		C+	Tag 05 contains the device name that may be included in the response when the token is located.

Table F-3: 0302/0312 Token Maintenance File (cont'd.)

Field Number and Name		Format	Token Maintenance File		Description
			0302	0312	
			Iss	VIC	
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm		C	Tag 06 contains the token expiration date.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes		C+	Tag 07 contains the token type value of 01 (ECOM/COF (e-commerce/card on file)) or 05 (E-commerce enabler)
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte		C	This tag contains the status of the token. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i> If the token sent in the request is invalid, this field will not be included in the response.
TLV 123, Usage 2, Dataset ID 68, Tag 80	Bound Device Index	1 byte, binary	M	M	This field contains the index number from the Visa database where the device ID is stored. The value will be a one-byte hexadecimal value in the range of 01–63 (Decimal 1–99). NOTE <i>This tag must contain the same value from the 0100 Device binding request when Field 63.3 contains the value of 3743 or 3744.</i>

0620/0630 Issuer Device Binding Notification Advice Messages for Device Binding

The following table shows the message layout and contents of the 0620/0630 Issuer device binding notification advice and response messages used to support Visa Token Service notifications for e-commerce/card-on-file token types for the following message reason codes:

- **3741** (Device binding results)
- **3742** (OTP verification result - device binding)
- **3743** (Call center step up - device binding)
- **3744** (Mobile banking app step up - device binding)
- **3745** (Device binding removed)
- **3751** (Cardholder verification results)
- **3752** (OTP verification result - cardholder verification)
- **3753** (Call center step up - cardholder verification)
- **3754** (Mobile banking app step up - cardholder verification)

Table F-4: 0620/0630 Issuer Device Binding Notification Advice and Response

Field Number and Name		Format	Issuer Device Binding Notification Advice		Description
			0620	0630	
			VIC	Iss	
2	Primary Account Number	Variable length 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	This field contains the number identifying the cardholder account or relationship.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes	M	M	This field contains the date and time the request or advice was submitted to VisaNet by the issuer.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	This field contains a number assigned by the message initiator that uniquely identifies a cardholder transaction and all the message types, also known as system transactions that it comprises, according to individual program rules.

Table F-4: 0620/0630 Issuer Device Binding Notification Advice and Response (cont'd.)

Field Number and Name		Format	Issuer Device Binding Notification Advice		Description
			0620	0630	
			VIC	Iss	
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	M	O	This is an existing field that contains the month and day.
33	Forwarding Institution Identification Code	Variable length 1 byte, binary+ 11 N, 4-bit BCD, 7 bytes max	M		This is an existing field that contains a Visa acquiring identifier that is assigned by Visa.
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information.
39	Response Code	2 AN, EBCDIC, 2 bytes	M	M	This field contains the response code 00 (Unconditional approval [immediately bind token to device]) in the response message.
48, Usage 2	Additional Data Unformatted Text in Authorization /Reversal Messages	Variable length TLV format 1 byte, binary+ 255 ANS, EBCDIC, 256 bytes max	C		This is an existing field that contains comments about the transaction.
TLV 56, Usage 1, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		Visa will populate the payment account reference in Tag 01 prior to sending the 0620 Device binding notification advice to the issuer.

Table F-4: 0620/0630 Issuer Device Binding Notification Advice and Response (cont'd.)

Field Number and Name		Format	Issuer Device Binding Notification Advice		Description
			0620	0630	
			VIC	Iss	
62.0	Field 62 Bitmap	64 N, bit string, 8 bytes	M	O	This field contains a bitmap that specifies which Field 62 subfields are present.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique for each original authorization and financial request.
63.0	Field 63 Bitmap	24 N, bit string, 3 bytes	M	M	This field contains a bitmap that specifies which subfields are present.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	This is an existing field that contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains existing values to identify that the request message is for a device binding event. This field contains one of the following values: • 3741 (Device binding results) • 3742 (OTP verification result - device binding) • 3743 (Call center step up - device binding) • 3744 (Mobile banking app step up - device binding) • 3745 (Device binding removed) • 3751 (Cardholder verification results) • 3752 (OTP verification result - cardholder verification) • 3753 (Call center step up - cardholder verification) • 3754 (Mobile banking app step up - cardholder verification)

Table F-4: 0620/0630 Issuer Device Binding Notification Advice and Response (cont'd.)

Field Number and Name		Format	Issuer Device Binding Notification Advice		Description
			0620	0630	
			VIC	Iss	
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes	M		This field contains the value of 9095 (Issuer notification of token vault provisioned or status change) to identify why STIP responded for the issuer or why the switch generated an advice.
70	Network Management Information Code	3 N, 4-bit BCD, 2 bytes	M	M	This field contains the value 890 (Issuer token advice).
100	Receiving Institution Identification Code	Variable length 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	C		This field is a message routing field. It contains a code that identifies the institution that should receive a request or advice.
TLV 123, Usage 2, Dataset ID 68, Tag 01	Token	13–19 N, 19 bytes max	M		This is an existing field and dataset ID with the existing Tag 01 that contains the token.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C		This tag contains the default value of spaces. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		This is an existing field and dataset ID with the existing Tag 03. The issuer will receive the token requestor ID.
TLV 123, Usage 2, Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		This is an existing field and dataset ID with the existing Tag 05. The issuer will receive the token reference ID.

Table F-4: 0620/0630 Issuer Device Binding Notification Advice and Response (cont'd.)

Field Number and Name		Format	Issuer Device Binding Notification Advice		Description
			0620	0630	
			VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 06	Token Expiration Date	4 N, 4 bytes format: yymm	M		This is an existing field and dataset ID with the existing Tag 06.
TLV 123, Usage 2, Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M		This is an existing field and dataset ID with the existing Tag 07 that contains one of the following values: • 01 (ECOM/COF (e-commerce/card on file)) • 05 (E-commerce enabler)
TLV 123, Usage 2, Dataset ID 68, Tag 08	Token Status	1 AN, EBCDIC, 1 byte	M		This is an existing field and dataset ID with the existing Tag 08 that contains the existing value of A (Active for payment).
TLV 123, Usage 2, Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		This is an existing field and dataset ID with the existing Tag 0B that contains the PAN reference ID.

Table F–4: 0620/0630 Issuer Device Binding Notification Advice and Response (cont'd.)

Field Number and Name		Format	Issuer Device Binding Notification Advice		Description
			0620	0630	
			VIC	Iss	
TLV 123, Usage 2, Dataset ID 68, Tag 80	Bound Device Index	Binary, 1 byte	C		This is an existing field and dataset ID with the new Tag 80 that contains the index number from the Visa database where the device ID is stored. Tag 80 will be present when Field 63.3 contains one of the following message reason codes: • 3741 • 3742 • 3743 • 3744 • 3745 NOTE <i>Bound device index is only applicable for transactions with e-commerce/card-on-file and e-commerce enabler token types. This tag contains a zero value for transactions with secure element and cloud-based payment token types.</i> <i>When a device ID is validated for an authorization transaction originated from a trusted device Tag 80 will be present in token-based e-commerce authorization transactions for e-commerce/card-on-file and e-commerce enabler tokens.</i>
TLV 125, Usage 2, Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	C		This is an existing field and dataset ID with the existing Tag 03.

Table F-4: 0620/0630 Issuer Device Binding Notification Advice and Response (cont'd.)

Field Number and Name		Format	Issuer Device Binding Notification Advice		Description
			0620	0630	
			VIC	Iss	
TLV 125, Usage 2, Dataset ID 02, Tag 09	Wallet Account ID	32 ANS, EBCDIC, 32 bytes	M	O	This is an existing field and dataset ID with the existing Tag 09 that contains the wallet account ID.

BASE II Data Records

G

This appendix includes the BASE II fields and positions to support the Visa Token Service for issuers. These fields and values are applicable to all token types.

NOTE

This appendix will include only the token data fields.

BASE II Draft Data Transactions—TC x5, TC x6, TC x7

The following table shows the layout and contents of the token data fields of the BASE II Draft Data transactions.

Token transactions are valid for the following transaction code qualifier (TCQ) values:

- **0** (Default)
- **1** (Account funding)
- **2** (Original credit)

TCR 0

The following table shows the layout and contents of the token data fields of the BASE II Draft Data TCR 0 record.

Table G-1: TCR 0

Position	Length	Format	Field Name	Description
1–4	4	n/a	n/a	n/a
5–20	16	UN	Account Number	This field contains the cardholder PAN.
21–150	137	n/a	n/a	n/a
151	1	AN	Authorization Characteristics Indicator	This field contains the code used by the acquirer to request CPS qualification.
152–157	6	n/a	n/a	n/a

Table G-1: TCR 0 (cont'd.)

Position	Length	Format	Field Name	Description
158	1	AN	POS Terminal Capability	This field may contain the value of 5 (Chip-capable terminal) to identify that contact chip is also supported, or the value of 8 (Proximity-read capable terminal) to identify that the terminal supports Visa Contactless.
159–161	3	n/a	n/a	n/a
162–163	2	AN	POS Entry Mode	This field contains the POS entry mode. The transaction must be authorized and must use the same POS entry mode value as the authorization request.
164–168	5	n/a	n/a	n/a

TCR 1—Additional Data

The following table shows the layout and contents of the token data fields of the BASE II Draft Data TCR 1 record.

Table G-2: TCR 1—Additional Data

Position	Length	Format	Field Name	Description
1–4	4	n/a	n/a	n/a
5	1	AN	Business Format Code	This field contains a space.
6–7	2	AN	Token Assurance Method	This field identifies the cardholder authentication method used during provisioning, device binding, and cardholder verification. Valid values are: - Spaces (No value set) 00 (No issuer ID&V) 10 (Card issuer account verification) 11 (Card issuer interactive cardholder authentication - 1 factor) 12 (Card issuer interactive cardholder authentication - 2 factor) 13 (Card issuer risk oriented non-interactive cardholder authentication) 14 (Card issuer asserted authentication)
8–16	9	AN	Reserved	This field contains all spaces.
17–115	99	n/a	n/a	n/a

Table G-2: TCR 1—Additional Data (cont'd.)

Position	Length	Format	Field Name	Description
116	1	AN	Mail/Phone/ Electronic Commerce and Payment Indicator	This field contains the value of 7 (Non-authenticated security transaction) or MOTO/ECI value of 5 (Authenticated security transaction) in POS transactions that were processed using the Visa Token Service in card-on-file/e-commerce and e-commerce enabler transactions. Issuers must be aware that they will receive the value submitted by the acquirers in the reversal messages.
117–121	5	n/a	n/a	n/a
122	1	AN	Additional Token Response Information	This field contains a value that identifies if the transaction is eligible for token services. Valid token service values are: 1 (Token program) - Space (Not applicable) NOTE <i>Endpoints must support receiving any alphanumeric value in this field.</i>
123	1	AN	Reserved	This field is reserved for future use.
124–168	45	n/a	n/a	n/a

TCR 4—Supplemental Financial Data

The following table shows the layout and contents of the token data fields of the BASE II Draft Data TCR 4—Supplemental Financial Data record.

Table G-3: TCR 4—Supplemental Financial Data

Position	Length	Format	Field Name	Description
1–119	119	n/a	n/a	n/a
120–148	29	AN	Payment Account Reference	This field contains the payment account reference.
149–159	11	UN	Token Requestor ID	This field contains the token requestor ID. If not used, this field should be space-filled.
160–168	9	AN	n/a	n/a

TCR 4—Supplemental Financial and Promotion Data

The following table shows the layout and contents of the token data fields of the BASE II Draft Data TCR 4—Supplemental Financial and Promotion Data record.

Table G-4: TCR 4—Supplemental Financial and Promotion Data

Position	Length	Format	Field Name	Description
1–111	111	n/a	n/a	n/a
112–140	29	AN	Payment Account Reference	This field contains the payment account reference.
141–151	11	UN	Token Requestor ID	This field contains the token requestor ID. If not used, this field should be space-filled.
152–168	17	AN	n/a	n/a

TCR 5—Payment Service Data

The following table shows the layout and contents of the token data fields of the BASE II Draft Data TCR 5 record.

Table G-5: TCR 5—Payment Service Data

Position	Length	Format	Field Name	Description
1–149	149	n/a	n/a	n/a
150–165	16	UN	PAN Token	This field contains the token. NOTE <i>If a token is present in the originals, issuers must send the token in the PAN Token field of all Draft Data, TCR 5 records. If a token is not present in originals, issuers must send all zeros in the PAN Token field of all Draft Data, TCR 5 records.</i>
166–167	2	AN	Reserved	This field contains all spaces.
168	1	n/a	n/a	n/a

TC 33—BASE II Clearing and Settlement Advice Record

The following table shows the layout and contents of the token data fields of the BASE II TC 33 transactions.

Table G-6: TCR 1—BASE II Clearing and Settlement Advice Record

Position	Length	Format	Field Name	Description
1–95	95	n/a	n/a	n/a

Table G-6: TCR 1—BASE II Clearing and Settlement Advice Record (cont'd.)

Position	Length	Format	Field Name	Description
96	1	AN	Additional Token Response Information	This field contains a value that identifies if the transaction is eligible for token services. Valid token service values are: • 1 (Token program) • Space (Not applicable) NOTE Endpoints must support receiving any alphanumeric value in this field.
97–168	72	AN	n/a	n/a

TC 40—Fraud Advice Transaction

The following table shows the layout and contents of the token data fields of the TC 40 transactions.

REFERENCE

For more information, refer to the Fraud Reporting System (FRS) User's Guide.

Table G-7: TCR 2

Position	Length	Format	Field Name	Description
1–87	87	n/a	n/a	n/a
88–116	29	AN	Payment Account Reference (PAR)	This field contains the payment account reference.
117–145	29	AN	Reserved	This field is reserved for future use.
146–161	16	UN	PAN Token	This field contains the token. NOTE <i>If a token is present in the originals, issuers must send the token in the PAN Token field of TC 40, TCR 2 records. If a token is not present in the originals, issuers should send all zeros in the PAN Token field of TC 40, TCR 2 records.</i>
162–164	3	UN	PAN Token Extension	This field contains the token extension.
165–168	4	n/a	n/a	n/a

TC 48—BASE I Advice Record

The following table shows the layout and contents of the token data fields of the TC 48 transactions.

Table G–8: BASE I Advice Processing

Field Name	Transaction Code and TCR	Position	Valid Values
POS Entry Mode	TC 48, TCR 0, Format 1	124–125	This field contains one of these values: 07 (Proximity payment using VSDC chip data rules) 91 (Proximity payment using magnetic stripe data rules) Issuers that currently do not support contactless chip must be prepared to receive POS entry mode codes 07 and 91. Issuers that currently support chip data will continue to receive the POS entry mode codes for contactless and contact chip processing. The value is passed from Field 22 of authorization and full financial messages.
	TC 48, TCR 0, Format 2	78–79	
POS Entry Capability	TC 48, TCR 0, Format 1	126–129	This field contains one of these values: 3 (Optical code) 5 (Chip-capable terminal) for VSDC 8 (Proximity read capability terminal) for contactless-only Issuers that currently support chip data will continue to receive the POS terminal capability values for contactless and contact chip processing. The value is passed from Field 60.2 of authorization and full financial messages.
	TC 48, TCR 0, Format 2	80	
Chip Debit/Credit Transaction Indicator	TC 48, TCR 6	82	This field contains the value of 4 (V.I.P. inserts this code based on the presence of a token-based transaction). The value is passed from Field 60.6 of authorization and full financial messages.

TC 50—Text Messages Transactions

The following table shows the layout and contents of the account number fields of the BASE II TC 50 transactions.

REFERENCE

For more information, refer to the Visa U.S.A. Enhanced Data Service Member Implementation Guide. For a current copy of the guide, contact Visa U.S.A. Commercial Solutions.

Table G-9: Account Number Fields in Commercial Card BASE II TC 50, TCR 0 Records

Impacted TCR 0 Records for Additional Data	Account Number Positions	Account Number Extension Positions	Message Identifier Positions
TCR 0—Commercial Card—Passenger Itinerary Data	42–57	58–60	23–37
TCR 0—Commercial Card—Generic Data	42–57	58–60	23–37
TCR 0—Commercial Card—Invoice (Header and Summary)	121–136	137–139	23–37
TCR 0—Commercial Card—Lodging (Additional Data Elements)	121–136	137–139	23–37
TCR 0—Commercial Card—Car Rental (Additional Data Elements)	121–136	137–139	23–37
TCR 0—Commercial Card—Open Format—Shipping and Overnight Courier Services	47–62	63–65	23–37
TCR 0—Commercial Card—Open Format—Temporary Help Services	47–62	63–65	23–37

THIS PAGE INTENTIONALLY LEFT BLANK.

0100/0110 Account Verification Request and Response Messages

H

This appendix includes the 0100/0110 Account verification request and response messages applicable to all token types.

0100/0110 Account Verification Request and Response and 0120/0130 STIP Advice Messages

The table shows the message layout and contents of the 0100/0110 Account verification request and response messages, and 0120/0130 STIP advice messages to support Visa Token Service transactions.

NOTE

The Visa Token Service acts as the acquirer for the 0100 Account verification messages.

Bold values in the 0110 Account verification response indicate the field must contain the same values from the 0100 Account verification request.

Bold values in the 0130 STIP advice response indicate the field must contain the same values from the 0120 STIP advice request.

Table H-1: 0100/0110 Account Verification Request and Response and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Account Verification				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	>	M	>	M	M	This field contains the number identifying the cardholder account or relationship.
3	Processing Code	6 N, 4-bit BCD, 3 bytes	M	>	M	>	M	M	This field contains these values: - Positions 1–2, Transaction Type; contains the value of 00 (Goods/service purchase-debit) - Positions 3–4, Account Type (From); contains the value of 00 (Not applicable or not specified) - Positions 5–6, Account Type (To); contains the value of 00 (Not applicable)

Table H-1: 0100/0110 Account Verification Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Account Verification				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
4	Amount, Transaction	12 N, 4-bit BCD, 6 bytes	M	>	M	>	M		This field contains a 0 (Zero).
6	Amount, Cardholder Billing	12 N, 4-bit BCD, 6 bytes		O		O	O		This field contains the transaction amount from Field 4 converted to the currency used to bill the cardholder's account. Issuers that receive the multi-currency fields in 0100 Token activation request messages must support Field 6 containing all zeros.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	>	M	>	M	M	This field contains the date and time when the request was created for the issuer.
10	Conversion Rate, Cardholder Billing	8 N, 4-bit BCD, 4 bytes		O		O	O		This field contains the rate used by Visa to convert the transaction amount in Field 4 to the cardholder billing amount in Field 6.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	>	M	>	M	M	This field contains a Visa-generated tracing element and unique values for messages that Visa has processed.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	M	>			M		This field contains the PAN expiration date.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C		C				This field contains the month and day.

Table H-1: 0100/0110 Account Verification Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Account Verification				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains the MCC 6012 (Financial institutions – merchandise, services, and debt repayment).
19	Acquiring Institution Country Code	3 N, 4-bit BCD, 2 bytes	M	>	M	>	M	M	This field contains the country code for the issuing account range.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains the value of 00 (Unknown or terminal not used).
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	>	M	C+	M	M	This field contains the value of 51 (Address/CVV2/account verification without authorization).
32	Acquiring Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M	>	M	>	M	M	This field contains a Visa identifier. Default values are: • 423378 for SE mobile devices • 320000 for HCE mobile devices, COF/e-commerce, and e-commerce enabler
TLV 34	Electronic Commerce Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max		C+	O	-			This TLV field contains Dataset ID 56.
TLV 34, Dataset ID 56	Supplemental Data			C+	O	-			This dataset ID contains Tag DF21.

Table H-1: 0100/0110 Account Verification Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Account Verification				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 34, Dataset ID 56, Tag DF21	Secure Remote Commerce	1 N 4-bit BCD 1 byte		C+	O	-			This tag contains the Visa Digital Commerce Indicator with the value of 01 (Visa digital commerce).
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddhnnnnnn	M	>	M	>	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>

Table H-1: 0100/0110 Account Verification Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Account Verification				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
38	Authorization Identification Response	6 AN, EBCDIC, 6 bytes			C	>	C		For approved authorization requests, this field must not contain any of these invalid values: • 00000 (All zeros in the last five positions of the six-byte field) • ^^^^^ (All spaces in the last five positions of the six-byte field) • X (X in the last position of the six-byte field) • 0000^ (Four zeros followed by a space in the last five positions of the six-byte field) • 0000N (Four zeros followed by N in the last five positions of the six-byte field) • 0000Y (Four zeros followed by Y in the last five positions of the six-byte field) • 0000P (Four zeros followed by P in the last five positions of the six-byte field) • SVC (SVC in the first three positions of the six-byte field)

Table H-1: 0100/0110 Account Verification Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Account Verification				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
39	Response Code	2 AN, EBCDIC, 2 bytes		C+	M	>	M	M	This field contains the response code. Valid values are: 00 (Unconditional approval (provision and activate immediately for payments)) 05 (Do not honor) 85 (Conditional approval (provision, but do not activate until additional consumer verification is performed)). For the 0110 response, issuers can optionally send response code 85. Visa will convert 85 to 00 and assign a token based on the rules for the token type. For the 0130 response, 00 is used to acknowledge receipt of the STIP advice. Any response code present other than 00 will prevent device provisioning. NOTE Issuers can optionally return these values in the 0110 response, but the device will not be provisioned: 14 (Invalid account number (no such number)) 19 (Re-enter transaction) 54 (Expired card or expiration date missing) 91 (Issuer or switch inoperative; STIP not applicable or not available for this transaction) 96 (System malfunction) N7 (Decline for CVV2 failure)

Table H-1: 0100/0110 Account Verification Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Account Verification				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
42	Card Acceptor Identification Code	15 ANS, EBCDIC, 15 bytes	M	>	M		M	M	Issuers must be prepared to receive the following default values in this field: 4004250000000001 for SE mobile devices 3200000000000001 for HCE mobile devices, COF/e-commerce, and e-commerce enabler
43	Card Acceptor Name/Location	40 ANS, EBCDIC, 40 bytes	M	>			C		This field contains the default value of Visa Provisioning Service in positions 1–25 and the alpha country code for the issuing account range in positions 39–40. For example, for the United States, this field contains Visa Provisioning Service US . REFERENCE <i>For a list of alpha country codes, refer to the Full Service POS Online Messages Technical Specifications.</i>
44.1	Response Source Reason/Code	1 ANS, EBCDIC, 1 byte				M+	M		This field is set by Visa and contains the response source/reason code that identifies the source of the Field 39 response decision.
44.2	Address Verification Result Code	1 ANS, EBCDIC, 1 byte			C	>			This field contains a Visa-defined code that describes the result of an address verification.
44.10	CVV2 Result Code	1 ANS, EBCDIC, 1 byte	C		C				This field contains a card verification value 2 (CVV2) verification result code.

Table H-1: 0100/0110 Account Verification Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Account Verification				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
49	Currency Code, Transaction	3 N, 4-bit BCD, 2 bytes	M	>	M	>	M		This field contains a valid currency code set by Visa as part of the account verification request.
51	Currency Code, Cardholder Billing	3 N, 4-bit BCD, 2 bytes		O		O	O		This field contains a three-digit numeric code that identifies the currency that the issuer uses to bill the cardholder's account. If this field is present, these fields are also required: - Field 6—Amount, Cardholder Billing - Field 10—Conversion Rate, Cardholder Billing
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max	O		O		O		This TLV field contains Dataset ID 01.
TLV 56, Dataset ID 01	Account Data		O		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		O		Visa populates the payment account reference in this tag before sending the 0100 Account verification request message.
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes		M+	O	C+	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique.

Table H-1: 0100/0110 Account Verification Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Account Verification				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
62.21	Online Risk Assessment Risk Score and Reason Codes	4 AN, EBCDIC, 4 bytes		C			C		This field contains the online risk assessment information from Visa Advanced Authorization. It is conditional based on participation.
62.22	Online Risk Assessment Conditions Code	6 AN, EBCDIC, 6 bytes		C			C		This field contains the online risk assessment information to assist issuers in the authorization decision-making process.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	>	M	>	M	M	This field contains the network ID 0002 (Visa).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes					M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
63.13	Decimal Positions Indicator	6 N, 4-bit BCD, 3 bytes	C	C+	C		C		This field contains the number of decimal positions in Field 4 and Field 6 if they are present in the message. Only issuers that participate in the Currency Precision Service will receive Field 63.13.
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes maximum	O	C-		C+			This field contains additional tracing information for proprietary use. Issuers must be aware that when this field is present in the original message, the issuer must send the field and values in the response message.

Table H-1: 0100/0110 Account Verification Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Account Verification				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum	C				C		This TLV field contains Dataset ID 66.
TLV 123, Usage 2, Dataset ID 66	Verification Data								This dataset ID contains Tag C0 and Tag CF.
TLV 123, Usage 2, Dataset ID 66, Tag C0	Postal Code	9 AN, EBCDIC, 9 bytes	C				C		This tag contains the cardholder address postal code.
TLV 123, Usage 2, Dataset ID 66, Tag CF	Street Address	40 AN, EBCDIC, 40 bytes	C				C		This tag contains the cardholder billing address.
126.10	CVV2 Authorization Request Data	6 ANS, EBCDIC, 6 bytes	C	>			C		This field contains CVV2 data.

THIS PAGE INTENTIONALLY LEFT BLANK.

0100/0110 Token Activation Request and Response Messages I

This appendix includes the 0100/0110 Token activation request and response, and 0120/0130 STIP advice messages applicable to all token types.

0100/0110 Token Activation Request and Response Messages

This table shows the message layout and contents of the 0100/0110 Token activation request and response messages, and 0120/0130 STIP advice messages to support Visa Token Service transactions.

NOTE

The values in the 0120 Token STIP advice message are from the 0100 Token activation request message or are created in V.I.P. Bold values in the 0100 Token activation request indicate that the value in this field is the same as the value in the token eligibility check request.

Bold values in the 0110 Token activation response indicate the field must contain the same values from the 0100 Token activation request.

Bold values in the 0130 STIP advice response indicate the field must contain the same values from the 0120 STIP advice request.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	This field contains the number identifying the cardholder account or relationship.
3	Processing Code	6 N, 4-bit BCD, 3 bytes	M	M	M	M	This field contains these values: - Positions 1–2, Transaction Type; contains the value of 00 (Goods/service purchase-debit) - Positions 3–4, Account Type (From); contains the value of 00 (Not applicable or not specified) - Positions 5–6, Account Type (To); contains the value of 00 (Not applicable)
4	Amount, Transaction	12 N, 4-bit BCD, 6 bytes	M	M	M		This field contains a 0 (Zero).

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
6	Amount, Cardholder Billing	12 N, 4-bit BCD, 6 bytes	C	C	C		This field contains the transaction amount from Field 4 converted to the currency used to bill the account. Issuers that receive the multi-currency fields in 0100 Token activation request messages must support Field 6 containing all zeros.
7	Transmission Date and Time	10 N, 4-bit BCD, 5 bytes format: MMDDhhmmss	M	M	M	M	This field contains the date and time when the request was created for the issuer.
10	Conversion Rate, Cardholder Billing	8 N, 4-bit BCD, 4 bytes	C		C		This field contains the rate that Visa used to convert the transaction amount in Field 4 to the cardholder billing amount in Field 6.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	M	M	M	This field contains a Visa-generated tracing element and unique values for messages that Visa has processed. The 0120 Token STIP advice and 0620 Token notification advice messages contains the same value as the 0100 Token activation request.
14	Date, Expiration	4 N, 4-bit BCD, 2 bytes format: yymm	M		M		This field contains the PAN expiration date.
15	Date, Settlement	4 N, 4-bit BCD, 2 bytes format: mmdd	C	C	C	C	This field contains the month and day.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the MCC 6012 (Financial institutions – merchandise, services, and debt repayment).
19	Acquiring Institution Country Code	3 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the country code for the issuing account range.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M		M		This field contains the value of 00 (Unknown or terminal not used).
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	M	M	M	This field contains the value of 51 (Address/CVV2/account verification without authorization).
32	Acquiring Institution Identification Code	Variable length, 1 byte binary+ 11 N, 4-bit BCD, 7 bytes max	M	M	M	M	This field contains a Visa identifier. Default values are: • 423378 for SE mobile devices • 320000 for HCE mobile devices, COF/e-commerce, and e-commerce enabler

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes, format: ydddhnnnnnn	M	M	M	M	This field contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction, referred to as a transaction set. The number will be assigned by the message initiator and the content is limited to numeric information. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i> The 0120 Token STIP advice and 0620 Token notification advice messages contains the same value as the 0100 Token activation request.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
39	Response Code	2 AN, EBCDIC, 2 bytes		M	M	M	This field contains the response code. Valid values are: 00 (Unconditional approval (provision and activate immediately for payments)) 05 (Do not honor) 85 (Conditional approval (provision, do not activate until additional consumer verification is performed)) For the 0130 response, only 00 is used in the response, and it is used to acknowledge receipt of STIP advice. Any response code present other than 00 and 85 will prevent device provisioning. NOTE <i>Issuers can optionally return these values in the 0110 response, but the device will not be provisioned:</i> 14 (Invalid account number (no such number)) 19 (Re-enter transaction) 54 (Expired card or expiration date missing) 91 (Issuer or switch inoperative; STIP not applicable or not available for this transaction) 96 (System malfunction) N7 (Decline for CVV2 failure)
42	Card Acceptor Identification Code	15 ANS, EBCDIC, 15 bytes	M	M	M	M	In the 0100/0110 messages, issuers must be prepared to receive one of these default values in this field: 4004250000000001 for SE mobile devices 3200000000000001 for HCE mobile devices, COF/e-commerce, and e-commerce enabler In the 0120/0130 messages, issuers must be prepared to receive any value in this field.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
43	Card Acceptor Name/Location	40 ANS, EBCDIC, 40 bytes	M		M		This field contains the default value of Visa Provisioning Service in positions 1–25 and the alpha country code for the issuing account range in positions 39–40. As an example, this field contains Visa Provisioning Service US for the United States. REFERENCE <i>For a list of alpha country codes, refer to the Full Service POS Online Messages Technical Specifications.</i>
44.1	Response Source Reason/Code	1 ANS, EBCDIC, 1 byte	O		M		This field is set by Visa and contains the response source and/or reason code that identifies the source of the Field 39 response decision.
44.2	Address Verification Result Code	1 ANS, EBCDIC, 1 byte	C	C	C		This field contains a Visa-defined code that describes the result of an address verification.
44.10	CVV2 Result Code	1 ANS, EBCDIC, 1 byte	C	C	C		This field contains a card verification value 2 (CVV2) verification result code.
49	Currency Code, Transaction	3 N, 4-bit BCD, 2 bytes	M	M	M		This field contains a valid currency code set by Visa as part of the activation request.
51	Currency Code, Cardholder Billing	3 N, 4-bit BCD, 2 bytes	C		C		This field contains a three-digit numeric code that identifies the currency that the issuer uses to bill the account. If this field is present, these fields are also required: - Field 6—Amount, Cardholder Billing - Field 10—Conversion Rate, Cardholder Billing

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 56	Customer Related Data	Variable length, TLV format: 1 byte binary+ 255 ANS, EBCDIC, 256 bytes max					This TLV field contains Dataset ID 01 and Dataset ID 03.
TLV 56, Dataset ID 01	Account Data		O		O		This dataset ID contains Tag 01.
TLV 56, Dataset ID 01, Tag 01	Payment Account Reference	29 AN, EBCDIC, 29 bytes	O		O		Visa populates this tag with the payment account reference prior to sending the 0100 Token activation request message.
TLV 56, Dataset ID 03	Customer Identification Data		C				This dataset ID contains Tag 80.
TLV 56, Dataset ID 03, Tag 80	Customer Identification (unspecified)	99 ANS, EBCDIC, 99 bytes	C				This field contains market-specific customer identification.
60	Additional POS Information	Variable length, 1 byte binary+ 12 N, 4-bit BCD, 7 bytes	C		C		For SE transactions, this field contains additional Visa-provided information about the point-of-sale or point of service.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	M	O	M	O	This field contains a right-justified, Visa-generated transaction identifier (TID) that is unique. The 0120 Token STIP advice and 0620 Token notification advice messages contains the same value as the 0100 Token activation request.
62.21	Online Risk Assessment Risk Score and Reason Codes	4 AN EBCDIC 4 bytes	C		C		This field contains the online risk assessment information from Visa Advanced Authorization. It is conditional based on participation.
63.1	Network Identification Code	4 N, 4-bit BCD, 2 bytes	M	M	M	M	This field contains the network ID 0002 (Visa).
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M	O	M		This field contains a value to identify that the message is requesting a token. It contains the value of 3700 (Token create).
63.4	STIP/Switch Reason Code	4 N, 4-bit BCD, 2 bytes			M		This field contains a code that identifies why STIP responded for the issuer or why the switch generated an advice.
63.13	Decimal Positions Indicator	6 N, 4-bit BCD, 3 bytes	C		C		This field contains the number of decimal positions in Field 4 and Field 6 if they are present in the message. Only issuers that participate in the Currency Precision Service will receive Field 63.13.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 114	Domestic and Localized Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max	O		O		This TLV field contains Dataset ID 70.
TLV 114, Dataset ID 70	Localized Data		O		O		This dataset ID contains Tag C0, Tag C1, Tag C2, Tag C3, Tag C4, and Tag C5.
TLV 114, Dataset ID 70, Tag C0	Language Code	3 AN, EBCDIC, 3 bytes	O		O		This tag contains the ISO 639-defined language code.
TLV 114, Dataset ID 70, Tag C1	Data Encoding Format	20 AN, EBCDIC, 20 bytes max	O		O		This tag identifies how all tags except C0 and C1 are encoded in this data set.
TLV 114, Dataset ID 70, Tag C2	Device Name	Binary, UTF-8, 400 bytes max	O		O		This tag contains the device name. Length = 100 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 114, Dataset ID 70, Tag C3	Cardholder Name	Binary, UTF-8, 1024 bytes max	O		O		This tag contains the cardholder name. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114, Dataset ID 70, Tag C4	Address	Binary, UTF-8, 1024 bytes max	O		O		This tag carries all address data. Each line of the address will be comma-separated and left-justified. Length = 256 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
TLV 114, Dataset ID 70, Tag C5	Zip Code	Binary, UTF-8, 64 bytes max	O		O		This tag contains the zip code. Length = 16 characters maximum NOTE <i>UTF-8 encoding may cause a single character to be up to 4 bytes.</i>
115	Additional Trace Data	Variable length, 1 byte binary+ 24 ANS, EBCDIC, 25 bytes maximum	O	C	C	C	This field contains additional tracing information for proprietary use. When this field is present in the original message, the issuer must send the field and values in the response message.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 120	Auxiliary Transaction Data (TLV Format)	Variable length, 2 bytes binary, TLV format: 1535 bytes, variable by usage, 1537 bytes max					This TLV field contains Dataset ID 56, Dataset ID 57, and Dataset ID 58.
TLV 120, Dataset ID 56	Device Parameters						This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 04, Tag 05, Tag 06, Tag 07, Tag 08, Tag 09, Tag 0A, Tag 0B, Tag 0C, and Tag 0D.
TLV 120, Dataset ID 56 Tag 01	Device IMEI	24 AN, EBCDIC, 24 bytes	O				This tag contains the hardware ID of the device.
TLV 120, Dataset ID 56 Tag 02	OS ID	24 AN, EBCDIC, 24 bytes	O				This tag indicates the build of velocity and risk rules.
TLV 120, Dataset ID 56 Tag 03	Provisioning Attempts on the Device	2 N, 4-bit BCD, 1 byte	O				This tag contains the number of provisioning attempts on the device within the last 24 hours.
TLV 120, Dataset ID 56 Tag 04	Account-to-Device Bonding Age	Binary, 2 bytes	O				This tag contains the number of days the device was used by this account.
TLV 120, Dataset ID 56 Tag 05	Device Country	2 AN, EBCDIC, 2 bytes	O				This tag contains the two-character alpha ISO country code of the device at the time of provisioning.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 120, Dataset ID 56 Tag 06	Token Protection Method	1 N, 4-bit BCD, 1 byte	O				This tag describes how the tokens are protected on the device. Valid values are: • 1 (Software) • 2 (Transaction execution environment (TEE)) • 3 (Secure element (SE)) • 4 (Cloud) NOTE <i>The value of 4 only applies to e-commerce tokens.</i>
TLV 120, Dataset ID 56 Tag 07	Presentation Type	1 N, 4-bit BCD, 1 byte	O				This tag contains the token presentment mode. Valid values are: • 1 (Near field communication (NFC)-host card emulation (HCE) or secure element (SE)) • 2 (Magnetic secure transmission) • 3 (QR-consumer device) • 4 (QR-consumer cloud)
TLV 120, Dataset ID 56 Tag 08	Device Serial Number	24 AN, EBCDIC, 24 bytes	O				This tag contains the serial number of the mobile device.
TLV 120, Dataset ID 56 Tag 09	Location Source	1 N, 4-bit BCD, 1 byte	O				This tag contains the source used to identify the consumer's location. Valid values are: • 1 (WiFi) • 2 (Cellular) • 3 (GPS) • 4 (Other)
TLV 120, Dataset ID 56 Tag 0A	Device Time Zone	5 AN, EBCDIC, 5 bytes	O				This tag contains the device time zone.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 120, Dataset ID 56 Tag 0B	Device Time Zone Setting	1 N, 4-bit BCD, 1 byte	O				This tag indicates how the time zone setting was obtained. Valid values are: • 1 (Network set) • 2 (Consumer set)
TLV 120, Dataset ID 56 Tag 0C	Device Bluetooth Media Access Control (MAC)	24 ANS, EBCDIC, 24 byte	O				This tag contains the MAC address for Bluetooth.
TLV 120, Dataset ID 56 Tag 0D	OS Type	1 N, 4-bit BCD, 1 byte	O				This tag indicates the operating system running on the device. Valid values are: • 1 (Android) • 2 (iOS) • 3 (Windows) • 4 (Blackberry) • 5 (Tizen) • 6 (Other)
TLV 120, Dataset ID 57	Wallet Parameters						This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 04, Tag 05, Tag 06, Tag 07, Tag 08, Tag 09, Tag 0A, Tag 0B, Tag 0C, Tag 80, and Tag 81.
TLV 120, Dataset ID 57 Tag 01	Wallet Provider PAN Age	Binary, 2 bytes	O				This tag contains the number of days that the user's PAN has been on file for the user.
TLV 120, Dataset ID 57 Tag 02	User Account Age	Binary, 2 bytes	O				This tag contains the number of days the user account has existed.
TLV 120, Dataset ID 57 Tag 03	Wallet Account Age	Binary, 2 bytes	O				This tag contains the number of days since the user created the wallet account or started using the account.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 120, Dataset ID 57 Tag 04	Days Since Last Activity	Binary, 2 bytes	O				This tag contains the number of days since the last activity on the account.
TLV 120, Dataset ID 57 Tag 05	Number of Transactions, Last 12 Months	Binary, 2 bytes	O				This tag contains the number of transactions on this account within the last 12 months.
TLV 120, Dataset ID 57 Tag 06	Days Since Last Account Change	Binary, 2 bytes	O				This tag contains the number of days since account settings were changed.
TLV 120, Dataset ID 57 Tag 07	Suspended Cards in Account	1 N, 4-bit BCD, 1 byte	O				This tag contains the number of suspended cards suspended on the account.
TLV 120, Dataset ID 57 Tag 08	Wallet Account Country	2 AN, EBCDIC, 2 byte	O				This tag contains the two-character alpha ISO country code of the account holder.
TLV 120, Dataset ID 57 Tag 09	Number of Active Tokens	Binary, 1 byte	O				This field contains the number of active tokens on the user's account.
TLV 120, Dataset ID 57 Tag 0A	Number of Devices With Active Tokens	Binary, 1 byte	O				This tag contains the number of devices for this user with the same token.
TLV 120, Dataset ID 57 Tag 0B	Number of Active Tokens on All Devices	Binary, 2 bytes	O				This tag contains the number of active tokens for this user across all devices.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 120, Dataset ID 57 Tag 0C	Consumer Entry Mode	1 N, 4-bit BCD, 1 byte	O				This tag indicates how the card information was entered in the device. Valid values are: • 1 (Key-entered) • 2 (Camera captured) • 3 (Unknown)
TLV 120, Dataset ID 57 Tag 80	Wallet Account Email Address Age	4 N, 4-bit BCD, 2 bytes	O		O		For secure element transactions, this tag represents the number of days between 0000-9999 that the email address has existed.
TLV 120, Dataset ID 57 Tag 81	Wallet Provider Phone Score	1 N, 4-bit BCD, 1 byte	O		O		This tag contains a value between 1-5 , where 5 is the most trusted.
TLV 120, Dataset ID 58	Card Environment Data						This dataset ID contains Tag 01, Tag 02, Tag 80, Tag 81, Tag 82, and Tag 83.
TLV 120, Dataset ID 58 Tag 01	PAN Issued Date	6 N, 4-bit BCD, 3 bytes format: yymmdd		O			This tag represents the date the PAN was issued. It may be included in the 0110 message when TLV Field 123, Usage 2, Dataset ID 68, Tag 07 in the 0100 message contained one of these values: • 01 (ECOM/COF (e-commerce/card on file)) • 05 (E-commerce enabler)
TLV 120, Dataset ID 58 Tag 02	PAN Activation Date	6 N, 4-bit BCD, 3 bytes format: yymmdd		O			This tag represents the date the PAN was activated. It may be included in the 0110 message when TLV Field 123, Usage 2, Dataset ID 68, Tag 07 in the 0100 message contained one of these values: • 01 (ECOM/COF (e-commerce/card on file)) • 05 (E-commerce enabler)

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 120, Dataset ID 58 Tag 80	Original Token	13–19 N, 19 bytes max	C		C		This tag contains the original token that was previously provisioned. It is included in the 0100 message when TLV Field 125, Usage 2, Dataset ID 02, Tag 08 contains the value of 04 .
TLV 120, Dataset ID 58 Tag 81	Original Token Assurance Method	2 AN, EBCDIC, 2 bytes	C		C		This tag contains the original token assurance method. It is included in the 0100 message when TLV Field 125, Usage 2, Dataset ID 02, Tag 08 contains the value of 04 .
TLV 120, Dataset ID 58 Tag 82	Original Token Requestor ID	11 N, 11 bytes	C		C		This tag contains the original token requestor ID. It is included in the 0100 message when TLV Field 125, Usage 2, Dataset ID 02, Tag 08 contains the value of 04 .
TLV 120, Dataset ID 58 Tag 83	Original Token Reference ID	32 AN, EBCDIC, 32 bytes	C		C		This tag contains the original token reference ID. It is included in the 0100 message when TLV Field 125, Usage 2, Dataset ID 02, Tag 08 contains the value of 04 .
TLV 120, Dataset ID 58 Tag 84	Original Token Type	2 AN, EBCDIC, 2 bytes					This field contains the token type of the source token used for provisioning a new token. It is included in the 0100 message when TLV Field 125, Usage 2, Dataset ID 02, Tag 08 contains the value of 04 .
TLV 120, Dataset ID 58 Tag 85	Original Token Device Type	2 AN, EBCDIC, 2 bytes					This field contains the device type of the source token used for provisioning a new token. It is included in the 0100 message when TLV Field 125, Usage 2, Dataset ID 02, Tag 08 contains the value of 04 .

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 120, Dataset ID 58 Tag 86	Original Device ID	2 ANS, EBCDIC, 2 bytes					This field contains the device ID of the source token used for provisioning a new token. It is included in the 0100 message when TLV Field 125, Usage 2, Dataset ID 02, Tag 08 contains the value of 04 .
TLV 123, Usage 2	Verification & Token Data (TLV Format)	Variable length, TLV format: 1 byte binary+ 255 binary and ANS, EBCDIC, 256 bytes maximum					This TLV field contains Dataset ID 66, Dataset ID 67, and Dataset ID 68.
TLV 123, Usage 2, Dataset ID 66	Verification Data						This dataset ID contains Tag C0, Tag CF, Tag D0, Tag 81, and Tag D4.
TLV 123, Usage 2 Dataset ID 66 Tag C0	Postal Code	9 AN, EBCDIC, 9 bytes	C		C		This tag contains the cardholder address postal code.
TLV 123, Usage 2 Dataset ID 66 Tag CF	Street Address	40 AN, EBCDIC, 40 bytes	C		C		This tag contains the cardholder billing address.
TLV 123, Usage 2 Dataset ID 66 Tag D0	Compressed AVS Data	14 AN, EBCDIC, 14 bytes	C		C		This tag contains Address Verification Service (AVS) data, including the postal code and street address with alpha characters and special characters removed from the street address, for token activation request messages based on U.S. and U.K. issuer configuration in Visa systems.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 123, Usage 2 Dataset ID 66 Tag D4	Cardholder Name	26 ANS, EBCDIC, 26 bytes	C		C		This field contains the cardholder name. It is present when Field 63.3 contains the value of 3700 . The value will be truncated if the length of the name is longer than 26 characters.
TLV 123, Usage 2 Dataset ID 67	Activation Verification Data			O			This dataset ID contains Tag 07.
TLV 123, Usage 2 Dataset ID 67, Tag 07	Issuer Special Condition Code	2 AN, EBCDIC, 2 bytes		O			This tag contains an issuer-assigned value. Issuers will populate the issuer special condition codes in Tag 07 prior to sending the 0110 Token activation response message to Visa. This tag will not apply if the issuer is unavailable, and the 0100 Token activation request message goes into stand-in processing.
TLV 123, Usage 2 Dataset ID 68	Token Data						This dataset ID contains Tag 1F37, Tag 1F38, Tag 02, Tag 03, Tag 05, Tag 07, Tag 08, Tag 10, Tag 11, Tag 12, Tag 13, and Tag 14.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 123, Usage 2 Dataset ID 68, Tag 1F37	Issuer Custom Data for File Control Information (FCI) Template	128 AN, EBCDIC, 128 bytes		O			This tag contains custom personalization data from the issuer. The custom personalization data will be transmitted in Tag 6F—FCI Template, Subtag BF0C—FCI Issuer Discretionary Data. Visa does not validate custom personalization data from the issuer. This tag is optionally present when TLV Field 123, Usage 2, Dataset ID 68, Tag 07 contains the value of 02 or 03. REFERENCE <i>For more information about this tag, refer to the Full Service POS Online Messages Technical Specifications.</i>

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 123, Usage 2, Dataset ID 68, Tag 1F38	Issuer Custom Data for Issuer Application Data (IAD)	15 AN, EBCDIC, 15 bytes		O			This tag contains custom personalization data from the issuer and must be exactly 15 bytes long. The first byte of this field must be hexadecimal 00. If content is less than 15 bytes, the remaining bytes of this field should be padded with hexadecimal 00. The custom personalization data will be transmitted in the Issuer Discretionary Data (IDD) portion of Issuer Application Data (IAD), in Tag 9F10—Issuer Application Data during the get processing options (GPO) response from the terminal. Custom personalization data is sent to issuers in the authorization message in Tag 9F10 in Field 55, Usage 1—VSDC Chip Data. Visa does not validate the 14 bytes of issuer custom personalization data except to validate that the field does not contain any spaces or all zeros. This tag is optionally present only when TLV Field 123, Usage 2, Dataset ID 68, Tag 07 contains the value of 02 or 03.
TLV 123, Usage 2, Dataset ID 68, Tag 02	Token Assurance Method	2 AN, EBCDIC, 2 bytes	C		C		This tag contains the default value of spaces. REFERENCE <i>For a list of valid values, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 123, Usage 2, Dataset ID 68, Tag 03	Token Requestor ID	11 N, 11 bytes	M		M		This tag contains the token requestor ID. The issuer will receive in the 0100 Token activation request message the same value from the token eligibility check request message.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 123, Usage 2 Dataset ID 68, Tag 05	Token Reference ID	32 AN, EBCDIC, 32 bytes	M		M		This tag contains the token reference ID. The issuer will receive in the 0100 Token activation request message the same value from the token eligibility check request message.
TLV 123, Usage 2 Dataset ID 68, Tag 07	Token Type	2 AN, EBCDIC, 2 bytes	M		M		This tag contains one of these values: • 01 (ECOM/COF (e-commerce/card on file)) • 02 (SE (secure element)) • 03 (CBP (cloud-based payment)) • 05 (E-commerce enabler) Certain error conditions can result in this tag not being present in the 0120 Token STIP advice message.
TLV 123, Usage 2 Dataset ID 68, Tag 0B	PAN Reference ID	32 ANS, EBCDIC, 32 bytes	M		M		This tag contains a unique reference ID generated by Visa for the card account number.
TLV 123, Usage 2 Dataset ID 68, Tag 10	Visa Token Score	2 N, 2 bytes	M		C		This tag contains a value that indicates the degree of risk associated with the token. This is a two-byte numeric value from 01–99 . Certain error conditions can result in this tag not being present in the 0120 Token STIP advice message.
TLV 123, Usage 2 Dataset ID 68, Tag 11	Visa Token Decisioning	2 AN, EBCDIC, 2 bytes	C		C		This tag contains the results from the Token Provisioning Service. Valid values are: • 00 (Provision and activate) • 05 (Do not provision) • 85 (Provision in inactive state - requires further consumer authentication before activation)

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 123, Usage 2 Dataset ID 68, Tag 12	Number of Active Tokens	2 N, 2 bytes	C		C		This tag contains the number of tokens that are currently active for this PAN.
TLV 123, Usage 2 Dataset ID 68, Tag 13	Number of Inactive Tokens	2 N, 2 bytes	C		C		This tag contains the number of device tokens currently inactive (device tokens that have not been activated) for this PAN.
TLV 123, Usage 2 Dataset ID 68, Tag 14	Number of Suspended Tokens	2 N, 2 bytes	C		C		This tag contains the number of tokens that were activated, but are suspended for payments for this PAN.
TLV 123, Usage 2, Dataset ID 68, Tag 86	Token Requestor - Token Service Provider ID	11 N, 4-bit BCD, 6 bytes	C		C		This tag contains a unique value that identifies the token requestor-token service provider. NOTE <i>This tag will only be present when the transaction is initiated by a Token Requestor-Token Service Provider.</i> <i>This tag only applies to transactions with the value of 01 or 05 in TLV Field 123, Usage 2 Dataset ID 68, Tag 07.</i>
TLV 125 Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	C		C		This is a TLV field that contains Dataset ID 01 and Dataset ID 02.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 125 Usage 2 Dataset ID 01	Token Device		C		C		This dataset ID contains Tag 01, Tag 02, Tag 03, Tag 04, Tag 05, Tag 06, and Tag 07.
TLV 125 Usage 2 Dataset ID 01, Tag 01	Device Type	2 AN, EBCDIC, 2 bytes	C		C		This tag contains the device type value. REFERENCE <i>For a list of valid device types, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125 Usage 2 Dataset ID 01, Tag 02	Device Language Code	3 AN, EBCDIC, 3 bytes	C		C		This tag contains a three-character language code that conforms with ISO 639 standards. An example of a valid value is eng (English).
TLV 125 Usage 2 Dataset ID 01, Tag 03	Device ID	48 ANS, EBCDIC, 48 bytes	C		C		This tag contains the device ID.
TLV 125 Usage 2 Dataset ID 01, Tag 04	Device Number	15 N, 15 bytes	C		C		This tag contains the full phone number or partial phone number when available.
TLV 125 Usage 2 Dataset ID 01, Tag 05	Device Name	16 ANS, EBCDIC, 16 bytes	C		C		This tag contains the device name that is recognized by the consumer. The value will be truncated if the name known by the consumer is longer than 16 characters.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 125 Usage 2 Dataset ID 01, Tag 06	Device Location	25 ANS, EBCDIC, 25 bytes	C		C		This tag contains the obfuscated geographic location of the device. When available, the latitude and longitude will be provided with up to 4 digits of precision. For example: +xxx.xxxx/-xxx.xxxx. Precision may be rounded to a less granular level. For example: +xx/-xxx or +xx.xx/-xxx.xx.
TLV 125 Usage 2 Dataset ID 01, Tag 07	IP Address	15 ANS, EBCDIC, 15 bytes	C		C		This tag contains the IP address of the device at the time of the provisioning request. The value is represented in 255.255.255.255 format. Each octet (255) may be 1–3 digits in length.
TLV 125 Usage 2 Dataset ID 02	Wallet Provider		C		C		This dataset ID contains Tag 03, Tag 04, Tag 05, Tag 06, Tag 07, Tag 08, Tag 09, and Tag 0A.
TLV 125 Usage 2 Dataset ID 02 Tag 03	Wallet Provider Risk Assessment	1 ANS, EBCDIC, 1 bytes	C		C		For secure element, this tag contains one of these values: • 0 (Unconditionally approved) • 1 (Conditionally approved with further verification) • 2 (Not approved)
TLV 125 Usage 2 Dataset ID 02 Tag 04	Wallet Provider Risk Assessment Version	10 ANS, EBCDIC, 10 bytes	C		C		For secure element, this tag contains the Wallet Provider Risk Assessment Version. This tag will be present in the 0120 Token STIP advice message, if provided by the wallet provider. This field may contain separators to indicate major and minor components. For example: periods, hyphens, slashes, and other similar characters.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 125 Usage 2 Dataset ID 02 Tag 05	Wallet Provider Device Score	2 N, 2 bytes	C		C		This tag contains the value of 1–5 , with the value of 5 being the most trusted. This tag will be present in the 0100 Token activation request and 0120 Token STIP advice messages, if provided by the wallet provider.
TLV 125 Usage 2 Dataset ID 02 Tag 06	Wallet Provider Account Score	2 N, 2 bytes	C		C		This tag contains the value of 1–5 , with the value of 5 being the most trusted. This tag will be present in the 0100 Token activation request and 0120 Token STIP advice messages, if provided by the wallet provider.
TLV 125 Usage 2 Dataset ID 02 Tag 07	Wallet Provider Reason Codes	30 ANS, EBCDIC, 30 bytes	C		C		This tag contains up to 15 wallet provider reason codes of 2 bytes each. REFERENCE <i>For a list of valid reason codes, refer to the Full Service POS Online Messages Technical Specifications.</i>
TLV 125 Usage 2 Dataset ID 02 Tag 08	PAN Source	2 N, 2 bytes	C		C		This tag includes one of the following valid values: • 01 (Key entered) • 02 (On file) • 03 (Mobile banking app) • 04 (Token) • 05 (Chip dip) • 06 (Contactless tap)
TLV 125 Usage 2 Dataset ID 02 Tag 09	Wallet Account ID	32 ANS, EBCDIC, 32 bytes	C		C		This tag contains the wallet account ID.

Table I-1: 0100/0110 Token Activation Request and Response and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Token Activation Request		Token STIP Advice		Description
			0100	0110	0120	0130	
TLV 125 Usage 2 Dataset ID 02 Tag 0A	Wallet Account E-mail Address	64 DX, 32 bytes	C		C		This tag contains the hashed full email address for the user's account that was sent by the digital wallet provider.
126.10	CVV2 Authorization Request Data	6 ANS, EBCDIC, 6 bytes	C		C		This field contains CVV2 data.

THIS PAGE INTENTIONALLY LEFT BLANK.

New Token Requestor ID Assignments Reports

J

New Token Requestor ID Assignments

Visa will implement two report options for issuers to automatically obtain information on new token requestor identifier (ID) assignments. Issuers may choose to receive the new token requestor ID assignment information in a new TC 33 record format or a delimited text file format.

TC 33—New Token Requestor ID Assignments

Visa will implement the TC 33—New Token Requestor ID Assignments with the following record:

- TCR 0—Token Requestor ID Report Record

The data will be available to issuers that choose to subscribe to the TC 33 record.

TC 33, TCR 0—Token Requestor ID Report Record

The following table shows the layout of the TC 33, TCR 0—Token Requestor ID Report record.

Table J-1: TC 33, TCR 0—Token Requestor ID Report Record

Position	Length	Format	Field Name	Description
1–2	2	UN	Transaction Code	This field contains the value of 33 (Token requestor ID report).
3	1	UN	Transaction Code Qualifier	This field contains the value of 0 (Zero).
4	1	AN	Transaction Component Sequence Number	This field contains the value of 0 (Zero).
5–10	6	UN	Recipient Identifier	This field contains the issuing identifier to which the report is sent.

AN = Alphanumeric, UN = Unpacked Numeric

Table J-1: TC 33, TCR 0—Token Requestor ID Report Record (cont'd.)

Position	Length	Format	Field Name	Description
11–16	6	UN	Source Identifier	This field contains the identifier from the Visa reporting application.
17–26	10	AN	Report Identifier	This field will indicate the type of report and contains the value of TRIDRP1 (Token requestor ID report). This field is left justified and space filled.
27–34	8	UN	Report Line Sequence Number	This field contains the sequence number of this line within the report.
35–42	8	UN	Token Requestor ID Assigned Date	This field contains the date when the token requestor ID was assigned. The date is in ccyyymmdd format, where: - cc = century (01–99) - yy = year (00–99) - mm = month (01–12) - dd = day (01–31)
43–44	2	AN	Token Requestor Type	This field contains a value to identify the type of token requestor. This field contains one of the following values: 01 (Digital wallet provider - third party) 02 (Merchant of record) 03 (Payment service provider)
45–64	20	AN	Token Requestor Name	This field contains the business name of the token requestor. This field is left justified and space filled.
65–75	11	AN	Token Requestor ID	This field contains the token requestor ID.
76–129	54	AN	Token Requestor URL	This field contains the token requestor universal resource locator (URL) address. This field is left justified and space filled.
130–140	11	AN	Token Requestor-Token Service Provider Identifier	This field contains the token requestor-token service provider ID that on boarded the token requestor. This field will be space filled when the token requestor was not on boarded by a token requestor-token service provider.
141–160	20	AN	Token Requestor-Token Service Provider Name	This field contains the business name of the token requestor-token service provider. This field is left justified and space filled.

AN = Alphanumeric, UN = Unpacked Numeric

Table J-1: TC 33, TCR 0—Token Requestor ID Report Record (cont'd.)

Position	Length	Format	Field Name	Description
161–162	2	AN	Token Type Code	This field contains a code to identify the type of token. This field contains one of the following values: • 01 (E-commerce/card on file) • 02 (Secure element) • 03 (Cloud-based payment) • 04 (Quick response code) • 05 (E-commerce enabler) • 06 (Pseudo account)
163–166	4	AN	Token Type Name	This field contains a value to identify the type of token. This field contains one of the following values: • COF (Card on file) • SE (Secure element) • HCE (Cloud-based payment) • QRC (Quick response code) • ECOM (E-commerce enabler) • CCPA (Pseudo account) This field is left justified and space filled.
167–168	2	AN	Reserved	This field is reserved for future use.

AN = Alphanumeric, UN = Unpacked Numeric

Delimited Text File for New Token Requestor ID Assignments

Issuers can choose to receive new token requestor ID assignments in a delimited text file that uses a pipe character (|) to separate values.

File Layout for the Delimited Text File Format

The following table shows the layout of the generic file for the Token Requestor ID Report record in delimited text file format.

Table J-2: Delimited Token Requestor ID Report Record

Maximum Length	Format	Field Name	Description
10	AN	Report Identifier	This field contains the report name value of TRIDRP2 (Delimited token requestor ID report).
8	UN	Report Line Sequence Number	This field contains the sequence number of this line within the report.

AN = Alphanumeric, UN = Unpacked Numeric

Table J-2: Delimited Token Requestor ID Report Record (cont'd.)

Maximum Length	Format	Field Name	Description
8	UN	Report Date	This field contains the date of the report. The date is in ccyyymmdd format, where: - cc = century (01–99) - yy = year (00–99) - mm = month (01–12) - dd = day (01–31)
8	UN	Token Requestor ID Assigned Date	This field contains the date when the token requestor ID was assigned. The date is in ccyyymmdd format, where: - cc = century (01–99) - yy = year (00–99) - mm = month (01–12) - dd = day (01–31)
2	AN	Token Requestor Type	This field contains a value to identify the type of token requestor. This field contains one of the following values: 01 (Digital wallet provider - third party) 02 (Merchant of record) 03 (Payment service provider)
20	AN	Token Requestor Name	This field contains the business name of the token requestor.
11	AN	Token Requestor ID	This field contains the token requestor ID.
54	AN	Token Requestor URL	This field contains the token requestor universal resource locator (URL) address.
11	AN	Token Requestor-Token Service Provider Identifier	This field contains the token requestor-token service provider ID that on boarded the token requestor. This field will be space filled when the token requestor was not on boarded by a token requestor-token service provider.
20	AN	Token Requestor-Token Service Provider Name	This field contains the business name of the token requestor-token service provider.
2	AN	Token Type Code	This field contains a code to identify the type of token. This field contains one of the following values: 01 (E-commerce/card on file) 02 (Secure element) 03 (Cloud-based payment) 04 (Quick response code) 05 (E-commerce enabler) 06 (Pseudo account)

AN = Alphanumeric, UN = Unpacked Numeric

Table J-2: Delimited Token Requestor ID Report Record (cont'd.)

Maximum Length	Format	Field Name	Description
4	AN	Token Type Name	This field contains a value to identify the type of token. This field contains one of the following values: • COF (Card on file) • SE (Secure element) • HCE (Cloud-based payment) • QRC (Quick response code) • ECOM (E-commerce enabler) • CCPA (Pseudo account)

AN = Alphanumeric, UN = Unpacked Numeric

THIS PAGE INTENTIONALLY LEFT BLANK.

The appendix includes the Edit Package fields and positions to support the Visa Token Service. These fields and values are applicable to all token types.

NOTE

This appendix will include only the token data fields.

Edit Package ARDEF Changes

Visa has implemented changes to the following Edit Package files and records:

- ARDEF Value Table Detail Record
- ARDEF Extract File
- ARDEF Table Override Part 2
- Combined (ID & ARD) Extract Table

ARDEF Value Table Detail Record Layout

The following table shows the ARDEF Value Table Detail Record layout.

Table K-1: ARDEF Value Table Detail Record Layout

Position	Length	Format	Field Name	Description
1-53	53	n/a	n/a	Not token related fields
54	1	AN	Token Indicator	Valid values: • Space (n/a) • Y (Token range)
55-100	46	n/a	n/a	Not token related fields

ARDEF Extract File Layout

The following table shows the ARDEF Extract File layout.

Table K-2: ARDEF Extract File Table Layout

Position	Length	Format	Field Name	Description
1–33	33	n/a	n/a	Not token related fields
34	1	AN	Token Indicator	Valid values: - Space (n/a) Y (Token range)
35–140	106	n/a	n/a	Not token related fields

ARDEF Table Override Part 2 Layout

The following table shows the ARDEF Table Override Part 2 layout.

Table K-3: ARDEF Table Override Part 2 Layout

Position	Length	Format	Field Name	Description
1–32	32	n/a	n/a	Not token related fields
33	1	AN	Token Indicator	Valid values: - Space (n/a) Y (Token range)
34–80	47	n/a	n/a	Not token related fields

Combined (ID & ARD) Extract Table Layout

The following table shows the Combined (ID & ARD) Extract Table layout.

Table K-4: Combined (ID & ARD) Extract Table Layout

Position	Length	Format	Field Name	Description
1–133	133	n/a	n/a	Not token related fields
134	1	AN	Token Indicator	Valid values: - Space (n/a) Y (Token range)
135–240	106	n/a	n/a	Not token related fields

SMS Raw Data

L

This appendix includes the SMS Raw Data fields and positions to support the Visa Token Service. These fields and values are applicable to all token types.

NOTE

This appendix will include only the token data fields.

SMS Raw Data

Visa has implemented changes to the SMS Raw Data to support token data elements.

Financial Transaction Record 1.1—V22201

Issuers must be prepared to support the token data elements in SMS Raw Data V22201 record. The record layout is shown in the following table.

Table L-1: Financial Transaction Record 1.1—V22201

Field Name	Position	Attribute	Field Source	Comments
Record Type	1–6	6 AN	n/a	V22201: Financial Record 1
PAN Token	7–25	19 AN	Field 123, Usage 2, Dataset ID 68, Tag 01	This field contains the token.

Table L-1: Financial Transaction Record 1.1—V22201 (cont'd.)

Field Name	Position	Attribute	Field Source	Comments
Token Assurance Method	26–27	2 AN	Field 123, Usage 2, Dataset ID 68, Tag 02	This field contains the following values: • 00 (ID&V not performed) • 10 (Card issuer account verification) • 11 (Card issuer interactive cardholder authentication - 1 factor) • 12 (Card issuer interactive cardholder authentication - 2 factor) • 13 (Card issuer risk oriented non-interactive cardholder authentication) • 14 (Card issuer asserted authentication)
Token Requestor ID	28–38	11 UN	Field 123, Usage 2, Dataset ID 68, Tag 03	This field contains the token requestor ID, if present. If there is no token requestor ID, this field will be zero-filled. The token requestor ID is generated for token request messages, as well as other request messages.
n/a	39–130	n/a	n/a	n/a

Financial Transaction Record 2—V22210

Issuers must be prepared to support the token data elements in SMS Raw Data V22210 record. The record layout is shown in the following table.

Table L-2: Financial Transaction Record 2—V22210

Field Name	Position	Attribute	Field Source	Comments
Record Type	1–6	6 AN	n/a	V22210: Financial Record 2
n/a	7–49	n/a	n/a	Not token related fields
Message Reason Code	50–53	4 N	Field 63.3	This field contains the message reason code.
n/a	54–130	n/a	n/a	n/a

E-Commerce 3-D Secure Record—V22227

Issuers must be prepared to support the token data elements in SMS Raw Data V22227 record. The record layout is shown in the following table.

Table L-3: Financial Transaction Fee Record—V22227

Field Name	Position	Attribute	Field Source	Comments
Record Type	1–6	6 AN	n/a	V22227: E-Commerce 3-D Secure Record—V22227
n/a	7–91	n/a	n/a	n/a
Authentication Program	92–93	2 AN	TLV Field 34, Dataset ID 01, Tag C0	This field identifies transactions that were authenticated as part of the digital authentication framework.
n/a	94–130	n/a	n/a	n/a

Financial Transaction Fee Record—V22261

Issuers must be prepared to support the token data elements in SMS Raw Data V22261 record. The record layout is shown in the following table.

Table L-4: Financial Transaction Fee Record—V22261

Field Name	Position	Attribute	Field Source	Comments
Record Type	1–6	6 AN	n/a	V22261: Financial Transaction Fee Record
n/a	7–53	n/a	n/a	n/a
Additional Token Response Information	54	1 AN	Field 44.3	This field contains a value that identifies if the transaction is eligible for token programs. Valid values are: - Space (Not applicable) 1 (Token program)
n/a	55–130	n/a	n/a	n/a

Administrative Message 1 Transaction Record—V22400

Issuers must be prepared to support the token data elements in SMS Raw Data V22400 record. The record layout is shown in the following table.

Table L-5: Administrative Message 1 Transaction Record—V22400

Field Name	Position	Attribute	Field Source	Comments
Record Type	1–6	6 AN	n/a	V22400: Administrative Message 1
n/a	7–84	n/a	n/a	Not token related fields
Message Reason Code	85–88	4 N	Field 63.3	This field contains the message reason code.
n/a	89–130	n/a	n/a	n/a

Financial Transaction Fee Record—V23210

Issuers must be prepared to support the token data elements in SMS Raw Data V23210 record. The record layout is shown in the following table.

Table L-6: Financial Transaction Fee Record—V23210

Field Name	Position	Attribute	Field Source	Comments
Record Type	1–6	6 AN	n/a	V23210: Financial Transaction Fee Record
n/a	7–34	n/a	n/a	n/a
Additional Token Response Information	35	1 AN	Field 44.3	This field contains a value that identifies if the transaction is eligible for token programs. Valid values are: • Space (Not applicable) • 1 (Token program)
n/a	36–130	n/a	n/a	n/a

Merchant Initiated Transactions

M

This appendix includes the following message layouts for merchant-initiated transactions:

- Resubmission Transaction
 - 0100/0110 Authorization and 0120/0130 STIP advice messages
 - 0200/0210 Full financial request and response, and 0220/0230 STIP advice messages
- Delayed charges and reauthorization transactions
 - 0100/0110 Authorization and 0120/0130 STIP advice messages
 - 0200/0210 Full financial request and response, and 0220/0230 STIP advice messages
- No show transaction
 - 0100/0110 Authorization and 0120/0130 STIP advice messages
 - 0200/0210 Full financial request and response, and 0220/0230 STIP advice messages
- Recurring transaction
 - 0100/0110 Authorization and 0120/0130 STIP advice messages
 - 0200/0210 Full financial request and response, and 0220/0230 STIP advice messages
- Installment transaction
 - 0100/0110 Authorization and 0120/0130 STIP advice messages
 - 0200/0210 Full financial request and response, and 0220/0230 STIP advice messages
- Unscheduled stored credential transaction
 - 0100/0110 Authorization and 0120/0130 STIP advice messages
 - 0200/0210 Full financial request and response, and 0220/0230 STIP advice messages
- Credential on file transaction
 - 0100/0110 Authorization and 0120/0130 STIP advice messages
 - 0200/0210 Full financial request and response, and 0220/0230 STIP advice messages

- Estimated or initial authorization transaction
 - 0100/0110 Authorization and 0120/0130 STIP advice messages
- Incremental authorization transaction for non-CPS and non-U.S. CPS endpoints
 - 0100/0110 Authorization and 0120/0130 STIP advice messages
- Incremental authorization transaction for U.S. CPS endpoints
 - 0100/0110 Authorization and 0120/0130 STIP advice messages

Resubmission Transaction

Issuers must be prepared to receive resubmission merchant-initiated transactions with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

IMPORTANT

Resubmission transactions submitted with a payment token must contain a transaction identifier that is less than 14 days old. Transactions containing a transaction identifier older than 14 days will be declined by V.I.P. with the decline code 05 (Do not honor).

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Resubmission Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. This table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

Table M-1: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of these values: • 01 (Manual (key entry)) • 10 (Credential on file)
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+	0	C+	M	0	This field contains the transaction identifier value from the original consumer-initiated transaction response message. NOTE <i>V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.</i>

Table M–1: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M	>			C		This field contains the value of 3901 (Resubmission). NOTE <i>The message reason code for resubmission merchant-initiated transactions initiated with a payment token will be allowed on tokens in an active, suspended, or deactivated state.</i>
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max							This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements		C	>			C		This dataset ID contains Tag 03.

Table M-1: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		This field contains the transaction identifier value from the original consumer-initiated transaction response message. If the issuer is activated to receive TLV Field 125, the original transaction identifier will be populated in TLV Field 125, Usage 2, Dataset ID 03, Tag 03. If the issuer is not activated to receive TLV Field 125, V.I.P. will drop the original transaction identifier from the request before the request message is sent to the issuer. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.

0200/0210 and 0220/0230 POS Full Financial Messages for Resubmission Transaction

The following table shows the message layout and content of the 0200/0210 and 0220/0230 Full financial messages. This table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

Table M–2: 0200/0210 and 0220/0230 POS Full Financial Messages

Field and Field Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of these values: 01 (Manual (key entry)) 10 (Credential on file)
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+		M+	M		This field contains the transaction identifier value from the original consumer-initiated transaction response message. NOTE <i>V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.</i>
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M	>			C		This field contains the value of 3901 (Resubmission). NOTE <i>The message reason code for resubmission merchant-initiated transactions initiated with a payment token will be allowed on tokens in an active, suspended, or deactivated state.</i>

Table M-2: 0200/0210 and 0220/0230 POS Full Financial Messages (cont'd.)

Field and Field Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max							This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements								This dataset ID contains Tag 03.
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		This field contains the transaction identifier value from the original consumer-initiated transaction response message. If the issuer is activated to receive TLV Field 125, the original transaction identifier will be populated in TLV Field 125, Usage 2, Dataset ID 03, Tag 03. If the issuer is not activated to receive TLV Field 125, V.I.P. will drop the original transaction identifier from the request before the request message is sent to the issuer. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.

Delayed Charges and Reauthorization Transaction

Issuers must be prepared to receive delayed charges and reauthorization merchant-initiated transactions with all the existing requirements for card-not-present transactions of the type submitted, with the additional requirements shown in the following table.

IMPORTANT

Delayed charges merchant-initiated transactions submitted with a payment token must contain a token identifier that is less than 90 days old. Transactions containing a transaction identifier that is older than 90 days will be declined by V.I.P. with the decline code 05 (Do not honor).

Reauthorization merchant-initiated transactions submitted with a payment token must contain a token identifier that is less than 120 days old for MCCs eligible for extended time limits, and 90 days for non-eligible MCCs. Transactions containing a transaction identifier that is older than 90 or 120 days, depending on the MCC, will be declined by V.I.P. with the decline code 05 (Do not honor).

The following MCCs are eligible for the extended time limit of 120 days for reauthorization merchant-initiated transactions:

- 3351–3441 (Car rental agencies)
- 3501–3999 (Lodging – hotels, motels, resorts)
- 4411 (Steamship and cruise lines)
- 4457 (Boat rentals and leasing)
- 7011 (Lodging – hotels, motels, resorts, central reservation services (not elsewhere classified))
- 7033 (Trailer parks and campgrounds)
- 7394 (Equipment, tool, furniture, and appliance rental and leasing)
- 7512 (Automobile rental agency)
- 7513 (Truck and utility trailer rentals)
- 7519 (Motor home and recreational vehicle rentals)
- 7999 (Recreation services (not elsewhere classified))

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Delayed Charges and Reauthorization Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. This table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

NOTE

Bold values in the 0110 Account verification response indicate the field must contain the same values from the 0100 Account verification request.

Table M-3: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of these values: 01 (Manual (key entry)) 10 (Credential on file)
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+	O	C+	M	O	This field contains the transaction identifier value from the original consumer-initiated transaction response message. NOTE <i>V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.</i>

Table M–3: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M	>			C		This field contains one of these values: 3902 (Delayed charges) 3903 (Reauthorization) Both message reason codes will be allowed on tokens in an active, suspended, or deactivated state.
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max							This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements								This dataset ID contains Tag 03.

Table M-3: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		This field contains the transaction identifier value from the original consumer-initiated transaction response message. If the issuer is activated to receive TLV Field 125, the original transaction identifier will be populated in TLV Field 125, Usage 2, Dataset ID 03, Tag 03. If the issuer is not activated to receive TLV Field 125, V.I.P. will drop the original transaction identifier from the request before the request message is sent to the issuer. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.

0200/0210 and 0220/0230 POS Full Financial Messages for Delayed Charges and Reauthorization Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. This table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

Table M-4: 0200/0210 and 0220/0230 POS Full Financial Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of these values: 01 (Manual (key entry)) 10 (Credential on file)
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+		M+	M		This field contains the transaction identifier value from the original consumer-initiated transaction response message. NOTE <i>V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.</i>
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M	>			C		This field contains one of these values: 3902 (Delayed charges) 3903 (Reauthorization) Both message reason codes will be allowed on tokens in an active, suspended, or deactivated state.

Table M-4: 0200/0210 and 0220/0230 POS Full Financial Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max							This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements								This dataset ID contains Tag 03.
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		This field contains the transaction identifier value from the original consumer-initiated transaction response message. If the issuer is activated to receive TLV Field 125, the original transaction identifier will be populated in TLV Field 125, Usage 2, Dataset ID 03, Tag 03. If the issuer is not activated to receive TLV Field 125, V.I.P. will drop the original transaction identifier from the request before the request message is sent to the issuer. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.

No Show Transaction

Issuers must be prepared to receive no show merchant-initiated transactions with all the existing requirements for card-not-present transactions of the type submitted, with the additional requirements shown in the following table.

0100/0110 Authorization and 0120/0130 STIP Advice Messages for No Show Transaction

The following table shows the message layout and content of the 0100/0100 and 0120/0130 POS Authorization messages. This table must be used in conjunction with all the existing requirements for card-not present transactions, with additional requirements shown in the following table.

NOTE

Bold values in the 0110 Account verification response indicate the field must contain the same values from the 0100 Account verification request.

Table M-5: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of these values: 01 (Manual (key entry)) 10 (Credential on file)
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+	O	C+	M	O	This field contains the transaction identifier value from the original consumer-initiated transaction response message. NOTE <i>V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.</i>

Table M-5: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M	>			C		This field contains the value of 3904 (No show). NOTE <i>The message reason code for no show merchant-initiated transactions initiated with a payment token will be allowed on tokens in an active, suspended or deactivated state.</i>
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max							This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements								This dataset ID contains Tag 03.

Table M-5: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		This field contains the transaction identifier value from the original consumer-initiated transaction response message. If the issuer is activated to receive TLV Field 125, the original transaction identifier will be populated in TLV Field 125, Usage 2, Dataset ID 03, Tag 03. If the issuer is not activated to receive TLV Field 125, V.I.P. will drop the original transaction identifier from the request before the request message is sent to the issuer. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.

0200/0210 and 0220/0230 POS Full Financial Messages for No Show Transaction

The following table shows the message layout and content of the 0200/0210 and 0220/0230 Full financial messages. This table must be used in conjunction with all the existing requirements for card-not present transactions, with additional requirements shown in the following table.

Table M-6: 0200/0210 and 0220/0230 POS Full Financial Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of these values: 01 (Manual (key entry)) 10 (Credential on file)
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+		M+	M		This field contains the transaction identifier value from the original consumer-initiated transaction response message. NOTE <i>V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.</i>
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	M	>			C		This field contains the value of 3904 (No show). NOTE <i>The message reason code for no show merchant-initiated transactions initiated with a payment token will be allowed on tokens in an active, suspended or deactivated state.</i>

Table M-6: 0200/0210 and 0220/0230 POS Full Financial Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	C	>			C		This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements		C	>			C		This dataset ID contains Tag 03.
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		This field contains the transaction identifier value from the original consumer-initiated transaction response message. If the issuer is activated to receive TLV Field 125, the original transaction identifier will be populated in TLV Field 125, Usage 2, Dataset ID 03, Tag 03. If the issuer is not activated to receive TLV Field 125, V.I.P. will drop the original transaction identifier from the request before the request message is sent to the issuer. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.

Recurring Transaction

Issuers must be prepared to receive recurring transactions subsequent to the original recurring transactions with all the existing requirements for card-not-present transactions of the type submitted, with the additional requirements shown in the following table.

NOTE

The additional requirements in the following table is for subsequent recurring transactions. The initial recurring transaction in a series remains unchanged. Additionally, an initial transaction initiated with a payment token must continue to include Field 126.9—CAVV Data containing the token cryptogram value.

For endpoints in the U.S. region, these additional requirements apply to bill payment transaction types of recurring transaction.

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Recurring Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. The table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

Table M-7: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of these values: • 01 (Manual (key entry)) • 10 (Credential on file)
60.8	Mail/Phone/Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C	C-			C		For U.S. issuers only, V.I.P. will assign the value of 02 (Recurring transaction) in 0100 Authorization request messages for either of these conditions: • Field 60.8 was populated with the value of 02 by the acquirer • Field 126.13 was populated with the value of R by the acquirer

Table M-7: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+	0	C+	M	0	This field contains the transaction identifier value from the response message of the original or the previous authorization in this series. NOTE Only the subsequent transactions in a series of recurring payment transactions contains the transaction identifier value in either Field 62.2 or TLV Field 125, Usage 2, Dataset ID 03, Tag 03 of the request message. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	C	>			C		This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements		C	>			C		This dataset ID contains Tag 03.

Table M-7: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		This field contains the transaction identifier value from the response message of the original or the previous authorization in this series. Only the subsequent transactions in a series of recurring payment transactions contains the transaction identifier value in either Field 62.2 or TLV Field 125, Usage 2, Dataset ID 03, Tag 03 of the request message. If the issuer is activated to receive TLV Field 125, the original transaction identifier will be populated in TLV Field 125, Usage 2, Dataset ID 03, Tag 03. If the issuer is not activated to receive TLV Field 125, the original transaction identifier will be dropped from the request by V.I.P. before the request message is sent to the issuer. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.
126.9	CAVV Data	Binary, 20 bytes	C	C-					This field contains a token cryptogram value. NOTE <i>An initial recurring transaction initiated with a payment token must continue to include Field 126.9 that contains the token cryptogram value.</i>

Table M-7: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
126.13	POS Environment	1 AN, EBCDIC, 1 byte	C	O-			O		This field contains the value of R (Indicated that the cardholder and merchant have agreed to periodic billing for goods and services, such as utility bills and magazines). NOTE <i>If the issuer is activated to receive Field 126.13, the value sent by the acquirer will be forwarded to the issuer. If the acquirer does not send the value of R, V.I.P. will populate the value of R in Field 126.13.</i>

0200/0210 and 0220/0230 POS Full Financial Messages for Recurring Transaction

The following table shows the message layout and content of the 0200/0210 and 0220/0230 Full financial messages. The table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

Table M-8: 0200/0210 and 0220/0230 POS Full Financial Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of these values: 01 (Manual (key entry)) 10 (Credential on file)
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+		M+	M		This field contains the transaction identifier value from the response message of the original or the previous authorization in this series. NOTE Only the subsequent transactions in a series of recurring payment transactions contains the transaction identifier value in either Field 62.2 or TLV Field 125, Usage 2, Dataset ID 03, Tag 03 of the request message. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.
63.6 position 4	Mail/Phone/Electronic Commerce (MOTO/ECI) and Payment Indicator	1 ANS, EBCDIC 1 bytes	C	C+			M		For U.S. issuers only, V.I.P. will assign the value of 2 (Recurring transaction) in 0200 Full financial request message for either of these conditions: - Field 63.6 was populated with the value of 2 by the acquirer - Field 126.13 was populated with the value of R by the acquirer

Table M-8: 0200/0210 and 0220/0230 POS Full Financial Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	C	>			C		This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements		C	>			C		This dataset ID contains Tag 03.
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		This field contains the transaction identifier value from the response message of the original or the previous authorization in this series. Only the subsequent transactions in a series of recurring payment transactions contains the transaction identifier value in either Field 62.2 or TLV Field 125, Usage 2, Dataset ID 03, Tag 03 of the request message. If the issuer is activated to receive TLV Field 125, the original transaction identifier will be populated in TLV Field 125, Usage 2, Dataset ID 03, Tag 03. If the issuer is not activated to receive TLV Field 125, the original transaction identifier will be dropped from the request by V.I.P. before the request message is sent to the issuer. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.

Table M-8: 0200/0210 and 0220/0230 POS Full Financial Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
126.9	CAVV Data	Binary, 20 bytes	C	C-					This field contains a token cryptogram value. NOTE <i>An initial recurring transaction initiated with a payment token must continue to include Field 126.9 that contains the token cryptogram value.</i>
126.13	POS Environment	1 AN, EBCDIC, 1 byte	C	O-			O		This field contains the value of R (Indicated that the cardholder and merchant have agreed to periodic billing for goods and services, such as utility bills and magazines). NOTE <i>If the issuer is activated to receive Field 126.13, the value sent by the acquirer will be forwarded to the issuer. If the acquirer does not send the value of R, V.I.P. will populate the value of R in Field 126.13.</i>

Installment Transaction

Issuers must be prepared to receive installment transactions subsequent to the original installment transactions with all the existing requirements for card-not-present transactions of the type submitted, with the additional requirements shown in the following table.

NOTE

The additional requirements in the following table is for subsequent installment transactions. The initial installment transaction in a series remains unchanged. Additionally, an initial transaction initiated with a payment token must continue to include Field 126.9—CAVV Data containing the token cryptogram value.

For endpoints in the U.S. region, these additional requirements apply to bill payment transaction types of installment transaction.

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Installment Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. The table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

Table M-9: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of these values: • 01 (Manual (key entry)) • 10 (Credential on file)
60.8	Mail/Phone/Electronic Commerce and Payment Indicator	2 N, 4-bit BCD, 1 byte	C	C-			C		For U.S. issuers only, V.I.P. will assign the value of 03 (Installment payment) in 0100 Authorization request messages for either of these conditions: • Field 60.8 was populated with the value of 03 by the acquirer • Field 126.13 was populated with the value of 1 by the acquirer

Table M-9: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+	0	C+	M	0	This field contains the transaction identifier value from the response message of the original or the previous authorization in this series. NOTE Only the subsequent transactions in a series of installment transactions contains the transaction identifier value in either Field 62.2 or TLV Field 125, Usage 2, Dataset ID 03, Tag 03 of the request message. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	C	>			C		This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements		C	>			C		This dataset ID contains Tag 03.

Table M-9: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		This field contains the transaction identifier value from the response message of the original or the previous authorization in this series. Only the subsequent transactions in a series of recurring payment transactions contains the transaction identifier value in either Field 62.2 or TLV Field 125, Usage 2, Dataset ID 03, Tag 03 of the request message. If the issuer is activated to receive TLV Field 125, the original transaction identifier will be populated in TLV Field 125, Usage 2, Dataset ID 03, Tag 03. If the issuer is not activated to receive TLV Field 125, the original transaction identifier will be dropped from the request by V.I.P. before the request message is sent to the issuer. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.
126.13	POS Environment	1 AN, EBCDIC, 1 byte	C	O-			O		This field contains the value of I (Indicates that the message is for an installment payment). NOTE <i>If the issuer is activated to receive Field 126.13, the value sent by the acquirer will be forwarded to the issuer. If the acquirer does not send the value of I, V.I.P. will populate the value of I in Field 126.13.</i>

0200/0210 and 0220/0230 POS Full Financial Messages for Installment Transaction

The following table shows the message layout and content of the 0200/0210 and 0220/0230 Full financial messages. The table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

Table M-10: 0200/0210 and 0220/0230 POS Full Financial Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of these values: 01 (Manual (key entry)) 10 (Credential on file)
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+		M+	M		This field contains the transaction identifier value from the response message of the original or the previous authorization in this series. NOTE <i>Only the subsequent transactions in a series of installment transactions contains the transaction identifier value in either Field 62.2 or TLV Field 125, Usage 2, Dataset ID 03, Tag 03 of the request message.</i> <i>V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.</i>
63.6 position 4	Mail/Phone/Electronic Commerce (MOTO/ECI) and Payment Indicator	1 ANS, EBCDIC 1 bytes	C	C+			M		For U.S. issuers only, V.I.P. will assign the value of 3 (Installment payment) in 0200 Full financial request message for either of these conditions: - Field 63.6 was populated with the value of 3 by the acquirer - Field 126.13 was populated with the value of I by the acquirer

Table M-10: 0200/0210 and 0220/0230 POS Full Financial Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	C	>			C		This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements		C	>			C		This dataset ID contains Tag 03.
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		This field contains the transaction identifier value from the response message of the original or the previous authorization in this series. Only the subsequent transactions in a series of recurring payment transactions contains the transaction identifier value in either Field 62.2 or TLV Field 125, Usage 2, Dataset ID 03, Tag 03 of the request message. If the issuer is activated to receive TLV Field 125, the original transaction identifier will be populated in TLV Field 125, Usage 2, Dataset ID 03, Tag 03. If the issuer is not activated to receive TLV Field 125, the original transaction identifier will be dropped from the request by V.I.P. before the request message is sent to the issuer. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.

Table M–10: 0200/0210 and 0220/0230 POS Full Financial Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
126.13	POS Environment	1 AN, EBCDIC, 1 byte	C	O-			O		This field contains the value of I (Indicates that the message is for an installment payment). NOTE <i>If the issuer is activated to receive Field 126.13, the value sent by the acquirer will be forwarded to the issuer. If the acquirer does not send the value of I, V.I.P. will populate the value of I in Field 126.13.</i>

Unscheduled Stored Credential Transaction

Issuers must be prepared to receive unscheduled stored credential merchant-initiated transactions with all the existing requirements for card-not-present transactions of the type submitted, with the additional requirements shown in the following table.

NOTE

For unscheduled stored credential transaction initiated with a payment token, Field 126.9—CAVV Data containing the token cryptogram value is not required. However, if present in the request message, V.I.P. will validate the cryptogram and decline the request if validation fails.

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Unscheduled Stored Credential Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. The table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

Table M-11: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of these values: 01 (Manual (key entry)) 10 (Credential on file)
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	>	M	>	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+	O	C+	M	O	This field contains the transaction identifier value from the original consumer-initiated transaction response message. NOTE <i>V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.</i>

Table M-11: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	C	>			C		This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements		C	>			C		This dataset ID contains Tag 03.
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		This field contains the transaction identifier value from the original consumer-initiated transaction response message. Only the subsequent transactions in a series of recurring payment transactions contains the transaction identifier value in either Field 62.2 or TLV Field 125, Usage 2, Dataset ID 03, Tag 03 of the request message. If the issuer is activated to receive TLV Field 125, the original transaction identifier will be populated in TLV Field 125, Usage 2, Dataset ID 03, Tag 03. If the issuer is not activated to receive TLV Field 125, the original transaction identifier will be dropped from the request by V.I.P. before the request message is sent to the issuer. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.

Table M–11: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
126.13	POS Environment	1 AN, EBCDIC, 1 byte	M	O-			O		This field contains the value of C (Credential on file). NOTE <i>If the issuer is not activated to receive Field 126.13, V.I.P. will drop the credential on file indicator from the request message before the request message is sent to the issuer.</i>

0200/0210 and 0220/0230 POS Full Financial Messages for Unscheduled Stored Credential Transaction

The following table shows the message layout and content of the 0200/0210 and 0220/0230 Full financial messages. The table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

Table M-12: 0200/0210 and 0220/0230 POS Full Financial Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of these values: 01 (Manual (key entry)) 10 (Credential on file)
25	Point-of-Service Condition Code	2 N, 4-bit BCD, 1 byte	M	>	M	>	M	M	This field contains one of these values: 08 (Mail, telephone, recurring, advance, or installment order) 59 (E-commerce request by public network)
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+		M+	M		This field contains the transaction identifier value from the original consumer-initiated transaction response message. NOTE <i>V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.</i>
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	C	>			C		This TLV field contains Dataset ID 03.

Table M-12: 0200/0210 and 0220/0230 POS Full Financial Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements		C	>			C		This dataset ID contains Tag 03.
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		This field contains the transaction identifier value from the original consumer-initiated transaction response message. Only the subsequent transactions in a series of recurring payment transactions contains the transaction identifier value in either Field 62.2 or TLV Field 125, Usage 2, Dataset ID 03, Tag 03 of the request message. If the issuer is activated to receive TLV Field 125, the original transaction identifier will be populated in TLV Field 125, Usage 2, Dataset ID 03, Tag 03. If the issuer is not activated to receive TLV Field 125, the original transaction identifier will be dropped from the request by V.I.P. before the request message is sent to the issuer. V.I.P. will assign a new transaction identifier to the merchant-initiated transaction. It will be populated in Field 62.2.
126.13	POS Environment	1 AN, EBCDIC, 1 byte	M	O-			O		This field contains the value of C (Credential on file). NOTE <i>If the issuer is not activated to receive Field 126.13, V.I.P. will drop the credential on file indicator from the request message before the request message is sent to the issuer.</i>

Credential on File Card-Not-Present Transaction

Issuers must be prepared to receive credential on file indicator, with all the existing requirements for card-not-present transactions of the type submitted, with the additional requirements shown in the following table.

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Credential-on-File Card-Not-Present Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. The table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

Table M–13: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains the value of 10 (Credential on file). NOTE <i>V.I.P. will forward the value of 10 in Field 22, positions 1–2 in the request message for a transaction where the credentials are being stored for future use and for transactions where the credentials are already stored on file.</i>

Table M-13: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
126.13	POS Environment	1 AN, EBCDIC, 1 byte	O	O-			O		This field contains the value of C (Credential on file). NOTE <i>If the issuer is activated to receive Field 126.13, credential on file indicator will be populated in Field 126.13 and sent to the issuer in the request message for transactions where the credentials are being stored for future use.</i> <i>If the issuer is not activated to receive Field 126.13, V.I.P. will drop the credential on file indicator from the request message before the request message is sent to the issuer for transactions where the credentials are being stored for future use.</i>

0200/0210 and 0220/0230 POS Full Financial Messages for Credential-on-File Card-Not-Present Transaction

The following table shows the message layout and content of the 0200/0210 and 0220/0230 Full financial messages. The table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

Table M-14: 0200/0210 and 0220/0230 POS Full Financial Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains the value of 10 (Credential on file). NOTE <i>V.I.P. will forward the value of 10 in Field 22, positions 1–2 in the request message for a transaction where the credentials are being stored for future use and for transactions where the credentials are already stored on file.</i>

Table M-14: 0200/0210 and 0220/0230 POS Full Financial Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
126.13	POS Environment	1 AN, EBCDIC, 1 byte	C	C+			C		This field contains the value of C (Credential on file). NOTE <i>If the issuer is activated to receive Field 126.13, credential on file indicator will be populated in Field 126.13 and sent to the issuer in the request message for transactions where the credentials are being stored for future use.</i> <i>If the issuer is not activated to receive Field 126.13, V.I.P. will drop the credential on file indicator from the request message before the request message is sent to the issuer for transactions where the credentials are being stored for future use.</i>

Credential on File Card-Present Transaction

Issuers must be prepared to receive credential on file indicator, with all the existing requirements for card-present transactions of the type submitted, with the additional requirements shown in the following table.

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Credential-on-File Card-Present Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. The table must be used in conjunction with all the existing requirements for card-present transactions, with the additional requirements shown in the following table.

Table M–15: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	C+			M		This field contains the value of 10 (Credential on file). NOTE <i>V.I.P. will forward the value of 10 in Field 22, positions 1–2 in the request message for a transaction where the credentials are being stored for future use and for transactions where the credentials are already stored on file.</i>

Table M–15: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
126.13	POS Environment	1 AN, EBCDIC, 1 byte	O	O-			O		This field contains the value of C (Credential on file). NOTE <i>If the issuer is activated to receive Field 126.13, credential on file indicator will be populated in Field 126.13 and sent to the issuer in the request message for transactions where the credentials are being stored for future use.</i> <i>If the issuer is not activated to receive Field 126.13, V.I.P. will drop the credential on file indicator from the request message before the request message is sent to the issuer for transactions where the credentials are being stored for future use.</i>

0200/0210 and 0220/0230 POS Full Financial Messages for Credential-on-File Card-Present Transaction

The following table shows the message layout and content of the 0200/0210 and 0220/0230 Full financial messages. The table must be used in conjunction with all the existing requirements for card-present transactions, with the additional requirements shown in the following table.

Table M-16: 0200/0210 POS Full Financial Messages and 0220/0230 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	C+			M		This field contains the value of 10 (Credential on file). NOTE <i>V.I.P. will forward the value of 10 in Field 22, positions 1–2 in the request message for a transaction where the credentials are being stored for future use and for transactions where the credentials are already stored on file.</i>

Table M–16: 0200/0210 POS Full Financial Messages and 0220/0230 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0200		0210		0220	0230	
			Acq	VIC	Iss	VIC	VIC	Iss	
126.13	POS Environment	1 AN, EBCDIC, 1 byte	C	C+			C		This field contains the value of C (Credential on file). NOTE <i>If the issuer is activated to receive Field 126.13, credential on file indicator will be populated in Field 126.13 and sent to the issuer in the request message for transactions where the credentials are being stored for future use.</i> <i>If the issuer is not activated to receive Field 126.13, V.I.P. will drop the credential on file indicator from the request message before the request message is sent to the issuer for transactions where the credentials are being stored for future use.</i>

Estimated or Initial Authorization Card-Not-Present Transaction

Issuers must be prepared to receive the estimated authorization indicator with all the existing requirements for card-not-present transactions of the type submitted, with the additional requirements shown in the following table. The estimated authorization indicator is intended for any estimated or initial authorization request where the final amount is not known at the time of authorization.

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Estimated or Initial Authorization Card-Not-Present Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. The table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

Table M-17: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of the following expanded MCCs that may request estimated or initial authorization transactions: 4457 (Boat rentals and leasing) 5812 (Eating places and restaurants) 5813 (Drinking places (alcoholic beverages)—bars, taverns, nightclubs, cocktail lounges, and discotheques) 7033 (Trailer parks and campgrounds) 7394 (Equipment, tool, furniture, and appliance rental and leasing) 7519 (Motor home and recreational vehicle rentals) 7996 (Amusement parks, circuses, carnivals, and fortune tellers) 7999 (Recreation services (not elsewhere classified))

Table M–17: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
60.10	Additional Authorization Indicators	1 N, 4-bit BCD 1 digit	M	>			M		This field contains one of these values: • 2 (Estimated amount) • 3 (Estimated amount and terminal accepts partial authorization responses) NOTE <i>If the issuer is activated to receive Field 60.10, the additional authorization indicator value as received by the acquirer will be sent to the issuer in the request message.</i> <i>If the issuer is not activated to receive Field 60.10, V.I.P. will drop the additional authorization indicator value from the request message before the request message is sent to the issuer.</i>

Estimated or Initial Authorization Card-Present Transaction

Issuers must be prepared to receive estimated authorization indicator with all the existing requirements for card-present transactions of the type submitted, with the additional requirements shown in the following table. The estimated authorization indicator is intended for any initial or estimated authorization request where the final amount is not known at the time of authorization.

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Estimated or Initial Authorization Card-Present Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. The table must be used in conjunction with all the existing requirements for card-not-present transactions, with the additional requirements shown in the following table.

Table M-18: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of the following expanded MCCs that may request estimated or initial authorization transactions: • 4457 (Boat rentals and leasing) • 5812 (Eating places and restaurants) • 5813 (Drinking places (alcoholic beverages)—bars, taverns, nightclubs, cocktail lounges, and discotheques) • 7033 (Trailer parks and campgrounds) • 7394 (Equipment, tool, furniture, and appliance rental and leasing) • 7519 (Motor home and recreational vehicle rentals) • 7996 (Amusement parks, circuses, carnivals, and fortune tellers) • 7999 (Recreation services (not elsewhere classified))

Table M–18: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
60.10	Additional Authorization Indicators	1 N, 4-bit BCD 1 digit	C	C-			C		This field contains one of these values: 2 (Estimated amount) 3 (Estimated amount and terminal accepts partial authorization responses) NOTE <i>If the issuer is activated to receive Field 60.10, the additional authorization indicator value as received by the acquirer will be sent to the issuer in the request message.</i> <i>If the issuer is not activated to receive Field 60.10, V.I.P. will drop the additional authorization indicator value from the request message before the request message is sent to the issuer.</i>

Incremental Authorization for Non-CPS and Non-U.S. CPS Card-Not-Present Transaction

Issuers must be prepared to receive estimated authorization indicator with all the existing requirements for non-CPS and non-U.S. CPS card-not-present transactions of the type submitted, with the additional requirements shown in the following table.

NOTE

Incremental authorizations may be sent only if the first authorization was an estimated, or initial authorization.

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Incremental Authorization Card-Not-Present Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. The table must be used in conjunction with all the existing requirements for non-CPS card-not-present transactions, with the additional requirements shown in the following table.

Table M-19: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	>	M	>	M	M	This field contains the system trace audit number from the original transaction.

Table M–19: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of the following expanded MCCs that may request incremental authorization transactions: • 4457 (Boat rentals and leasing) • 5812 (Eating places and restaurants) • 5813 (Drinking places (alcoholic beverages)–bars, taverns, nightclubs, cocktail lounges, and discotheques) • 7033 (Trailer parks and campgrounds) • 7394 (Equipment, tool, furniture, and appliance rental and leasing) • 7519 (Motor home and recreational vehicle rentals) • 7996 (Amusement parks, circuses, carnivals, and fortune tellers) • 7999 (Recreation services (not elsewhere classified))
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	C+			M		This field contains any valid value, including the value of 10 (Credential on file).
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddh nnnnn	M	>	M	>	M	M	This field contains the retrieval reference number from the original transaction. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>

Table M–19: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
54	Additional Amounts	Variable length, 1 byte, binary + 20 ANS EBCDIC, 21 bytes max	C	C-	C	C-	C		This field contains the total cumulative amount for this series of incremental authorizations in the amount type 43 (Total cumulative amount).
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+	0	C+	M	0	This field contains the transaction identifier from the response message from the original transaction or the previous authorization in this series, populated in the request message in either: - Field 62.2—Transaction Identifier (Bitmap Format), - TLV Field 125, Usage 2, Dataset ID 03, Tag 03—Original Transaction Identifier If the issuer is activated to receive TLV Field 125, Field 62.2 will be populated with the original transaction identifier or the transaction identifier from the previous authorization. V.I.P. will not assign a new transaction identifier. As a result, the same transaction identifier value will be populated in Field 62.2 and TLV Field 125, Usage 2, Dataset ID 03, Tag 03.
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C				C		This field contains the value of 3900 (Incremental authorization).

Table M-19: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	C	>			C		This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements		C	>			C		This dataset ID contains Tag 03.
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		When the issuer is activated to receive TLV Field 125, this field will be present and populated with the original transaction identifier or the transaction identifier from the previous authorization. The same value will be sent in Field 62.2. When the issuer is not activated to receive TLV Field 125, V.I.P. will drop the original transaction identifier from the request message prior to forwarding the message to the issuer. V.I.P. will not assign a new transaction identifier. As a result, the same transaction identifier value will be populated in Field 62.2 and TLV Field 125, Usage 2, Dataset ID 03, Tag 03.

Incremental Authorization for Non-CPS and Non-U.S. CPS Card-Present Transaction

Issuers must be prepared to receive estimated authorization indicator with all the existing requirements for non-CPS and non-U.S. CPS card-present transactions of the type submitted, with the additional requirements shown in the following table.

NOTE

Incremental authorizations may be sent only if the first authorization was an estimated, or initial authorization.

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Incremental Authorization Card-Present Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. The table must be used in conjunction with all the existing requirements for non-CPS card-present transactions, with the additional requirements shown in the following table.

Table M-20: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	>	M	>	M	M	This field contains the system trace audit number from the original transaction.

Table M-20: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of the following expanded MCCs that may request incremental authorization transactions: • 4457 (Boat rentals and leasing) • 5812 (Eating places and restaurants) • 5813 (Drinking places (alcoholic beverages)—bars, taverns, nightclubs, cocktail lounges, and discotheques) • 7033 (Trailer parks and campgrounds) • 7394 (Equipment, tool, furniture, and appliance rental and leasing) • 7519 (Motor home and recreational vehicle rentals) • 7996 (Amusement parks, circuses, carnivals, and fortune tellers) • 7999 (Recreation services (not elsewhere classified))
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains any valid value, including the value of 10 (Credential on file).
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddh nnnnn	M	>	M	>	M	M	This field contains the retrieval reference number from the original transaction. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>

Table M–20: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
54	Additional Amounts	Variable length, 1 byte, binary + 20 ANS EBCDIC, 21 bytes max	C	C-	C	C-	C		This field contains the total cumulative amount for this series of incremental authorizations in the amount type 43 (Total cumulative amount).
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+	0	C+	M	0	This field contains the transaction identifier from the response message, from the original transaction or the previous authorization in this series, populated in the request message in either: - Field 62.2—Transaction Identifier (Bitmap Format), - TLV Field 125, Usage 2, Dataset ID 03, Tag 03—Original Transaction Identifier NOTE <i>If the issuer is activated to receive TLV Field 125, Field 62.2 will be populated with the original transaction identifier or the transaction identifier from the previous authorization.</i> <i>V.I.P. will not assign a new transaction identifier. As a result, the same transaction identifier value will be populated in Field 62.2 and TLV Field 125, Usage 2, Dataset ID 03, Tag 03.</i>
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C				C		This field contains the value of 3900 (Incremental authorization).

Table M-20: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	C	>			C		This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements		C	>			C		This dataset ID contains Tag 03.
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		When the issuer is activated to receive TLV Field 125, this field will be present and populated with the original transaction identifier or the transaction identifier from the previous authorization. The same value will be sent in Field 62.2. When the issuer is not activated to receive TLV Field 125, V.I.P. will drop the original transaction identifier from the request message prior to forwarding the message to the issuer. V.I.P. will not assign a new transaction identifier. As a result, the same transaction identifier value will be populated in Field 62.2 and TLV Field 125, Usage 2, Dataset ID 03, Tag 03.

Incremental Authorization for U.S. CPS Card-Not-Present Transaction

Issuers must be prepared to receive estimated authorization indicator with all the existing requirements for U.S. CPS card-not-present transactions of the type submitted, with the additional requirements shown in the following table.

NOTE

Incremental authorizations may be sent only if the first authorization was an estimated, or initial authorization.

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Incremental Authorization Card-Not-Present Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. The table must be used in conjunction with all the existing requirements for non-CPS card-not-present transactions, with the additional requirements shown in the following table.

Table M-21: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	>	M	>	M	M	This field contains the system trace audit number from the original transaction.

Table M-21: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of the following expanded MCCs that may request incremental authorization transactions: • 4457 (Boat rentals and leasing) • 5812 (Eating places and restaurants) • 5813 (Drinking places (alcoholic beverages)–bars, taverns, nightclubs, cocktail lounges, and discotheques) • 7033 (Trailer parks and campgrounds) • 7394 (Equipment, tool, furniture, and appliance rental and leasing) • 7519 (Motor home and recreational vehicle rentals) • 7996 (Amusement parks, circuses, carnivals, and fortune tellers) • 7999 (Recreation services (not elsewhere classified))
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains any valid value, including the value of 10 (Credential on file).
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddh nnnnn	M	>	M	>	M	M	This field contains the retrieval reference number from the original transaction. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>

Table M–21: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
54	Additional Amounts	Variable length, 1 byte, binary + 20 ANS EBCDIC, 21 bytes max	C	C-	C	C-	C		This field contains the total cumulative amount for this series of incremental authorizations in the amount type 43 (Total cumulative amount).
62.1	Authorization Characteristics Indicator (Bitmap Format)	1 AN EBCDIC, 1 byte	M	C+	O	C+	M	O	This field contains the value of I (Increment to previously approved transaction).

Table M-21: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+	O	C+	M	O	For an incremental authorization with a transaction identifier, this field will be populated with the transaction identifier of the response message, from the original transaction or the previous authorization in this series, populated in the request message in either: - Field 62.2—Transaction Identifier (Bitmap Format), - TLV Field 125, Usage 2, Dataset ID 03, Tag 03—Original Transaction Identifier NOTE <i>If the issuer is activated to receive TLV Field 125, Field 62.2 will be populated with the original transaction identifier or the transaction identifier from the previous authorization.</i> <i>V.I.P. will not assign a new transaction identifier. The same transaction identifier value will be populated in Field 62.2 and TLV Field 125, Usage 2, Dataset ID 03, Tag 03.</i> For an incremental authorization without a transaction identifier, this field may or may not be present. NOTE <i>For an incremental authorization without a transaction identifier where the issuer is activated to receive TLV Field 125, Field 62.2 will be populated with the new transaction identifier.</i> <i>For an incremental authorization without a transaction identifier where the issuer is not activated to receive TLV Field 125, Field 62.2 will be dropped from the request by V.I.P. before the request message is sent to the issuer.</i>

Table M-21: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C				C		This field contains the value of 3900 (Incremental authorization).
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	C	>			C		This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements		C	>			C		This dataset ID contains Tag 03.

Table M-21: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		For an incremental authorization with a transaction identifier: - When the issuer is activated to receive TLV Field 125, this field will be present and populated with the original transaction identifier or the transaction identifier from the previous authorization. The same value will be sent in Field 62.2. - When the issuer is not activated to receive TLV Field 125, V.I.P. will drop the original transaction identifier from the request message prior to forwarding the message to the issuer. NOTE <i>V.I.P. will not assign a new transaction identifier. As a result, the same transaction identifier value will be populated in Field 62.2 and TLV Field 125, Usage 2, Dataset ID 03, Tag 03.</i> For an incremental authorization without a transaction identifier: When the issuer is activated to receive TLV Field 125, this field will be present and populated with the new transaction identifier. The same value will be sent in Field 62.2. When the issuer is not activated to receive TLV Field 125, V.I.P. will drop the new transaction identifier from the request message prior to forwarding the message to the issuer.

Incremental Authorization for U.S. CPS Card-Present Transaction

Issuers must be prepared to receive estimated authorization indicator with all the existing requirements for U.S. CPS card-present transactions of the type submitted, with the additional requirements shown in the following table.

NOTE

Incremental authorizations may be sent only if the first authorization was an estimated, or initial authorization.

0100/0110 Authorization and 0120/0130 STIP Advice Messages for Incremental Authorization Card-Not-Present Transaction

The following table shows the message layout and content of the 0100/0110 and 0120/0130 POS Authorization messages. The table must be used in conjunction with all the existing requirements for non-CPS card-present transactions, with the additional requirements shown in the following table.

Table M-22: 0100/0110 Authorization and 0120/0130 STIP Advice Messages

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
2	Primary Account Number	Variable length, 1 byte binary+ 19 N, 4-bit BCD, 11 bytes max	M	M	M	M	M	M	This field contains a number identifying the customer account or relationship.
11	System Trace Audit Number	6 N, 4-bit BCD, 3 bytes	M	>	M	>	M	M	This field contains the system trace audit number from the original transaction.

Table M–22: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
18	Merchant Type	4 N, 4-bit BCD, 2 bytes	M	>			M		This field contains one of the following expanded MCCs that may request incremental authorization transactions: • 4457 (Boat rentals and leasing) • 5812 (Eating places and restaurants) • 5813 (Drinking places (alcoholic beverages)–bars, taverns, nightclubs, cocktail lounges, and discotheques) • 7033 (Trailer parks and campgrounds) • 7394 (Equipment, tool, furniture, and appliance rental and leasing) • 7519 (Motor home and recreational vehicle rentals) • 7996 (Amusement parks, circuses, carnivals, and fortune tellers) • 7999 (Recreation services (not elsewhere classified))
22	Point-of-Service Entry Mode Code	4 N, 4-bit BCD, 2 bytes	M	C+			M		This field contains any valid value, including the value of 10 (Credential on file).
37	Retrieval Reference Number	12 AN, EBCDIC, 12 bytes format: ydddh nnnnn	M	>	M	>	M	M	This field contains the retrieval reference number from the original transaction. NOTE <i>The retrieval reference number must begin with a valid Julian date.</i>

Table M-22: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
54	Additional Amounts	Variable length, 1 byte, binary + 20 ANS EBCDIC, 21 bytes max	C	C-	C	C-	C		This field contains the total cumulative amount for this series of incremental authorizations in the amount type 43 (Total cumulative amount).
62.1	Authorization Characteristics Indicator (Bitmap Format)	1 AN EBCDIC, 1 byte	M	C+	O	C+	M	O	This field contains the value of I (Increment to previously approved transaction).

Table M–22: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
62.2	Transaction Identifier (Bitmap Format)	15 N, 4-bit BCD, 8 bytes	C	M+	O	C+	M	O	For an incremental authorization with a transaction identifier, this field will be populated with the transaction identifier of the response message from the original transaction or the previous authorization in the series. It will be populated in the request message in these fields, as applicable: - Field 62.2 - TLV Field 125, Usage 2, Dataset ID 03, Tag 03 If the issuer is activated to receive TLV Field 125, Field 62.2 will be populated with the original transaction identifier or the transaction identifier from the previous authorization. V.I.P. will not assign a new transaction identifier. The same transaction identifier value will be populated in Field 62.2 and TLV Field 125, Usage 2, Dataset ID 03, Tag 03. For an incremental authorization without a transaction identifier, this field may or may not be present. For an incremental authorization without a transaction identifier: - When the issuer is activated to receive TLV Field 125, Field 62.2 will be present in the request message. Field 62.2 will be populated with the new transaction identifier. - When the issuer is not activated to receive TLV Field 125, V.I.P. will drop Field 62.2 from the request message before it is sent to the issuer.

Table M-22: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
63.3	Message Reason Code	4 N, 4-bit BCD, 2 bytes	C				C		This field contains the value of 3900 (Incremental authorization).
TLV 125, Usage 2	Supporting Information (TLV Format)	Variable length, 1 byte, binary+ TLV format: 255 ANS, EBCDIC, 256 bytes max	C	>			C		This TLV field contains Dataset ID 03.
TLV 125, Usage 2, Dataset ID 03	Additional Original Data Elements		C	>			C		This dataset ID contains Tag 03.

Table M–22: 0100/0110 Authorization and 0120/0130 STIP Advice Messages (cont'd.)

Field Number and Name		Format	Original				STIP Advice		Description
			0100		0110		0120	0130	
			Acq	VIC	Iss	VIC	VIC	Iss	
TLV 125, Usage 2, Dataset ID 03, Tag 03	Original Transaction Identifier	15 N, 4-bit BCD, 8 bytes	C	>			C		For an incremental authorization with a transaction identifier: - When the issuer is activated to receive TLV Field 125, this field will be present and populated with the original transaction identifier or the transaction identifier from the previous authorization. The same value will be sent in Field 62.2. - When the issuer is not activated to receive TLV Field 125, V.I.P. will drop the original transaction identifier from the request message prior to forwarding the message to the issuer. NOTE <i>V.I.P. will not assign a new transaction identifier. As a result, the same transaction identifier value will be populated in Field 62.2 and TLV Field 125, Usage 2, Dataset ID 03, Tag 03.</i> For an incremental authorization without a transaction identifier: - When the issuer is activated to receive TLV Field 125, this field will be present and populated with the new transaction identifier. The same value will be sent in Field 62.2. - When the issuer is not activated to receive TLV Field 125, V.I.P. will drop the new transaction identifier from the request message prior to forwarding the message to the issuer.