Finance and Stochastics manuscript No.

(will be inserted by the editor)

Insert your title here

Do you have a subtitle? If so, write it here

First Author Jr. · Second Author

Received: date / Accepted: date

Abstract

Insert your abstract here. Insert your abstract here.

Keywords First keyword · Second keyword · More

Mathematics Subject Classification (2010) XXXX · YYY

JEL Classification XXX · YYY

1 Ordinary text

The ends of words and sentences are marked by spaces. It doesn't matter how many spaces you type; one is as good as 100. The end of a line counts as a space.

One or more blank lines denote the end of a paragraph.

Since any number of consecutive spaces are treated like a single one, the formatting of the input file makes no difference to TeX, but it makes a difference to you. When you use LATeX, making your input file as easy to read as possible will be a great help as you write your document and when you change it. This sample file shows how you can add comments to your own input file.

Because printing is different from typewriting, there are a number of things that you have to do differently when preparing an input file than if you were just typing

F. Author

First Address, Organization Name, Street 112, City, Postcode State, Country E-mail: fauthor@example.com

S. Author

Department of Mathematics and Statistic, Cornell University, Ithaca, 14853 NY, USA

Present Address: D-MATH, ETH Zürich, Rämistrasse 101, 8092 Zürich, Switzerland

E-mail: sauthor@example.ch

the document directly. Quotation marks like "this" have to be handled specially, as do quotes within quotes: "'this' is what I just wrote, not 'that'".

Dashes come in three sizes: an intra-word dash, a medium dash for number ranges like 1–2, and a punctuation dash—like this.

A sentence-ending space should be larger than the space between words within a sentence. You sometimes have to type special commands in conjunction with punctuation characters to get this right, as in the following sentence. Gnats, gnus, etc. all begin with G. You should check the spaces after periods when reading your output to make sure you haven't forgotten any special cases. Generating an ellipsis ... with the right spacing around the periods requires a special command.

TEX interprets some common characters as commands, so you must type special commands to generate them. These characters include the following: & % # { and }.

In printing, text is emphasized by using an *italic* type style.

A long segment of text can also be emphasized in this way. Text within such a segment given additional emphasis with Roman type. Italic type loses its ability to emphasize and become simply distracting when used excessively.

It is sometimes necessary to prevent TEX from breaking a line where it might otherwise do so. This may be at a space, as between the "Mr." and "Jones" in "Mr. Jones", or within a word—especially when the word is a symbol like *itemnum* that makes little sense when hyphenated across lines.

TeX is good at typesetting mathematical formulas like x-3y=7 or $a_1 > x^{2n}/y^{2n} > x'$. Remember that a letter like x is a formula when it denotes a mathematical symbol, and should be treated as one.

2 Notes

Footnotes¹ pose no problem.²

3 Displayed text

Text is displayed by indenting it from the left margin. Quotations are commonly displayed. There are short quotations

This is a short a quotation. It consists of a single paragraph of text. There is no paragraph indentation.

and longer ones.

This is a longer quotation. It consists of two paragraphs of text. The beginning of each paragraph is indicated by an extra indentation.

This is the second paragraph of the quotation. It is just as dull as the first paragraph.

¹ This is an example of a footnote.

² And another one.

Insert your title here 3

Another frequently-displayed structure is a list. The following is an example of an *itemized* list, four levels deep.

- This is the first item of an itemized list. Each item in the list is marked with a "tick". The document style determines what kind of tick mark is used.
- This is the second item of the list. It contains another list nested inside it. The three inner lists are an *itemized* list.
 - This is the first item of an enumerated list that is nested within the itemized list
 - This is the second item of the inner list. LATEX allows you to nest lists deeper than you really should.

This is the rest of the second item of the outer list. It is no more interesting than any other part of the item.

- This is the third item of the list.

The following is an example of an *enumerated* list, four levels deep.

- 1. This is the first item of an enumerated list. Each item in the list is marked with a "tick". The document style determines what kind of tick mark is used.
- 2. This is the second item of the list. It contains another list nested inside it. The three inner lists are an *enumerated* list.
 - (a) This is the first item of an enumerated list that is nested within the enumerated list.
 - (b) This is the second item of the inner list. LaTeX allows you to nest lists deeper than you really should.

This is the rest of the second item of the outer list. It is no more interesting than any other part of the item.

3. This is the third item of the list.

The following is an example of a description list.

Cow Highly intelligent animal that can produce milk out of grass.

Horse Less intelligent animal renowned for its legs.

Human being Not so intelligent animal that thinks that it can think.

You can even display poetry.

There is an environment for verse

Whose features some poets will curse.

For instead of making

Them do all line breaking,

It allows them to put too many words on a line when they'd rather be forced to be terse.

Mathematical formulas may also be displayed. A displayed formula is one-line long; multiline formulas require special formatting instructions.

$$x' + y^2 = z_i^2$$

Don't start a paragraph with a displayed equation, nor make one a paragraph by itself.

Example of a theorem:

Equil.	х	у	Z	С	S
Points					
$\overline{L_1}$	-2.485252241	0.000000000	0.017100631	8.230711648	U
L_2	0.000000000	0.000000000	3.068883732	0.000000000	S
L_3	0.009869059	0.000000000	4.756386544	-0.000057922	U
L_4	0.210589855	0.000000000	-0.007021459	9.440510897	U
L_5	0.455926604	0.000000000	-0.212446624	7.586126667	U
L_6	0.667031314	0.000000000	0.529879957	3.497660052	U
L_7	2.164386674	0.000000000	-0.169308438	6.866562449	U
L_8	0.560414471	0.421735658	-0.093667445	9.241525367	U
L_9	0.560414471	-0.421735658	-0.093667445	9.241525367	U
L_{10}	1.472523232	1.393484549	-0.083801333	6.733436505	U
L_{11}	1.472523232	-1.393484549	-0.083801333	6.733436505	U

Table 1 The spherical case $(I_1 = 0, I_2 = 0)$

Lemma 3.1 All conjectures are interesting, but some conjectures are more interesting than others.

Proof Obvious.

4 Tables and figures

Cross reference to labelled table: As you can see in Table 1 on page 4 and also in Table 2 on page 5.

A major point of difference lies in the value of the specific production rate π for large values of the specific growth rate μ . Already in the early publications [1–3] it appeared that high glucose concentrations in the production phase are well correlated with a low penicillin yield (the 'glucose effect'). It has been confirmed recently [1–4] that high glucose concentrations inhibit the synthesis of the enzymes of the penicillin pathway, but not the actual penicillin biosynthesis. In other words, glucose represses (and not inhibits) the penicillin biosynthesis.

These findings do not contradict the results of [1] and of [4] which were obtained for continuous culture fermentations. Because for high values of the specific growth rate μ it is most likely (as shall be discussed below) that maintenance metabolism occurs, it can be shown that in steady state continuous culture conditions, and with μ described by a Monod kinetics

$$C_s = K_M \frac{\mu/\mu_x}{1 - \mu/\mu_x} \tag{1}$$

Pirt and Rhigelato determined π for μ between 0.023 and 0.086 h⁻¹. They also reported a value $\mu_x \approx 0.095$ h⁻¹, so that for their experiments μ/μ_x is in the range of 0.24 to 0.9. Substituting K_M in (1) by the value $K_M = 1$ g/L as used by [1], one finds with the above equation $0.3 < C_s < 9$ g/L. This agrees well with the work of [4], who reported that penicillin biosynthesis repression only occurs at glucose concentrations from $C_s = 10$ g/L on. The conclusion is that the glucose concentrations in the experiments of Pirt and Rhigelato probably were too low for glucose repression to

Insert your title here 5

parameter		Set 1	Set 2	
μ_x	[h ⁻¹]	0.092	0.11	
K_{x}	[g/g DM]	0.15	0.006	
μ_p	[g/g DM h]	0.005	0.004	
K_p	[g/L]	0.0002	0.0001	
K_i	[g/L]	0.1	0.1	
$Y_{x/s}$	[g DM/g]	0.45	0.47	
$Y_{p/s}$	[g/g]	0.9	1.2	
k_h	$[h^{-1}]$	0.04	0.01	
m_{s}	[g/g DM h]	0.014	0.029	

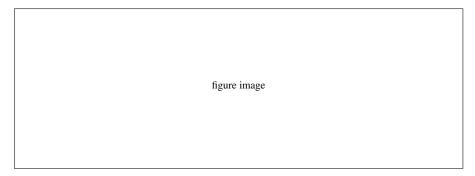


Fig. 1 Pathway of the penicillin G biosynthesis

be detected. The experimental data published by Ryu and Hospodka are not detailed sufficiently to permit a similar analysis.

Bajpai and Reuß decided to disregard the differences between time constants for the two regulation mechanisms (glucose repression or inhibition) because of the relatively very long fermentation times, and therefore proposed a Haldane expression for π .

It is interesting that simulations with the [4] model for the initial conditions given by these authors indicate that, when the remaining substrate is fed at a constant rate, a considerable and unrealistic amount of penicillin is produced when the glucose concentration is still very high [2–4] Simulations with the Bajpai and Reuß model correctly predict almost no penicillin production in similar conditions.

Sample of cross-reference to figure. Figure 1 shows that is not easy to get something on paper.

5 Headings

5.1 Subsection

Carr-Goldstein based their model on balancing methods and biochemical knowledge. The original model (1980) contained an equation for the oxygen dynamics which has been omitted in a second paper (1981). This simplified model shall be discussed here.

5.1.1 Subsubsection

Carr-Goldstein based their model on balancing methods and biochemical knowledge. The original model (1980) contained an equation for the oxygen dynamics which has been omitted in a second paper (1981). This simplified model shall be discussed here.

6 Equations and the like

Two equations:

$$C_s = K_M \frac{\mu/\mu_x}{1 - \mu/\mu_x} \tag{2}$$

and

$$G = \frac{P_{\text{opt}} - P_{\text{ref}}}{P_{\text{ref}}} 100 \,(\%) \tag{3}$$

Two equation arrays:

$$\frac{dS}{dt} = -\sigma X + s_F F \tag{4}$$

$$\frac{dX}{dt} = \mu X \tag{5}$$

$$\frac{dP}{dt} = \pi X - k_h P \tag{6}$$

$$\frac{dX}{dt} = \mu X \tag{5}$$

$$\frac{dP}{dt} = \pi X - k_h P \tag{6}$$

$$\frac{dV}{dt} = F \tag{7}$$

and,

$$\mu_{\text{substr}} = \mu_x \frac{C_s}{K_x C_x + C_s} \tag{8}$$

$$\mu = \mu_{\text{substr}} - Y_{x/s} (1 - H(C_s)) (m_s + \pi / Y_{p/s})$$
(9)

$$\sigma = \mu_{\text{substr}}/Y_{x/s} + H(C_s)(m_s + \pi/Y_{p/s})$$
 (10)

A Appendix section

We consider a sequence of queueing systems indexed by n. It is assumed that each system is composed of J stations, indexed by 1 through J, and K customer classes, indexed by 1 through K. Each customer class has a fixed route through the network of stations. Customers in class k, k = 1, ..., K, arrive to the system according to a renewal process, independently of the arrivals of the other customer classes. These customers move through the network, never visiting a station more than once, until they eventually exit the system.

Insert your title here 7

Appendix subsection

However, different customer classes may visit stations in different orders; the system is not necessarily "feed-forward." We define the *path of class k customers* in as the sequence of servers they encounter along their way through the network and denote it by

$$\mathcal{P} = (j_{k,1}, j_{k,2}, \dots, j_{k,m(k)}). \tag{11}$$

Sample of cross-reference to the formula (11) in A.

B Appendix section

We consider a sequence of queueing systems indexed by n. It is assumed that each system is composed of J stations, indexed by 1 through J, and K customer classes, indexed by 1 through K. Each customer class has a fixed route through the network of stations. Customers in class k, $k = 1, \ldots, K$, arrive to the system according to a renewal process, independently of the arrivals of the other customer classes. These customers move through the network, never visiting a station more than once, until they eventually exit the system.

Acknowledgements If you'd like to thank anyone, place your comments here and remove the percent signs.

Financial support and grants acknowledgements should be placed here.

Author Contribution Information about author contribution ...

Funding Information about fundings ...

Data Availability Information about available data ...

 ${\bf Materials} \ {\bf Availability} \ \ {\bf Information} \ about \ available \ material \ ...$

Code Availability Information about available code ...

Declarations

Conflict of interest The authors declare that they have no conflicts of interest

References

- 1. Chekanov, S., et al.: (ZEUS Collaboration), Eur. Phys. J. C 42, 1 (2005)
- 2. Brans, P.C., Meissner, U.G.: Eur. Phys. J. C 40, 97 (2005)
- 3. Kersting N.: Eur. Phys. J. C (2009). doi:10.1140/s10052-009-1063-6
- 4. Smith, J.M.: Molecular Dynamics, 2nd edn. Springer, Berlin, Heidelberg (1987)
- Smith, J.M.: Molecular Dynamics. In: Brown, C. (ed.) 2nd edn. Les Editions de Physique, Les Ulis (1987)
- Smith, J.M.: Molecular Dynamics. In: Brown, C. (ed.) 2nd edn. Springer, Berlin, Heidelberg (1987). in press
- Smith, J.M.: Proceedings of the International Conference on Low Temperature Physics, Madison, 1975.
 In: Brown, C. (ed.), p. 201. Les Éditions de Physique, Les Ulis (1987)
- Cartwright, J.: Big stars have weather too. IOP Publishing PhysicsWeb (2007). http://physicsweb.org/articles/news/11/6/16/1. Accessed 26 June 2007