

Using idnia

- [Install your package using idnai.](#)
- [More on india usage and application.](#)

Install your package using idnai.


- Create a GitHub directory for your package.
- Setup the idnai-* driven package.
- Activate documentation pages.

Create a GitHub repository.

Step 0 :

- + Creates your GitHub account (sign up) and/or
- + Log to this account (sign in)
- + Install (if not done) a [configure the ssh access](#).

Your login is here

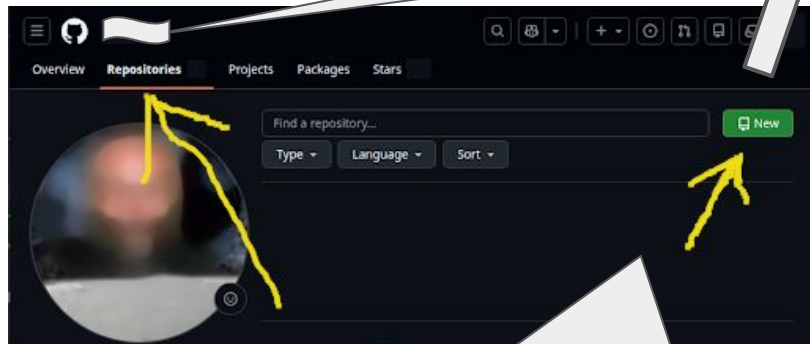

Step 1 : Clic New on the repository page.

Step 2 : enter parameters.

A screenshot of the 'Create a new repository' form on GitHub. The form is divided into two sections: '1 General' and '2 Configuration'. In the 'General' section, there is a 'Repository name' field with a callout box labeled 'The definitive package name'. Below it is a 'Description' field with a callout box labeled 'A line description'. In the 'Configuration' section, there are options for 'Choose visibility *' (set to 'Public'), 'Start with a template' (set to 'No template'), 'Add README' (set to 'Off'), 'Add .gitignore' (set to 'No .gitignore'), and 'Add license' (set to 'No license'). At the bottom right, there is a green 'Create repository' button. A callout box labeled 'That's it: Default options are fine. Readme, license, etc will be defined afterwards.' points to the 'Create repository' button.

Setups the idnai-* driven package

- Let us call ``$name`` the definitive package repository name, chosen when creating the GitHub repository.
- You should have a ``sketchbook`` where each subdirectory is a package.
 - Each directory corresponds to a git repository, on GitHub, in our context.
 - For instance ``~/sketchbook`` in your home directory.
- In this ``sketchbook`` :
 - 1/ download <https://vthierry.github.io/idnai-make/setup.sh>
 - 2/ run it ``bash ./setup.sh``

=> This interactive simple script will do the job (see next slide)

The setup dialog :

- This script will set up an idnai-* driven package, is it OK ?
- Are you in your sketchbook directory ?
 - What is, please, your GitHub login:
 - What is, please, the package name:
- [0/4] Installing useful packages, using sudo ...
- [1/4] Cloning your repository, using ssh ...
- [2/4] Installing a few useful files ...
- [3/4] Updating the GitHub repository ...
- [4/4] The next step is for you, to activate the documentation pages ...

Activate documentation pages.

GitHub repository settings for **vthierry / idnai-make**.

Navigation tabs: Code, Issues, Pull requests, Actions, Projects, Wiki, Security and quality, Insights, **Settings**.

Left sidebar menu items: General, Access, Collaborators, Moderation options, Code, planning, and automation, Branches, Tags, Rules, Actions, Webhooks, Copilot, Environments, Codespaces, **Pages**.

Main content area: **GitHub Pages**

Build and deployment

Source

Deploy from a branch

Branch

GitHub Pages is currently disabled. Select a source below to enable GitHub Pages for this repository. [Learn more about configuring the publishing source for your site.](#)

main /docs Save

Step 4 : activate the page functionality

1/ Go to the Settings page.

2/ Click on Pages menu item

3/ Choose main/docs in the Branch section and Save

Choose main/docs

That's it.

More on india usage and application.


- [idnai targeted hardware and operating systems.](#)
- [idnai file organization.](#)
- [idnai packages.](#)
 - [Remote processing.](#)

Idnai targeted hardware and operating systems.

The Raspberry Pi as a costless workstation, cyberdesk or controller.



also  or 

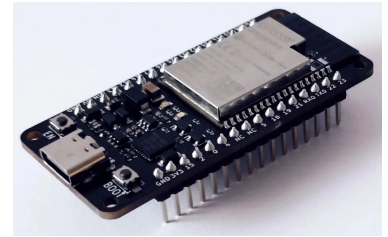

The ESP32 as a controller or for connected object.

Any Linux system, including MacOS and Windows `mingw64` LinUX extension.

Idnai file organization

~/sketchbook/\$package-name/makefile
/docs/\$web-site-pages
/src/\$source-files
/bin/\$script-and-command-files
/tex/\$latex-files

{
/.git
/.gitignore
/node_modules (linked to ../node_modules)

~/sketchbook/node_modules/\$third-party-packages/{bin,docs,src}
/libadnai.so # C/C++ all middleware library
/.bin/\$third-party-commands
/{package,package-lock}.json

This is the `sketchbook` with all project's repositories

Rendered at:
[https://\\$login.github.io/\\$name](https://$login.github.io/$name)

Here are the source and script package developments

Mainly if TeX files belongs to another (e.g., overleaf) git repository.

These are idnai automatically generated files, not to be edited.

All third-party modules are shared between packages.
(saving space, network activity, and computation time)

Idnai packages

[idnia-make](#): root package, with all install, build, and test rules.

[Idnia-sys](#): wrappers for used system and basic functionalities.

[idnia-json](#): weak-json implementation mechanism.

[idnia-web](#): multi-language implementation of web-service and communication.

[idnia-esp32](#): framework to make ESP32 fast programming very easy.

idnia-numeric: numerical quantity deterministic and statistical manipulation.

Remote processing

- The ``make build=$host`` has the capability to ask for remote processing