```java
package edu.task9;

public class Employee {

    private int id;
    private String name;
    private String dept;

    public Employee() {}

    public Employee(int id, String name, String dept) {
        this.id = id;
        this.name = name;
        this.dept = dept;
    }

    public int getId() {
        return id;
    }

    public void setId(int id) {
        this.id = id;
    }


    public String getName() {
        return name;
    }

    public void setName(String name) {
        this.name = name;
    }

    public String getDept() {
```

```java
package edu.task9;

import org.springframework.beans.factory.annotation.Autowired;

@Controller
public class EmployeeController {

@Autowired
private EmployeeRepository repo;

@GetMapping("/")
public String home(){
return "home";
}

@GetMapping("/employee")
public String getEmployee(@RequestParam("id") int id, Model model){

Employee emp = repo.findById(id);

if(emp==null){
model.addAttribute("error","Employee not found");
return "employee";
}

model.addAttribute("emp",emp);
return "employee";
}

}
```

```java
package edu.task9;

import org.springframework.stereotype.Component;

@Component
public class EmployeeRepository {

private final Map<Integer,Employee> store = Map.of(
101,new Employee(101,"Anand","CSE"),
102,new Employee(102,"Divya","ECE"),
103,new Employee(103,"Ravi","IT")
);

public Employee findById(int id){
return store.get(id);
}

}
```

```java
package edu.task9;

import org.springframework.boot.SpringApplication;

@SpringBootApplication
public class Task9Application {

    public static void main(String[] args) {
        SpringApplication.run(Task9Application.class, args);
    }

}
```

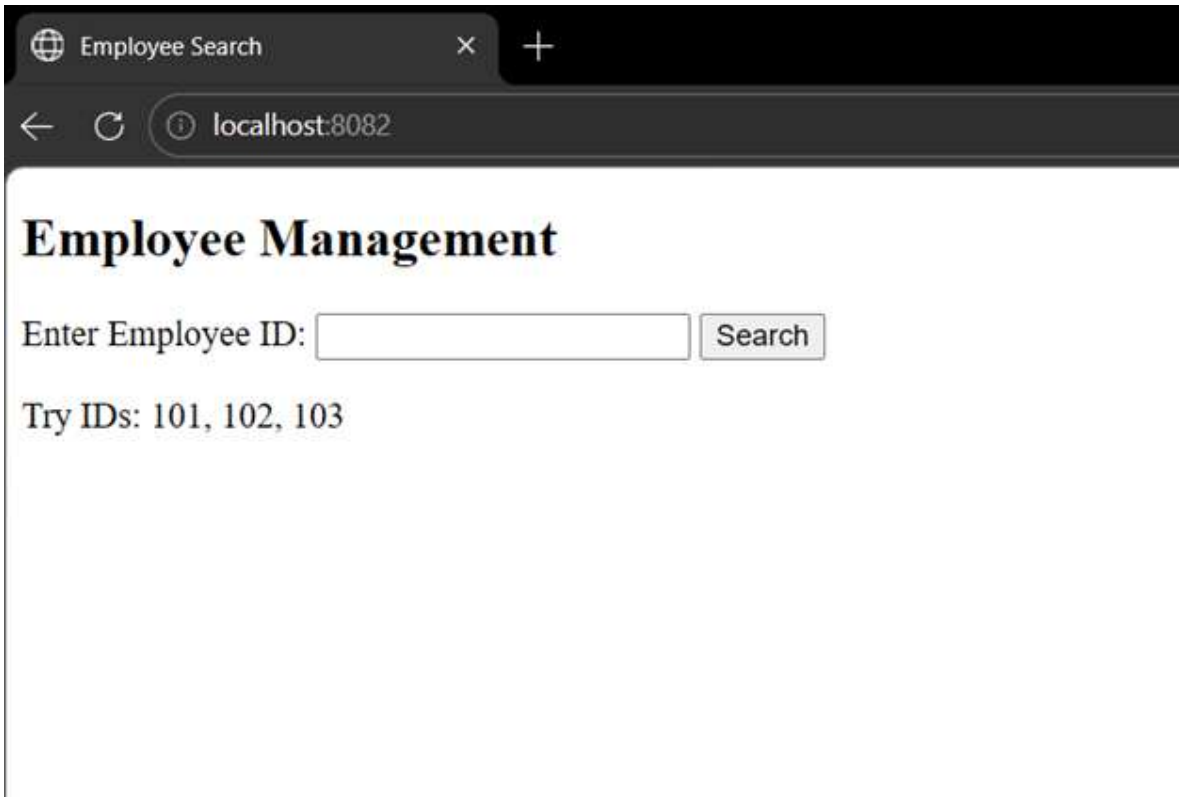

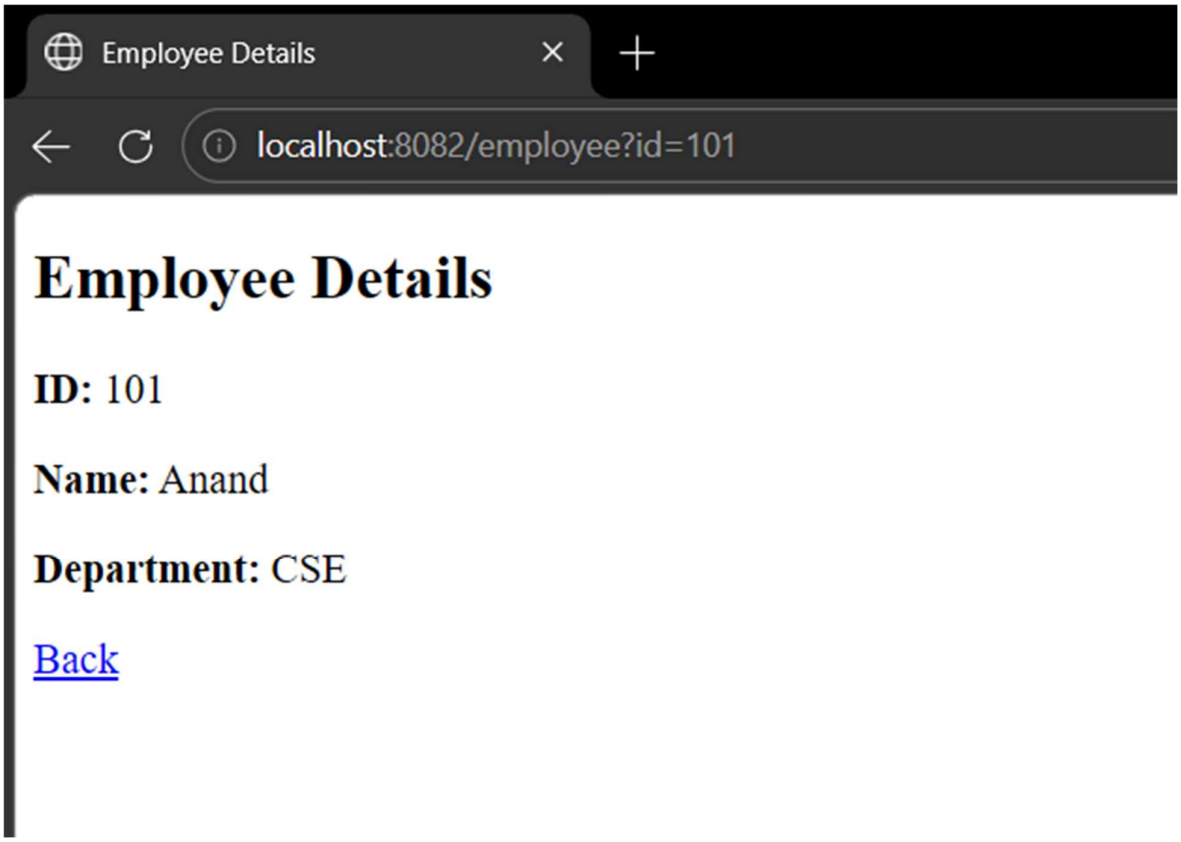
Employee Details
localhost:8082/employee?id=101
Employee Details
ID: 101
Name: Anand
Department: CSE
Back