

Congratulations!

You have passed the sample test cases. Click the submit button to run your code against all the test cases.

✔ Sample Test case 0

✔ Sample Test case 1

Input (stdin)

[Download](#)

```
1 2
2 ababaa
3 aa
```

Your Output (stdout)

```
1 11
2 3
```

Expected Output

[Download](#)

```
1 11
2 3
```

DescriptionAccepted XEditorialSolutionsSubmissions

All Submissions

Accepted133 / 133 testcases passed

Uma Vajresh submitted at Aug 30, 2026 10:30

AnalysisSolution

₹583.25/moSave over 55%


Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

8 ms | Beats 91.05%

Memory

46.98 MB | Beats 33.90%

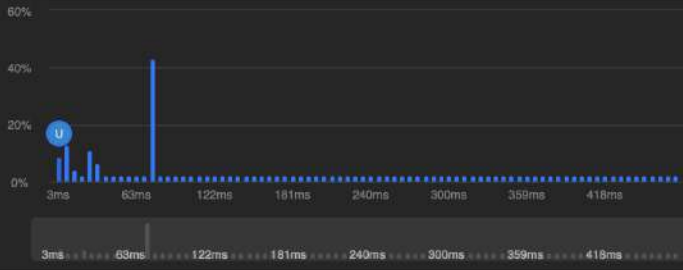

3ms63ms122ms181ms240ms300ms359ms418ms

CodeJava

```
1 import java.util.*;
2
3 class Solution {
4     public boolean repeatedSubstringPattern(String s) {
5         int n = s.length();
6
7         for (int len = 1; len <= n / 2; len++) {
```

Code

JavaAuto

Ln 29, Col 2

```
10
11
12 String sub = s.substring(0, len);
13 boolean valid = true;
14
15 for (int i = 0; i < n; i += len) {
16     if (!s.substring(i, i + len).equals(sub)) {
17         valid = false;
18         break;
19     }
20 }
21
22 if (valid) {
23     return true;
24 }
25
26
27 return false;
28 }
```

TestcaseTest Result

AcceptedRuntime: 0 ms

Case 1Case 2Case 3

Input

s =
"abab"

Output

Congratulations!

You have passed the sample test cases. Click the submit button to run your code against all the test cases.

✔ Sample Test case 0

✔ Sample Test case 1

✔ Sample Test case 2

```
2 hello
3 world
4 hi
5 world
```

Your Output (stdout)

```
1 YES
2 NO
```

Expected Output

```
1 YES
2 NO
```

[Download](#)

DescriptionAccepted xEditorialSolutionsSubmissions

All Submissions

Accepted511 / 511 testcases passed

Uma Vajresh submitted at Aug 30, 2026 10:39

AnalysisSolution

₹583.25/mo

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

2 ms | Beats 64.97%

Memory

43.70 MB | Beats 15.88%

Runtime (ms)	Beats (%)
1	~10
2	64.97
3	~5
4	~5

Code | Java

```
1 class Solution {
2     public boolean rotateString(String s, String goal) {
3         if (s.length() != goal.length()) {
4             return false;
5         }
6
7         String temp = s + s;
```

Code

Java Auto

```
1 class Solution {
2     public boolean rotateString(String s, String goal) {
3         if (s.length() != goal.length()) {
4             return false;
5         }
6
7         String temp = s + s;
8
9         return temp.contains(goal);
10    }
11 }
```

SavedLn 11, Col 2

Testcase > Test Result

AcceptedRuntime: 0 ms

☒ Case 1☒ Case 2

Input

s =

"m"

goal =

Congratulations!

You have passed the sample test cases. Click the submit button to run your code against all the test cases.

✓ Sample Test case 0

Input (stdin)

[Download](#)

```
1 SOSSPSSQSSOR
```

✓ Sample Test case 1

✓ Sample Test case 2

Your Output (stdout)

```
1 3
```

Expected Output

[Download](#)

```
1 3
```

DescriptionAccepted xEditorialSolutionsSubmissions

All Submissions

Accepted65 / 65 testcases passed

Uma Vajresh submitted at Aug 30, 2026 10:44

AnalysisSolution


₹583.25/moSave over 56%Unlock the Full LeetCode ExperienceCompany problems, Ask Leet, and expert editorials — all in one plan.

Runtime

11 msBeats 66.80%

Memory

47.19 MBBeats 30.38%

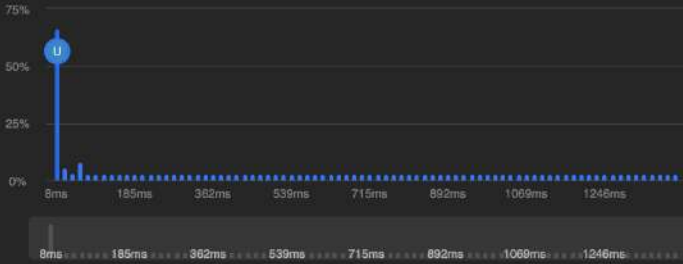

CodeJava

```
1 import java.util.*;
2
3 class Solution {
4     public List<Integer> findAnagrams(String s, String p) {
5         List<Integer> result = new ArrayList<>();
6
7         if (s.length() < p.length()) {
```

Code

JavaAuto

```
16
17
18
19     if (Arrays.equals(pCount, sCount)) {
20         result.add(0);
21     }
22
23     for (int i = p.length(); i < s.length(); i++) {
24         sCount[s.charAt(i) - 'a']++;
25         sCount[s.charAt(i - p.length()) - 'a']--;
26
27         if (Arrays.equals(pCount, sCount)) {
28             result.add(i - p.length() + 1);
29         }
30     }
31
32     return result;
33 }
34 }
```

SavedLn 34, Col 2

TestcaseTest Result

AcceptedRuntime: 0 ms

Case 1Case 2

Input

s =

"cbaebabacd"

p =

Congratulations!

You have passed the sample test cases. Click the submit button to run your code against all the test cases.

✓ Sample Test case 0

Input (stdin)

[Download](#)

```
1 3
2 aaab
3 baa
4 aaa
```

Your Output (stdout)

```
1 3
2 0
3 -1
```

Expected Output

[Download](#)

DescriptionAccepted xEditorialSolutionsSubmissions

All Submissions

Accepted86 / 88 testcases passed
Uma Vajresh submitted at Aug 30, 2026 10:50

₹583.25/mo
Save over 96%

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

1 msBeats 49.98%

Memory

42.78 MBBeats 91.76%

Time Interval	Performance (%)
1ms	~50%
2ms	~5%
3ms	~5%
4ms	~5%

Code | Java

```
1 class Solution {
2     public int strStr(String haystack, String needle) {
3         if (needle.length() > haystack.length()) {
4             return -1;
5         }
6
7         for (int i = 0; i <= haystack.length() - needle.length(); i++) {
```

Code

JavaAuto

```
8         int j = 0;
9
10        while (j < needle.length() &&
11              haystack.charAt(i + j) == needle.charAt(j)) {
12            j++;
13        }
14
15        if (j == needle.length()) {
16            return i;
17        }
18    }
19
20    return -1;
21 }
22 }
```

SavedLn 22, Col 2

TestcaseTest Result

needle =

"sad"

Output

0

Expected

0

DescriptionAccepted xEditorialSolutionsSubmissions

All Submissions

Accepted144 / 144 testcases passed

Uma Vajresh submitted at Aug 30, 2026 10:53

AnalysisSolution

₹583.25

Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

14 ms | Beats 90.66%

Memory

43.82 MB | Beats 45.65%

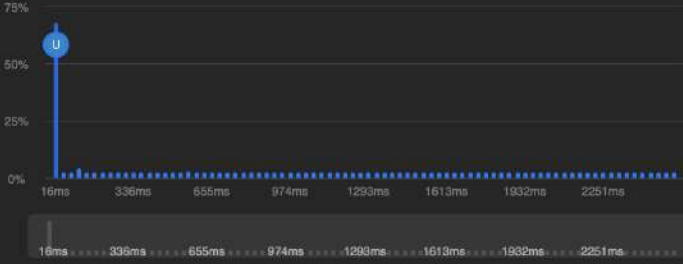

16ms336ms655ms974ms1293ms1613ms1932ms2251ms

CodeJava

```
1 class Solution {
2     public String longestPalindrome(String s) {
3         if (s.length() < 2) {
4             return s;
5         }
6
7         int start = 0;
```

Code

JavaAuto

```
17         start = i - (len - 1) / 2;
18         end = i + len / 2;
19     }
20 }
21
22     return s.substring(start, end + 1);
23 }
24
25 public int expand(String s, int left, int right) {
26     while (left >= 0 && right < s.length()
27           && s.charAt(left) == s.charAt(right)) {
28         left--;
29         right++;
30     }
31
32     return right - left - 1;
33 }
34 }
```

SavedLn 34, Col 2

TestcaseTest Result

AcceptedRuntime: 0 ms

☒ Case 1☒ Case 2

Input

s =
"babad"

Output

Congratulations!

You have passed the sample test cases. Click the submit button to run your code against all the test cases.

✔ Sample Test case 0

✔ Sample Test case 1

✔ Sample Test case 2

Expected Output

[Download](#)

1	12
2	12
3	10
4	8
5	8
6	9
7	11
8	13
9	11
10	9
11	8