

For two strings A and B, we define the similarity of the strings to be the length of the longest prefix common to both strings. For example, the similarity of strings "abc" and "abd" is 2, while the similarity of strings "aaa" and "aaab" is 3.

Calculate the sum of similarities of a string S with each of it's suffixes.

Input Format

The first line contains the number of test cases t.

Each of the next t lines contains a string to process, s.

Constraints

- $1 \leq t \leq 10$
- $1 \leq |s| \leq 100000$
- s is composed of characters in the range `ascii[a-z]`

Output Format

Output t lines, each containing the answer for the corresponding test case.

Sample Input

```
2
ababaa
aa
```

Sample Output

```
11
3
```

Explanation

For the first case, the suffixes of the string are "ababaa", "babaa", "abaa", "baa", "aa" and "a". The similarities of these strings with the string "ababaa" are 6,0,3,0,1, & 1 respectively. Thus, the answer is 6 + 0 + 3 + 0 + 1 + 1 = 11.

For the second case, the answer is 2 + 1 = 3.

Upload Codes as File☐ Test against custom input

Run CodeSubmit Code

Problem Solving

You have earned 100.00 points!
You are now 180 points away from the 4th star for your problem solving badge.

35%

295/475

Congratulations

You solved this challenge. Would you like to challenge your friends? [Twitter](#) [LinkedIn](#)

Next Challenge

Test case 0

Test case 1

Test case 2

Test case 3

Test case 4

Test case 5

Test case 6

Compiler Message

Success

Input (stdin)

1 2
2 ababaa
3 aa

Expected Output

1 11
2 3

Download

Download

₹583.25/mo
Save over 55%

Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

75 ms | Beats 46.13%

Memory

46.63 MB | Beats 82.75%

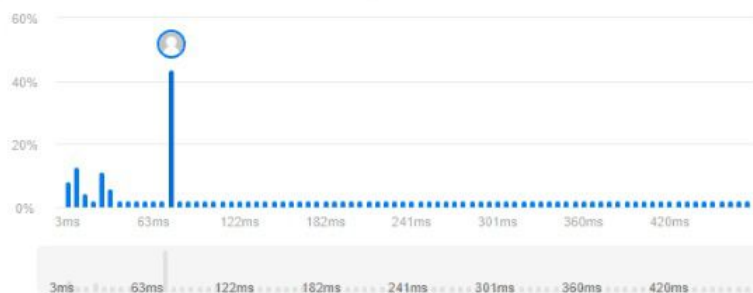

Code | Java

```
1 class Solution {
2     public boolean repeatedSubstringPattern(String s) {
3         String doubled = s + s;
4
5         return doubled.substring(1, doubled.length() - 1).contains(s);
6     }
7 }
8
```

More challenges

28. Find the Index of the First Occurrence in a String

686. Repeated String Match

Write your notes here

Code

Java Auto

```
1 class Solution {
2     public boolean repeatedSubstringPattern(String s) {
3         String doubled = s + s;
4
5         return doubled.substring(1, doubled.length() - 1).contains(s);
6     }
7 }
8
```

Saved

Ln 8, Col

Testcase Test Result

Accepted Runtime: 0 ms

Case 1 Case 2 Case 3

Input

s =
"abab"

Output

true

Expected

true

Contribute to LeetCode

Given two strings, determine if they share a common substring. A substring may be as small as one character.

Example

s1 = 'and'

s2 = 'art'

These share the common substring a.

s1 = 'be'

s2 = 'cat'

These do not share a substring.

Function Description

Complete the function twoStrings in the editor below.

twoStrings has the following parameter(s):

- string s1: a string
- string s2: another string

Returns

- string: either YES or NO

Input Format

The first line contains a single integer *p*, the number of test cases.

The following *p* pairs of lines are as follows:

- The first line contains string *s1*.
- The second line contains string *s2*.

Constraints

- s1* and *s2* consist of characters in the range `ascii[a-z]`.
- $1 \leq p \leq 10$
- $1 \leq |s1|, |s2| \leq 10^5$

Output Format

For each pair of strings, return YES or NO.

Upload Code as File

Test against custom input

Run Code

Submit Code



You have earned 25.00 points!

You are now 155 points away from the 4th star for your problem solving badge.

44%

320/475

Congratulations

You solved this challenge. Would you like to challenge your friends? [Twitter](#) [LinkedIn](#)

Next Challenge

Test case 0

Test case 1

Test case 2

Test case 3

Test case 4

Test case 5

Test case 6

Compiler Message

Success

Input (stdin)

```
1 2
2 hello
3 world
4 hi
5 world
```

Download

Expected Output

```
1 YES
```

Download

Accepted 511 / 511 testcases passed

DhanaSree_2006 submitted at Aug 25, 2026 11:08

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.



Runtime

2 ms | Beats 65.14%

Memory

43.33 MB | Beats 67.79%



Code | Java

```
1 class Solution {
2     public boolean rotateString(String s, String goal) {
3         if (s.length() != goal.length()) {
4             return false;
5         }
6     }
7     return (s + s).contains(goal);
8 }
```

View more

More challenges

Java Auto

```
1 class Solution {
2     public boolean rotateString(String s, String goal) {
3         if (s.length() != goal.length()) {
4             return false;
5         }
6         return (s + s).contains(goal);
7     }
8 }
9
10
```

Saved

Ln 10, Col 1

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

s =
"m"

goal =
"f"

Output

false

Expected

false

$s = \text{SOSSPSSQSSOR}$, and signal length $|s| = 12$. They sent 4 SOS messages (i.e.: $12/3 = 4$).

Expected signal: SOSSOSOSSOS
Recieved signal: SOSSPSSQSSOR
Difference: X X X

Sample Input 1

SOSSOT

Sample Output 1

1

Explanation 1

$s = \text{SOSSOT}$, and signal length $|s| = 6$. They sent 2 SOS messages (i.e.: $6/3 = 2$).

Expected Signal: SOSSOS
Received Signal: SOSSOT
Difference: X

Sample Input 2

SOSSOSSOS

Sample Output 2

0

Explanation 2

Since no character is altered, return 0.

Upload Code as File

☐ Test against custom input

Run Code

Submit Code

Problem Solving

You have earned 15.00 points!

You are now 140 points away from the 4th star for your problem solving badge.

49%

335/475

Congratulations

You solved this challenge. Would you like to challenge your friends?

Twitter

LinkedIn

Next Challenge

Test case 0

Test case 1

Test case 2

Test case 3

Test case 4

Test case 5

Test case 6

Compiler Message

Success

Input (stdin)

1SOSSPSSQSSOR

Expected Output

13

Download

Download

Description Accepted Editorial Solutions Submissions

All Submissions

Accepted 65 / 65 testcases passed

DhanaSree_2006 submitted at Aug 25, 2026 11:12

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.



Runtime

10 ms Beats 80.92%

Memory

46.78 MB Beats 71.86%



Code Java

```
1 import java.util.*;
2
3 class Solution {
4     public List<Integer> findAnagrams(String s, String p) {
5         List<Integer> result = new ArrayList<>();
6
7         if (s.length() < p.length()) {
8             return result;
9         }
10    }
```

View more

More challenges

Code

Java Auto

```
24
25 // Keep window size equal to p.length()
26 if (i >= windowSize) {
27     windowCount[s.charAt(i - windowSize) - 'a']--;
28 }
29
30 // Check if current window is an anagram
31 if (i >= windowSize - 1 && Arrays.equals(pCount, windowCount)) {
32     result.add(i - windowSize + 1);
33 }
34
35
36 return result;
37 }
38
39 }
```

Saved

Ln 39, Co

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

s =
"cbaebabacd"

p =
"abc"

Output

[0,6]

Expected

[0,6]

Given a string of lowercase letters in the range `ascii[a-z]`, determine the index of a character that can be removed to make the string a **palindrome**. There may be more than one solution, but any will do. If the word is already a palindrome or there is no solution, return -1. Otherwise, return the index of a character to remove.

Example

`s = "bcbc"`

Either remove 'b' at index 0 or 'c' at index 3.

Function Description

Complete the `palindromeIndex` function in the editor below.

`palindromeIndex` has the following parameter(s):

- string `s`: a string to analyze

Returns

- int: the index of the character to remove or `-1`

Input Format

The first line contains an integer `q`, the number of queries.

Each of the next `q` lines contains a query string `s`.

Constraints

- $1 \leq q \leq 20$
- $1 \leq \text{length of } s \leq 10^5 + 5$
- All characters are in the range `ascii[a-z]`.

Sample Input

STDIN	Function
-----	-----
3	q = 3
aaab	s = 'aaab' (first query)
baa	s = 'baa' (second query)
aaa	s = 'aaa' (third query)

Sample Output

Upload Code as File

☐ Test against custom input

Run Code

Submit Code

Problem Solving

You have earned 25.00 points!

You are now 115 points away from the 4th star for your problem solving badge.

58%

360/475

Congratulations

You solved this challenge. Would you like to challenge your friends?

Next Challenge

Test case 0

Test case 1

Test case 2

Test case 3

Test case 4

Test case 5

Test case 6

Compiler Message

Success

Input (stdin)

13

2aaab

3baa

4aaa

Expected Output

13

20

Download

Download

Accepted 86 / 86 testcases passed Time taken: 21m 54s

DhanaSree_2006 submitted at Aug 25, 2026 11:18

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.




Runtime

0 ms | Beats 100.00%

Memory

43.08 MB | Beats 51.78%

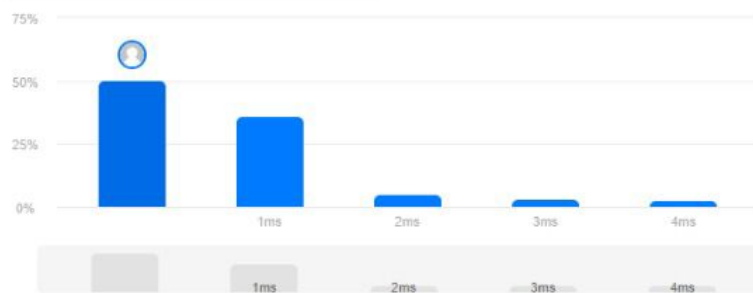

Code | Java

```
1 class Solution {
2     public int strStr(String haystack, String needle) {
3         return haystack.indexOf(needle);
4     }
5 }
6
```

More challenges

• 214. Shortest Palindrome



Java Auto



```
1 class Solution {
2     public int strStr(String haystack, String needle) {
3         return haystack.indexOf(needle);
4     }
5 }
6
```

Saved

Ln 6, Col 1

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

haystack =
"sadbutsad"needle =
"sad"

Output

0

Expected

0

Accepted 144 / 144 testcases passed

DhanaSree_2006 submitted at Aug 25, 2026 11:20

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.



Runtime

15 ms | Beats 59.29%

Memory

43.37 MB | Beats 89.56%



Code | Java

```
1 class Solution {
2     public String longestPalindrome(String s) {
3         if (s == null || s.length() < 2) {
4             return s;
5         }
6
7         int start = 0;
8         int end = 0;
```

View more

More challenges



Java Auto



```
24     return s.substring(start, end + 1);
25 }
26
27 private int expandAroundCenter(String s, int left, int right) {
28     while (left >= 0 &&
29           right < s.length() &&
30           s.charAt(left) == s.charAt(right)) {
31         left--;
32         right++;
33     }
34     return right - left - 1;
35 }
36
37 }
38
39 }
```

Saved

Ln 39, Col 1

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

```
s =
"babad"
```

Output

```
"bab"
```

Expected

```
"bab"
```

Contribute a testcase

A palindrome is a string that reads the same from left to right as it does from right to left.

Given a string, S , of N lowercase English letters, we define a k -length rotation as cutting the first k characters from the beginning of S and appending them to the end of S . For each S , there are N possible k -length rotations (where $0 \leq k < N$). See the Explanation section for examples.

Given N and S , find all N k -length rotations of S ; for each rotated string, S_k , print the maximum possible length of any palindromic substring of S_k on a new line.

Input Format

The first line contains an integer, N (the length of S).

The second line contains a single string, S .

Constraints

- $1 \leq N \leq 5 \times 10^5$
- $0 \leq k < N$
- S is comprised of lowercase English letters.

Output Format

There should be N lines of output, where each line k contains an integer denoting the maximum length of any palindromic substring of rotation S_k .

Sample Input 0

```
13
aaaaabbbbbaaaa
```

Sample Output 0

```
12
12
10
8
8
9
```

Upload Code as File

☐ Test against custom input

Run Code

Submit Code



You have earned 120.00 points!

You are now 370 points away from the gold level for your problem solving badge.

1%

480/850

Congratulations

You solved this challenge. Would you like to challenge your friends?



Next Challenge

Test case 0

Test case 1

Test case 2

Test case 3

Test case 4

Test case 5

Test case 6

Compiler Message

Success

Input (stdin)

```
1 13
2 aaaaabbbbbaaaa
```

Expected Output

```
1 12
2 12
3 10
4 8
```

Download

Download