

Description Accepted x Editorial Solutions Submissions

All Submissions

Accepted 210 / 210 testcases passed

DhanaSree_2006 submitted at Aug 24, 2026 11:32

Analysis

Solution

₹583.25/mo
Save over 66%

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

1 ms | Beats 99.95%

Memory

77.13 MB | Beats 66.61%



Code | Java

```
1 class Solution {
2     public int maxSubArray(int[] nums) {
3         int n = nums.length;
4         int max = Integer.MIN_VALUE, sum = 0;
5
6         for(int i=0;i<n;i++){
7             sum += nums[i];
8             max = Math.max(sum,max);
9         }
10    }
```

View more

More challenges

Code

Java Auto

```
1 class Solution {
2     public int maxSubArray(int[] nums) {
3         int n = nums.length;
4         int max = Integer.MIN_VALUE, sum = 0;
5
6         for(int i=0;i<n;i++){
7             sum += nums[i];
8             max = Math.max(sum,max);
9             if(sum<0) sum = 0;
10        }
11
12        return max;
13    }
14 }
15
16
17
```

Saved

Ln 7,

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Case 3

Input

nums =
[-2,1,-3,4,-1,2,1,-5,4]

Output

6

Expected

6

Contribute a testcase

Two children, Lily and Ron, want to share a chocolate bar. Each of the squares has an integer on it.

Lily decides to share a contiguous segment of the bar selected such that:

- The length of the segment matches Ron's birth month, and,
- The sum of the integers on the squares is equal to his birth day.

Determine how many ways she can divide the chocolate.

Example

$s = [2, 2, 1, 3, 2]$

$d = 4$

$m = 2$

Lily wants to find segments summing to Ron's birth day, $d = 4$ with a length equalling his birth month, $m = 2$. In this case, there are two segments meeting her criteria: $[2, 2]$ and $[1, 3]$.

Function Description

Complete the birthday function in the editor below.

birthday has the following parameter(s):

- int $s[n]$: the numbers on each of the squares of chocolate
- int d : Ron's birth day
- int m : Ron's birth month

Returns

- int: the number of ways the bar can be divided

Input Format

```

18
19
20         return count;
21     }
22
23     public static void main(String[] args) throws IOException {
24         Scanner sc = new Scanner(System.in);
25     }

```

Line: 38 Col: 1

[Upload Code as File](#)
☐ Test against custom input

Run Code

Submit Code

Running Testcases

- ☒ Test case 0
 ☐ Test case 4
 ☒ Test case 8
 ☒ Test case 12
- ☒ Test case 1
 ☒ Test case 5
 ☒ Test case 9
 ☐ Test case 13
- ☒ Test case 2
 ☒ Test case 6
 ☒ Test case 10
- ☒ Test case 3
 ☒ Test case 7
 ☒ Test case 11

We define subsequence as any subset of an array. We define a subarray as a contiguous subsequence in an array.

Given an array, find the maximum possible sum among:

1. all nonempty subarrays.
2. all nonempty subsequences.

Print the two values as space-separated integers on one line.

Note that empty subarrays/subsequences should not be considered.

Example

$arr = [-1, 2, 3, -4, 5, 10]$

The maximum subarray sum is comprised of elements at indices $[1 - 5]$. Their sum is $2 + 3 + -4 + 5 + 10 = 16$. The maximum subsequence sum is comprised of elements at indices $[1, 2, 4, 5]$ and their sum is $2 + 3 + 5 + 10 = 20$.

Function Description

Complete the maxSubarray function in the editor below.

maxSubarray has the following parameter(s):

- `int arr[n]`: an array of integers

Returns

- `int[2]`: the maximum subarray and subsequence sums

Input Format

The first line of input contains a single integer t , the number of test cases.

The first line of each test case contains a single integer n .

Congratulations

You solved this challenge. Would you like to challenge your friends? [Twitter](#) [LinkedIn](#)

[Next Challenge](#)

✓ Test case 0 

Compiler Message

✓ Test case 1 

Success

✓ Test case 2 

✓ Test case 3

✓ Test case 4

Hidden Test Case

Unlock this testcase for 5 hackos.


Unlock

Accepted 112 / 112 testcases passed

DhanaSree_2006 submitted at Aug 24, 2026 11:50

Analysis

Solution



Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

8 ms | Beats 26.23%

Memory

51.24 MB | Beats 23.44%

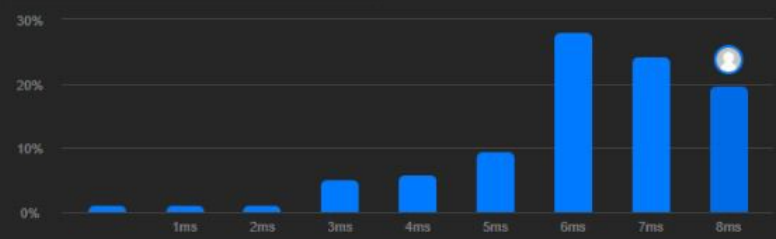

Code | Java

```
1 class Solution {
2     public int maxSubarraySumCircular(int[] nums) {
3         int total = 0;
4
5         int maxSum = nums[0];
6         int curMax = nums[0];
7
8         int minSum = nums[0];
```

View more

More challenges

Code

Java Auto

```
1 class Solution {
2     public int maxSubarraySumCircular(int[] nums) {
3         int total = 0;
4
5         int maxSum = nums[0];
6         int curMax = nums[0];
7
8         int minSum = nums[0];
9         int curMin = nums[0];
10
11         for (int i = 0; i < nums.length; i++) {
12             total += nums[i];
13
14             if (i > 0) {
15                 curMax = Math.max(nums[i], curMax + nums[i]);
16                 maxSum = Math.max(maxSum, curMax);
```

Saved

Ln 23,

Testcase Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

Case 3

Input

nums =
[1,-2,3,-2]

Output

3

Expected

3

Contribute a testcase

Accepted 1096 / 1096 testcases passed

DhanaFree_2006 submitted at Aug 24, 2026 11:53

Analysis

Solution



Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

1 ms | Beats 100.00%

Memory

44.03 MB | Beats 10.62%

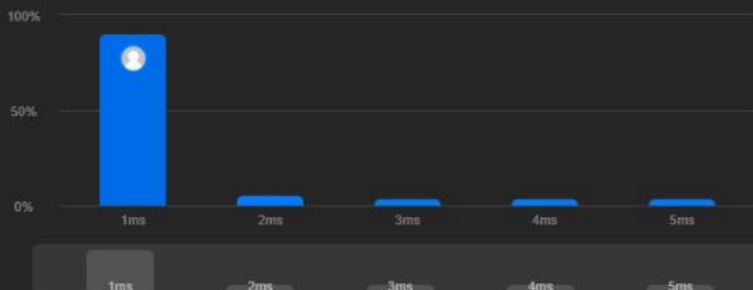

Code | Java

```
1 class Solution {
2     public int myAtoi(String s) {
3         int i = 0;
4         int n = s.length();
5
6
7         while (i < n && s.charAt(i) == ' ') {
8             i++;
9         }
10    }
```

View more

More challenges

Code

Java Auto

```
1 class Solution {
2     public int myAtoi(String s) {
3         int i = 0;
4         int n = s.length();
5
6
7         while (i < n && s.charAt(i) == ' ') {
8             i++;
9         }
10
11
12         int sign = 1;
13         if (i < n && (s.charAt(i) == '+' || s.charAt(i) == '-')) {
14             if (s.charAt(i) == '-') {
15                 sign = -1;
16             }
17             i++;
18         }
19
20         long result = 0;
21         while (i < n && (s.charAt(i) >= '0' && s.charAt(i) <= '9')) {
22             result = result * 10 + (s.charAt(i) - '0');
23             if (result >= Integer.MAX_VALUE / sign) {
24                 return (int) (result * sign);
25             }
26             i++;
27         }
28         return (int) (result * sign);
29     }
30 }
```

Saved

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Case 3

Case 4

Case 5

Input

s =
"42"

Output

42

Expected

42

Contribute a testcase

You are given a string containing characters A and B only. Your task is to change it into a string such that there are no matching adjacent characters. To do this, you are allowed to delete zero or more characters in the string.

Your task is to find the minimum number of required deletions.

Example

$s = AABAAB$

Remove an A at positions 0 and 3 to make $s = ABAB$ in 2 deletions.

Function Description

Complete the `alternatingCharacters` function in the editor below.

`alternatingCharacters` has the following parameter(s):

- string s : a string

Returns

- int: the minimum number of deletions required

Input Format

The first line contains an integer q , the number of queries.

The next q lines each contain a string s to analyze.

Constraints

- $1 \leq q \leq 10$
- $1 \leq \text{length of } s \leq 10^5$
- Each string s will consist only of characters A and B .

Congratulations

You solved this challenge. Would you like to challenge your friends? [Twitter](#) [LinkedIn](#)

[Next Challenge](#)

Test case 0

Test case 1

Test case 2

Test case 3

Test case 4

Test case 5

Test case 6

Compiler Message

Success

Input (stdin)

```
1 5
2 AAAA
3 BBBB
4 ABABABAB
5 BABABA
6 AAABBB
```

[Download](#)

Expected Output

[Download](#)

Accepted 1036 / 1036 testcases passed

DhanaSree_2006 submitted at Aug 25, 2026 11:29

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.




Runtime

6 ms | Beats 82.02%

Memory

48.02 MB | Beats 11.70%

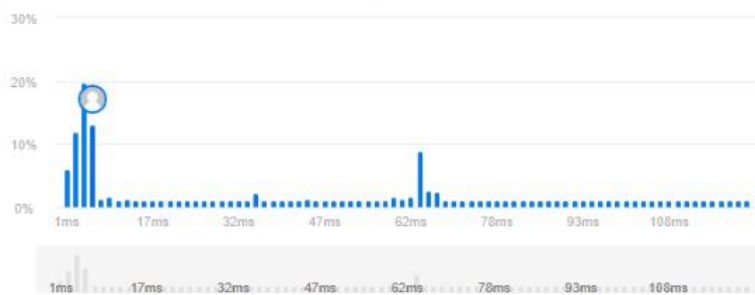

Code | Java


```
1 class Solution {
2     public int lengthOfLongestSubstring(String s) {
3         int[] last = new int[128];
4         java.util.Arrays.fill(last, -1);
5
6         int left = 0;
7         int max = 0;
8     }
```

View more

More challenges



Java Auto



```
1 class Solution {
2     public int lengthOfLongestSubstring(String s) {
3         int[] last = new int[128];
4         java.util.Arrays.fill(last, -1);
5
6         int left = 0;
7         int max = 0;
8
9         for (int right = 0; right < s.length(); right++) {
10             char c = s.charAt(right);
11
12             if (last[c] >= left) {
13                 left = last[c] + 1;
14             }
15
16             last[c] = right;
17             max = Math.max(max, right - left + 1);
18         }
19         return max;
20     }
21 }
```

Saved

Ln 23, Col 1

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Case 3

Input

```
s =
"abcabcbb"
```

Output

3

Expected

3


Contribute a testcase

Accepted 50 / 50 testcases passed

DhanaSree_2006 submitted at Aug 24, 2026 11:56

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.



Runtime

0 ms | Beats 100.00%

Memory

43.65 MB | Beats 77.83%



Code | Java

```
1 import java.util.*;
2
3 class Solution {
4     public List<String> findAndReplacePattern(String[] words, String pattern) {
5         List<String> result = new ArrayList<>();
6
7         for (String word : words) {
8             if (matches(word, pattern)) {
```

View more

More challenges

Code

Java | Auto

```
1 import java.util.*;
2
3 class Solution {
4     public List<String> findAndReplacePattern(String[] words, String pattern) {
5         List<String> result = new ArrayList<>();
6
7         for (String word : words) {
8             if (matches(word, pattern)) {
9                 result.add(word);
10            }
11        }
12
13        return result;
14    }
15
16    private boolean matches(String word, String pattern) {
```

Saved

Ln 27, Col 13

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

words =
["abc", "deq", "mee", "aqq", "dkd", "ccc"]

pattern =
"abb"

Output

["mee", "aqq"]

Expected

["mee", "aqq"]


← All Submissions

Accepted 69 / 69 testcases passed

DhanaSree_2006 submitted at Aug 24, 2026 16:14

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

4 ms Beats 96.85%

Memory

43.82 MB Beats 29.59%



Code | Java

```
1 class Solution {
```



Java Auto



```
1 class Solution {
2     public List<String> stringMatching(String[] words) {
3         List<String> ans = new ArrayList<>();
4
5         for (int i = 0; i < words.length; i++) {
6             for (int j = 0; j < words.length; j++) {
7                 if (i != j && words[j].contains(words[i])) {
8                     ans.add(words[i]);
9                     break;
10                }
11            }
12        }
13
14        return ans;
15    }
16 }
```

Saved

Ln 16, Col 2

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Case 3

Input

words =
["mass", "as", "hero", "superhero"]

Output