

Problem List

Accepted

Editorial

Solutions

Submissions

All Submissions

Accepted 102 / 102 testcases passed

DhanaSree_2006 submitted at Sep 02, 2026 09:04

AnalysisSolution

Unlock the Full LeetCode Experience

₹583.25/mo

Save over 66%


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

7 ms | Beats 100.00%

Memory

46.72 MB | Beats 91.11%

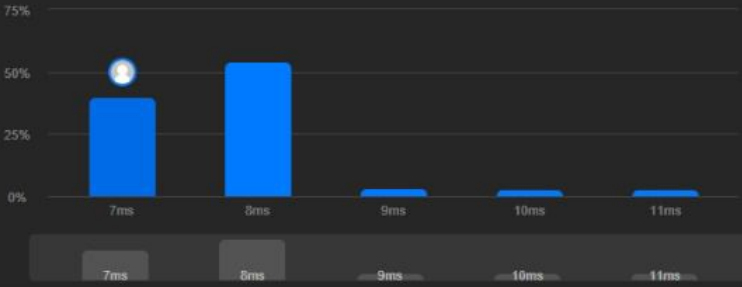

Runtime	Percentage
7ms	~45%
8ms	~55%
9ms	~2%
10ms	~2%
11ms	~2%

Code | Java

```
1 class ParkingSystem {
2     private int[] slots;
3
4     public ParkingSystem(int big, int medium, int small) {
5         slots = new int[]{big, medium, small};
6     }
7
8     public boolean addCar(int carType) {
```

Code

Java

```
4     public ParkingSystem(int big, int medium, int small) {
5         slots = new int[]{big, medium, small};
6     }
7
8     public boolean addCar(int carType) {
9         int index = carType - 1;
10
11         if (slots[index] > 0) {
12             slots[index]--;
13             return true;
14         }
15
16         return false;
17     }
18 }
19
20
```

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1

Input

["ParkingSystem", "addCar", "addCar", "addCar", "addCar"]

[[1, 1, 0], [1], [2], [3], [1]]

Output

[null, true, true, false, false]

Expected

The Java instanceof operator is used to test if the object or instance is an instanceof the specified type.

In this problem we have given you three classes in the editor:

- Student class
- Rockstar class
- Hacker class

In the main method, we populated an ArrayList with several instances of these classes. count method calculates how many instances of each type is present in the ArrayList. The code prints three integers, the number of instance of Student class, the number of instance of Rockstar class, the number of instance of Hacker class.

But some lines of the code are missing, and you have to fix it by modifying only **3** lines! Don't add, delete or modify any extra line.

To restore the original code in the editor, click on the top left icon in the editor and create a new buffer.

Sample Input

```
5
Student
Student
Rockstar
Student
Hacker
```

Sample Output

```
3 1 1
```

Upload Code as File

☐ Test against custom input

Run Code

Submit Code



You have earned 10.00 points!

You are now 17 points away from the 4th star for your java badge.

76%

133/150

Congratulations

You solved this challenge. Would you like to challenge your friends? [Twitter](#) [LinkedIn](#)

Next Challenge

Test case 0

Success

Test case 1

Input (stdin)

Download

Test case 2

```
1 5
2 Student
3 Student
4 Rockstar
5 Student
6 Hacker
```

Expected Output

Download

```
1 3 1 1
```

 **Solution**

 **₹583.25/mo**
Save over 56%

👑 Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

57.23 MB | Beats 91.85% 🟢



More challenges

```

45 // Stores customer's check-in information
46 private static class CheckInData {
47     String stationName;
48     int time;
49
50     CheckInData(String stationName, int time) {
51         this.stationName = stationName;
52         this.time = time;
53     }
54 }
55
56 // Stores route statistics
57 private static class RouteData {
58     long totalTime;
59     int trips;
60 }
61 }
62

```

Testcase > Test Result

Input

```
["UndergroundSystem","checkIn","checkIn","checkIn","checkOut","checkOut","checkOut","getAverageTime","getAverageTime","checkIn","getAverageTime","checkOut","getAverageTime"]
```

```
[1], [45, "Leyton", 3], [32, "Paradise", 8], [27, "Leyton", 10], [45, "Waterloo", 15], [27, "Waterloo", 20], [32, "Cambridge", 22], ["Paradise", "Cambridge"], ["Leyton", "Waterloo"], [10, "Leyton", 24], ["Leyton", "Waterloo"], [10, "Waterloo", 38], ["Leyton", "Waterloo"]]
```

Output

```
[null,null,null,null,null,null,null,14.00000,11.00000,null,11.00000,null,12.00000]
```

Expected

```
[null,null,null,null,null,null,null,14.00000,11.00000,null,11.00000,null,12.00000]
```

♥ [Contribute a testcase](#)

Description Accepted Editorial Solutions Submissions

All Submissions

Accepted 73 / 73 testcases passed

DhanaSree_2006 submitted at Sep 02, 2026 09:21

Analysis

Solution

₹583.25/mo
Save over 86%

Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

48 ms | Beats 86.94%

Memory

53.93 MB | Beats 25.69%

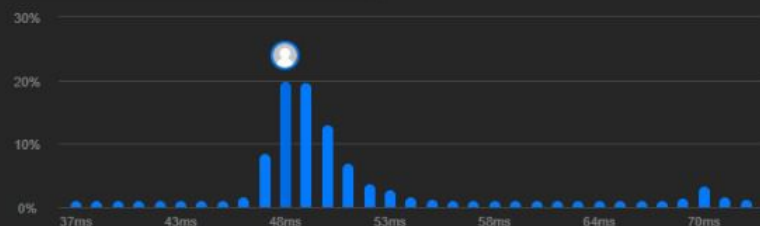

Code | Java

```
1 import java.util.ArrayList;
2 import java.util.List;
3
4 class BrowserHistory {
5
6     private List<String> history;
7     private int current;
8 }
```

View more

Code

Java Auto

```
18         history.remove(history.size() - 1);
19     }
20
21     history.add(url);
22     current++;
23 }
24
25 public String back(int steps) {
26     current = Math.max(0, current - steps);
27     return history.get(current);
28 }
29
30 public String forward(int steps) {
31     current = Math.min(history.size() - 1, current + steps);
32     return history.get(current);
33 }
34 }
35 }
```

Saved

In 35, Col

Testcase Test Result

Accepted Runtime: 4 ms

Case 1

Input

["BrowserHistory","visit","visit","visit","back","back","forward","visit","forward","back","back"]

[["leetcode.com"],["google.com"],["facebook.com"],["youtube.com"],[1],[1],[1],["linkedin.com"],[2],[2],[7]]

Output


[null,null,null,null,"facebook.com","google.com","facebook.com",null,"linkedin.com","google.com","leetcode.com"]

Accepted 29 / 29 testcases passed

DhanaSree_2006 submitted at Sep 02, 2026 09:23

Analysis

Solution



Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

12 ms Beats 97.07%

Memory

54.34 MB Beats 20.53%

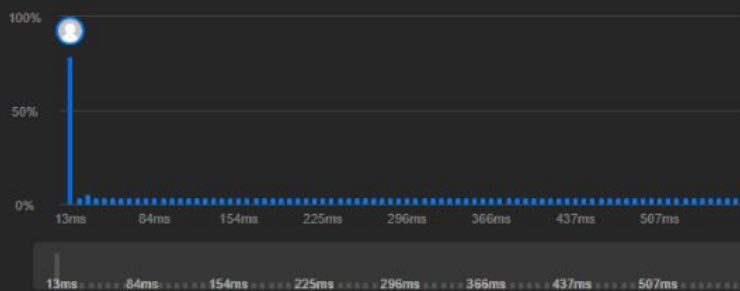

Code | Java

```
1 class MyHashSet {
2
3     private boolean[] set;
4
5     public MyHashSet() {
6         set = new boolean[1000001];
7     }
8 }
```

View more

Code

Java Auto

```
1 class MyHashSet {
2
3     private boolean[] set;
4
5     public MyHashSet() {
6         set = new boolean[1000001];
7     }
8
9     public void add(int key) {
10        set[key] = true;
11    }
12
13    public void remove(int key) {
14        set[key] = false;
15    }
16
17    public boolean contains(int key) {
18        return set[key];
19    }
20 }
```

Saved

Ln 21, Col 1

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Input

["MyHashSet","add","add","add","remove","contains","add","add","add","remove","contains","add","add","add","remove","contains","add","add","add","remove","contains"]

[[], [1], [10001], [1], [1], [1], [7], [10007], [7], [7], [7], [123], [10123], [123], [123], [123], [5000], [15000], [5000], [5000], [5000]]

Output

[null,null,null,null,null,false,null,null,null,null,false,null,null,null,null,false,null,null,null,null,false]

HackerLand University has the following grading policy:

- Every student receives a *grade* in the inclusive range from 0 to 100.
- Any *grade* less than 40 is a failing grade.

Sam is a professor at the university and likes to round each student's *grade* according to these rules:

- If the difference between the *grade* and the next multiple of 5 is less than 3, round *grade* up to the next multiple of 5.
- If the value of *grade* is less than 38, no rounding occurs as the result will still be a failing grade.

Examples

- *grade* = 84 round to 85 (85 - 84 is less than 3)
- *grade* = 29 do not round (result is less than 38)
- *grade* = 57 do not round (60 - 57 is 3 or higher)

Given the initial value of *grade* for each of Sam's *n* students, write code to automate the rounding process.

Function Description

Complete the function *gradingStudents* with the following parameter(s):

- *int grades[n]*: the grades before rounding

Returns

- *int[n]*: the grades after rounding

Input Format

The first line contains a single integer, *n*, the number of students.

Each line *i* of the *n* subsequent lines contains a single integer, *grades[i]*.

Constraints

- $1 \leq n \leq 60$
- $0 \leq grades[i] \leq 100$

Sample Input 0

```
4
73
67
38
```

Upload Code as File☐ Test against custom input

Run CodeSubmit Code

Problem Solving

You have earned 10.00 points!

You are now 360 points away from the gold level for your problem solving badge.

4%490/850

Congratulations

You solved this challenge. Would you like to challenge your friends?

Next Challenge

Test case 0

Test case 1

Test case 2

Test case 3

Test case 4

Test case 5

Test case 6

Compiler Message

Success

Input (stdin)

Expected Output

14

273

367

438

533

175

Download

Download

Using inheritance, one class can acquire the properties of others. Consider the following Animal class:

```
class Animal{
    void walk(){
        System.out.println("I am walking");
    }
}
```

This class has only one method, walk. Next, we want to create a Bird class that also has a fly method. We do this using extends keyword:

```
class Bird extends Animal {
    void fly() {
        System.out.println("I am flying");
    }
}
```

Finally, we can create a Bird object that can both fly and walk.

```
public class Solution{
    public static void main(String[] args){

        Bird bird = new Bird();
        bird.walk();
        bird.fly();
    }
}
```

The above code will print:

```
I am walking
I am flying
```

This means that a Bird object has all the properties that an Animal object has, as well as some additional unique properties.

The code above is provided for you in your editor. You must add a sing method to the Bird class, then modify the main

Upload Code as File

☐ Test against custom input

Run Code

Submit Code



You have earned 5.00 points!

You are now 12 points away from the 4th star for your java badge.

83%

138/150

Congratulations

You solved this challenge. Would you like to challenge your friends? [Twitter](#) [LinkedIn](#)

Next Challenge

Test case 0

Compiler Message

Success

Expected Output

[Download](#)

```
1 I am walking
2 I am flying
3 I am singing
```

Write the following code in your editor below:

- 1. A class named Arithmetic with a method named add that takes 2 integers as parameters and returns an integer denoting their sum.
- 2. A class named Adder that inherits from a superclass named Arithmetic.

Your classes should not be be **public**.

Input Format

You are not responsible for reading any input from stdin; a locked code stub will test your submission by calling the add method on an Adder object and passing it 2 integer parameters.

Output Format

You are not responsible for printing anything to stdout. Your add method must return the sum of its parameters.

Sample Output

The main method in the Solution class above should print the following:

```
My superclass is: Arithmetic
42 13 20
```

Upload Code as File

☐ Test against custom input

Run Code

Submit Code



You have earned 10.00 points!

You are now 2 points away from the 4th star for your java badge.

97%

148/150

Congratulations

You solved this challenge. Would you like to challenge your friends?  

Next Challenge

Test case 0

Compiler Message

Success

Expected Output

1

My superclass is: Arithmetic

2

42 13 20

Download

Generic methods are a very efficient way to handle multiple datatypes using a single method. This problem will test your knowledge on Java Generic methods.

Let's say you have an integer array and a string array. You have to write a **single** method `printArray` that can print all the elements of both arrays. The method should be able to accept both integer arrays or string arrays.

You are given code in the editor. Complete the code so that it prints the following lines:

```
1
2
3
Hello
World
```

Do not use method overloading because your answer will not be accepted.

[Upload Code as File](#)☐ Test against custom input[Run Code](#)[Submit Code](#)

You have earned 15.00 points!

You are now 87 points away from the gold level for your java badge.

13%

163/250

Congratulations

You solved this challenge. Would you like to challenge your friends? [Twitter](#) [LinkedIn](#)

[Next Challenge](#)

Test case 0

Compiler Message


Success

Expected Output

[Download](#)

```
1 1
2 2
3 3
4 Hello
5 World
```

← All Submissions



👑 Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.




🕒 Runtime

264 ms | Beats 18.94%

@ Memory

121.78 MB | Beats 6.81%

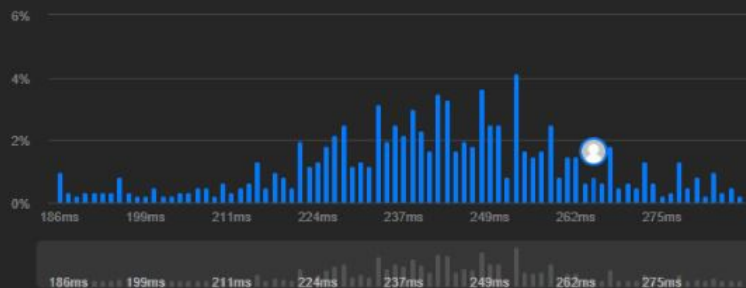

Code | Java

```
1 import java.util.*;
2
3 class ThroneInheritance {
4
5     private String king;
6     private Map<String, List<String>> children;
7     private Set<String> dead;
8 }
```

👁 View more

More challenges

• 1993. Operations on Tree

Java ▾ 🔒 Auto

☰ 🔖 {} ↺ 🔍

```
1 import java.util.*;
2
3 class ThroneInheritance {
4
5     private String king;
6     private Map<String, List<String>> children;
7     private Set<String> dead;
8
9     public ThroneInheritance(String kingName) {
10         king = kingName;
11         children = new HashMap<>();
12         dead = new HashSet<>();
13
14         children.put(kingName, new ArrayList<>());
15     }
16
17     public void birth(String parentName, String childName) {
18         children.putIfAbsent(childName, new ArrayList<>());
19         children.get(parentName).add(childName);
20     }
21 }
```

Saved

Ln 33, Col 8

Testcase | Test Result

Accepted Runtime: 6 ms

✅ Case 1

Input

["ThroneInheritance","birth","birth","birth","birth","birth","birth","getInheritanceOrder","death","getInheritanceOrder"]

[["king"],["king","andy"],["king","bob"],["king","catherine"],["andy","matthew"],["bob","alex"],["bob","asha"],[null],["bob"],[null]]

Output

[null,null,null,null,null,null,null,["king","andy","matthew","bob","alex","asha","catherine"],null,["king","andy","matthew","alex","asha","catherine"]]