

Accepted 53 / 53 testcases passed

DhanaSree_2006 submitted at Jul 28, 2026 12:04

Analysis

Solution



Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

0 ms | Beats 100.00%

Memory

46.82 MB | Beats 7.53%

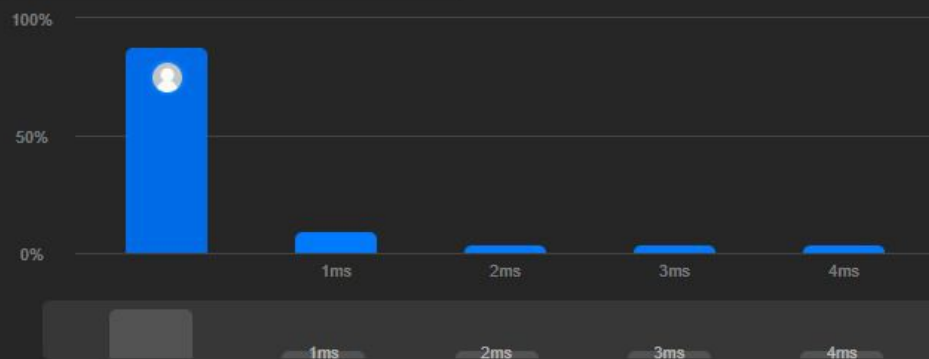

Code | Java

```
1 class Solution {
2     public int[] shuffle(int[] nums, int n) {
3         int[] result = new int[2 * n];
4         int index = 0;
5
6         for (int i = 0; i < n; i++) {
7             result[index++] = nums[i];
8             result[index++] = nums[i + n];
9         }
10        return result;
11    }
12 }
```

View more

More challenges

Code

Java Auto

```
1 class Solution {
2     public int[] shuffle(int[] nums, int n) {
3         int[] result = new int[2 * n];
4         int index = 0;
5
6         for (int i = 0; i < n; i++) {
7             result[index++] = nums[i];
8             result[index++] = nums[i + n];
9         }
10
11        return result;
12    }
13 }
```

Saved

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Case 3

Input

nums =

[2, 5, 1, 3, 4, 7]

n =

3

Output


[2, 3, 5, 4, 1, 7]

Accepted 116 / 116 testcases passed

DhanaSree_2006 submitted at Jul 28, 2026 12:08

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.



Runtime

0 ms | Beats 100.00%

Memory

43.33 MB | Beats 79.94%



Code | Java

```
1 class Solution {
2     public int removeElement(int[] nums, int val) {
3         int k = 0;
4         for (int i = 0; i < nums.length; i++) {
5             if (nums[i] != val) {
6                 nums[k] = nums[i];
7                 k++;
8             }
9         }
10        return k;
11    }
12 }
```

View more

More challenges

Java Auto

```
1 class Solution {
2     public int removeElement(int[] nums, int val) {
3         int k = 0;
4         for (int i = 0; i < nums.length; i++) {
5             if (nums[i] != val) {
6                 nums[k] = nums[i];
7                 k++;
8             }
9         }
10        return k;
11    }
12 }
```

Saved

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

nums =

[3,2,2,3]

val =

3

Output

[2,2]

Accepted 362 / 362 testcases passed

DhanaSree_2006 submitted at Jul 28, 2026 12:15

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.




Runtime

1 ms | Beats 77.50%

Memory

46.90 MB | Beats 24.73%

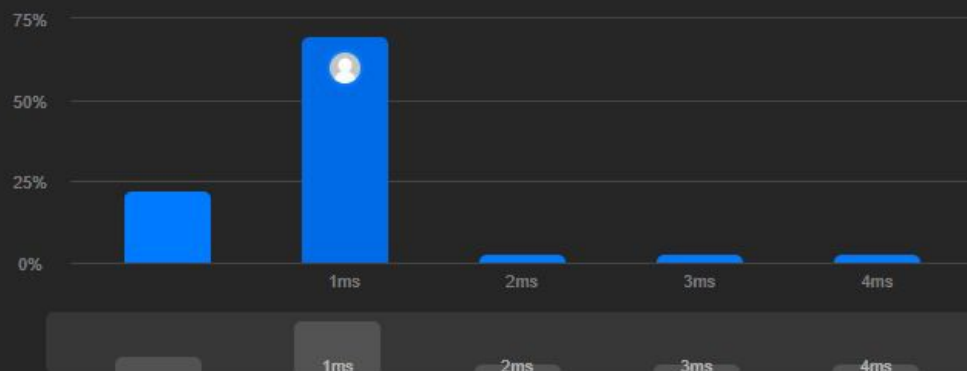

Code | Java

```
1 class Solution {
2     public int removeDuplicates(int[] nums) {
3         if (nums.length == 0) {
4             return 0;
5         }
6         int k = 1;
7         for (int i = 1; i < nums.length; i++) {
8             if (nums[i] != nums[i - 1]) {
```

View more

More challenges

Java Auto

```
1 class Solution {
2     public int removeDuplicates(int[] nums) {
3         if (nums.length == 0) {
4             return 0;
5         }
6         int k = 1;
7         for (int i = 1; i < nums.length; i++) {
8             if (nums[i] != nums[i - 1]) {
9                 nums[k] = nums[i];
10                k++;
11            }
12        }
13
14        return k;
15    }
16 }
```

Saved Upgrade to Cloud Saving

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

nums =
[1,1,2]

Output

[1,2]

Expected

[1,2]

Accepted 210 / 210 testcases passed

DhanaSree_2006 submitted at Jul 28, 2026 12:18

Analysis

Solution



Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.




Runtime

2 ms | Beats 4.27%

Memory

80.95 MB | Beats 5.78%

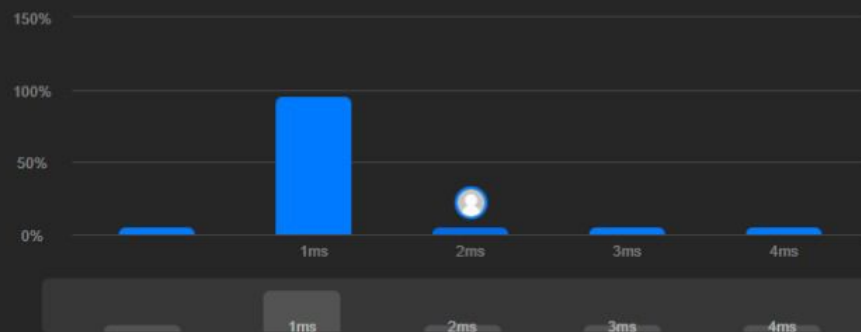

Code | Java

```
1 class Solution {
2     public int maxSubArray(int[] nums) {
3         int maxSum = nums[0];
4         int currentSum = nums[0];
5
6         for (int i = 1; i < nums.length; i++) {
7             currentSum = Math.max(nums[i], currentSum + nums[i]);
8             maxSum = Math.max(maxSum, currentSum);
9         }
10        return maxSum;
11    }
12 }
13 }
```

View more

More challenges

Java Auto

```
1 class Solution {
2     public int maxSubArray(int[] nums) {
3         int maxSum = nums[0];
4         int currentSum = nums[0];
5
6         for (int i = 1; i < nums.length; i++) {
7             currentSum = Math.max(nums[i], currentSum + nums[i]);
8             maxSum = Math.max(maxSum, currentSum);
9         }
10
11        return maxSum;
12    }
13 }
```

Saved

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Case 3

Input

nums =
[-2,1,-3,4,-1,2,1,-5,4]

Output

6

Expected

6

Accepted 80 / 80 testcases passed

DhanaSree_2006 submitted at Jul 29, 2026 09:07

Analysis

Solution



Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

0 ms | Beats 100.00%

Memory

43.33 MB | Beats 6.33%

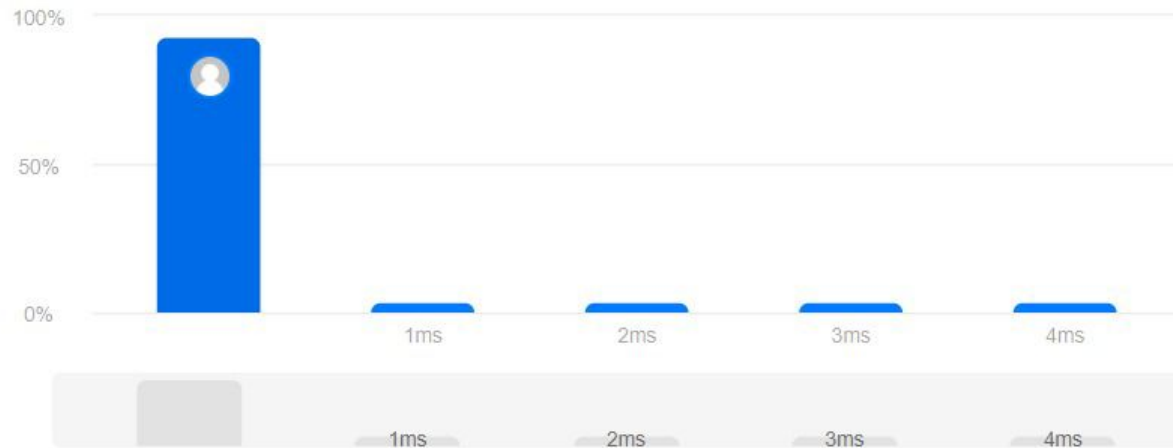

Code | Java

```
1 class Solution {
```

Explain

```
1 class Solution {
2     public int largestAltitude(int[] gain) {
3         int altitude = 0;
4         int maxAltitude = 0;
5
6         for (int g : gain) {
7             altitude += g;
8             if (altitude > maxAltitude) {
9                 maxAltitude = altitude;
10            }
11        }
12
13        return maxAltitude;
14    }
15 }
```

Saved

Testcase Test Result

Case 1

Case 2

Input

gain =
[-5,1,5,0,-7]

Output

1

← All Submissions

Accepted 128 / 128 testcases passed

 DhanaSree_2006 submitted at Jul 29, 2026 09:27

 Analysis

 Solution



 **Unlock the Full LeetCode Experience**


Company problems, Ask Leet, and expert editorials — all in one plan. →

⌚ Runtime

7 ms | Beats 72.83% 

💾 Memory

49.58 MB | Beats 72.15% 

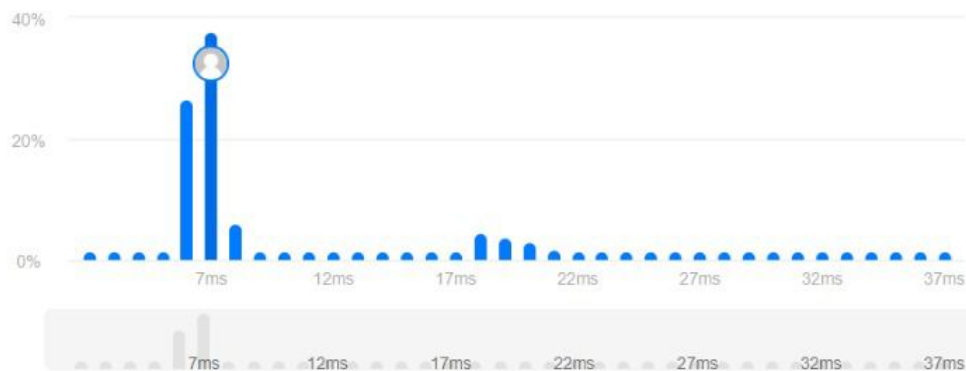

Code | Java

Java  Auto

```
1 import java.util.*;
2
3 class Solution {
4     public List<List<String>> groupAnagrams(String[] strs) {
5         Map<String, List<String>> map = new HashMap<>();
6
7         for (String str : strs) {
8             char[] chars = str.toCharArray();
9             Arrays.sort(chars);
10            String key = new String(chars);
11
12            if (!map.containsKey(key)) {
13                map.put(key, new ArrayList<>());
14            }
15        }
16    }
17 }
```

Saved

Ln 21,

☒ Testcase  Test Result

Output

[["eat","tea","ate"],["bat"],["tan","nat"]]

Expected

[["bat"],["nat","tan"],["ate","eat","tea"]]

 [Contribute a testcase](#)

Accepted 25 / 25 testcases passed
DhanaSree_2006 submitted at Jul 29, 2026 09:35

Analysis Solution




₹583.25/mo
Save over 56%

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

→

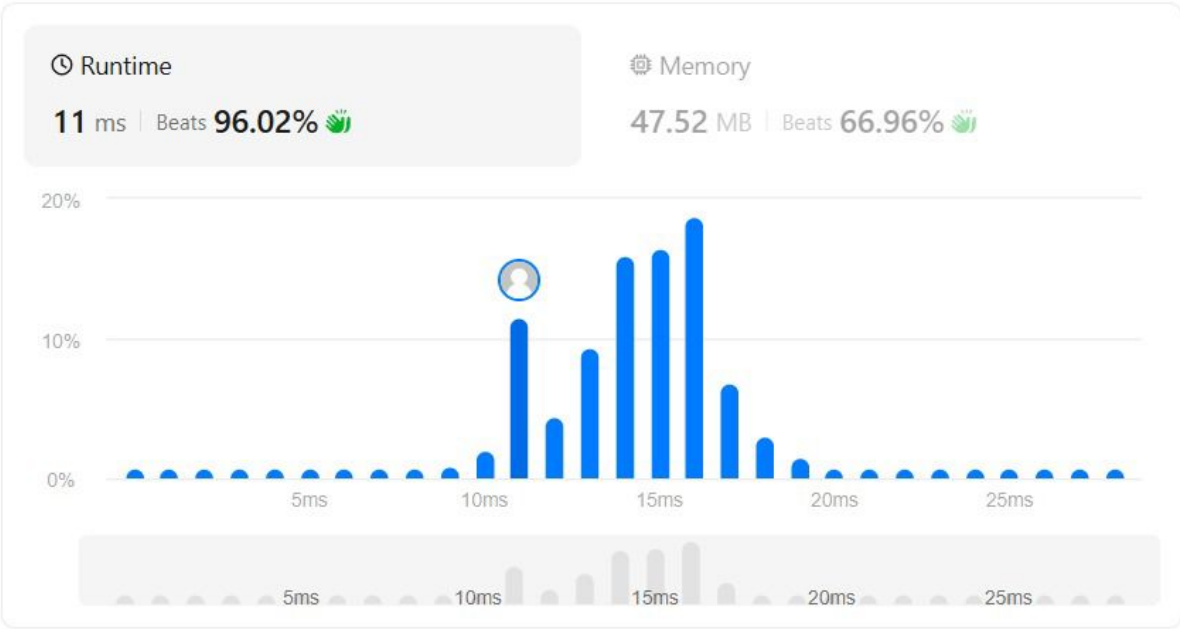

Code | Java

```
1 import java.util.*;
```



Java Auto

```
1 import java.util.*;
2
3 class Solution {
4     public int[] topKFrequent(int[] nums, int k) {
5         Map<Integer, Integer> map = new HashMap<>();
6         for (int n : nums)
7             map.put(n, map.getOrDefault(n, 0) + 1);
8
9         List<Integer>[] bucket = new ArrayList[nums.length + 1];
10        for (int key : map.keySet()) {
11            int freq = map.get(key);
12            if (bucket[freq] == null)
13                bucket[freq] = new ArrayList<>();
14            bucket[freq].add(key);
15        }
16    }
17 }
```

Saved

Testcase Test Result

Accepted Runtime: 0 ms

Case 1 Case 2 Case 3

Input

nums =
[1,1,1,2,2,3]

k =

Problem

You are given a list of student information: ID, FirstName, and CGPA. Your task is to rearrange them according to their CGPA in decreasing order. If two student have the same CGPA, then arrange them according to their first name in alphabetical order. If those two students also have the same first name, then order them according to their ID. No two students have the same ID.

Hint: You can use comparators to sort a list of objects. See the [oracle docs](#) to learn about comparators.

Input Format

The first line of input contains an integer N , representing the total number of students. The next N lines contains a list of student information in the following structure:

```
ID Name CGPA
```

Constraints

- $2 \leq N \leq 1000$
- $0 \leq ID \leq 100000$
- $5 \leq |Name| \leq 30$
- $0 \leq CGPA \leq 4.00$

The name contains only lowercase English letters. The ID contains only integer numbers without leading zeros. The CGPA will contain, at most, 2 digits after the decimal point.

Output Format

Congratulations

You solved this challenge. Would you like to challenge your friends? [f](#) [t](#) [in](#) [Next Challenge](#)

Test case 0 ✓ [lock](#)

Test case 1 ✓ [lock](#)

Test case 2 ✓ [lock](#)

Test case 3 ✓ [lock](#)

Test case 4 ✓ [lock](#)

Test case 5 ✓ [lock](#)

Test case 6 ✓ [lock](#)

Compiler Message

Success

Input (stdin) [Download](#)

```
1 5
2 33 Rumpa 3.68
3 85 Ashis 3.85
4 56 Samiha 3.75
5 19 Samara 3.75
6 22 Fahim 3.76
```

Expected Output [Download](#)

In computer science, a set is an abstract data type that can store certain values, without any particular order, and no repeated values(Wikipedia). $\{1, 2, 3\}$ is an example of a set, but $\{1, 2, 2\}$ is not a set. Today you will learn how to use sets in java by solving this problem.

You are given n pairs of strings. Two pairs (a, b) and (c, d) are identical if $a = c$ and $b = d$. That also implies (a, b) is not same as (b, a) . After taking each pair as input, you need to print number of unique pairs you currently have.

Complete the code in the editor to solve this problem.

Input Format

In the first line, there will be an integer T denoting number of pairs. Each of the next T lines will contain two strings seperated by a single space.

Constraints:

- $1 \leq T \leq 100000$
- Length of each string is atmost 5 and will consist lower case letters only.

Output Format

Print T lines. In the i_{th} line, print number of unique pairs you have after taking i^{th} pair as input.

Sample Input

```
5
john tom
john mary
```

Upload Code as File Test against custom input Run Code Submit Code

Congratulations!

You have passed the sample test cases. Click the submit button to run your code against all the test cases.

Sample Test case 0

Input (stdin)

Download

```
1 5
2 john tom
3 john mary
4 john tom
5 mary anna
6 mary anna
```

Your Output (stdout)

```
1 1
2 2
3 2
```